Sr no	Name of Feeder	Voltage in Kv	Section	Type of conductor	Size	Rated current of conductor	Total DTC/HTC on this section	Resistance of the section	Reactance of the section	Length	Total connected load in KVA	Remarks
1	11KV Curti feeder	11000		XLPE 3C Cable	300Sq.mm	355A in Ground	23			13.225		
		11000	SO1	XLPE 3C Cable	300Sq.mm	355A in Ground	4	0.31265	0.2046655	2.405	600	
		11000	SO2	XLPE 3C Cable	300Sq.mm	355A in Ground	7	0.4862	0.318274	3.74	1420	
		11000	SO3	XLPE 3C Cable	300Sq.mm	355A in Ground	2	0.2262	0.148074	1.74	700	
		11000	SO4	XLPE 3C Cable	300Sq.mm	355A in Ground	2	0.17095	0.1119065	1.315	360	
		11000	SO5	XLPE 3C Cable	300Sq.mm	355A in Ground	4	0.07215	0.0472305	0.555	2020	
		11000	SO6	XLPE 3C Cable	300Sq.mm	355A in Ground	4	0.4511	0.295297	3.47	760	

CURTI FEEDER

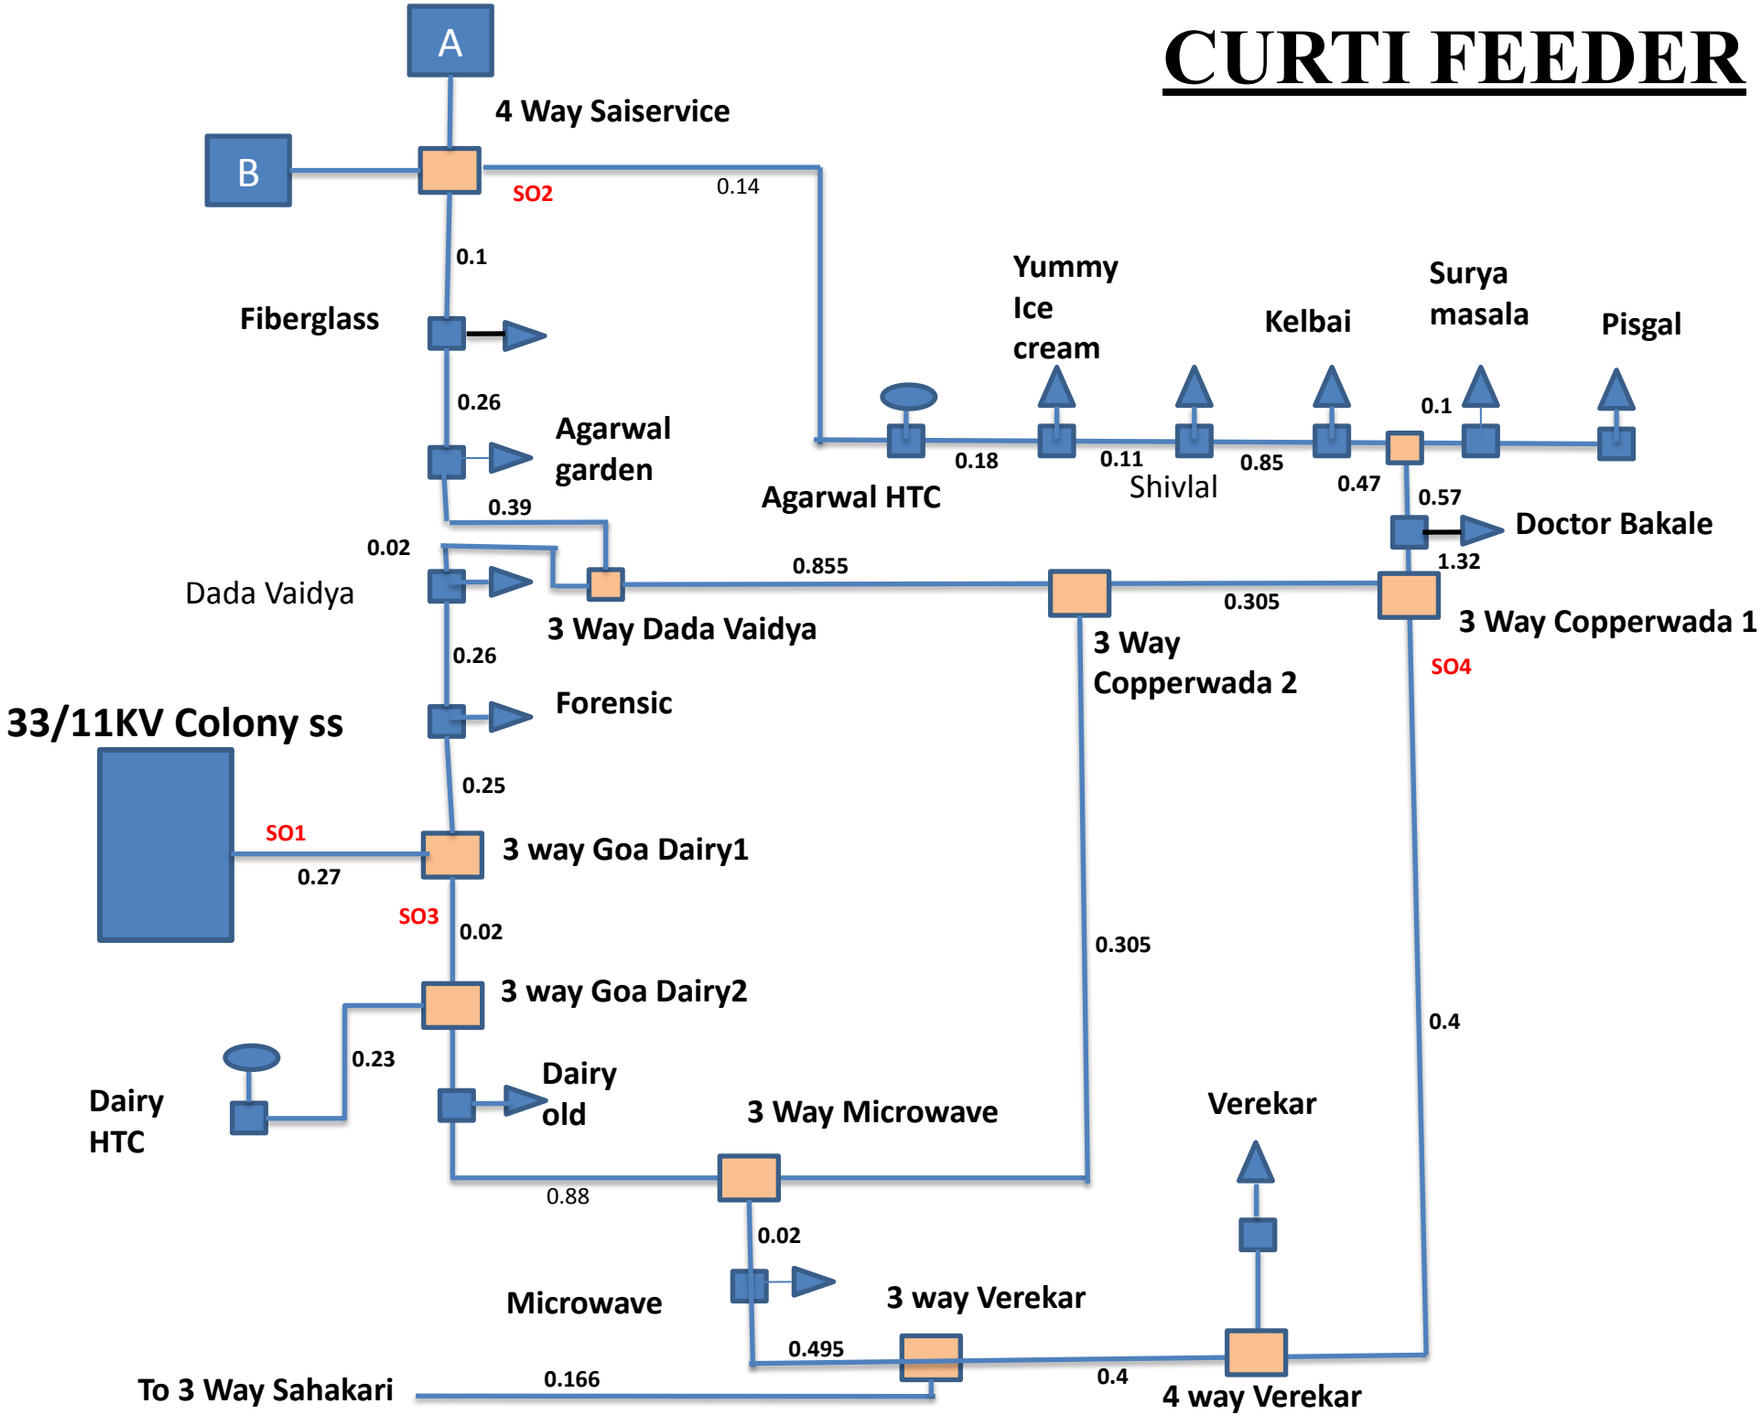

CURTI FEEDER

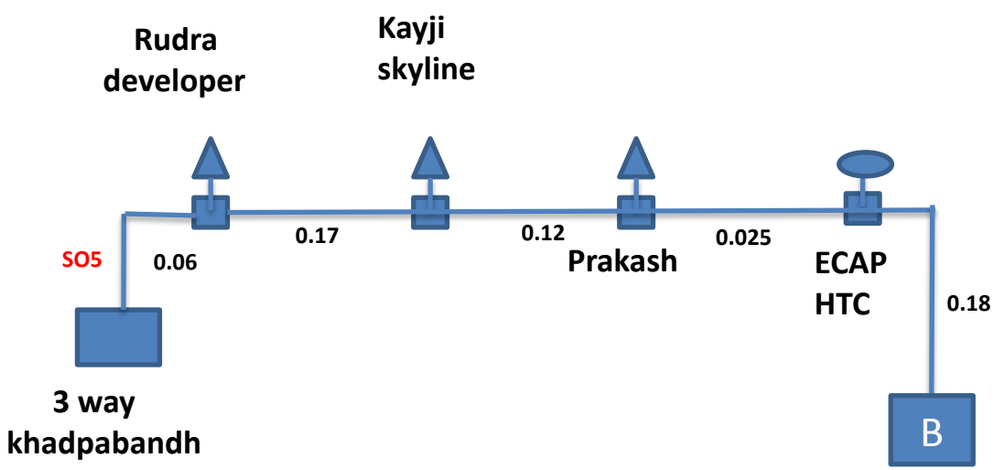

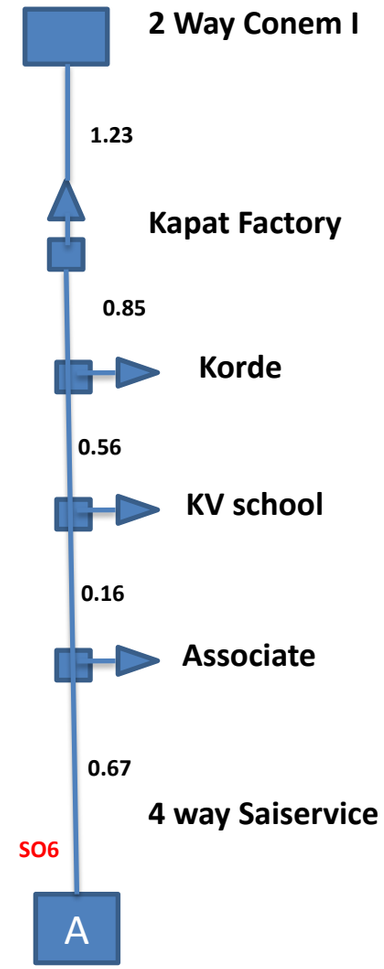

Sr no	Name of Feeder	DTC/HTC name	DTC/HTC capacity in KVA	Impedance %age voltage	Resistance of Transformer	year of manufacture	Full load of Primary Current as per name plate	Full load of Secondary Current as per name plate	Make/Manufature details	Fault in MVA	Three Phase Fault Current	short circuit current at 11KV side	short circuit current at Secondary side	%age peak loading	Remarks
1	11KV Curti feeder	Dairy Old	200	4.7		Not Visible	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
2	11KV Curti feeder	Forensic	200	4.7		2004	10.4	266.68	STANELEC PVT LTD	4.2553	5.59027739	0.223352884	5.583822104	80%	
3	11KV Curti feeder	Dada Vaidhya/ Ganganagar	100	4.82		2007	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	90%	
4	11KV Curti feeder	Kayji Garden (Agarwal Apt)	200	4.7		Not Visible	10.4	266.68	Vtst Trf	4.2553	5.59027739	0.223352884	5.583822104	60%	
5	11KV Curti feeder	Fiber Glass	100	4.82		Not Visible	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	70%	
6	11KV Curti feeder	Yummy	100	4.82		Not Visible	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	80%	
7	11KV Curti feeder	Shivlal	200	4.7		2022	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	30%	
8	11KV Curti feeder	Prakash Corrugeted	100	4.82		Not Visible	5.2	133.33	Kirloskar Trf	2.0747	2.72555018	0.108896116	2.722402893	80%	
9	11KV Curti feeder	Kapat Factory	100	4.82		2007	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	80%	
10	11KV Curti feeder	K.G Skyline	400	4.92		Not Visible	24	533.34	Shiddhi Vinayaka Trf	8.1301	10.68061127	0.42673112	10.668278	80%	
11	11KV Curti feeder	Navajeevan/ Rudra Developers	160	4.85		2014	8.39	213.34	Shiddhi Vinayaka Trf	3.2990	4.33390577	0.17315605	4.32890126	80%	
12	11KV Curti feeder	Associate (bldr)	400	4.92			21	533.34	Shiddhi Vinayaka Trf	8.1301	10.68061127	0.42673112	10.668278	70%	
13	11KV Curti feeder	Kendriya Vidhyalay	160	4.85		2010	8.39	213.34	Stanelec Trf	3.2990	4.33390577	0.17315605	4.32890126	80%	
14	11KV Curti feeder	Korde	100	4.82		2010	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	50%	
15	11KV Curti feeder	ECAP HTC	1000	4.7		2021	52.48	1333.3	SHIDDHI VINAYAKA TRF INDUSTRIES	21.2766	27.95138695	1.116764421	27.91911052	80%	
16	11KV Curti feeder	Agarwal HTC (Doop)	1250	4.8		2007	65.59	1666.6	Shiddhi Vinayaka Trf	26.0417	34.21133298	1.366873119	34.17182798	80%	
17	11KV Curti feeder	Goa Dairy HTC	500	4.8		2001	26.24	655.7	Stanelec Trf	10.4167	13.68453319	0.546749248	13.66873119	80%	
18	11KV Curti feeder	Microwave	160	4.85		2007	8.39	213.34	Stanelec Trf	3.2990	4.33390577	0.17315605	4.32890126	70%	
19	11KV Curti feeder	Kelbai	100	4.82		2014	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	60%	
20	11KV Curti feeder	Docter Bhakhale	160	4.85		2008	8.39	213.34	Stanelec Trf	3.2990	4.33390577	0.17315605	4.32890126	60%	
21	11KV Curti feeder	Surya Masala	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
22	11KV Curti feeder	Pisgal	160	4.85		2001	8.39	213.34	Stanelec Trf	3.2990	4.33390577	0.17315605	4.32890126	70%	
23	11KV Curti feeder	Verekar	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	70%	

Sr no	Name of Feeder	Voltage in Kv	Section	Type of conductor	Size	Rated current of conductor	Total DTC/HTC on this section	Resistance of the section	Reactance of the section	Length	Total connected load in KVA	Remarks
2	11KV Farmagudi feeder	11000		XLPE 3C Cable	300Sq.mm	355A in Ground	29			19.247		
		11000	SO1	XLPE 3C Cable	300Sq.mm	355A in Ground	14	1.14569	0.7499863	8.813	2800	
		11000	SO2	XLPE 3C Cable	300Sq.mm	355A in Ground	2	0.28587	0.1871349	2.199	300	
		11000	SO3	XLPE 3C Cable	300Sq.mm	355A in Ground	3	0.4238	0.277426	3.26	586	
		11000	SO4	XLPE 3C Cable	300Sq.mm	355A in Ground	3	0.3198	0.209346	2.46	700	
		11000	SO5	XLPE 3C Cable	300Sq.mm	355A in Ground	6	0.29575	0.1936025	2.275	1700	
		11000	SO6	XLPE 3C Cable	300Sq.mm	355A in Ground	1	0.0312	0.020424	0.24	100	

Farmagudi Feeder

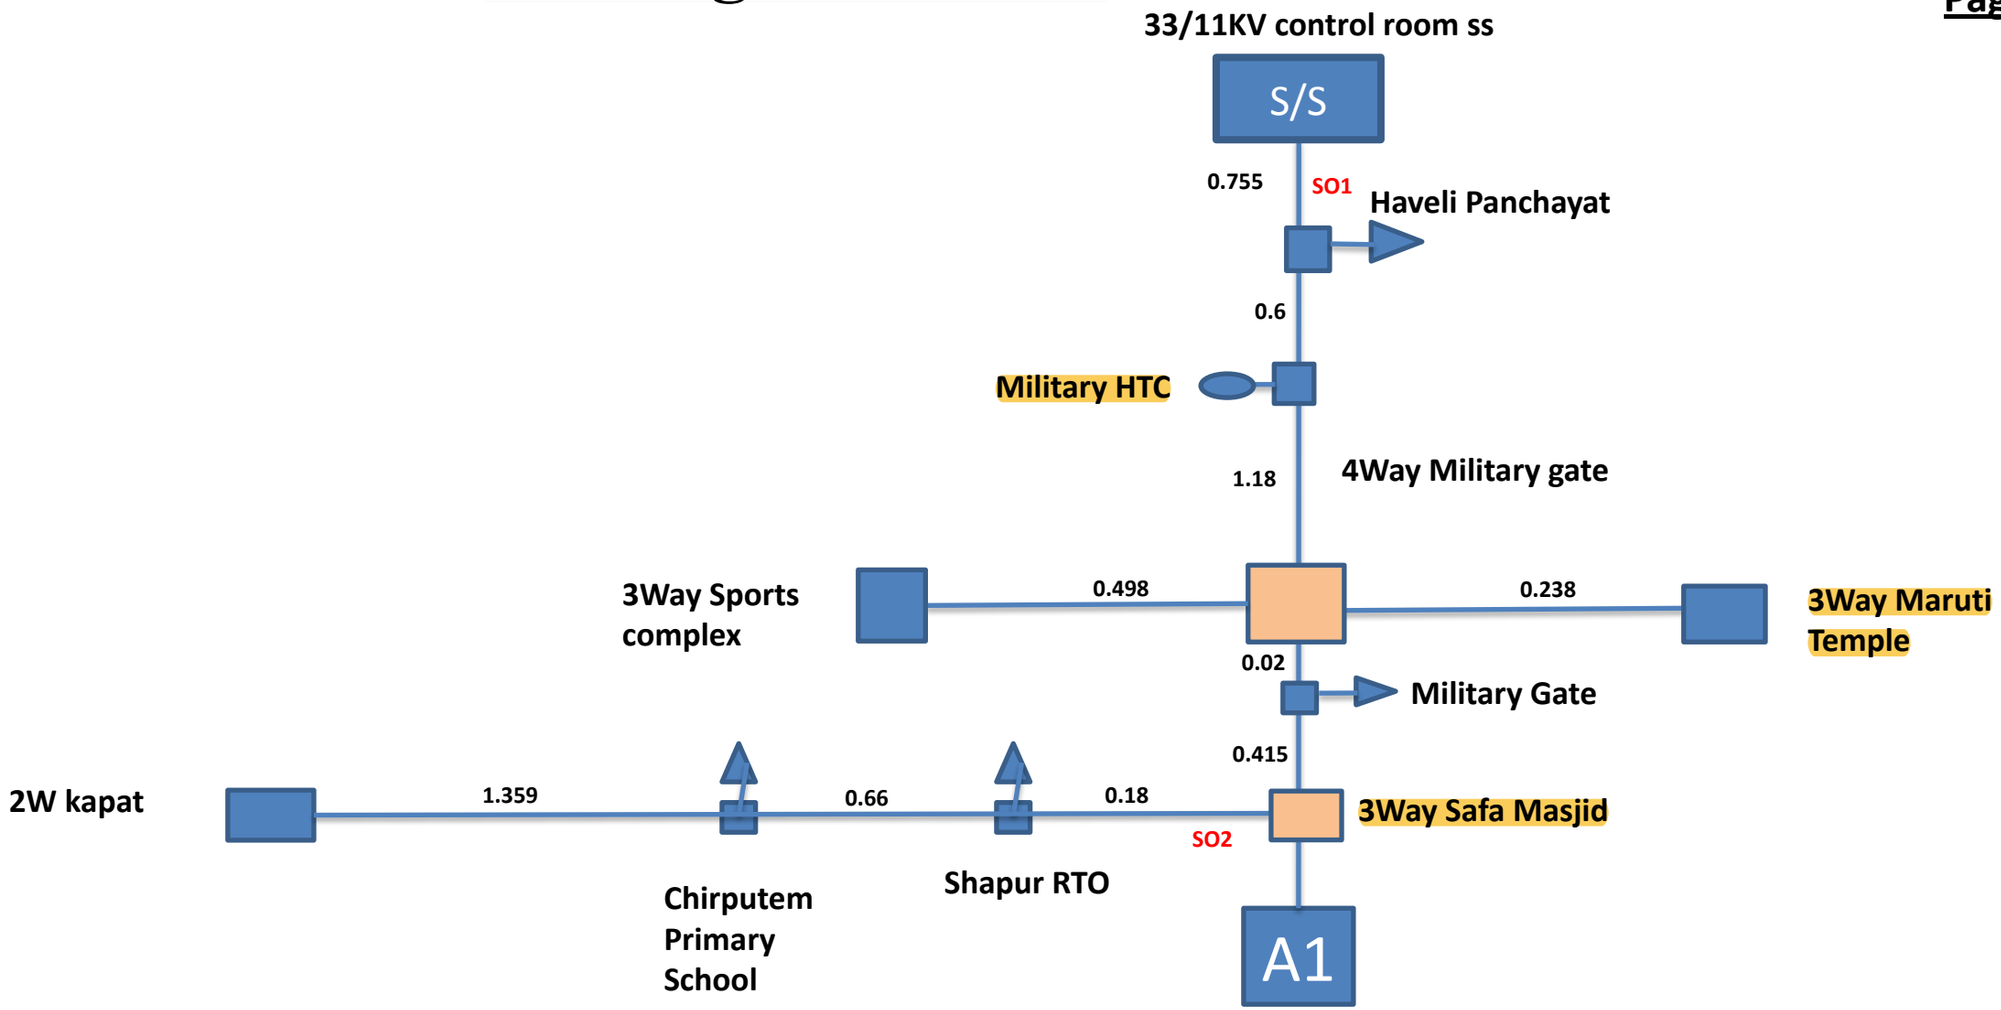

Farmagudi Feeder

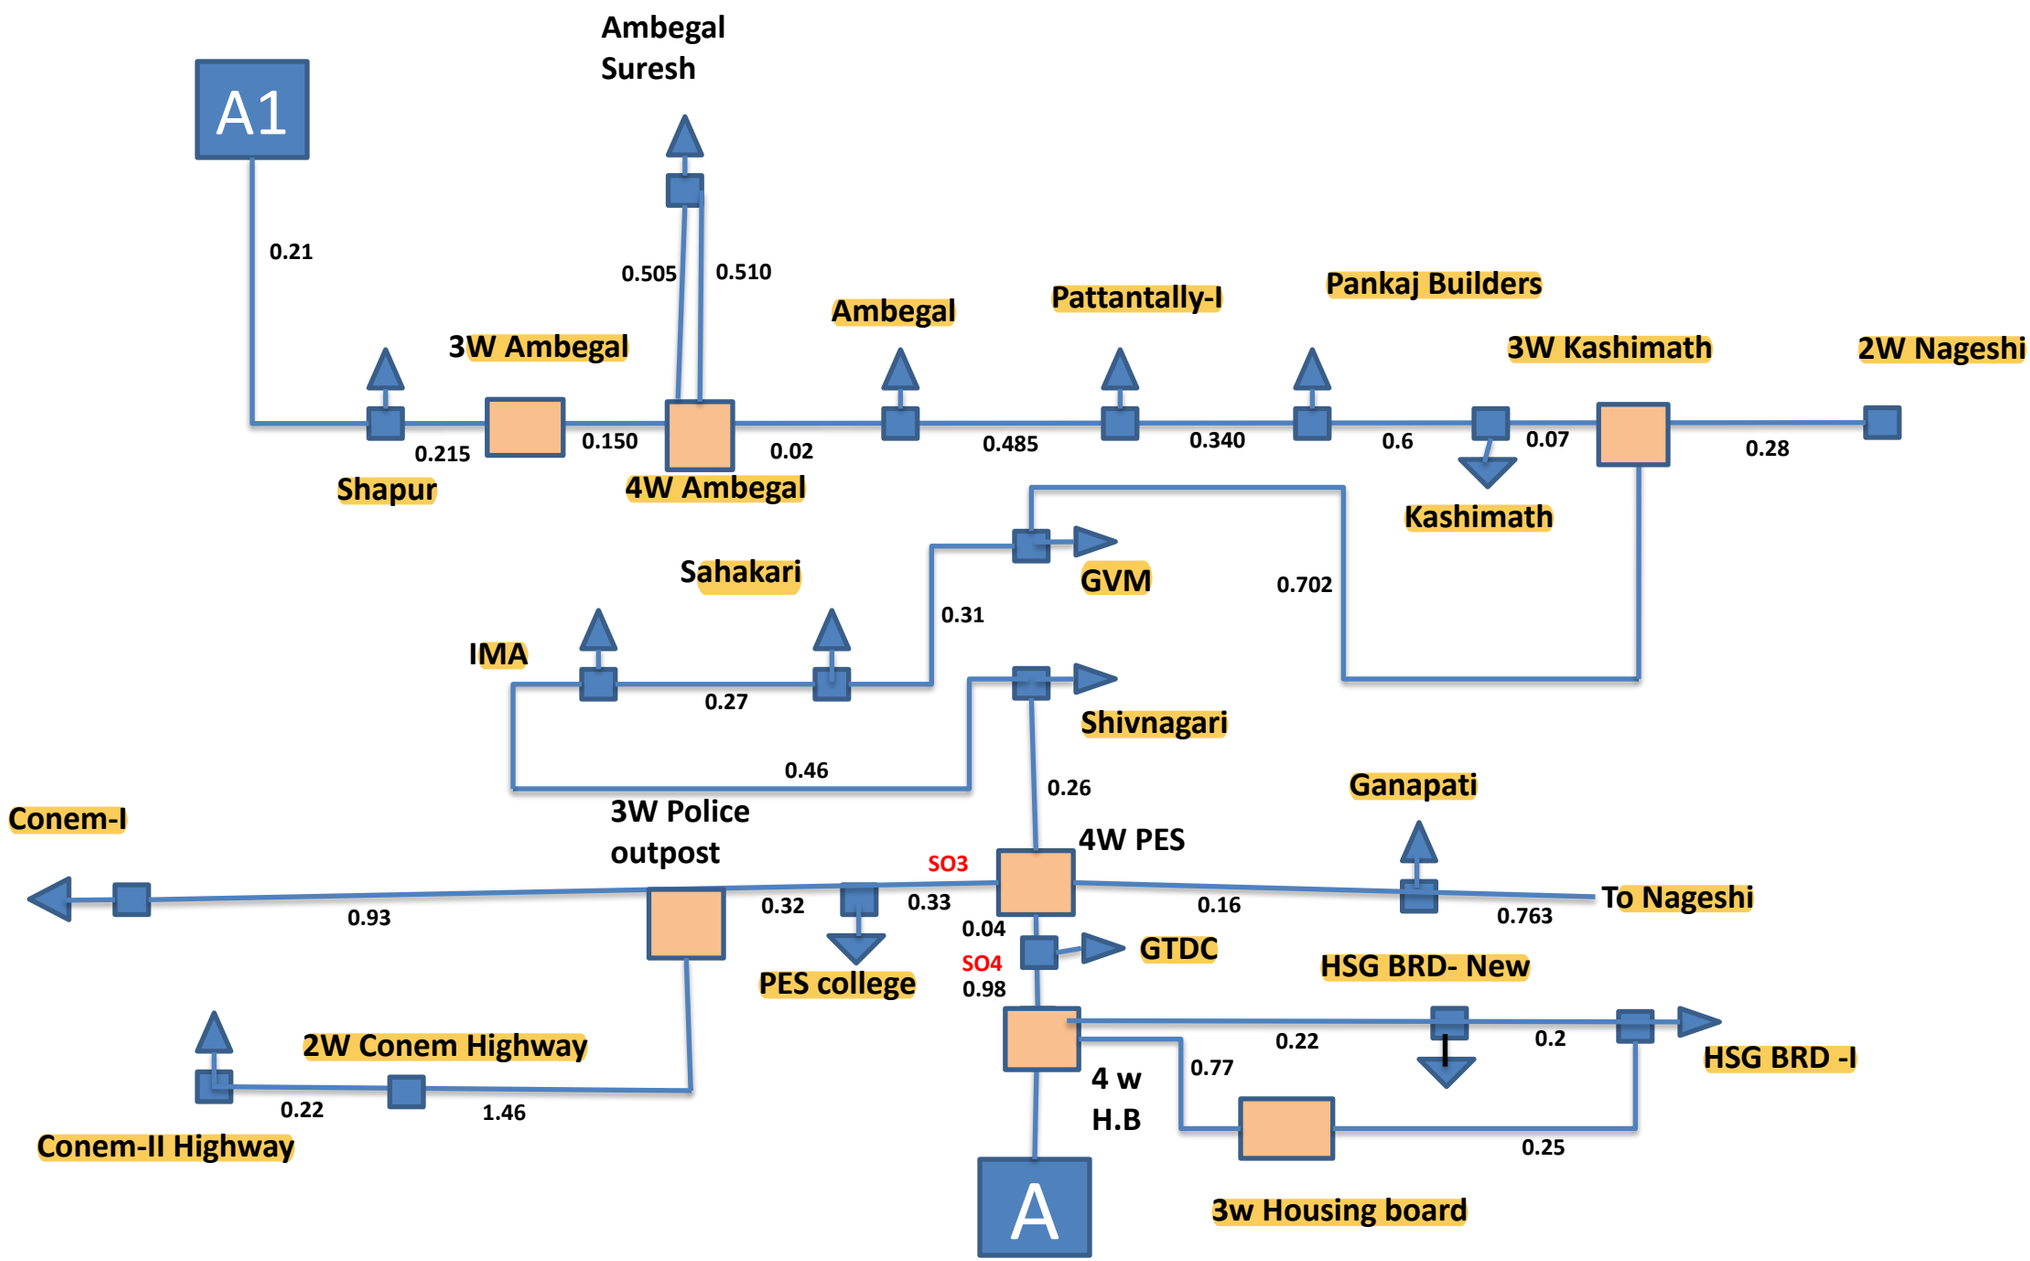

Farmagudi Feeder

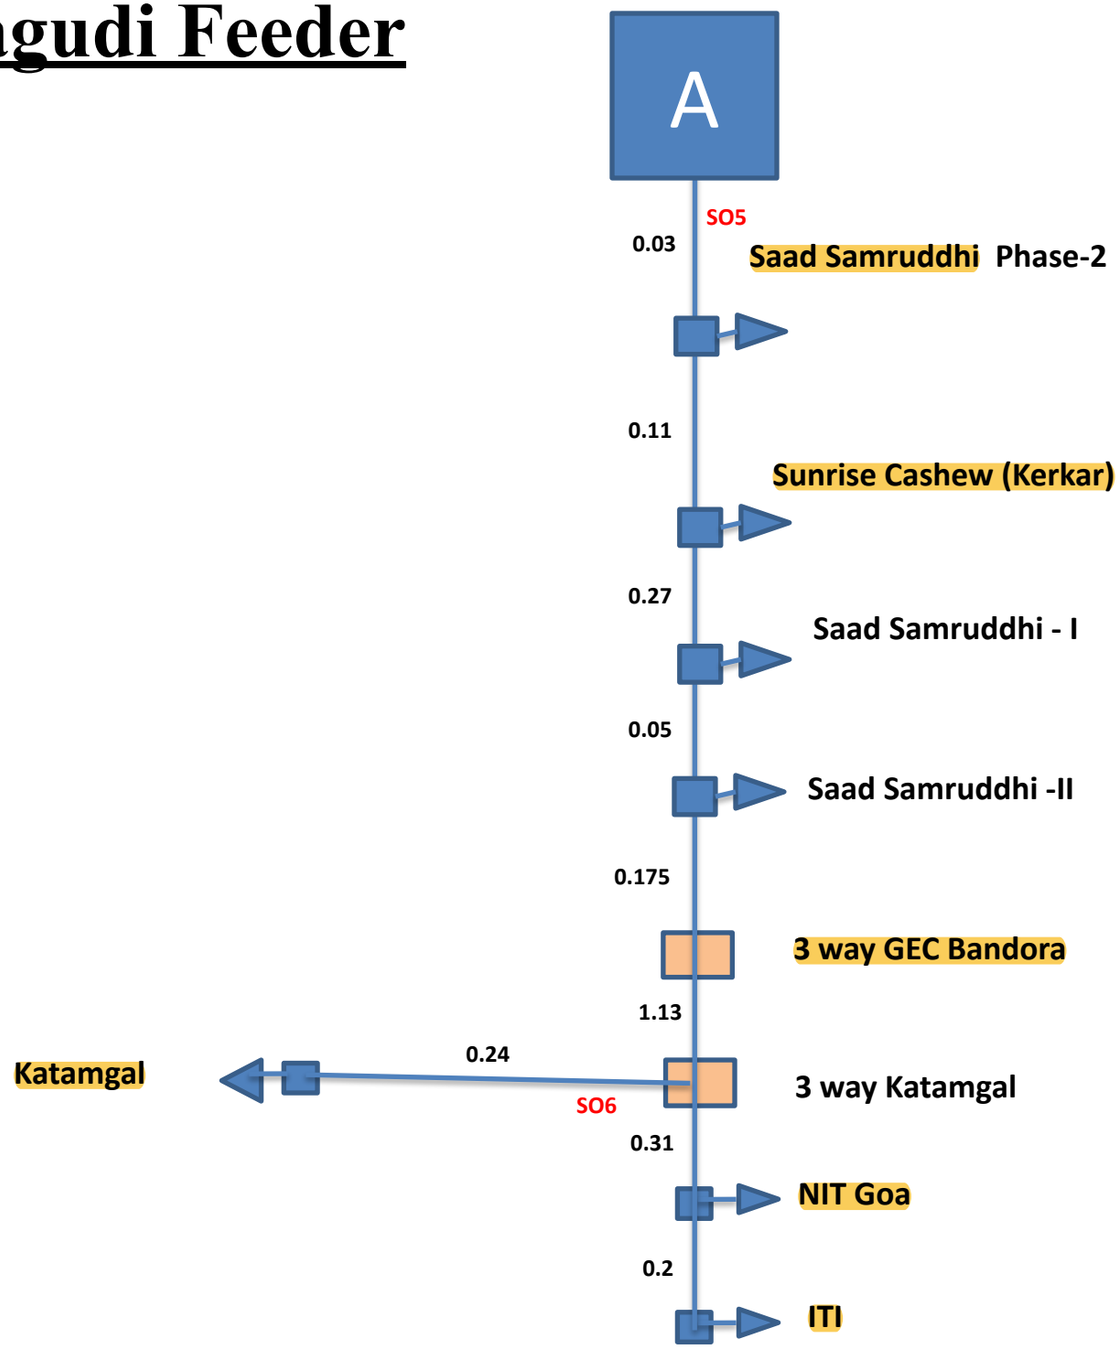

Sr no	Name of Feeder	DTC/HTC name	DTC/HTC capacity in KVA	Impedance %age voltage	Resistance of Transformer	year of manufacture	Full load of Primary Current as per name plate	Full load of Secondary Current as per name plate	Make/Manufature details	Fault in MVA	Three Phase Fault Current	short circuit current at 11KV side	short circuit current at Secondary side	%age peak loading	Remarks
1	11KV Farmagudi feeder	Agarwal	200	4.7		2014	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	70%	
2	11KV Farmagudi feeder	Shapur	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	60%	
3	11KV Farmagudi feeder	Ambegal	400	4.92		2011	21	533.34	Stanelec Trf	8.1301	10.68061127	0.42673112	10.668278	60%	
4	11KV Farmagudi feeder	Patantali	200	4.7		2010	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	70%	
5	11KV Farmagudi feeder	Panakaj Builders	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	60%	
6	11KV Farmagudi feeder	Kashimath	100	4.82		2008	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	60%	
7	11KV Farmagudi feeder	GVMS	100	4.82		2014	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	70%	
8	11KV Farmagudi feeder	Sahakari	100	4.82		1997	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	60%	
9	11KV Farmagudi feeder	IMA	200	4.7		2023	10.4	266.68	Shree Datta	4.2553	5.59027739	0.223352884	5.583822104	50%	
10	11KV Farmagudi feeder	Shivnagari	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
11	11KV Farmagudi feeder	Ganesh Temple	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
12	11KV Farmagudi feeder	GTDC/Tourist Deaprtment	100	4.82		2001	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	80%	
13	11KV Farmagudi feeder	PES	160	4.85		2018	8.39	213.34	Stanelec Trf	3.2990	4.33390577	0.17315605	4.32890126	80%	
14	11KV Farmagudi feeder	Sunrise cashew	100	4.82		2012	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	70%	
15	11KV Farmagudi feeder	Housing Board New Farmagudi	400	4.92		2022	21	533.34	SHIDDHI VINAYAKA TRF INDUSTRIES	8.1301	10.68061127	0.42673112	10.668278	50%	
16	11KV Farmagudi feeder	Housing Board I	200	4.7		2010	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	60%	
17	11KV Farmagudi feeder	Saad Samrudhi Phase II	400	4.92		2022	21	533.34	SHIDDHI VINAYAKA TRF INDUSTRIES	8.1301	10.68061127	0.42673112	10.668278	50%	
18	11KV Farmagudi feeder	saad I	400	4.92			21	533.34	Stanelec Trf	8.1301	10.68061127	0.42673112	10.668278	60%	
19	11KV Farmagudi feeder	saad II	400	4.92			21	533.34	Stanelec Trf	8.1301	10.68061127	0.42673112	10.668278	60%	
20	11KV Farmagudi feeder	Katmgaal	100	4.82		2014	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	60%	
21	11KV Farmagudi feeder	Conem II	63	4.8		2010	3.3	84		1.3125	1.724251182	0.068890405	1.72226013	60%	
22	11KV Farmagudi feeder	Conem I Highway	63	4.8		2010	3.3	84		1.3125	1.724251182	0.068890405	1.72226013	60%	
23	11KV Farmagudi feeder	NIT HTC	300	4.7			8.4	390	Pactil Trf	6.3830	8.385416084	0.335029326	8.375733156	40%	
24	11KV Farmagudi feeder	6TTR HTC	300	4.7				390	Stanelec Trf	6.3830	8.385416084	0.335029326	8.375733156	80%	
25	11KV Farmagudi feeder	ITI HTC	100	4.82		1997	5.2	133.33	Kirloskar Trf	2.0747	2.72555018	0.108896116	2.722402893	60%	
26	11KV Farmagudi feeder	Chirputem Primary School	100	4.82		2001	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	70%	
27	11KV Farmagudi feeder	RTO office New	200	4.7		2022	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
28	11KV Farmagudi feeder	Ambegal II	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
29	11KV Farmagudi feeder	Military Gate	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	60%	

Sr no	Name of Feeder	Voltage in Kv	Section	Type of conductor	Size	Rated current of conductor	Total DTC/HTC on this section	Resistance of the section	Reactance of the section	Length	Total connected load in KVA	Remarks
3	11KV Khadpabandh feeder	11000		XLPE 3C Cable	300Sq.mm	355A in Ground	29			12.232		
		11000	SO1	XLPE 3C Cable	300Sq.mm	355A in Ground	19	1.1817	0.773559	9.09	5075	
		11000	SO2	XLPE 3C Cable	300Sq.mm	355A in Ground	2	0.11583	0.0758241	0.891	460	
		11000	SO3	XLPE 3C Cable	300Sq.mm	355A in Ground	3	0.12298	0.0805046	0.946	600	
		11000	SO4	XLPE 3C Cable	300Sq.mm	355A in Ground	5	0.16965	0.1110555	1.305	1100	

Khadpabandh Feeder

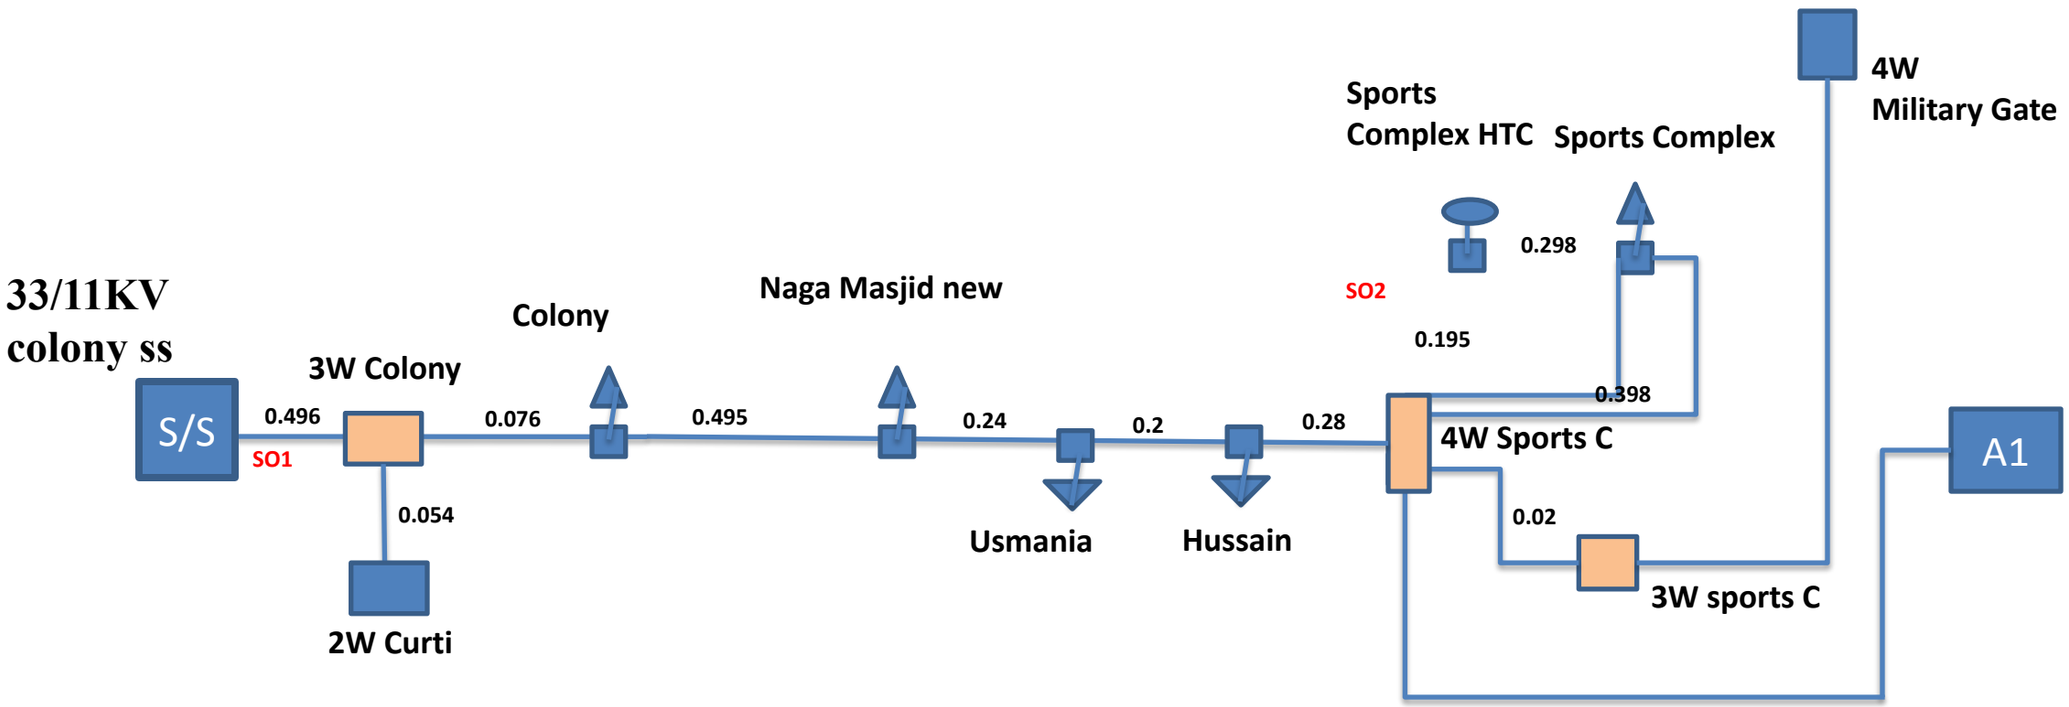

Khadpabandh Feeder

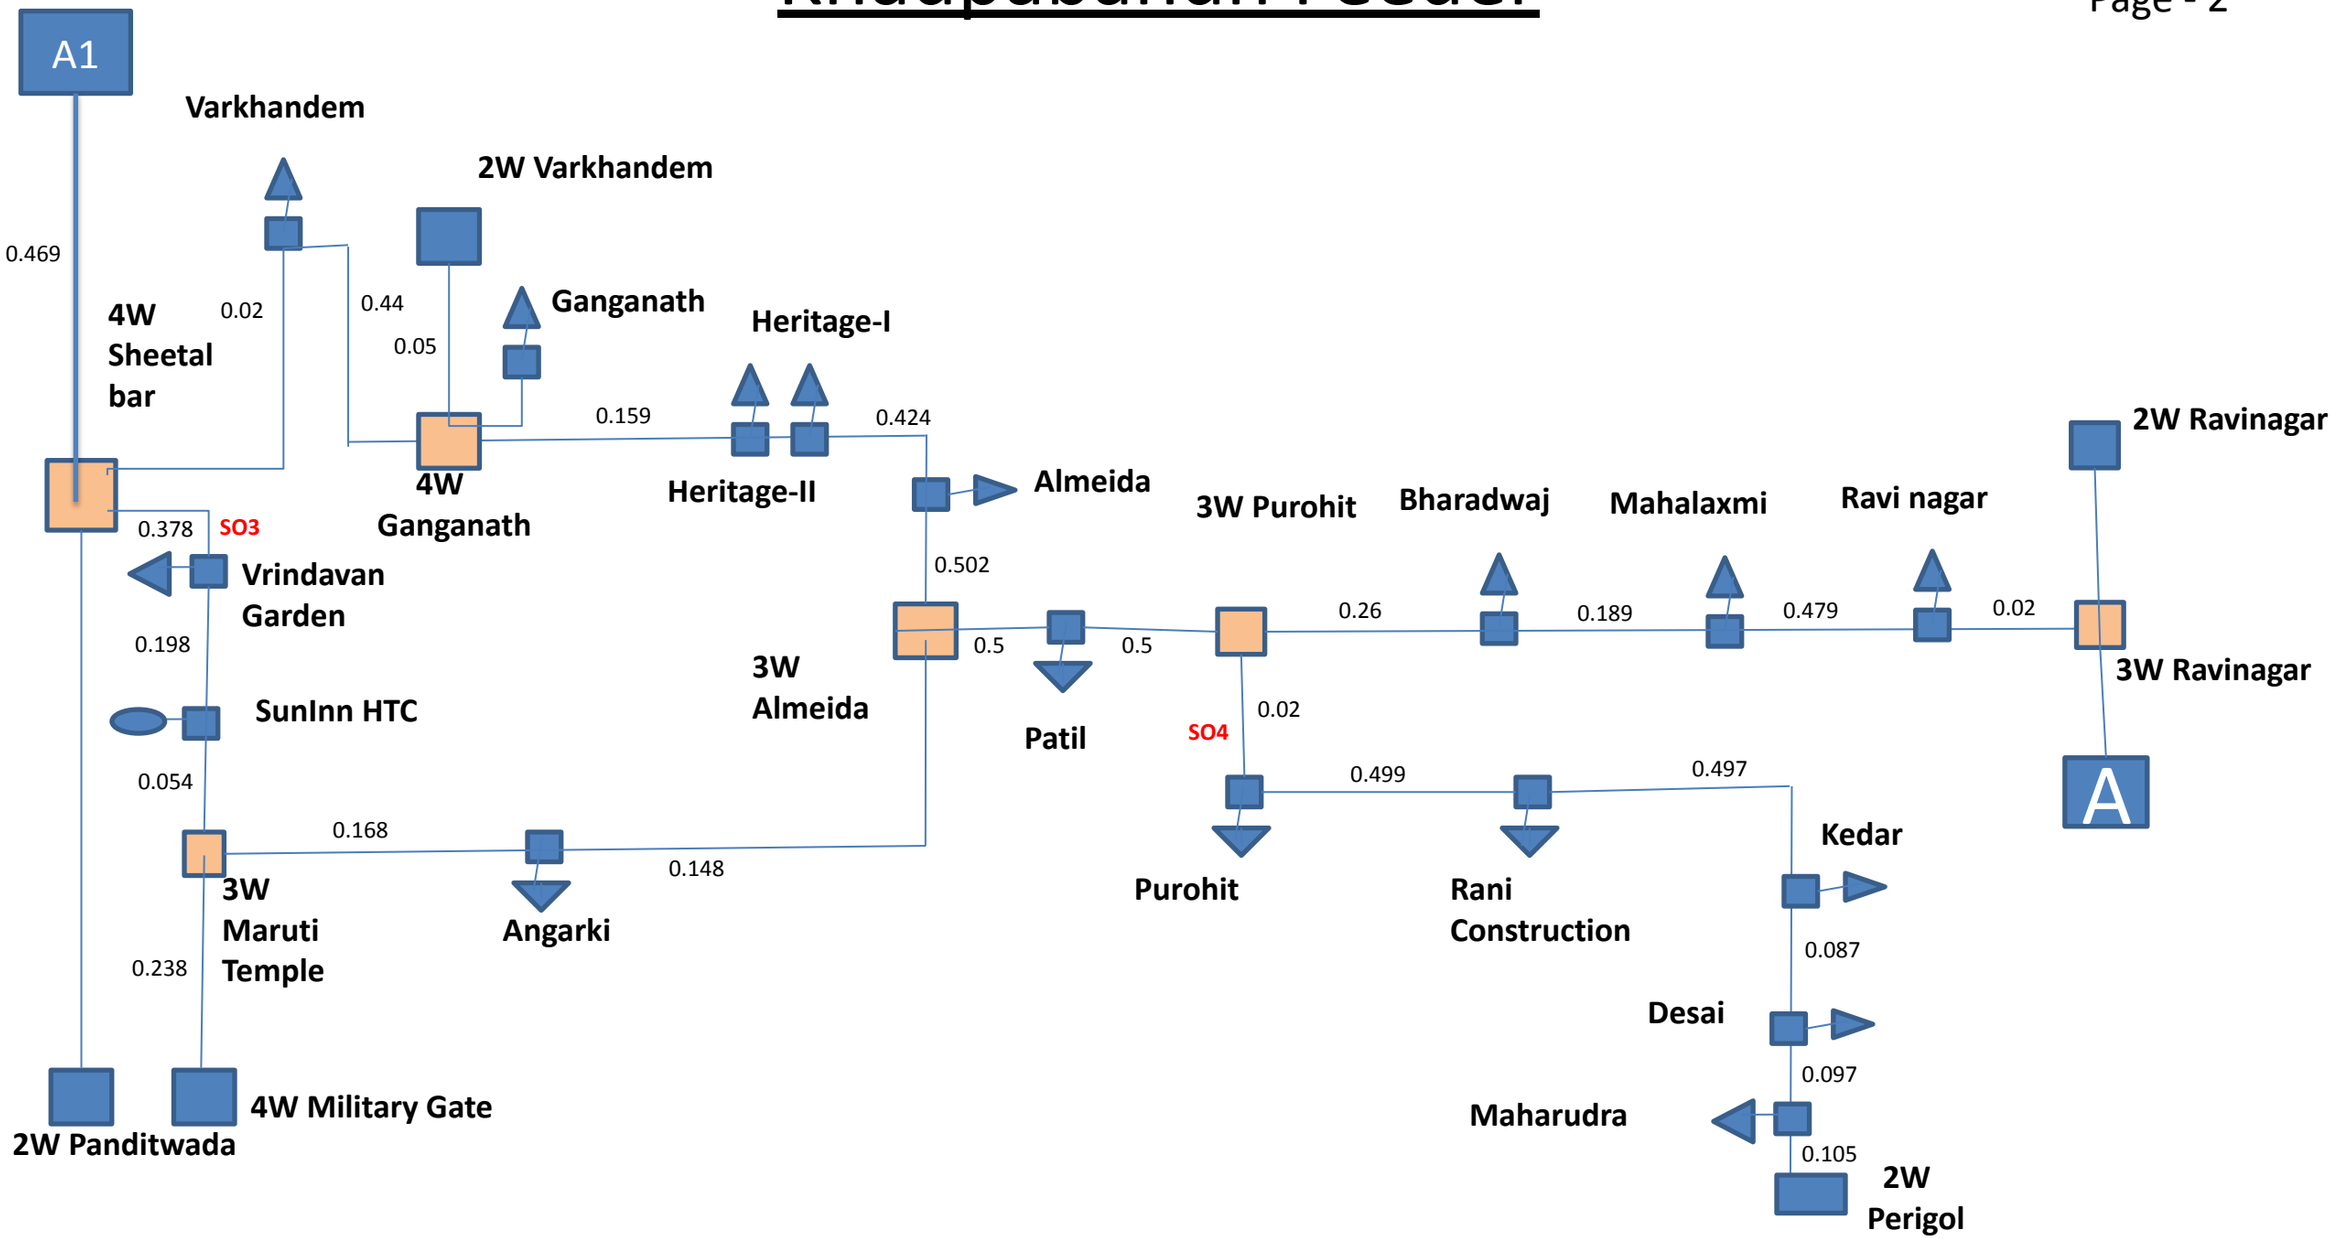

Khadpabandh Feeder

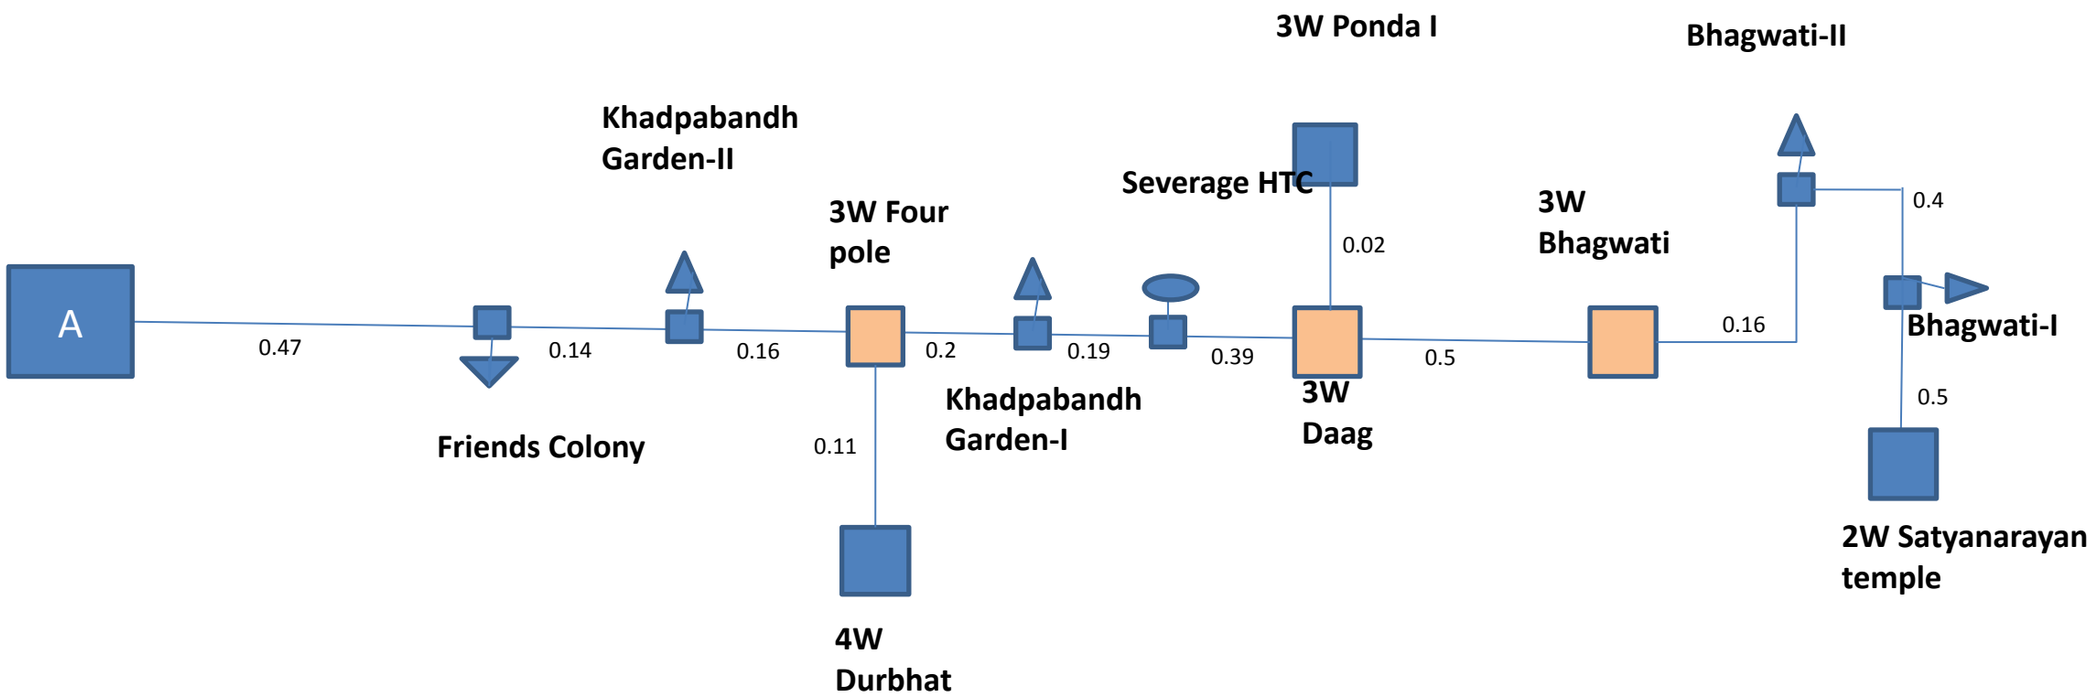

Sr no	Name of Feeder	DTC/HTC name	DTC/HTC capacity in KVA	Impedance %age voltage	Resistance of Transformer	year of manufacture	Full load of Primary Current as per name plate	Full load of Secondary Current as per name plate	Make/Manufature details	Fault in MVA	Three Phase Fault Current	short circuit current at 11KV side	short circuit current at Secondary side	%age peak loading	Remarks
1	11KV Khadpabandh feeder	Colony	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	60%	
2	11KV Khadpabandh feeder	Lotlikar/ Naga masjid	200	4.7		2001	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
3	11KV Khadpabandh feeder	USMANIA	100	4.82		2014	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	80%	
4	11KV Khadpabandh feeder	Varkhande	160	4.85		2013	8.39	213.34	Stanelec Trf	3.2990	4.33390577	0.17315605	4.32890126	70%	
5	11KV Khadpabandh feeder	Vrudhavan Garden	200	4.7			10.4	266.68	Vtst Trf	4.2553	5.59027739	0.223352884	5.583822104	60%	
6	11KV Khadpabandh feeder	Nagamasjid new	200	4.7			10.4	266.68	Shree Datta	4.2553	5.59027739	0.223352884	5.583822104	40%	
7	11KV Khadpabandh feeder	Angarki	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
8	11KV Khadpabandh feeder	Ganganath	200	4.7		2001	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
9	11KV Khadpabandh feeder	Heritage I	400	4.92		2013	21	533.34	Shiddhi Vinayaka Trf	8.1301	10.68061127	0.42673112	10.668278	60%	
10	11KV Khadpabandh feeder	Heritage II	400	4.92		2013	21	533.34	Shiddhi Vinayaka Trf	8.1301	10.68061127	0.42673112	10.668278	60%	
11	11KV Khadpabandh feeder	Almeda	160	4.85		2023	8.39	213.34	Shree Datta	3.2990	4.33390577	0.17315605	4.32890126	80%	
12	11KV Khadpabandh feeder	Patil	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	70%	
13	11KV Khadpabandh feeder	Purohit	200	4.7		2010	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
14	11KV Khadpabandh feeder	BHARDWAJ	100	4.82		2001	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	70%	
15	11KV Khadpabandh feeder	Mahalaxmi Dev	400	4.92			21	533.34	Stanelec Trf	8.1301	10.68061127	0.42673112	10.668278	60%	
16	11KV Khadpabandh feeder	Kedar	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
17	11KV Khadpabandh feeder	Dessai (Santoba)	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	50%	
18	11KV Khadpabandh feeder	Rani Construction	100	4.82		2008	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	70%	
19	11KV Khadpabandh feeder	Maharudra	400	4.92			21	533.34	SHIDDHI VINAYAKA TRF INDUSTRIES	8.1301	10.68061127	0.42673112	10.668278	60%	
20	11KV Khadpabandh feeder	Ravinagar	160	4.85		2010	8.39	213.34	Stanelec Trf	3.2990	4.33390577	0.17315605	4.32890126	80%	
21	11KV Khadpabandh feeder	Friends Colony	100	4.82		2005	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	80%	
22	11KV Khadpabandh feeder	Khadpabandh Garden II	315	4.8		2021	8.49	432	SHIDDHI VINAYAKA TRF INDUSTRIES	6.5625	8.621255912	0.344452026	8.611300651	40%	
23	11KV Khadpabandh feeder	Khadpabandh Garden I	630	4.38			33	840	Stanelec Trf	14.3836	18.89590337	0.754963345	18.87408362	50%	
24	11KV Khadpabandh feeder	Sports Complex	200	4.7		2008	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
25	11KV Khadpabandh feeder	Bhagwati I	200	4.7		2006	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
26	11KV Khadpabandh feeder	Bhagwati II	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
27	11KV Khadpabandh feeder	Sewerage HTC	750	4.8			39	930	VOLTAMP TRF LTD	15.6250	20.52679979	0.820123872	20.50309679	60%	
28	11KV Khadpabandh feeder	Sports Complex HTC	260	4.8			10.49	320	Stanelec Trf	5.4167	7.11595726	0.284309609	7.10774022	70%	
29	11KV Khadpabandh feeder	Sungrace HTC	200	4.7			10.4	266.68	Power Tech Trf	4.2553	5.59027739	0.223352884	5.583822104	60%	

Sr no	Name of Feeder	Voltage in Kv	Section	Type of conductor	Size	Rated current of conductor	Total DTC/HTC on this section	Resistance of the section	Reactance of the section	Length	Total connected load in KVA	Remarks
4	11KV Ponda I feeder	11000		XLPE 3C Cable	300Sq.mm	355A in Ground	37			9.595		
		11000	SO1	XLPE 3C Cable	300Sq.mm	355A in Ground	23	0.70278	0.4600506	5.406	5922	
		11000	SO2	XLPE 3C Cable	300Sq.mm	355A in Ground	2	0.0286	0.018722	0.22	360	
		11000	SO3	XLPE 3C Cable	300Sq.mm	355A in Ground	1	0.0299	0.019573	0.23	100	
		11000	SO4	XLPE 3C Cable	300Sq.mm	355A in Ground	2	0.12688	0.0830576	0.976	400	
		11000	SO5	XLPE 3C Cable	300Sq.mm	355A in Ground	7	0.16094	0.1053538	1.238	2230	
		11000	SO6	XLPE 3C Cable	300Sq.mm	355A in Ground	2	0.0806	0.052762	0.62	800	

Ponda- I Feeder

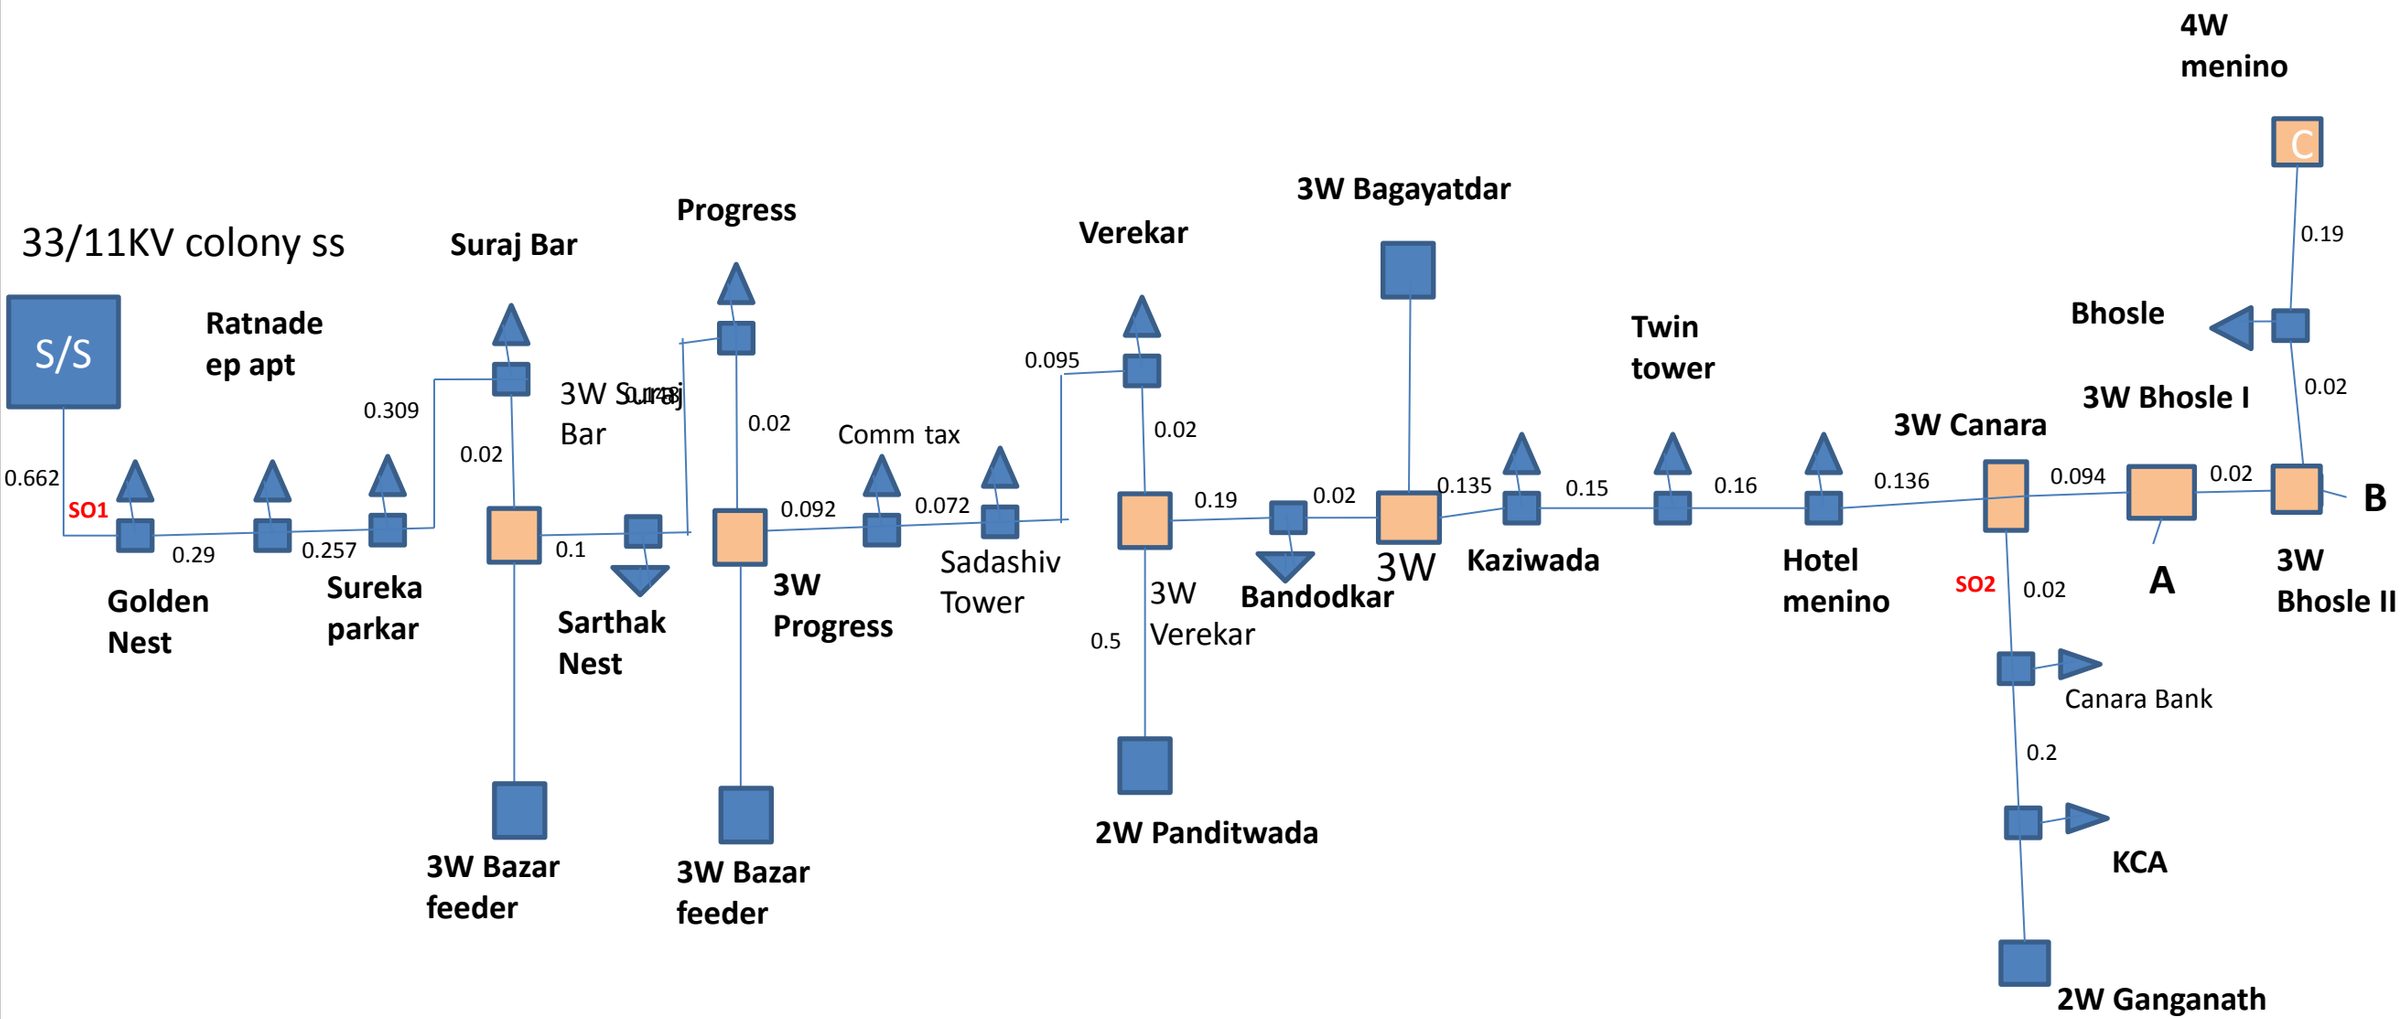

Ponda- I Feeder

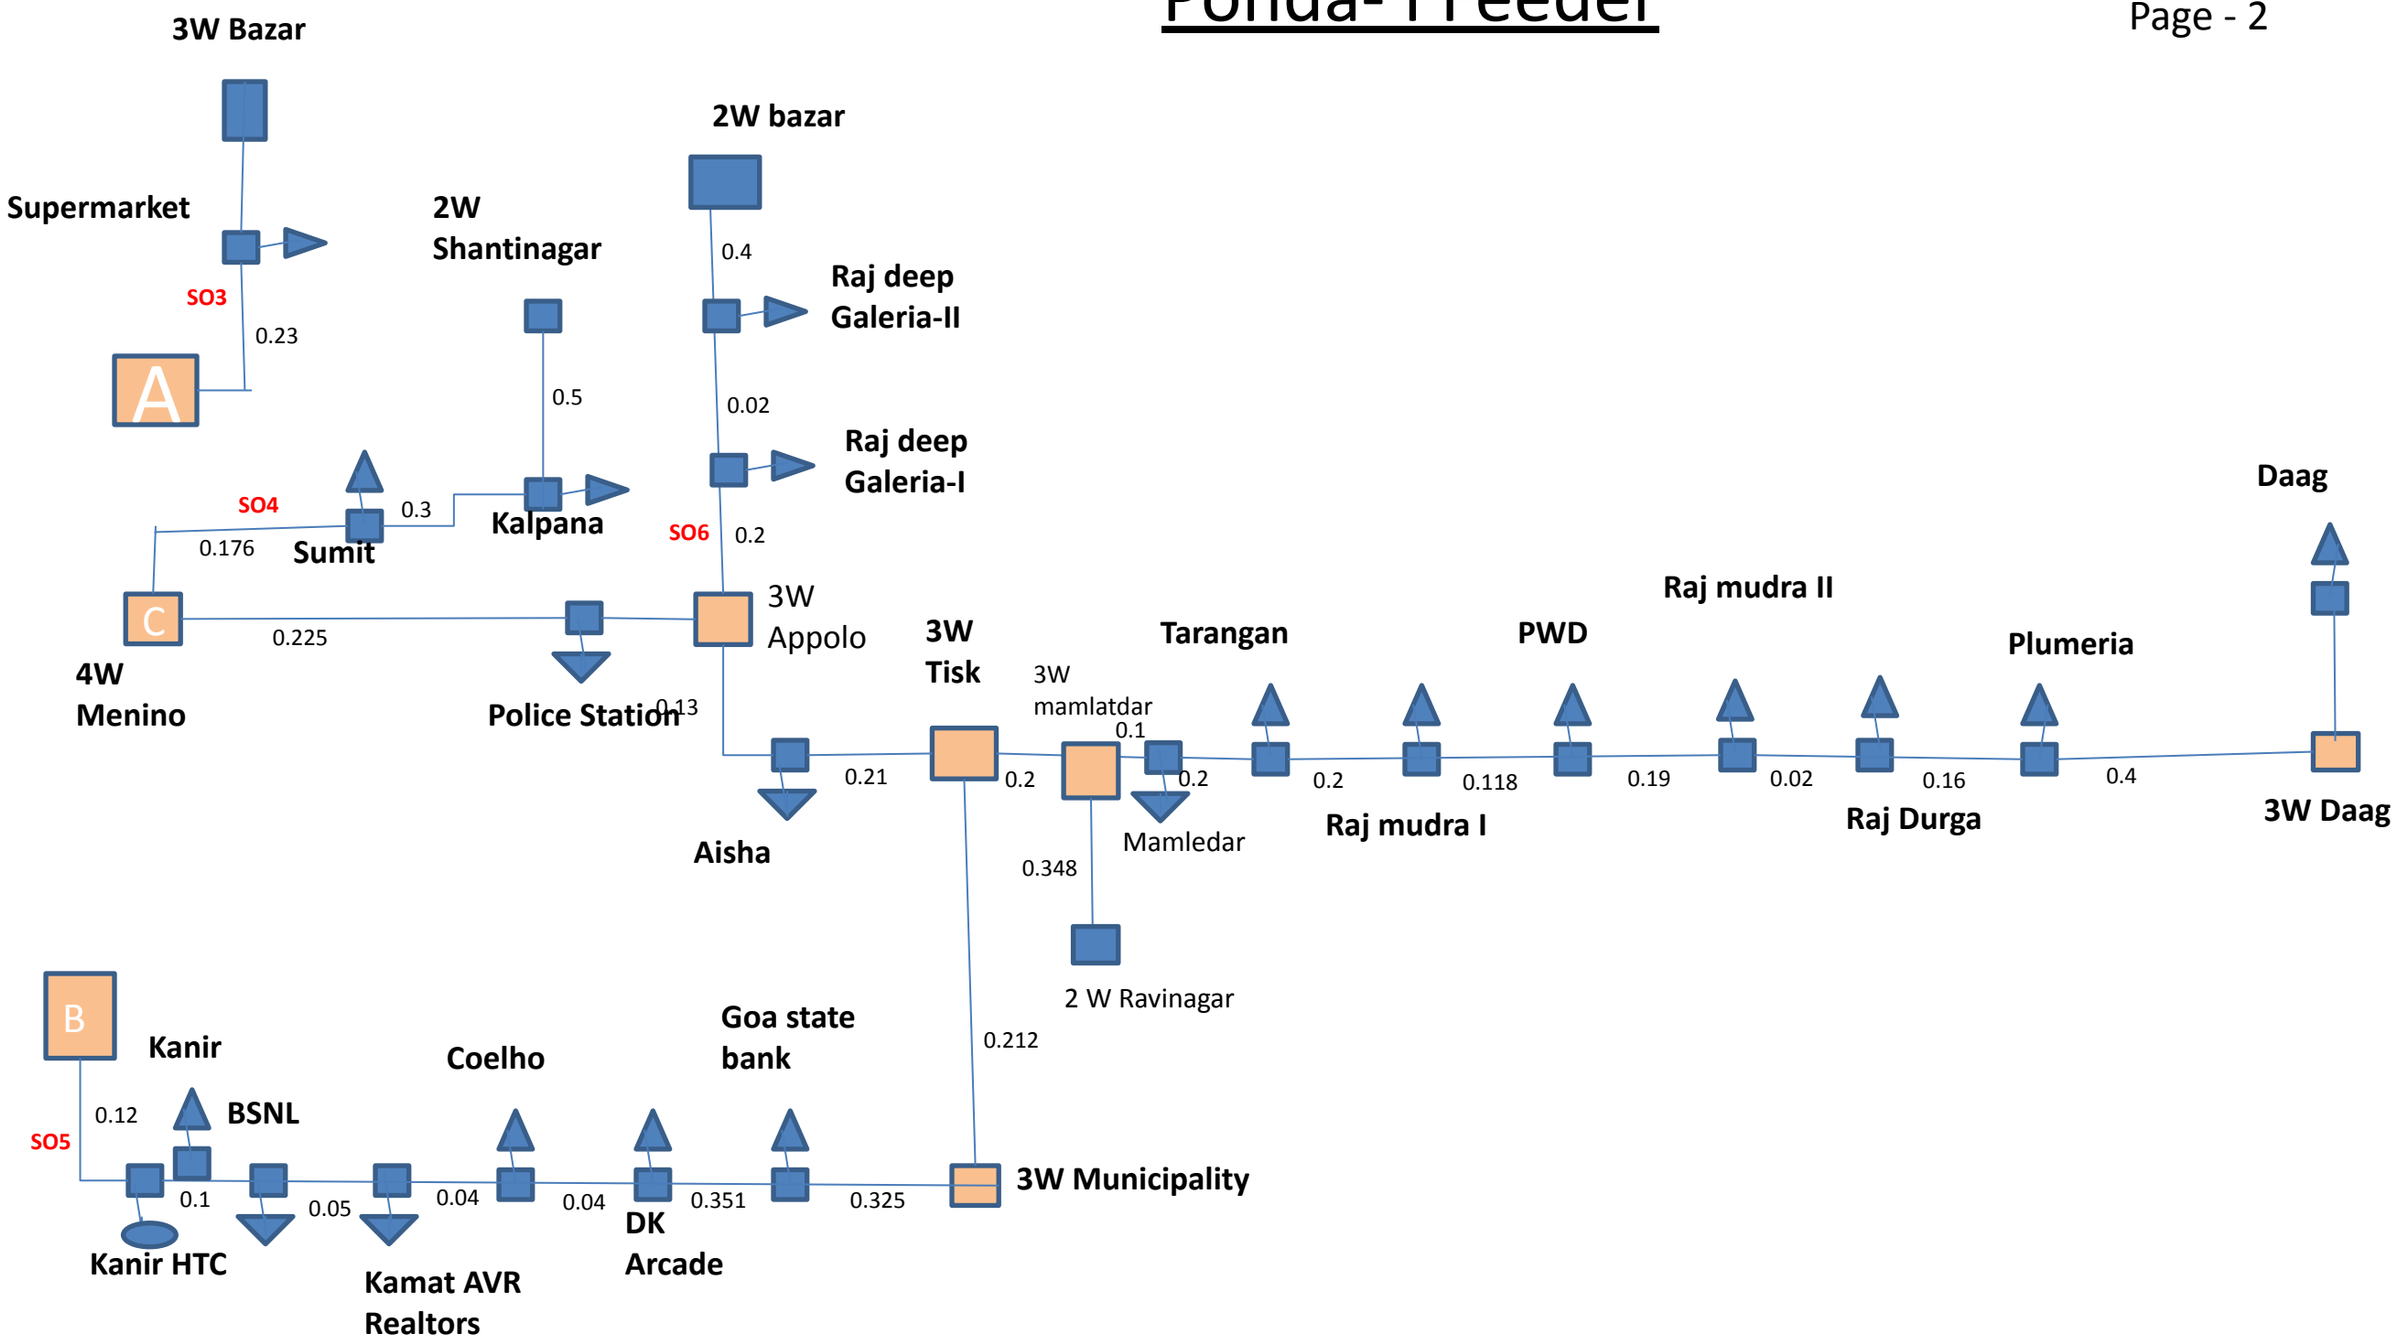

Sr no	Name of Feeder	DTC/HTC name	DTC/HTC capacity in KVA	Impedance %age voltage	Resistance of Transformer	year of manufacture	Full load of Primary Current as per name plate	Full load of Secondary Current as per name plate	Make/Manufature details	Fault in MVA	Three Phase Fault Current	short circuit current at 11KV side	short circuit current at Secondary side	%age peak loading	Remarks
1	11KV Ponda I feeder	Golden Nest	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	60%	
2	11KV Ponda I feeder	Surekha Parkar	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
3	11KV Ponda I feeder	Nagzar	200	4.7		2008	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
4	11KV Ponda I feeder	Sarthak Nest	200	4.7			10.4	266.68	SHIDDHI VINAYAKA TRF INDUSTRIES	4.2553	5.59027739	0.223352884	5.583822104	60%	
5	11KV Ponda I feeder	Progress	200	4.7		2001	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
6	11KV Ponda I feeder	Commertial Tax	200	4.7		2012	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
7	11KV Ponda I feeder	Panditwada	160	4.85		2013	8.39	213.34	Stanelec Trf	3.2990	4.33390577	0.17315605	4.32890126	60%	
8	11KV Ponda I feeder	Verekar	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	70%	
9	11KV Ponda I feeder	Bandodkar	200	4.7			10.4	266.68	Indo Tech Electric Company	4.2553	5.59027739	0.223352884	5.583822104	70%	
10	11KV Ponda I feeder	Kaziwada	150	4.7		2001	8.3	213.34	Stanelec Trf	3.1915	4.192708042	0.167514663	4.187866578	80%	
11	11KV Ponda I feeder	Twin Tower	200	4.7		2013	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	60%	
12	11KV Ponda I feeder	Canara Bank	200	4.7		2011	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
13	11KV Ponda I feeder	Kurtarkar Arcade (KCA)	160	4.85		2007	8.39	213.34	KEL	3.2990	4.33390577	0.17315605	4.32890126	60%	
14	11KV Ponda I feeder	Bhosle	200	4.7		2010	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
15	11KV Ponda I feeder	Super Market	100	4.82		2014	5.2	133.33	Stanelec Trf	2.0747	2.72555018	0.108896116	2.722402893	60%	
16	11KV Ponda I feeder	D.K Arcade	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
17	11KV Ponda I feeder	Coelo	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	

18	11KV Ponda I feeder	AVR	630	4.38		2021	33	840	SHIDDHI VINAYAKA TRF INDUSTRIES	14.3836	18.89590337	0.754963345	18.87408362	50%	
19	11KV Ponda I feeder	BSNL/ Sub Divisional Engr (Internal)	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	50%	
20	11KV Ponda I feeder	Kanir Construction	400	4.92			21	533.34	Stanelec Trf	8.1301	10.68061127	0.42673112	10.668278	50%	
21	11KV Ponda I feeder	Sumit (Sumit Shivam)	200	4.7		2006	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	70%	
22	11KV Ponda I feeder	Kalpana	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
23	11KV Ponda I feeder	Police Station	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
24	11KV Ponda I feeder	Goa State bank	200	4.7		1998	10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
25	11KV Ponda I feeder	Rajdeep Galaria I	400	4.92		2012	21	533.34	Urja Techniques	8.1301	10.68061127	0.42673112	10.668278	70%	
26	11KV Ponda I feeder	Rajdeep Galaria II	400	4.92		2012	21	533.34	Urja Techniques	8.1301	10.68061127	0.42673112	10.668278	70%	
27	11KV Ponda I feeder	Aiesha	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
28	11KV Ponda I feeder	Mamladtdar	160	4.85		2008	8.39	213.34	Stanelec Trf	3.2990	4.33390577	0.17315605	4.32890126	80%	
29	11KV Ponda I feeder	Tarangan I	400	4.92			21	533.34	Stanelec Trf	8.1301	10.68061127	0.42673112	10.668278	60%	
30	11KV Ponda I feeder	Tarangan II	400	4.92			21	533.34	Stanelec Trf	8.1301	10.68061127	0.42673112	10.668278	60%	
31	11KV Ponda I feeder	Rajmudra I	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
32	11KV Ponda I feeder	Rajmudra II	400	4.92			21	533.34	Stanelec Trf	8.1301	10.68061127	0.42673112	10.668278	60%	
33	11KV Ponda I feeder	Rajdurga	630	4.38			33	840	Shiddhi Vinayaka Trf	14.3836	18.89590337	0.754963345	18.87408362	60%	
34	11KV Ponda I feeder	Sumit Plumeria	400	4.92			21	533.34	SHIDDHI VINAYAKA TRF INDUSTRIES	8.1301	10.68061127	0.42673112	10.668278	50%	
35	11KV Ponda I feeder	Daag	200	4.7			10.4	266.68	Stanelec Trf	4.2553	5.59027739	0.223352884	5.583822104	80%	
36	11KV Ponda I feeder	Kanir Construction HTC	400	4.92			21	533.34	Stanelec Trf	8.1301	10.68061127	0.42673112	10.668278	60%	
37	11KV Ponda I feeder	Josheph HTC	222	4.8			10.49	280	Power Tech Trf	4.6250	6.075932738	0.242756666	6.068916649	60%	
38	11KV Ponda I feeder	Ratnadeep Apt	200	4.7			10.4	266.8		4.2553	5.59027739	0.223352884	5.583822104	0%	