Whole House

Sample Client

48 Example Ridge Road, Sampleton, CA 90000, US

DRAWING AV-200 · PROJECT RM-2026-014 · REVISION B · ISSUED 2026-07-18

INTEGRATOR

Example Integration Co.
projects@example.invalid

SIGN-OFF

DRAWN RackPal · CHECKED RackPal · APPROVED —

DRAWING INDEX

1	T0.00	COVER AND DRAWING INDEX
2	T0.01	SYMBOL LEGEND
3–4	T0.02–T0.03	EXCEPTIONS AND ACKNOWLEDGEMENTS (2 pages)
5	T2.01	RACK ELEVATION — FRONT · RK-1
6	T2.02	RACK ELEVATION — REAR · RK-1
7	T6.01	INTERCONNECT · Analog Video & RF
8	T6.02	INTERCONNECT · Network
9–10	T6.10–T6.11	PULL SHEET (2 pages)
11	T6.15	TERMINATION SCHEDULE
12	T6.20	UNUSED HOME RUNS
13–15	T6.30–T6.32	EQUIPMENT LIST AND MATERIALS (3 pages)
16	T5.01	PLATE, PANEL AND PINOUT DETAILS

RACKS

RACK	SIZE	DEVICES	RU USED	WEIGHT	POWER	HEAT
RK-1 MDF — Equipment Room	42U	26	F 37 · R 28	378.0 lb	≥ 2490 VA (5 unknown)	≥ 6920 BTU/hr (4 unknown)

REV	DATE	DESCRIPTION	BY
B	2026-04-21	Head-end updated after trim walkthrough	RackPal
A	2026-01-30	Issued for rough-in	RackPal

Whole House

48 Example Ridge Road, Sampleton, CA 90000, US

CLIENT Sample Client

COVER AND DRAWING INDEX

DRAWN	RackPal	SCALE	NTS	SIZE	B	DATE	2026-07-18	REV	B
CHK'D	RackPal	PROJ	RM-2026-014	DISC	T	FILE	whole_house.rppj	SHEET	1/16

Example Integration Co. · projects@example.invalid

SYMBOL LEGEND: SEE SHEET T0.01

CABLE TYPES


Colour marks the signal domain, not the cable type: no palette stays distinguishable to colour-blind readers past about eight hues.
Dash, weight, mark and tag carry the type, so every type below still reads in greyscale (AC-054).

TYPE	FAMILY	IN COLOUR	IN GREYSCALE
Analog RCA	Line level, unbalanced (RCA)	● AUD·AUD	● AUD·AUD
HDMI	HDMI 2.0 (18 Gbps)	▲ VID·HD20	▲ VID·HD20
	HDMI 2.1 (48 Gbps)	▲ VID·HD21	▲ VID·HD21
	HDMI 1.4	▲ VID·HD14	▲ VID·HD14
Network	Ethernet (copper)	■ NET·NET	■ NET·NET
	PoE / PoE+ / PoE++	■ NET·PoE	■ NET·PoE
IR	IR emitter (flasher)	✚ CTL·IR	✚ CTL·IR
	IR receiver (powered eye)	✚ CTL·IRRX	✚ CTL·IRRX
	IR direct (device input)	✚ CTL·IRD	✚ CTL·IRD
RS-232	RS-232	✚ CTL·232	✚ CTL·232
RG6	RF / CATV distribution	▽ RF·RF	▽ RF·RF
	Satellite / SWM	▽ RF·SAT	▽ RF·SAT
	OTA antenna	▽ RF·OTA	▽ RF·OTA
S/PDIF	S/PDIF, coaxial (75 Ω)	◆ DIG·SPD	◆ DIG·SPD
TOSLINK	TOSLINK (optical S/PDIF)	◇ DIG·OPT	◇ DIG·OPT
Speaker level	Speaker level, low-Z	◖ AUD·SPK	◖ AUD·SPK
	Speaker, constant-voltage 70 / 100 / 25 V	○ AUD·70V	○ AUD·70V
Power	AC branch circuit	⬢ PWR·PWR	⬢ PWR·PWR
	IEC device power (C13/C14, C19/C20)	⬢ PWR·IEC	⬢ PWR·IEC
Fibre, singlemode (OS2)	Fibre, singlemode (OS2)	□ NET·FIBS	□ NET·FIBS

SYMBOLS

- Matrix switch
- Switcher
- Amplifier
- Source
- Power
- Blank or vent
- Distribution amplifier
- Extender
- Processor
- Patch panel
- Battery or UPS
- Shelf

DEVICE BLOCK

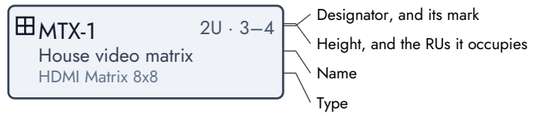

An example block, not a device in this project.

CONVENTIONS

Border: NEW

Hatched: a blank, vent or shelf

2U · 3–4 Height, and the RUs a device occupies

176.6 lb Load gutter: weight carried from this RU up

W003 · RF·RF

Tag pill: the cable's number and type, at each end of a drawn cable

IDENTIFIERS

Device {TYPE_PREFIX}{SEP}{SEQ} → AMP-1
- TYPE_PREFIX = AMP, prefix of the device type
- SEP = -, separator
- SEQ = 1, sequence number

Port J{PORT_SEQ:2} → J03
- PORT_SEQ = 3, port sequence on the device

Cable W{SEQ:3} → W001
- SEQ = 1, sequence number

Outlet, field end {ROOM_ABBR}-{SERVICE}-{SEQ} → LR-TV-1
- ROOM_ABBR = LR, room abbreviation
- SERVICE = TV, service at the outlet
- SEQ = 1, sequence number

Outlet, rack end {FLOOR}{SPACE}-{PANEL}{PORT:2} → 1A-A12
- FLOOR = 1, floor
- SPACE = A, space on the floor
- PANEL = A, patch panel letter
- PORT = 12, panel port number

ABBREVIATIONS AND NOTES

RU	rack unit, 1.75 in
NTS	not to scale
REV	revision
CHK'D	checked by
DISC	discipline
PROJ	project number
AUD	Analog Audio (a tag prefix)
CTL	Control (a tag prefix)
DIG	Digital Audio (a tag prefix)
NET	Network (a tag prefix)
PWR	Power (a tag prefix)
RF	Analog Video & RF (a tag prefix)
STR	Structure (a tag prefix)
VID	Digital Video (a tag prefix)

Do not scale a sheet marked NTS.

A value shown as — is not known, and was not guessed.

REV	DATE	DESCRIPTION	BY
B	2026-04-21	Head-end updated after trim walkthrough	RackPal
A	2026-01-30	Issued for rough-in	RackPal

Whole House

48 Example Ridge Road, Sampleton, CA 90000, US

CLIENT Sample Client

SYMBOL LEGEND

DRAWN	RackPal	SCALE	NTS	SIZE	B	DATE	2026-07-18	REV	B
CHK'D	RackPal	PROJ	RM-2026-014	DISC	T	FILE	whole_house.rppj	SHEET	2/16

Example Integration Co. · projects@example.invalid

PROJECT-WIDE EXCEPTIONS (0)

RULE	CHANGE	REASON	BY	DATE

None. Every rule runs at its catalogue severity, and none is muted.

OPEN FINDINGS (39)

SEVERITY	RULE	LOCUS	MESSAGE
ERROR (15)			
ERROR	LEN-001	W015	W015 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W019	W019 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W001	W001 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W014	W014 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W016	W016 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W012	W012 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W011	W011 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W020	W020 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W008	W008 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W025	W025 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W013	W013 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W007	W007 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W024	W024 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W006	W006 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
ERROR	LEN-001	W002	W002 carries Ethernet and has no measured length, so the 100 m channel limit cannot be verified.
WARNING (23)			
WARNING	LEN-002	W015	W015 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W019	W019 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W001	W001 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W014	W014 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W016	W016 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W012	W012 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W011	W011 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W020	W020 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W008	W008 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W025	W025 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W013	W013 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W007	W007 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W024	W024 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W006	W006 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	LEN-002	W002	W002 is Cat6 UTP and has no measured length, so its 100.0 m maximum cannot be verified.
WARNING	RCK-013	UPS-1	UPS-1 is 41.7 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.
WARNING	RCK-013	SEQ-1	SEQ-1 is 8.2 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.

REV	DATE	DESCRIPTION	BY
B	2026-04-21	Head-end updated after trim walkthrough	RackPal
A	2026-01-30	Issued for rough-in	RackPal

Whole House

48 Example Ridge Road, Sampleton, CA 90000, US

CLIENT Sample Client

EXCEPTIONS AND ACKNOWLEDGEMENTS

DRAWN	RackPal	SCALE	NTS	SIZE	B	DATE	2026-07-18	REV	B
CHK'D	RackPal	PROJ	RM-2026-014	DISC	T	FILE	whole_house.rppj	SHEET	3/16

Example Integration Co. · projects@example.invalid

SYMBOL LEGEND: SEE SHEET T0.01

OPEN FINDINGS (39) (cont.)

SEVERITY	RULE	LOCUS	MESSAGE
WARNING (23) (cont.)			
WARNING	RCK-013	MTX-1	MTX-1 is 7.3 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.
WARNING	RCK-013	AMP-2	AMP-2 is 15.4 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.
WARNING	RCK-013	NAS-1	NAS-1 is 13.6 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.
WARNING	RCK-013	SW-1	SW-1 is 7.7 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.
WARNING	RCK-013	AMP-1	AMP-1 is 17.2 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.
WARNING	RCK-013	SW-2	SW-2 is 7.7 kg on front ears rated to 7.0 kg. It needs rear rail support or a shelf in RK-1, and may require adjustment of the rack ears.
ADVISORY (1)			
ADVISORY	LNK-020	No single location	12 runs still have an end to land.

ACKNOWLEDGED FINDINGS (0)

SEVERITY	RULE	LOCUS	MESSAGE	REASON	BY	DATE
None.						

REV	DATE	DESCRIPTION	BY
B	2026-04-21	Head-end updated after trim walkthrough	RackPal
A	2026-01-30	Issued for rough-in	RackPal

Whole House

48 Example Ridge Road, Sampleton, CA 90000, US

CLIENT Sample Client

EXCEPTIONS AND ACKNOWLEDGEMENTS


DRAWN	RackPal	SCALE	NTS	SIZE	B	DATE	2026-07-18	REV	B
CHK'D	RackPal	PROJ	RM-2026-014	DISC	T	FILE	whole_house.rppj	SHEET	4/16

Example Integration Co. · projects@example.invalid

SYMBOL LEGEND: SEE SHEET T0.01

SCALE APPLIES TO THE MOUNTING PANEL. RULER AND GUTTER ARE ANNOTATION.
RACK GROUND BAR PRESENT. BOND TO BUILDING GROUND PER LOCAL CODE.

RACK TOTAL 378.0 lb
CAPACITY 1984.2 lb
DRAW ≥ 2490 VA (5 unknown)
HEAT ≥ 6920 BTU/hr (4 unknown)
NOT DRAWN HERE 2 OF 31 — SEE T6.30; 4 COUNTED AT TOP

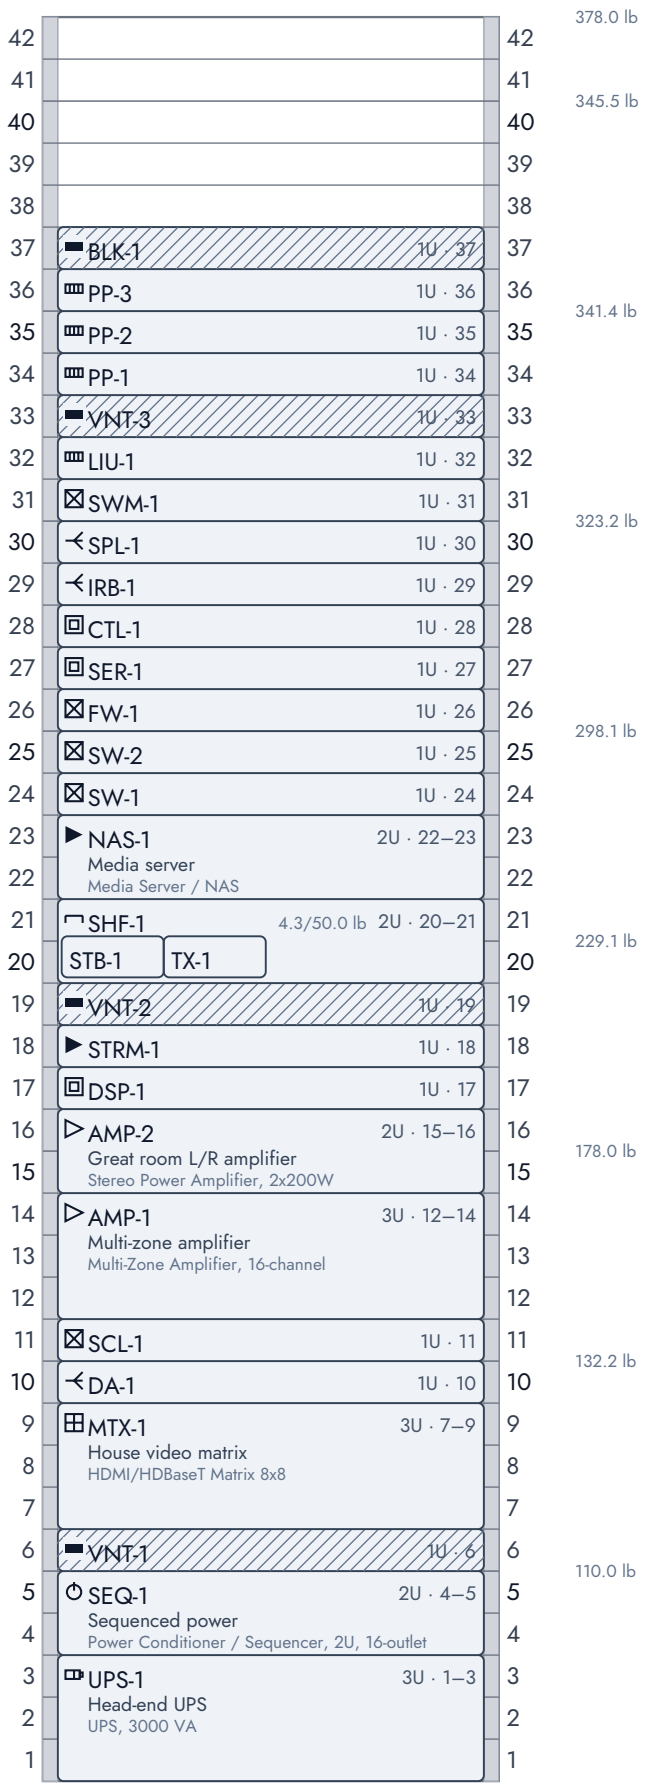

1 ft

REV	DATE	DESCRIPTION	BY
B	2026-04-21	Head-end updated after trim walkthrough	RackPal
A	2026-01-30	Issued for rough-in	RackPal

Whole House — RK-1 MDF — Equipment Room

48 Example Ridge Road, Sampleton, CA 90000, US

CLIENT Sample Client

RACK ELEVATION — FRONT

RK-1 · MDF — Equipment Room · 42U

DRAWN	RackPal	SCALE	1:8	SIZE	B	DATE	2026-07-18	REV	B
CHK'D	RackPal	PROJ	RM-2026-014	DISC	T	FILE	whole_house.rppj	SHEET	5/16

Example Integration Co. · projects@example.invalid


SYMBOL LEGEND: SEE SHEET T0.01

SHEET 5 OF 16 · RACK ELEVATION — FRONT

SHEET NO. T2.01

REAR FACES SHOWN. PORT AND CONNECTION DETAIL: SEE T6.15.
REAR VIEW — MIRRORED
SCALE APPLIES TO THE MOUNTING PANEL. RULER AND GUTTER ARE ANNOTATION.
RACK GROUND BAR PRESENT. BOND TO BUILDING GROUND PER LOCAL CODE.

RACK TOTAL 378.0 lb
CAPACITY 1984.2 lb
DRAW ≥ 2490 VA (5 unknown)
HEAT ≥ 6920 BTU/hr (4 unknown)
NOT DRAWN HERE 12 OF 31 — 10 ON FRONT, 2 ONLY ON T6.30; 4 COUNTED AT TOP

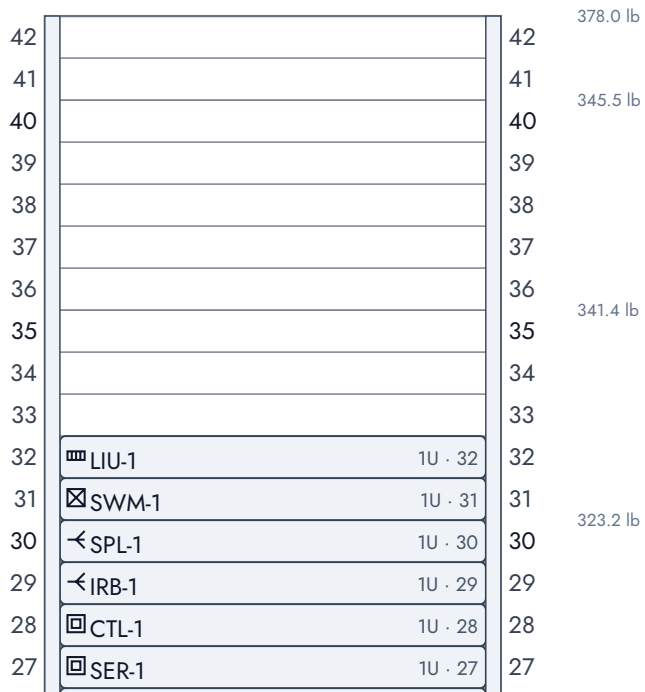

1 ft

REV	DATE	DESCRIPTION	BY
B	2026-04-21	Head-end updated after trim walkthrough	RackPal
A	2026-01-30	Issued for rough-in	RackPal

Whole House — RK-1 MDF — Equipment Room

48 Example Ridge Road, Sampleton, CA 90000, US

CLIENT Sample Client


RACK ELEVATION — REAR

RK-1 · MDF — Equipment Room · 42U

DRAWN	RackPal	SCALE	1:8	SIZE	B	DATE	2026-07-18	REV	B
CHK'D	RackPal	PROJ	RM-2026-014	DISC	T	FILE	whole_house.rppj	SHEET	6/16

Example Integration Co. · projects@example.invalid

SYMBOL LEGEND: SEE SHEET T0.01

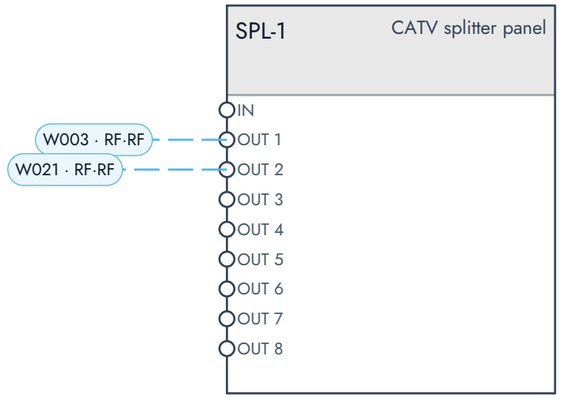

REV	DATE	DESCRIPTION	BY
B	2026-04-21	Head-end updated after trim walkthrough	RackPal
A	2026-01-30	Issued for rough-in	RackPal

Whole House — Analog Video & RF

48 Example Ridge Road, Sampleton, CA 90000, US

CLIENT Sample Client

INTERCONNECT


DRAWN	RackPal	SCALE	NTS	SIZE	B	DATE	2026-07-18	REV	B
CHK'D	RackPal	PROJ	RM-2026-014	DISC	T	FILE	whole_house.rppj	SHEET	7/16


Example Integration Co. · projects@example.invalid

SYMBOL LEGEND: SEE SHEET T0.01

SHEET 7 OF 16 · INTERCONNECT

SHEET NO. T6.01

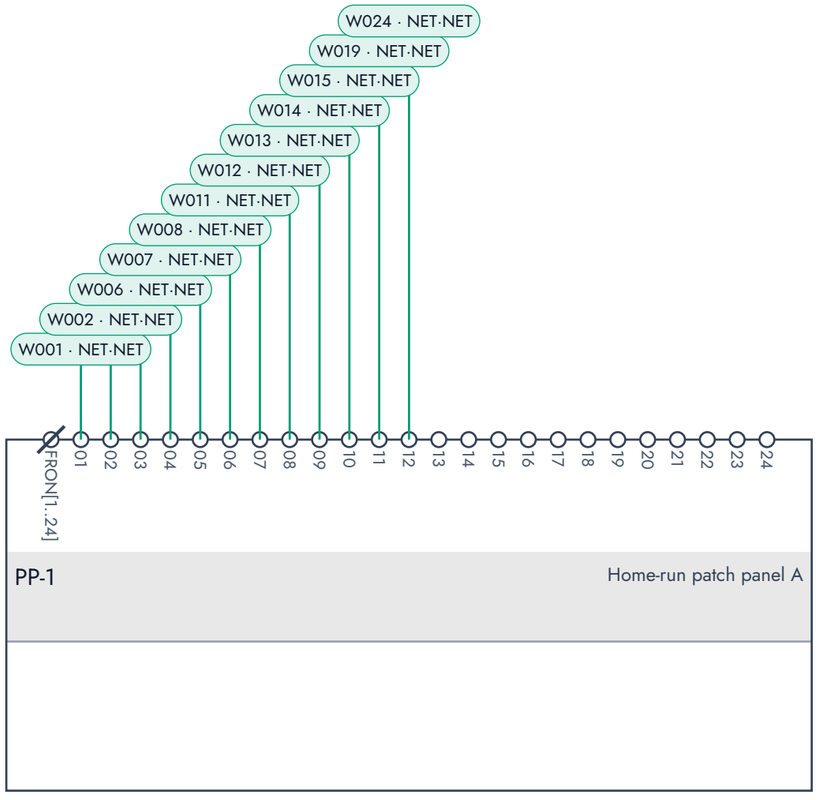

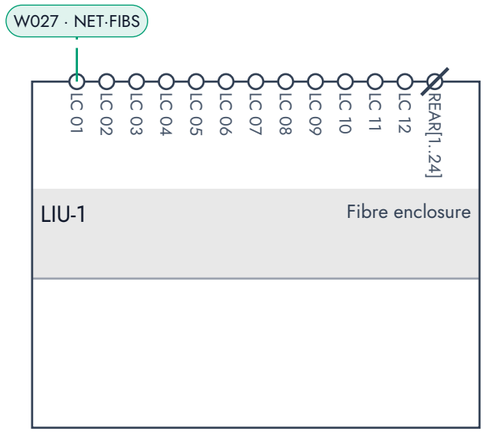

REV	DATE	DESCRIPTION	BY
B	2026-04-21	Head-end updated after trim walkthrough	RackPal
A	2026-01-30	Issued for rough-in	RackPal

Whole House — Network

48 Example Ridge Road, Sampleton, CA 90000, US

CLIENT Sample Client

INTERCONNECT

DRAWN	RackPal	SCALE	NTS	SIZE	B	DATE	2026-07-18	REV	B
CHK'D	RackPal	PROJ	RM-2026-014	DISC	T	FILE	whole_house.rppj	SHEET	8/16

Example Integration Co. · projects@example.invalid

SYMBOL LEGEND: SEE SHEET T0.01

SHEET 8 OF 16 · INTERCONNECT

SHEET NO. T6.02

PULL SHEET (27 runs)

CABLE ID	TYPE	FIELD LABEL	RACK LABEL	FROM — ROOM / OUTLET	TO — RACK / RU / FACE	MEDIA	LEN	PATHW…	SIGN-OFF
TO PULL · 27 runs									1734 ft
BEDROOM 2 · 1 run									95 ft
W025	NET·NET	BR2-DATA-1	—	Bedroom 2 / Bedroom 2 desk …	Rack end not yet terminated	Cat6 UTP CMR	95	T1	☐P ☐T ☐T ___
EQUIPMENT ROOM · 1 run									8 ft
W027	NET·FIBS	EQ-FIB-1	LIU1-01	Equipment Room / ISP demarcation, f…	RK-1 / U32 / front	Fibre OS2 singlemode CMR	8	T2	☐P ☐T ☐T ___
GARAGE · 1 run									25 ft
W013	NET·NET	GAR-DATA-1	PP1-08	Garage / Driveway camera, soffit GA…	RK-1 / U34 / front	Cat6 UTP CMR	25	T2	☐P ☐T ☐T ___
GREAT ROOM · 8 runs									443 ft
W001	NET·NET	GR-DATA-1	PP1-01	Great Room / Great Room TV wall, key…	RK-1 / U34 / front	Cat6 UTP CMR	60	T2	☐P ☐T ☐T ___
W002	NET·NET	GR-DATA-2	PP1-02	Great Room / Great Room TV wall, key…	RK-1 / U34 / front	Cat6 UTP CMR	60	T2	☐P ☐T ☐T ___
W003	RF·RF	GR-VID-1	SPL1-01	Great Room / Great Room TV wall, F-b…	RK-1 / U30 / front	RG6 quad-shield CL2	60	T2	☐P ☐T ☐T ___
W004	RF·RF	GR-VID-2	—	Great Room / Great Room TV wall, F-b…	Rack end not yet terminated	RG6 quad-shield CL2	60	T2	☐P ☐T ☐T ___
W005	AUD·SPK	GR-AUD-1	—	Great Room / Great Room ceiling spe…	Rack end not yet terminated	16/4 speaker CL3	60	T2	☐P ☐T ☐T ___
W006	NET·NET	GR-DATA-3	PP1-03	Great Room / Great Room touchpanel …	RK-1 / U34 / front	Cat6 UTP CMR	58	T2	☐P ☐T ☐T ___
W007	NET·NET	GR-DATA-4	PP1-04	Great Room / Ground floor ceili…	RK-1 / U34 / front	Cat6 UTP CMR	50	T2	☐P ☐T ☐T ___
W014	NET·NET	GR-DATA-5	PP1-09	Great Room / Front door camera, exte…	RK-1 / U34 / front	Cat6 UTP CMR	35	T2	☐P ☐T ☐T ___
KITCHEN · 3 runs									162 ft
W008	NET·NET	KIT-DATA-1	PP1-05	Kitchen / Kitchen display back box …	RK-1 / U34 / front	Cat6 UTP CMR	55	T2	☐P ☐T ☐T ___
W009	RF·RF	KIT-VID-1	—	Kitchen / Kitchen display, F-barrel K…	Rack end not yet terminated	RG6 quad-shield CL2	55	T2	☐P ☐T ☐T ___
W010	AUD·SPK	KIT-AUD-1	—	Kitchen / Kitchen ceiling speaker pa…	Rack end not yet terminated	16/4 speaker CL3	52	T2	☐P ☐T ☐T ___
MEDIA ROOM · 4 runs									303 ft
W015	NET·NET	MED-DATA-1	PP1-10	Media Room / Media room proje…	RK-1 / U34 / front	Cat6 UTP CMR	75	T1	☐P ☐T ☐T ___
W016	NET·NET	MED-DATA-2	—	Media Room / Media room proje…	Rack end not yet terminated	Cat6 UTP CMR	75	T1	☐P ☐T ☐T ___
W017	RF·RF	MED-VID-1	—	Media Room / Media room, F-ba…	Rack end not yet terminated	RG6 quad-shield CL2	75	T1	☐P ☐T ☐T ___
W018	AUD·SPK	MED-AUD-1	—	Media Room / Media room ceilin…	Rack end not yet terminated	16/4 speaker CL3	78	T3	☐P ☐T ☐T ___
PATIO · 1 run									110 ft
W026	AUD·SPK	PAT-AUD-1	—	Patio / Patio landscape speake…	Rack end not yet terminated	16/4 speaker	110	T4	☐P ☐T ☐T ___
PRIMARY BEDROOM · 6 runs									508 ft
W019	NET·NET	PBR-DATA-1	PP1-11	Primary Bedroom / Primary bedroom …	RK-1 / U34 / front	Cat6 UTP CMR	85	T1	☐P ☐T ☐T ___
W020	NET·NET	PBR-DATA-2	—	Primary Bedroom / Primary bedroom …	Rack end not yet terminated	Cat6 UTP CMR	85	T1	☐P ☐T ☐T ___

PULL SHEET (27 runs) (cont.)

CABLE ID	TYPE	FIELD LABEL	RACK LABEL	FROM — ROOM / OUTLET	TO — RACK / RU / FACE	MEDIA	LEN	PATHW…	SIGN-OFF
TO PULL · 27 runs (cont.)									1734 ft
PRIMARY BEDROOM · 6 runs (cont.)									508 ft
W021	RF·RF	PBR-VID-1	SPL1-02	Primary Bedroom / Primary bedroom …	RK-1 / U30 / front	RG6 quad-shield CL2	85	T1	☐P ☐T ☐T ___
W022	RF·RF	PBR-VID-2	—	Primary Bedroom / Primary bedroom …	Rack end not yet terminated	RG6 quad-shield CL2	85	T1	☐P ☐T ☐T ___
W023	AUD·SPK	PBR-AUD-1	—	Primary Bedroom / Primary bedroom …	Rack end not yet terminated	16/4 speaker CL3	88	T3	☐P ☐T ☐T ___
W024	NET·NET	PBR-DATA-3	PP1-12	Primary Bedroom / First floor ceiling …	RK-1 / U34 / front	Cat6 UTP CMR	80	T3	☐P ☐T ☐T ___
STUDY · 2 runs									80 ft
W011	NET·NET	STU-DATA-1	PP1-06	Study / Study desk, keystone 1 STU-D…	RK-1 / U34 / front	Cat6 UTP CMR	40	T2	☐P ☐T ☐T ___
W012	NET·NET	STU-DATA-2	PP1-07	Study / Study desk, keystone 2 STU-D…	RK-1 / U34 / front	Cat6 UTP CMR	40	T2	☐P ☐T ☐T ___

TERMINATION SCHEDULE (15 runs)

Not listed: 12 runs landing in no rack. A run landing in no rack is on the Pull Sheet.

CABLE ID	TYPE	RACK LABEL	FIELD LABEL	RACK / RU / FACE	DEVICE	PORT	FAR END	FAR PORT	MEDIA	FIELD TERM	RACK TERM	CONDUCT… / NOTES
RK-1 · 15 runs												816 ft
W027	NET·FIBS	LIU1-01	EQ-FIB-1	RK-1 / U32 / front	LIU-1	LC 01	Equipment Room / ISP demarcation, fibre ONT	—	Fibre OS2 singlemo…	FIELD CONNEC…	—	—
W001	NET·NET	PP1-01	GR-DATA-1	RK-1 / U34 / front	PP-1	01	Great Room / Great Room TV wall, keystone 1	—	Cat6 UTP CMR	KEYSTONE	—	—
W002	NET·NET	PP1-02	GR-DATA-2	RK-1 / U34 / front	PP-1	02	Great Room / Great Room TV wall, keystone 2	—	Cat6 UTP CMR	KEYSTONE	—	—
W006	NET·NET	PP1-03	GR-DATA-3	RK-1 / U34 / front	PP-1	03	Great Room / Great Room touchpanel back …	—	Cat6 UTP CMR	KEYSTONE	—	—
W007	NET·NET	PP1-04	GR-DATA-4	RK-1 / U34 / front	PP-1	04	Great Room / Ground floor ceiling access point	—	Cat6 UTP CMR	KEYSTONE	—	—
W008	NET·NET	PP1-05	KIT-DATA-1	RK-1 / U34 / front	PP-1	05	Kitchen / Kitchen display back box	—	Cat6 UTP CMR	KEYSTONE	—	—
W011	NET·NET	PP1-06	STU-DATA-1	RK-1 / U34 / front	PP-1	06	Study / Study desk, keystone 1	—	Cat6 UTP CMR	KEYSTONE	—	—
W012	NET·NET	PP1-07	STU-DATA-2	RK-1 / U34 / front	PP-1	07	Study / Study desk, keystone 2	—	Cat6 UTP CMR	KEYSTONE	—	—
W013	NET·NET	PP1-08	GAR-DATA-1	RK-1 / U34 / front	PP-1	08	Garage / Driveway camera, soffit	—	Cat6 UTP CMR	KEYSTONE	—	—
W014	NET·NET	PP1-09	GR-DATA-5	RK-1 / U34 / front	PP-1	09	Great Room / Front door camera, exterior wall	—	Cat6 UTP CMR	KEYSTONE	—	—
W015	NET·NET	PP1-10	MED-DATA-1	RK-1 / U34 / front	PP-1	10	Media Room / Media room projector, HDBas…	—	Cat6 UTP CMR	KEYSTONE	—	—
W019	NET·NET	PP1-11	PBR-DATA-1	RK-1 / U34 / front	PP-1	11	Primary Bedroom / Primary bedroom TV w…	—	Cat6 UTP CMR	KEYSTONE	—	—
W024	NET·NET	PP1-12	PBR-DATA-3	RK-1 / U34 / front	PP-1	12	Primary Bedroom / First floor ceiling access point	—	Cat6 UTP CMR	KEYSTONE	—	—
W003	RF·RF	SPL1-01	GR-VID-1	RK-1 / U30 / front	SPL-1	OUT 1	Great Room / Great Room TV wall, F-barrel 1	—	RG6 quad-shie…	F BARREL	—	—
W021	RF·RF	SPL1-02	PBR-VID-1	RK-1 / U30 / front	SPL-1	OUT 2	Primary Bedroom / Primary bedroom TV w…	—	RG6 quad-shie…	F BARREL	—	—

UNUSED HOME RUNS (12)

OPEN: the end left as a coil. RACK not landed at the rack · ROOM not terminated at the room · BOTH neither.

CABLE ID	OPEN	RACK LBL	FIELD LBL	OUTLET	FIELD END	MEDIA	LEN (FT)	PATHWAY	ROUGH-IN
BEDROOM 2 · 1 run									
W025	RACK	—	BR2-DATA-1	BR2-DATA-1	Bedroom 2 desk wall	Cat6 UTP CMR	95	T1	PULLED
GREAT ROOM · 2 runs									
W004	RACK	—	GR-VID-2	GR-TV-1	Great Room TV wall, F-barrel 2	RG6 quad-shield CL2	60	T2	PULLED
W005	RACK	—	GR-AUD-1	GR-SPK-1	Great Room ceiling speaker pair	16/4 speaker CL3	60	T2	PULLED
KITCHEN · 2 runs									
W009	RACK	—	KIT-VID-1	KIT-TV-1	Kitchen display, F-barrel	RG6 quad-shield CL2	55	T2	PULLED
W010	RACK	—	KIT-AUD-1	KIT-SPK-1	Kitchen ceiling speaker pair	16/4 speaker CL3	52	T2	PULLED
MEDIA ROOM · 3 runs									
W016	RACK	—	MED-DATA-2	MED-PROJ-1	Media room projector, control spare	Cat6 UTP CMR	75	T1	PULLED
W017	RACK	—	MED-VID-1	MED-PROJ-1	Media room, F-barrel spare	RG6 quad-shield CL2	75	T1	PLANNED
W018	RACK	—	MED-AUD-1	MED-SPK-1	Media room ceiling speaker pair	16/4 speaker CL3	78	T3	PULLED
PATIO · 1 run									
W026	RACK	—	PAT-AUD-1	PAT-SPK-1	Patio landscape speaker pair	16/4 speaker	110	T4	PLANNED
PRIMARY BEDROOM · 3 runs									
W020	RACK	—	PBR-DATA-2	PBR-TV-1	Primary bedroom TV wall, keystone 2	Cat6 UTP CMR	85	T1	PULLED
W022	RACK	—	PBR-VID-2	PBR-TV-1	Primary bedroom TV wall, F-barrel 2	RG6 quad-shield CL2	85	T1	PLANNED
W023	RACK	—	PBR-AUD-1	PBR-SPK-1	Primary bedroom ceiling speaker pair	16/4 speaker CL3	88	T3	PULLED

EQUIPMENT AND RACK MATERIALS. CABLE SCHEDULES: SEE T6.10 AND T6.15. POWER SCHEDULE NOT ISSUED IN THIS SET. 17 DEVICES NOT IN A RACK.

QTY	DESIGNATOR	MANUFACTURER	MODEL	DESCRIPTION	RU	RACK	LOCATION	FACE	MASS (LB)	DRAW (VA)	LIFECYCLE	NOTES
RK-1 · MDF — Equipment Room · 42U												
1	PP-3	Generic	PP-24	Equipment patch panel	1U · 36	RK-1	Equipment Room	FRONT	3.1	—	NEW	
1	PP-2	Generic	PP-24	Home-run patch panel B	1U · 35	RK-1	Equipment Room	FRONT	3.1	—	NEW	
1	PP-1	Generic	PP-24	Home-run patch panel A	1U · 34	RK-1	Equipment Room	FRONT	3.1	—	NEW	
1	LIU-1	Generic	LIU-24-SM	Fibre enclosure	1U · 32	RK-1	Equipment Room	FRONT	6.0	—	NEW	
1	SWM-1	Generic	SWM-16	Satellite multiswitch	1U · 31	RK-1	Equipment Room	FRONT	5.1	24	NEW	
1	SPL-1	Generic	SPL-8WAY	CATV splitter panel	1U · 30	RK-1	Equipment Room	FRONT	2.0	—	NEW	
1	IRB-1	Generic	IRB-4X16	IR distribution	1U · 29	RK-1	Equipment Room	FRONT	2.0	7	NEW	
1	CTL-1	Generic	CTL-PROC-1	Control processor	1U · 28	RK-1	Equipment Room	FRONT	7.1	32	NEW	
1	SER-1	Generic	SER-IP-8	Serial gateway	1U · 27	RK-1	Equipment Room	FRONT	5.1	16	NEW	
1	FW-1	Generic	FW-RTR-1	Router / firewall	1U · 26	RK-1	Equipment Room	FRONT	9.0	58	NEW	
1	SW-2	Generic	SW-48-POE	Edge switch	1U · 25	RK-1	Equipment Room	FRONT	17.0	400	NEW	
1	SW-1	Generic	SW-48-POE	Core switch	1U · 24	RK-1	Equipment Room	FRONT	17.0	400	NEW	
1	NAS-1	Generic	NAS-2U	Media server	2U · 22–23	RK-1	Equipment Room	FRONT	30.0	168	NEW	
1	STRM-1	Generic	STRM-4ZONE	Streaming source	1U · 18	RK-1	Equipment Room	FRONT	7.1	21	NEW	
1	DSP-1	Generic	DSP-8X8-DANTE	House audio DSP	1U · 17	RK-1	Equipment Room	FRONT	9.0	37	NEW	
1	AMP-2	Generic	AMP-2X200	Great room L/R amplifier	2U · 15–16	RK-1	Equipment Room	FRONT	34.0	585	NEW	
1	AMP-1	Generic	AMP-16CH	Multi-zone amplifier	3U · 12–14	RK-1	Equipment Room	FRONT	37.9	523	NEW	
1	SCL-1	Generic	SCL-4X1	Study presentation switcher	1U · 11	RK-1	Equipment Room	FRONT	7.9	29	NEW	
1	DA-1	Generic	DA-1X8-HDMI	Distribution amplifier	1U · 10	RK-1	Equipment Room	FRONT	5.1	17	NEW	
1	MTX-1	Generic	MTX-8X8-HDBT	House video matrix	3U · 7–9	RK-1	Equipment Room	FRONT	16.1	58	NEW	
1	SEQ-1	Generic	SEQ-2U-16	Sequenced power	2U · 4–5	RK-1	Equipment Room	FRONT	18.1	12	NEW	
1	UPS-1	Generic	UPS-3000VA	Head-end UPS	3U · 1–3	RK-1	Equipment Room	FRONT	91.9	50	NEW	
1	STB-1	Generic	STB-1	Satellite receiver	—	RK-1	Equipment Room	SHELF	3.1	24	NEW	
1	TX-1	Generic	TX-HDBT-1	Media room HDBaseT transmitter	—	RK-1	Equipment Room	SHELF	1.2	9	NEW	
1	PDU-1	Generic	PDU-0U-24	Rear PDU, left	0U	RK-1	Equipment Room	0U	14.1	10	NEW	
1	PDU-2	Generic	PDU-0U-24	Rear PDU, right	0U	RK-1	Equipment Room	0U	14.1	10	NEW	
							RK-1 SUBTOTAL	26 DEVICES + 5 PASSIVES (SEE MATERIALS)	378.0 lb			≥ 2490 VA (5 unknown)
NOT IN A RACK												
1	DISP-1	Generic	DISP-1	Great room display	—	—	Great Room	NONE	39.9	126	NEW	
1	DISP-2	Generic	DISP-1	Kitchen display	—	—	Kitchen	NONE	39.9	126	NEW	
1	DISP-3	Generic	DISP-1	Primary bedroom display	—	—	Primary Bedroom	NONE	39.9	126	NEW	
1	PROJ-1	Generic	PROJ-1	Media room projector	—	—	Media Room	NONE	16.1	295	NEW	
1	SPK-1	Generic	SPK-CEIL-PAIR	Great room ceiling pair	—	—	Great Room	NONE	6.0	—	NEW	
1	SPK-2	Generic	SPK-CEIL-PAIR	Kitchen ceiling pair	—	—	Kitchen	NONE	6.0	—	NEW	
1	SPK-3	Generic	SPK-CEIL-PAIR	Media room ceiling pair	—	—	Media Room	NONE	6.0	—	NEW	
1	SPK-4	Generic	SPK-CEIL-PAIR	Primary bedroom ceiling pair	—	—	Primary Bedroom	NONE	6.0	—	NEW	

EQUIPMENT AND RACK MATERIALS. CABLE SCHEDULES: SEE T6.10 AND T6.15. POWER SCHEDULE NOT ISSUED IN THIS SET. 17 DEVICES NOT IN A RACK.

QTY	DESIGNATOR	MANUFACTURER	MODEL	DESCRIPTION	RU	RACK	LOCATION	FACE	MASS (LB)	DRAW (VA)	LIFECYCLE	NOTES
NOT IN A RACK (cont.)												
1	SPK-5	Generic	SPK-OUTDOOR-1	Patio landscape pair	—	—	Patio	NONE	4.0	—	NEW	
1	AP-1	Generic	AP-1	Ground floor access point	—	—	Great Room	NONE	2.0	—	NEW	
1	AP-2	Generic	AP-1	First floor access point	—	—	Primary Bedroom	NONE	2.0	—	NEW	
1	CAM-1	Generic	CAM-IP-1	Front door camera	—	—	Great Room	NONE	1.5	—	NEW	
1	CAM-2	Generic	CAM-IP-1	Driveway camera	—	—	Garage	NONE	1.5	—	NEW	
1	TP-1	Generic	TP-1	Great room touchpanel	—	—	Great Room	NONE	3.1	—	NEW	
1	KP-1	Generic	KP-1	Kitchen keypad	—	—	Kitchen	NONE	0.4	—	NEW	
1	ONT-1	Generic	ONT-1	Fibre ONT	—	—	Equipment Room	NONE	2.4	—	NEW	
1	STR-1	—	Generic 42 in structure…	Rough-In — Main House	—	—	Equipment Room	NONE	—	—	NEW	
								NOT IN A RACK SUBTOTAL	17 DEVICES	≥ 176.6 lb (1 unknown)		≥ 673 VA (13 unknown)
MATERIALS												
1		Generic	BLK-1U	Blank Panel, 1U	RK-1 × 1				1.0	0	NEW	
1		Generic	SHF-2U	Rack Shelf, 2U, vented	RK-1 × 1				5.1	0	NEW	
3		Generic	VNT-1U	Vent Panel, 1U, 64% open	RK-1 × 3				3.0	0	NEW	

CABLE FOOTAGE BY MEDIA

MEDIA	RUNS	ESTIMATED	LENGTH UNKNOWN	FOOTAGE	WITH WASTE (+10%)
16/4 speaker	5	5	0	388 ft	427 ft
Cat6 UTP	15	15	0	918 ft	1010 ft
Fibre OS2 singlemode	1	1	0	8 ft	9 ft
RG6 quad-shield	6	6	0	420 ft	462 ft

HARDWARE IMPLIED BY THE RULES

QTY	ITEM	FOR	RACK	RULE	NOTES
1	Rear rail support	AMP-1	RK-1	RCK-013	
1	Rear rail support	AMP-2	RK-1	RCK-013	
1	Rear rail support	MTX-1	RK-1	RCK-013	
1	Rear rail support	NAS-1	RK-1	RCK-013	
1	Rear rail support	SEQ-1	RK-1	RCK-013	
1	Rear rail support	SW-1	RK-1	RCK-013	
1	Rear rail support	SW-2	RK-1	RCK-013	
1	Rear rail support	UPS-1	RK-1	RCK-013	

JUMPERS AND POWER CORDS

QTY	MEDIA	LENGTH	COLOUR	NOTES

NO JUMPERS OR POWER CORDS IN THIS PROJECT.

EQUIPMENT AND RACK MATERIALS. CABLE SCHEDULES: SEE T6.10 AND T6.15. POWER SCHEDULE NOT ISSUED IN THIS SET. 17 DEVICES NOT IN A RACK.

QTY	ADAPTER	MODEL

IN-LINE ADAPTERS

NO IN-LINE ADAPTER IS DECLARED.

OUTLET MAP

PROVIDER	OUTLET	DEVICE	INLET	CORD	RACK

NO CORD IS DRAWN TO AN OUTLET.

PDU-1: 0 of 24 outlets assigned, 24 free.

PDU-2: 0 of 24 outlets assigned, 24 free.

SEQ-1: 0 of 16 outlets assigned, 16 free.

UPS-1: 0 of 10 outlets assigned, 10 free.

31 devices have no cord drawn and are counted as one outlet per inlet.

POWERED IR RECEIVER PORTS (5)

A powered receiver port carries +12 V on the ring. Never plug a mono emitter into its jack: the plug bridges ring to sleeve.

DEVICE	PORT	VARIANT	PIN MAP
IRB-1	IR IN (from processor)	xantech-stereo	TIP IR · RING +12 V · SLEEVE GND
IRB-1	IR RX 1	xantech-stereo	TIP IR · RING +12 V · SLEEVE GND
IRB-1	IR RX 2	xantech-stereo	TIP IR · RING +12 V · SLEEVE GND
IRB-1	IR RX 3	xantech-stereo	TIP IR · RING +12 V · SLEEVE GND
IRB-1	IR RX 4	xantech-stereo	TIP IR · RING +12 V · SLEEVE GND