



6 Aerodromnaya street, Saint-Petersburg, 197348 Russia


Tel: +7 812 394-13-10, fax: +7 812 394-12-67, E-mail: info@kryotherm.ru, http://www.kryotherm.ru

SPECIFICATION OF THERMOELECTRIC MODULE STORM

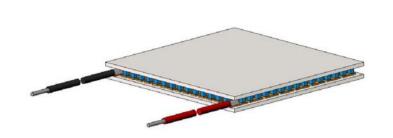



35		Standard F	Performance Gra	nph N≘1: Qc = f	(dT)		
30							
30							
25							
20 Now.							
9 15							
10							
5							
0 0	10	20	30 dT,K	40	50	60	70
◆ 25% Imax	•	50% Imax	÷ 75%	lmax	+100% lma	эх	

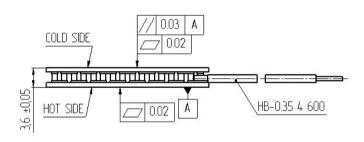

Assembly parameters	Unit	Value	
Wires	HB-0.35 4 600		
Cross section	mm ²	035	
Metallization	Not		
Sealing	Not		
Internal solder	°C	139	
Brazing solder	°C	Not	

Operational parameters	Unit	Value
Working temperature range	°C	-50 ÷ +80
Max. processing temperature	°C	130
ROHS compliance		YES

