Wireless Workstation Connect

Administrator Guide

MN-005467-02EN Rev. A

ZEBRA

Zebra Technologies | 3 Overlook Point | Lincolnshire, IL 60069 USA
zebra.com

Copyright

2026/10/09

The Zebra wordmark and logo are trademarks of Zebra Technologies Corp., registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. ©2026 Zebra Technologies Corp. and/or its affiliates.

Information in this document is subject to change without notice. The software described in this document is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of those agreements.

For further information regarding legal and proprietary statements, please go to:

SOFTWARE: zebra.com/informationpolicy.
COPYRIGHTS: zebra.com/copyright.
PATENTS: ip.zebra.com.
WARRANTY: zebra.com/warranty.
END USER LICENSE AGREEMENT: zebra.com/eula.

Terms of Use

Proprietary Statement

This manual contains proprietary information of Zebra Technologies Corporation and its subsidiaries ("Zebra Technologies"). It is intended solely for the information and use of parties operating and maintaining the equipment described herein. Such proprietary information may not be used, reproduced, or disclosed to any other parties for any other purpose without the express, written permission of Zebra Technologies.

Product Improvements

Continuous improvement of products is a policy of Zebra Technologies. All specifications and designs are subject to change without notice.

Liability Disclaimer

Zebra Technologies takes steps to ensure that its published Engineering specifications and manuals are correct; however, errors do occur. Zebra Technologies reserves the right to correct any such errors and disclaims liability resulting therefrom.

Limitation of Liability

In no event shall Zebra Technologies or anyone else involved in the creation, production, or delivery of the accompanying product (including hardware and software) be liable for any damages whatsoever (including, without limitation, consequential damages including loss of business profits, business interruption, or loss of business information) arising out of the use of, the results of use of, or inability to use such product, even if Zebra Technologies has been advised of the possibility of such damages. Some jurisdictions do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Contents

About This Guide **4**
Icon Conventions 4
Notational Conventions 4
Service Information 5

Zebra DNA Cloud **6**
Setting Up Zebra DNA Cloud 6
Configurations Settings 7
The Do Not Change Setting 8
Configuring Tap to Connect 8
Configuring Scan to Connect 8
Configuring Show Available Devices 9
Configuring the Gear Icon 10
Configuring Reduced Settings 11
Configuring Auto Disconnection 12
Configuring Auto Connection 13
Configuring Proximity 14
Name and Description 15
Modifying Name and Description 16
Review and Apply 17
Modifying Review and Apply 17
Use of the Feedback Channel 18

About This Guide

This guide provides information about administrative features for Wireless Workstation Connect.

Icon Conventions

The documentation set is designed to give the reader more visual clues. The following visual indicators are used throughout the documentation set.



NOTE: The text here indicates information that is supplemental for you to know and that is not required to complete a task.



IMPORTANT: The text here indicates information that is important for you to know.

CAUTION: If the precaution is not heeded, you could receive a minor or moderate injury.



WARNING: If danger is not avoided, you CAN be seriously injured or killed.



DANGER: If danger is not avoided, you WILL be seriously injured or killed.

Notational Conventions

The following conventions make the content of this document easy to navigate.

- **Bold** text is used to highlight the following:
  - Dialog box, window, and screen names
  - Dropdown list and list box names
  - Checkbox and radio button names
  - Icons on a screen
  - Key names on a keypad
  - Button names on a screen
- Bullets (•) indicate:
  - Action items

  - List of alternatives
  - Lists of required steps that are not necessarily sequential
- Sequential lists (for example, those that describe step-by-step procedures) appear as numbered lists.

Service Information

If you have a problem with your equipment, contact Zebra Global Customer Support for your region.

Contact information is available at: zebra.com/support. When contacting support, have the following information available:

- Serial number of the unit
- Model number or product name
- Software/firmware type and version number

Zebra responds to calls by email, telephone, or fax within the time limits set forth in support agreements.

If your problem cannot be solved by Zebra Customer Support, you may need to return your equipment for servicing and will be given specific directions. Zebra is not responsible for any damages incurred during shipment if the approved shipping container is not used. Shipping the units improperly can possibly void the warranty.

If you purchased your Zebra business product from a Zebra business partner, contact that business partner for support.

Zebra DNA Cloud

Zebra DNA Cloud is a device management platform that allows organizations to enroll and license devices, configure settings, and perform administrative tasks.

NOTE: The **Apply Immediately** feature is not supported in the Wireless Workstation Connect application. As a result, any configuration changes made will only be applied during the next casting connection.


The **My Apps** section is for installing apps on devices and deploying related files. Apps are uploaded to the Zebra DNA Cloud system in a Collection, after which the administrator creates an App Setup ZProfile, designating an APK (selected from the Collection) for deployment along with configuration and data file(s).

Zebra DNA Cloud stores applications in **Collections**. Applications preinstalled on Zebra devices are viewable on the **Zebra Collection** tab. Applications installed by an organization are viewable in the **My Collection** tab.


Setting Up Zebra DNA Cloud

This section explains how to set up Zebra DNA Cloud.


Before attempting the tasks described in this section, ensure that your organization has set up Zebra DNA Cloud. After one or more devices are enrolled and licensed in the Zebra DNA Cloud system, you can create and deploy device configurations or perform other administrative tasks such as email communication or document creation.

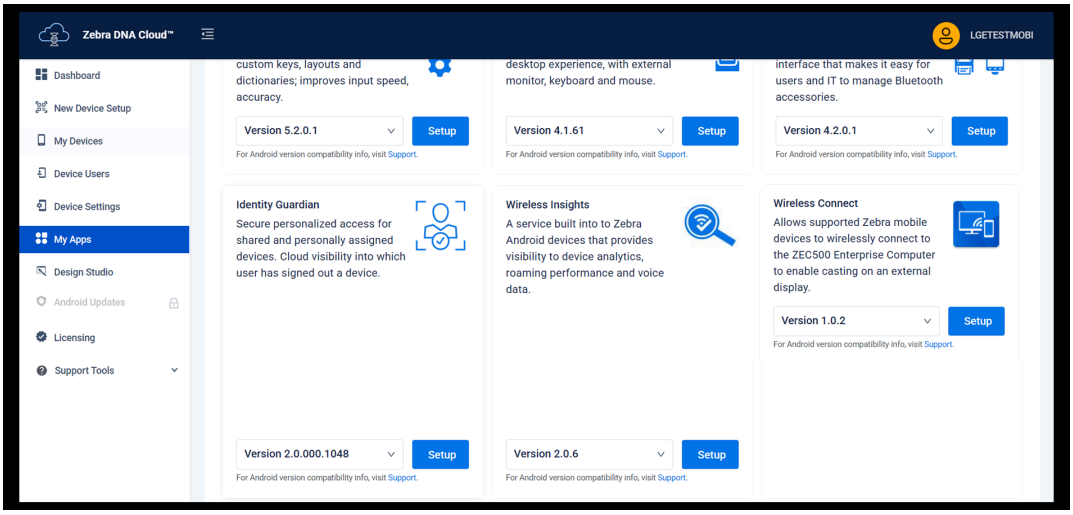

1. On the **Zebra Collection** tab, click **Setup** next to Wireless Workstation Connect to set up the application.
2. On the **Select App** page, confirm the information under **App Details**, and click **Next**.

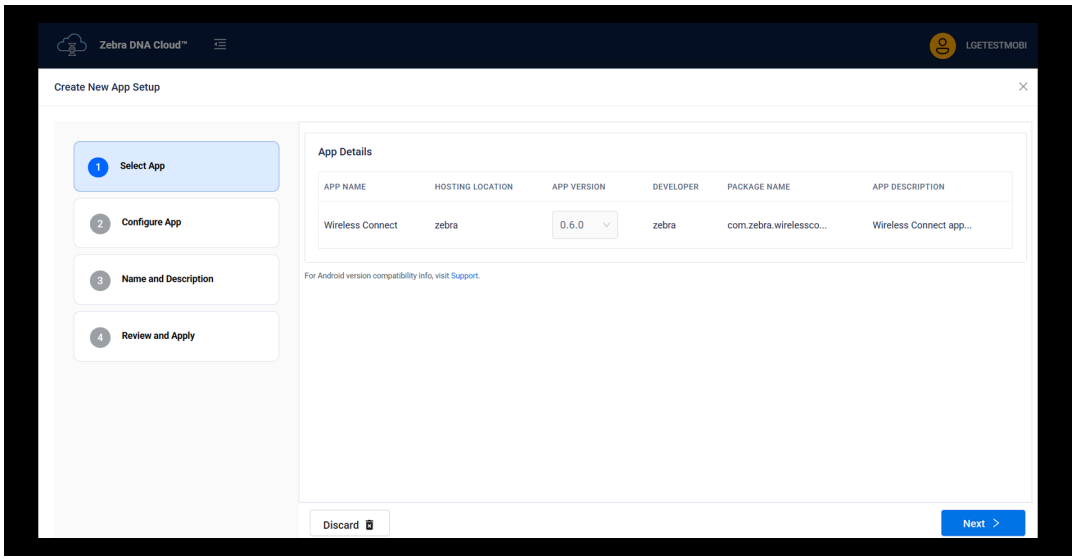

3. Click **Yes** to edit and include the configuration and data for the application.

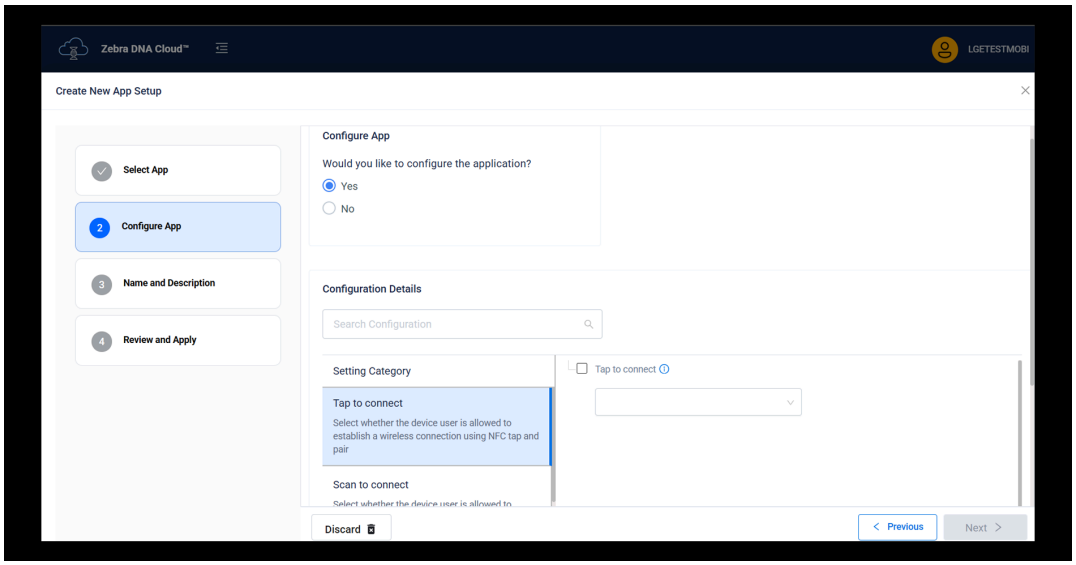

4. Navigate to the desired setting under **Configuration Details**, then click it.
5. Refer to the relevant section in this guide based on the setting you are configuring.

   For example, navigate to Configuring Tap to Connect to learn how to configure the **Tap to connect** setting.

Configurations Settings

You can modify configuration settings to meet your business use cases.

The Do Not Change Setting


Setting a configuration to **Do not change** persists the previous configuration without making a change to the configuration. Enabling this setting does not alter the current setting. If you have never configured a setting, the default state persists.

An administrator may choose to set a configuration to **Do not change** if it is already in its default state, is user-configurable, and the administrator wants to avoid reverting it to the default configuration during a connection or disconnection.

Configuring Tap to Connect

Wireless Workstation Connect provides administrators with the ability to control whether device users can establish a wireless connection using NFC tap and pair. Configure this setting according to your organization's security policies and user requirements to ensure appropriate access and connectivity in the field.

1. Click the **Tap to connect** box.

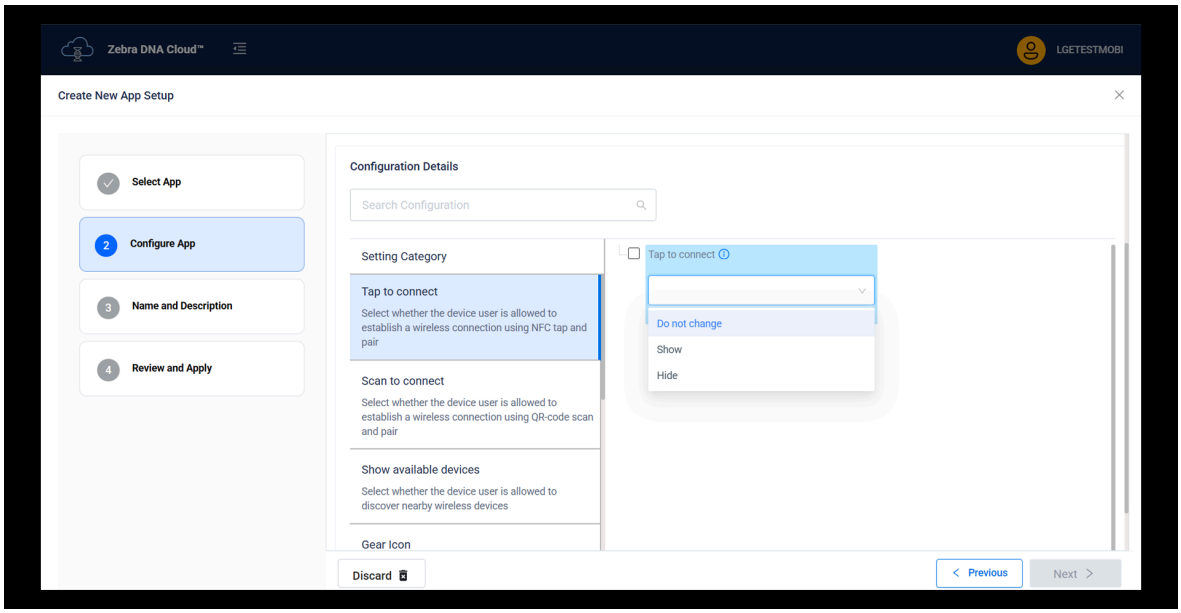


2. Click one of the following:
   - **Show** - your organization has personal control over the ability to use the Tap to Connect setting.
   - **Hide** - restricts your organization's visibility of the Tap to Connect setting.
   - **Do not change** - keeps your organization's current configuration for the Tap to Connect setting without making any changes.
3. Navigate to the next setting or click **Next** if you are done configuring settings.

Configuring Scan to Connect

Wireless Workstation Connect provides administrators with the ability to control whether device users can establish a wireless connection using QR-code scan and pair. Configure this setting according to

your organization's security policies and user needs to ensure appropriate access and connectivity in the field.

1. Click the **Scan to connect** box.

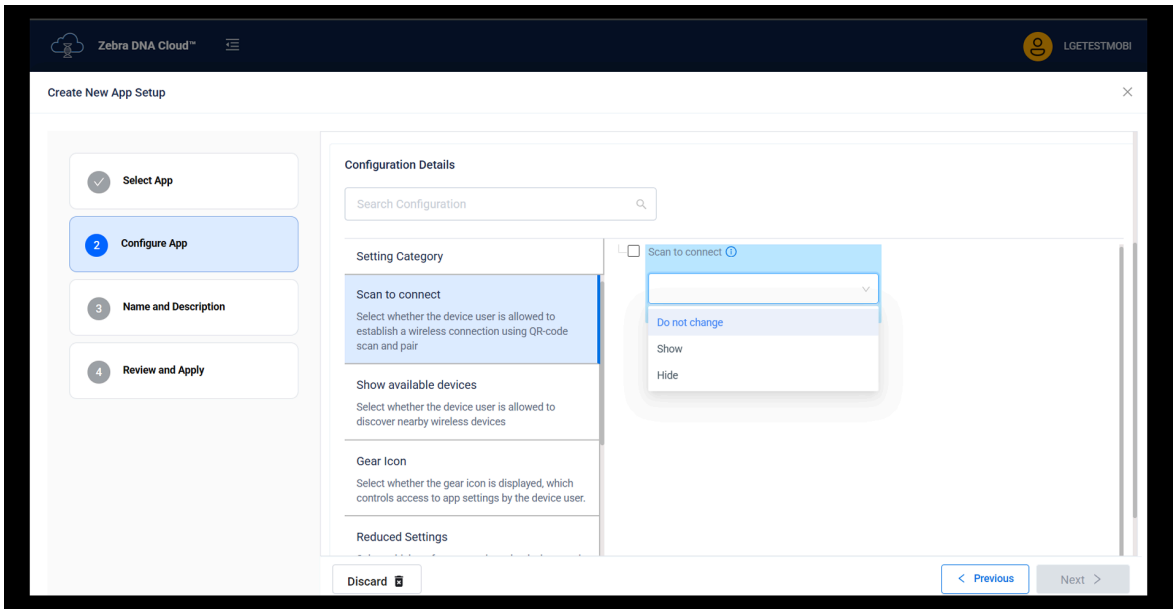


2. Click one of the following:
   - **Show** - your organization has personal control over the ability to use the Scan to Connect setting.
   - **Hide** - restricts your organization's visibility of the Scan to Connect setting.
   - **Do not change** - keeps your organization's current configuration for the Scan to Connect setting without making any changes.
3. Navigate to the next setting or click **Next** if you are done configuring settings.

Configuring Show Available Devices

Wireless Workstation Connect provides administrators with the ability to control whether device users can establish a wireless connection using nearby device discovery. Configure this setting according to your organization's security policies and user needs to ensure appropriate access and connectivity in the field.

1. Click the **Show available devices** box.

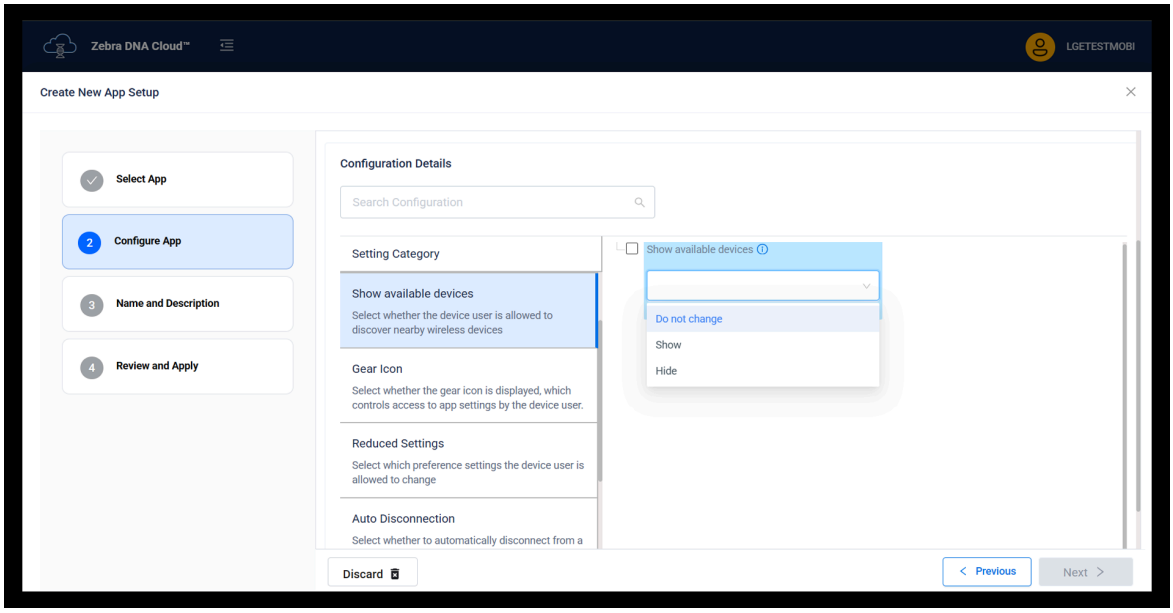


2. Click one of the following:
   - **Show** - your organization has personal control over the ability to use the Show Available Devices setting.
   - **Hide** - restricts your organization's visibility of the Show Available Devices setting.
   - **Do not change** - keeps your organization's current configuration for the Show Available Devices setting without making any changes.
3. Navigate to the next setting or click **Next** if you are done configuring settings.

Configuring the Gear Icon

Administrators control user access to app settings by configuring the visibility of the gear icon. By deciding whether to display the gear icon, you directly manage how users access and modify application settings, ensuring these actions align with your organization's security policies and operational guidelines.

1. Click the **Gear Icon** box.

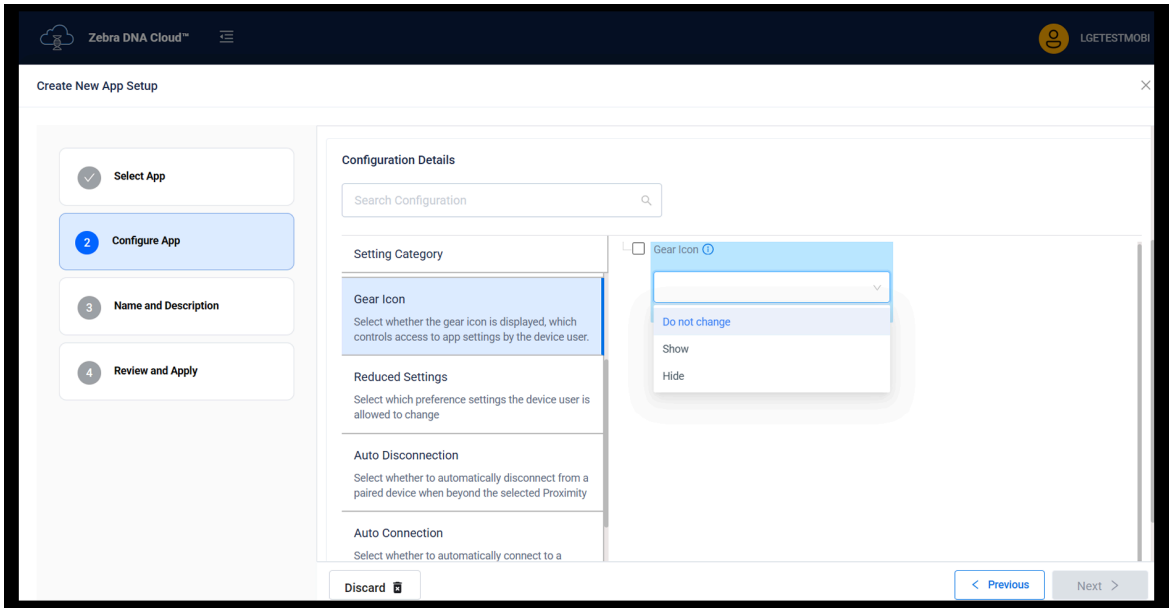


2. Click one of the following:
   - **Show** - your organization has personal control over the ability to use the Gear Icon setting.
   - **Hide** - restricts your organization's visibility of the Gear Icon setting.
   - **Do not change** - keeps your organization's current configuration for the Gear Icon setting without making any changes.
3. Navigate to the next setting or click **Next** if you are done configuring settings.

Configuring Reduced Settings

Administrators can manage device configurations by choosing which preference settings users are permitted to change. The Reduced Settings feature allows you to tailor user access to specific settings, ensuring compliance with organizational policies while providing users with the necessary flexibility.

1. Click the **Reduced Settings** box.

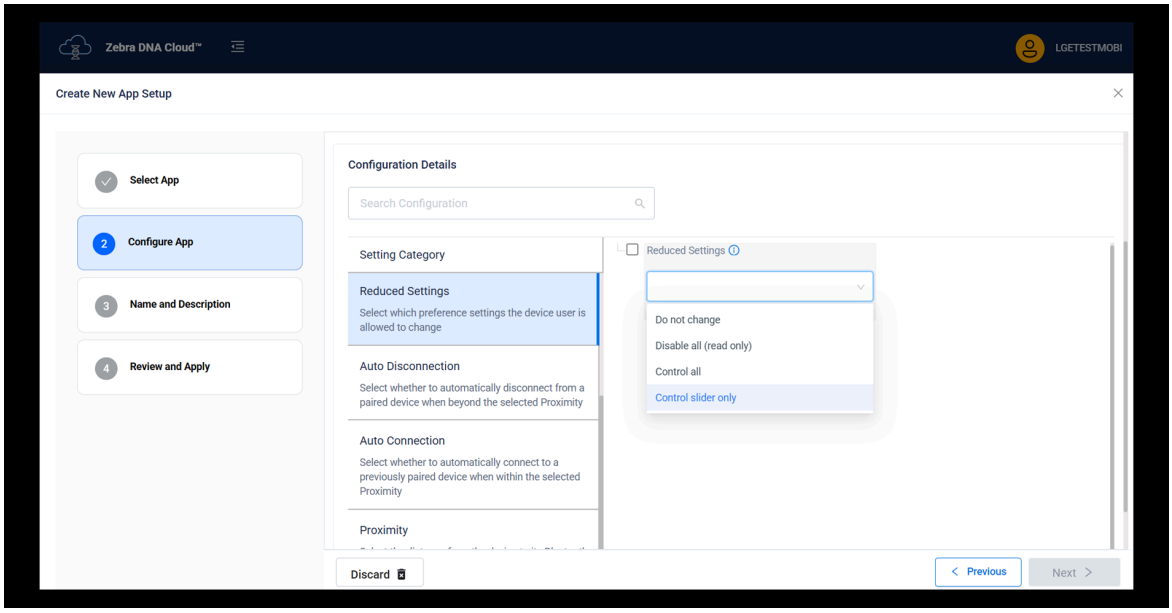


2. Click one of the following:
   - **Do not change** - keeps your organization's current configuration of the preference settings without making any changes.
   - **Disable all (read only)** - restricts your organization's control over the preference settings.
   - **Control all** - your organization has full control over the preference settings.
   - **Control slider only** - your organization has full control over only the Proximity Distance slider.
3. Navigate to the next setting or click **Next** if you are done configuring settings.

Configuring Auto Disconnection

Administrators can configure automatic disconnection settings to manage Bluetooth connectivity based on proximity. With the Auto Disconnection feature, devices automatically disconnect when they exceed a specified range from a paired Bluetooth receiver.

1. Click the **Auto Disconnection** box.

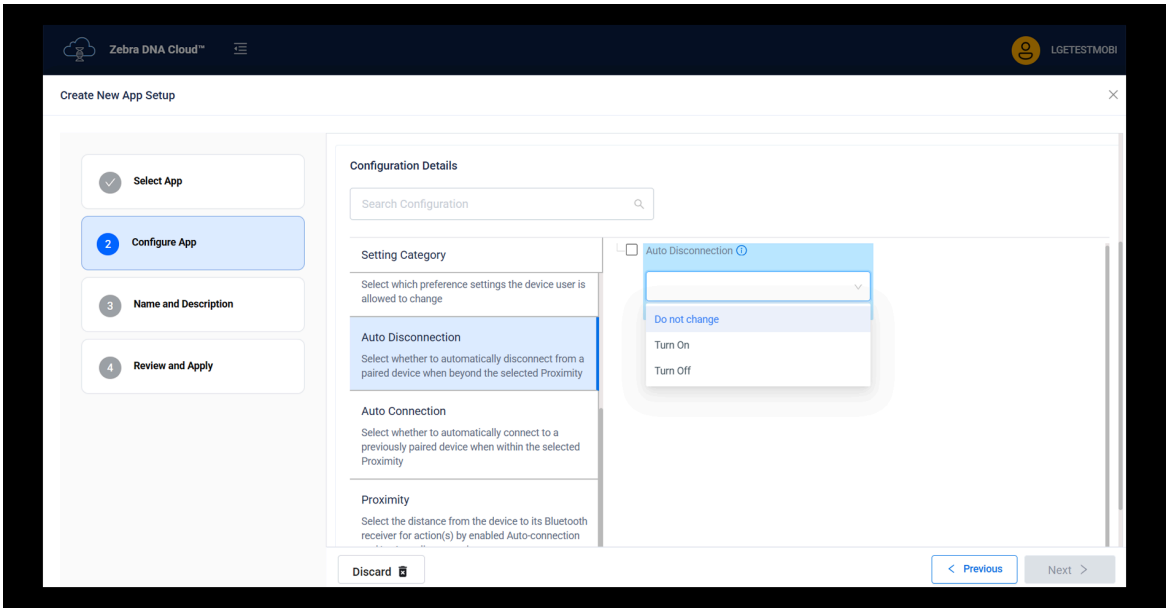


2. Click one of the following:
   - **Do not change** - keeps your organization's current configuration of the Auto Disconnect setting without making any changes.
   - **Turn On** - your organization has the ability to automatically disconnect at the set proximity disconnect.
   - **Turn Off** - restricts your organization's ability to automatically disconnect.
3. Navigate to the next setting or click **Next** if you are done configuring settings.

Configuring Auto Connection

Administrators can configure automatic connection settings to manage Bluetooth connectivity based on proximity. With the Auto Connection feature, devices automatically connect when they enter a specified range from a paired Bluetooth receiver.

1. Click the **Auto Connection** box.

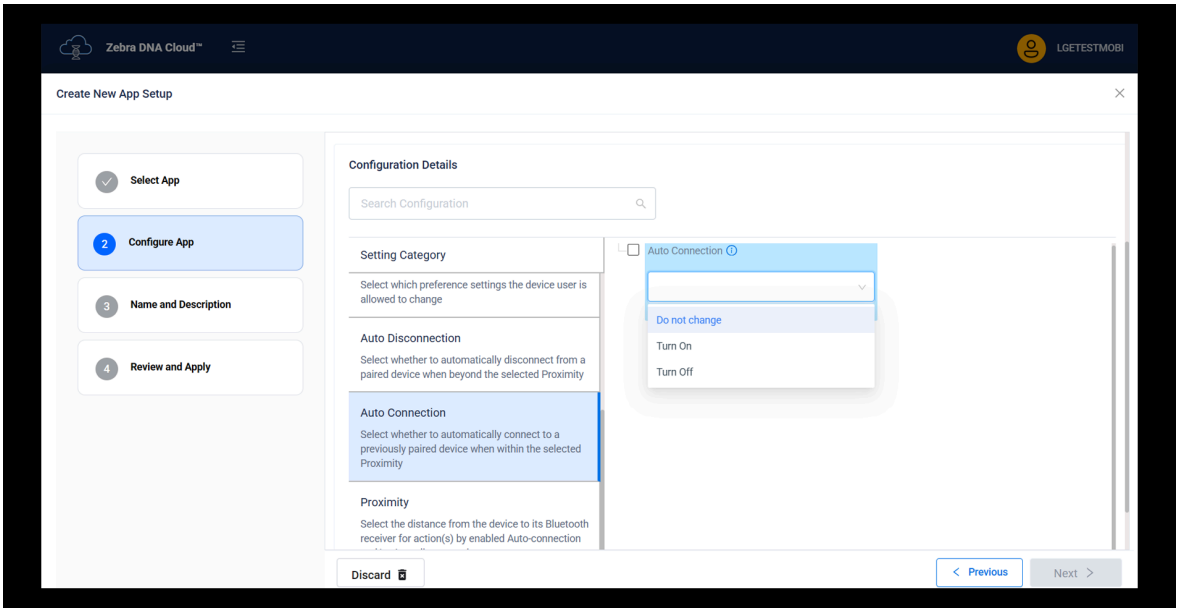


2. Click one of the following:
   - **Do not change** - keeps your organization's current configuration of the Auto Connection setting without making any changes.
   - **Turn On** - your organization has the ability to automatically connect at the set proximity connect.
   - **Turn Off** - restricts your organization's ability to automatically connect.
3. Navigate to the next setting or click **Next** if you are done configuring settings.

Configuring Proximity

Configuring the proximity allows administrators to adjust proximity settings for Bluetooth connections. By configuring Auto-connection and Auto-disconnection parameters, devices can automatically connect or disconnect based on their distance from a Bluetooth receiver.

1. Click the **Proximity** box.

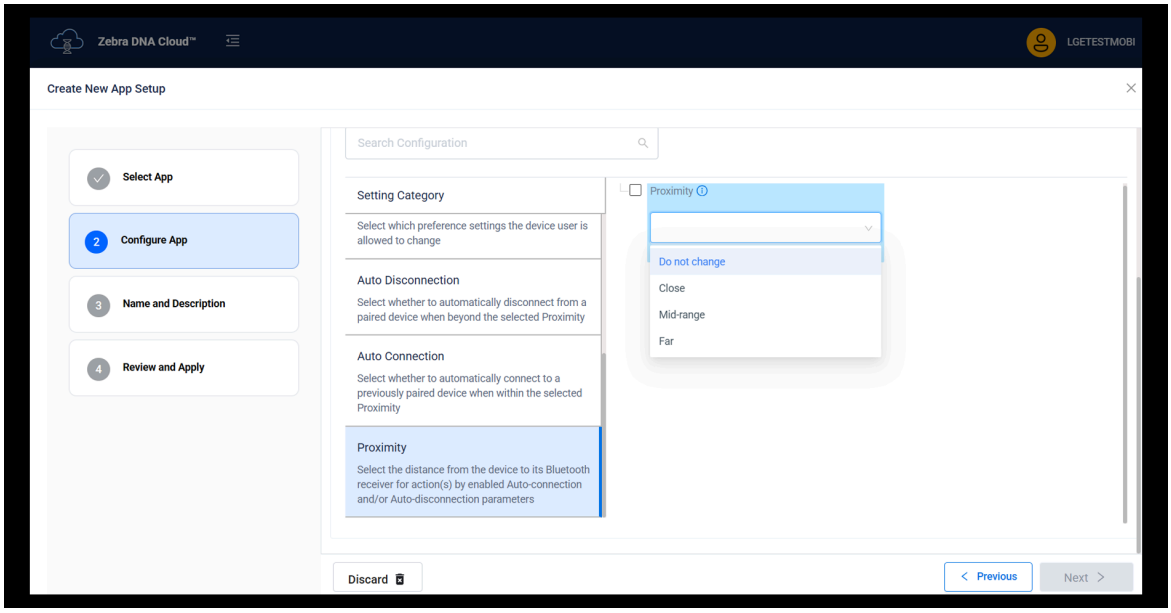

2. Click one of the following:
   - **Do not change** - keeps your organization's current configuration of the Proximity setting without making any changes.
   - **Close** - sets the proximity to close (0.6 m / 2 ft.).
   - **Mid-range** - sets the proximity to mid-range (1.5 m / 5 ft.).
   - **Far** - sets the proximity to far (4.6 m / 15 ft.).


   NOTE: The range of connection proximity can be significantly influenced by environmental factors, such as walls or other physical barriers. These obstacles can obstruct the wireless signal, reducing its effective range and potentially impacting the overall performance of the connection.
3. Navigate to the next setting or click **Next** if you are done configuring settings.

Name and Description

This section provides fields to define and document key details about the Wireless Workstation Connect application configuration.

Under **App Setup Name** an automatically generated name appears. If desired, editing the automatically generated name is possible.


Figure 1 The Name and Description Page

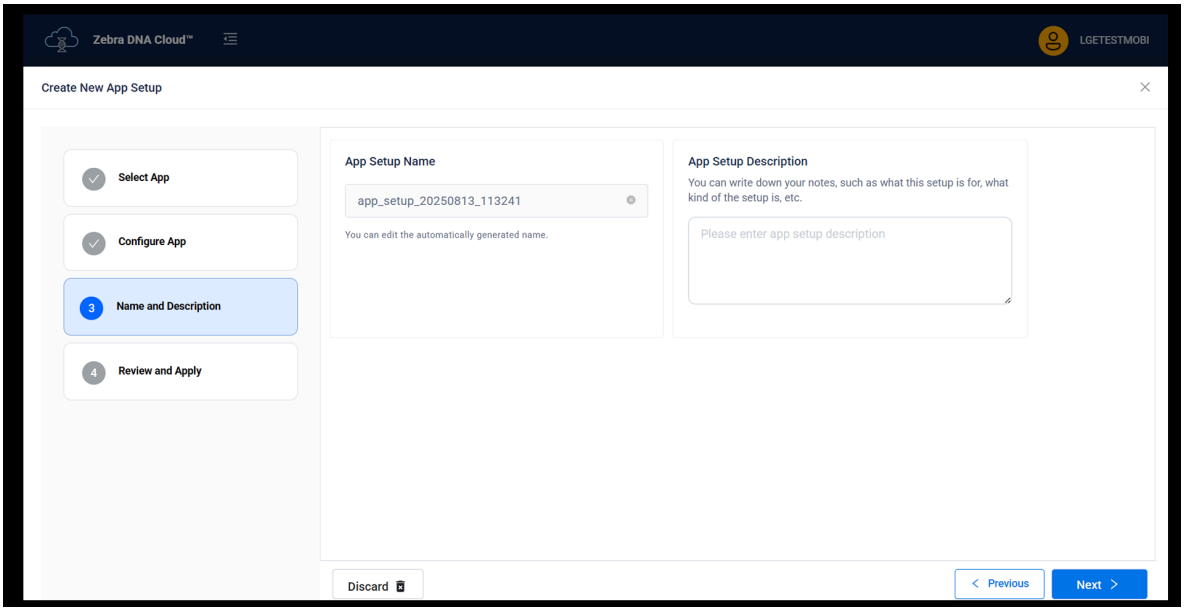

Modifying Name and Description


This section explains how to modify details in the Name and Description section.

1. Review the **App Setup Name** and **App Setup Description** content.
2. For any notes or additional information regarding the **App Setup Name**, take note of it in the **App Setup Description** box.
3. Click **Next**.

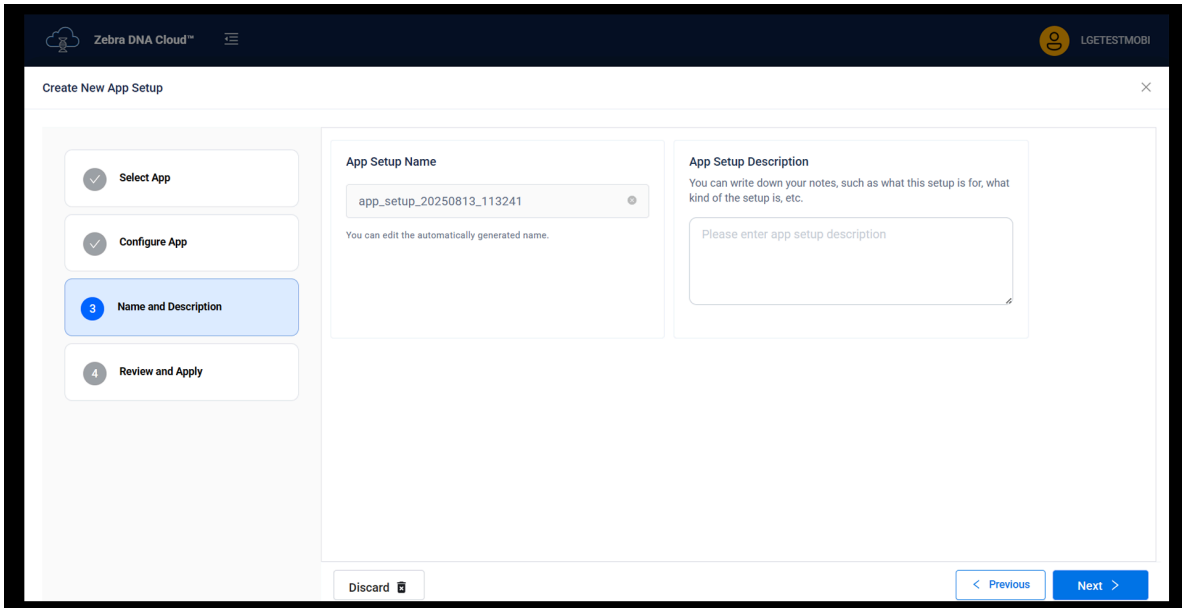

Review and Apply

This section enables users to review and apply configuration changes.

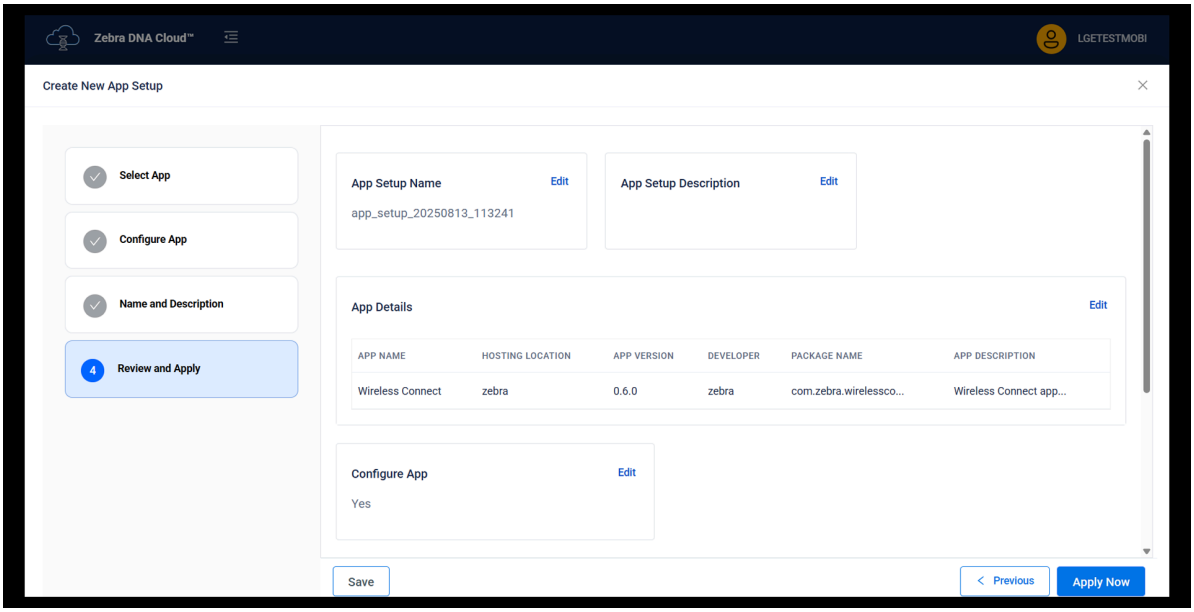


Modifying Review and Apply

This section explains how to modify details in the Review and Apply section.

NOTE: Changes applied remotely take effect the next time a wireless connection is initiated.

1. Ensure all details are correct. If there are any changes needed, click **Edit**.

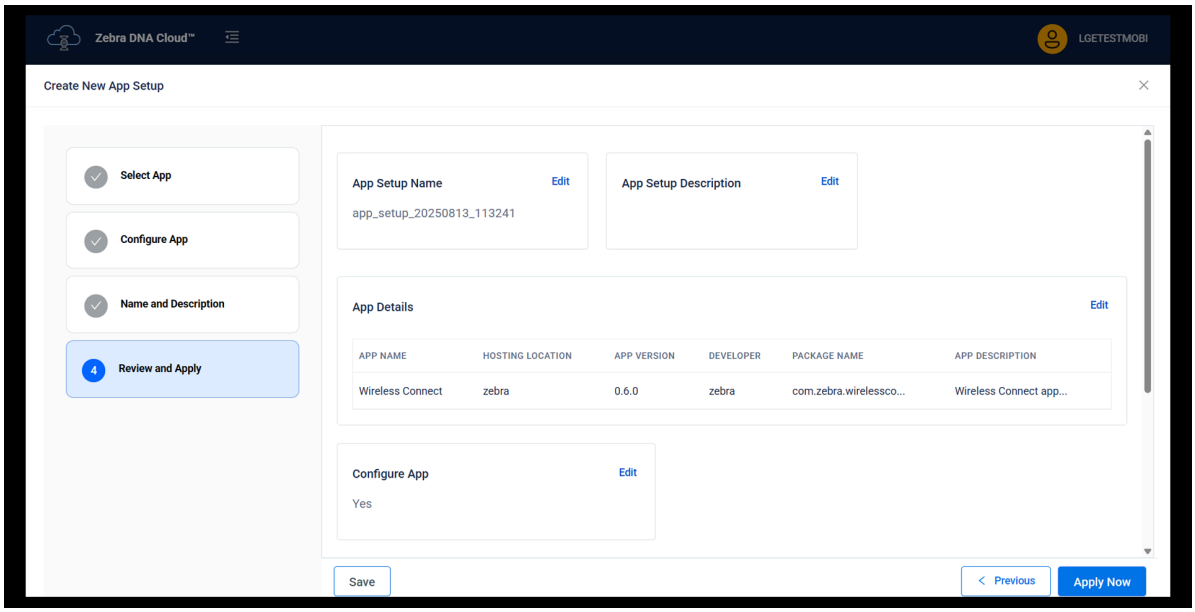

2. Once all details are correct, click **Apply Now**.

Use of the Feedback Channel

Refer to the Google Feedback Channel to send keyed application state results to the Enterprise Mobility Management (EMM) system, based on managed configurations pushed to the device.

After receiving a managed configuration, Wireless Workstation Connect processes the configuration to validate the data and sends feedback to the EMM indicating if Wireless Workstation Connect accepted or rejected the data. After validating the configuration data, Wireless Workstation Connect sends a `SEVERITY_INFO` or `SEVERITY_ERROR` as a feedback message with further information.

- `SEVERITY_INFO` – indicates that the configuration is correct, and the confirmation message displays the changes made by applying the new configuration.
- `SEVERITY_ERROR` – indicates that the configuration is incorrect and no change has occurred. Read the feedback message to understand the error. Make the appropriate changes and reapply the configuration.