Planet Electro Labs Private Limited, Wazirpur

ULR No. : --

DOC No.	:	PEL-2/ED/18800225	A-74/1, WAZIRPUR INDUSTRIAL AREA, NEW DELHI, WAZIRPUR, North West, Delhi, India - 110052
Telephone	:	9218029484	
FAX	:	-	
E-Mail	:	quality.planetelectrolabs02@gmail.com	
BO Code	:	None	

Test REPORT AS PER : IS 302 : Part 2 : SEC 31 (2009)

QR Code/Barcode : 100001080247

REPORT NO : 10497923/2025/SS/2_1 DATE : 26 Jul, 2025

PART A. PARTICULARS OF SAMPLE SUBMITTED

a) Customer Name & Address	:	SLP APPLIANCES D-5 Industrial Growth Centre, Mansa Road, BATHINDA, BATHINDA, PUNJAB, INDIA - 151001
b) Nature of sample	:	SS
c) Grade/Variety/Type/Class Size etc	:	name of product: household and similar appliances - Range Hood || Model No. - 301 || Rating - 92.5 W, 220-240V, 50Hz, Single Phase || Class of Appliance - Class 1
d) Declare values, if any	:	Rating - 92.5 W || Input Voltage - 220-240 V || Frequency - 50 Hz || Phase - Single Phase || Max Input Rating - 2.5W
e) Batch No. & Date of Manufacture	:	20250617/
f) Quantity	:	1 unit
g) Date of Receipt	:	07 Jul, 2025
h) BIS Seal	:	Verified by Sample Cell
i) IO's Signature	:	Verified by Sample Cell
j) Any other Information / Expiry Date, If any	:	-/NA
k) Date of Commencement of Testing	:	07 Jul, 2025
l) Date of Completion of Testing	:	26 Jul, 2025
m) Section Code	:	25E18C0
n) Section Report No.	:	25E18C0_1
o) Report Type	:	New
p) Reference Report No.	:	
q) Remarks	:	OK

Anuj Kumar
OIC SAMPLE CELL
(Authorized Signatory)
Authorized on: 26 Jul, 2025 20:10 PM

1.

This is a Computer Generated Report.

PART B. SUPPLEMENTARY INFORMATION

1.	Reference to sampling procedure, wherever applicable.	Not Applicable
2.	Supporting documents for the measurements taken and results derived like graphs, table sketches and or photographs as appropriate to test report, if any.	Yes
3.	Deviation from the test methods as prescribed in relevant ISS/Work instruction, if any.	Not Applicable
3.	NABL Report required ?	No

Balram Kumar
OIC Electrical
(Authorized Signatory)
Authorized on: 26 Jul, 2025 20:08 PM

This is a Computer Generated Report.

PART C. TEST RESULT

S.No.	Clause No Table No. Sl. No	Parameter - Method of test	Test Description	Min Limit	Max Limit	Unit	Result/ Observation
1	31	RESISTANCE TO RUSTING	-	-	-	-	complies (see cl.no. 31 in attachment test report)
2	28	SCREWS AND CONNECTIONS	-	-	-	-	complies (see cl.no. 28 in attachment test report)
3	18	ENDURANCE	-	-	-	-	Test Not Applicable
4	17	OVERLOAD PROTECTION OF TRANSFORMERS AND ASSOCIATED CIRCUITS	-	-	-	-	Test Not Applicable
5	16	LEAKAGE CURRENT AND ELECTRIC STRENGTH	-	-	-	-	complies(see in cl.no. 16 in attachement test report)
6	15	MOISTURE RESISTANCE	-	-	-	-	complies(see in cl.no. 15 in attachement test report)
7	Clause No -30.2.1	glow wire test	as per IS:11000 part 2/sec 1	-	-	-	complies (see cl.no. 30.2.1 in attachment test report)
8	Clause No -29.3.3	dry heat test	as per IS:9000 part 3/ sec 1	-	-	-	Test Not Applicable
9	Clause No -29.2	comparative tracking index	as per IS:15382 part 1	-	-	-	complies (see cl.no. 29.2 in attachment test report)
10	Clause No -27.6	for circuit board	as per IS:5921 part 6	-	-	-	complies (see cl.no. 27.6 in attachment test report)
11	Clause No -25.5	dimension for pins	as per IS:1293	-	-	-	complies (see cl.no. 25.5 in attachment test report)
12	Clause No -25.8, Table no -11	conductor resistance	as per IS:694	-	-	-	complies (see cl.no. 25.8 in attachment test report)
13	Clause No -24.4	plug and socket	as per IS: 1293	-	-	-	Test Not Applicable
14	Clause No -24.1.5	for innterconnection couplers	as per IS/IEC : 60320 part 2/sec 3	-	-	-	Test Not Applicable
15	Clause No -24.1.4	for automatic control	as per IS/IEC : 60730 part 1	-	-	-	Test Not Applicable
16	Clause No -24.1.3	for switches	as per IS/IEC : 61058	-	-	-	Test Not Applicable
17	Clause No -24.1.2	safety isolating transformer	as per IS/IEC : 61558-2-6	-	-	-	Test Not Applicable
18	Clause No -19.11.4.4	Voltage dips and interruption	as per IS: 14700 part 4/sec-11	-	-	-	complies (see cl.no. 19.11.4.4 in attachment test report)
19	Clause No -19.11.4.3	fast transient	as per IS: 14700 part 4/sec-4	-	-	-	complies (see cl.no. 19.11.4.3 in attachment test report)
20	Clause No -19.11.4.2	radiated field	as per IS: 14700 part 4/sec-3	-	-	-	Test Not Applicable

21	Clause No -19.11.4.1	electrostatic discharge	as per IS: 14700 part 4/sec-2	-	-	-	complies (see cl.no. 19.11.4.1 in attachment test report)
22	Clause No -19.7	test is repeated with the capacitor short circuited	as per IS: 1709	-	-	-	complies (see cl.no. 19.7 in attachment test report)
23	Clause No - 15.1.1	MOISTURE RESISTANCE	as per IS: 12063	-	-	-	Complies (see in cl. 15.1.1 in attachement test report)
24	Clause No - 14	Impulse test voltage	as per IS 302-part 1: 2008	-	-	-	Test Not Applicable
25	Clause No - 13.3,Table No.- 4	voltage for electrical strength	as per IS 302-part 1: 2008	-	-	-	complies (see cl.no. 13.3 in attachment test report)
26	Clause No - 13.3	"LEAKAGE CURRENT AND ELECTRIC STRENGTH AT OPERATING TEMPERATURE"	as per IS: 2071 part 1	-	-	-	complies (see cl.no. 13.3 in attachment test report)
27	Clause No - 10.1, Table No. -1	power input deviation	as per IS 302-part 1: 2008	-	-	-	Complies (See Cl. No. 10.1 in attached test report)
28	Clause No - 8.2	Addition	"as per IS :694 or IS: 9968 (Part 1)"	-	-	-	complies (see cl.no. 8.2 in attachment test report)
29	Clause No - 8.1.2	"PROTECTION AGAINST ACCESS TO LIVE PART - test probe 13"	as per IS: 1401	-	-	-	complies (see cl.no. 8.1.2 in attachment test report)
30	Clause No - 8.1.1	"PROTECTION AGAINST ACCESS TO LIVE PART- test probe B"	as per IS: 1401	-	-	-	complies (see cl.no. 8.1.1 in attachment test report)
31	Clause No - 5	GENERAL CONDITIONS FOR THE TESTS	as per IS 302-part 1: 2008	-	-	-	Complies (See Cl. No. 5 in attached test report)

Balram Kumar
OIC Electrical
(Authorized Signatory)
Authorized on: 26 Jul, 2025 20:08 PM

This is a Computer Generated Report.

PART D. REMARKS

FINAL TEST REPORT ATTACHED

Balram Kumar
OIC Electrical
(Authorized Signatory)
Authorized on: 26 Jul, 2025 20:08 PM

This is a Computer Generated Report.

Report No.: PEL-2/ED/18800225	IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020	Dated: 26/07/2025 Page 1 of 48
Discipline: Electrical		Group: Domestic Electrical Appliance

TEST REPORT

TEST REPORT AS PER: IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024 /IEC 60335-1: 2020

TEST REPORT NO.: PEL-2/ED/18800225 **DATE OF ISSUE OF TEST REPORT: 26/07/2025** **Customer Ref. & Date if any:**			Name & Address of Manufacturer: SLP APPLIANCES D-5 Industrial Growth Centre,Mansa Road,BATHINDA,BATHINDA,PUNJAB,INDIA-151001
Date of Sample Receipt: 07/07/2025	**Start Date of tests: 07/07/2025**	**End Date of tests: 26/07/2025**	Name & Address of Manufacturer: SLP APPLIANCES D-5 Industrial Growth Centre,Mansa Road,BATHINDA,BATHINDA,PUNJAB,INDIA-151001

PART A - PARTICULARS OF THE SAMPLE SUBMITTED

NATURE OF SAMPLE	Range Hoods
Grade/ Variety/ Type/ Class/ Size etc.	Name of product - Range Hood ,Model NO.-301 , Rating - 92.5 W , Input Voltage - 220-240 V , Frequency - 50 Hz , Phase - Single Phase |,Class of Appliance - Class 1
Declared Values, if any (declared by the manufacturer).	Rating - 92.5 W , Input Voltage - 220-240 V , Frequency - 50 Hz , Phase - Single Phase |, Max Input Rating - 2.5W
Sample Code no./ Sr. No.	10497923/2025/SS/2
Any Other information If any.	Insulation Class - Class B , Degree of Protection - IPX0 , Pollution Degree - PD3 , Material Group - IIIa, Type - Type Y, Push button Operated
Batch no., Date of manufacture	20250617
Brand Name/Model No.	**SLP APPLIANCES** / 301
Quantity of Samples	01
Condition of the Sample when received.	OK
Standard Specification (s).	IS 302 PART 2 : SEC 31: 2009
Environmental Conditions.	Temperature: 23±5°C, Humidity: <70%Rh

PART B - SUPPLEMENTARY INFORMATION

a) Deviations from the test methods as per relevant specification/ work instructions, if any:

b) Details of the drawings, graphs, tables, sketches or photographs as referred in the test report, if any:

Notes:

i) This Test Report shall not be reproduced either in full without prior approval, in writing from the Director through email ID: planetelectrolabs@gmail.com.

ii) This report refers only to the particular sample detailed above.

i) The results reported in this Test Reportare valid at the time of and under the stipulated conditions of measurement.

i) Sample will be disposed-off after 30 days of issue of test report if any further information is not received.


i) Laboratory is responsible for information provided in this test report, except the information provided by the customer / his representatives

Tested By	Approved By	Issued By
		
(Testing Engineer) Mr. Yash Raj Gupta	(Dy Technical Manager) Mr. Balram Kumar	(Customer Executive) Mr. Anuj Kumar
Date: 26/07/2025	Date: 26/07/2025	Date: 26/07/2025



Report No.: PEL-2/ED/18800225	IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020	Dated: 26/07/2025
		Page 2 of 48
Discipline: Electrical		Group: Domestic Electrical Appliance

Copy of marking plate:

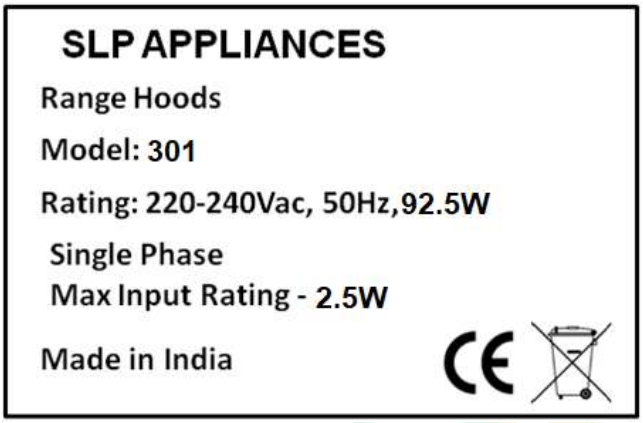

Copy of Marking Label

Report No.: PEL-2/ED/18800225	IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020	Dated: 26/07/2025
		Page 3 of 48
Discipline: Electrical		Group: Domestic Electrical Appliance

Table – List of Attachments

Attachment No.	Attachment Description	No. of pages in Attachment
Attachment – 1	Photo Document	48

General remarks:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Laboratory conditions ..... :	See below
Ambient Temperature ..... :	(23±5)°C
Ambient Humidity ..... :	<70%RH

General product information:

Equipment under test (EUT) is having Model: **301** with Brand **SLP APPLIANCES** have been tested as per**:** IS 302 PART 2: SEC 31: 2009 complies with all the applicable parameters.
Rated Voltage- 220-240V, Rated frequency-50Hz, Rated Power input-92.5 W, Appliance Class-I,
Class of insulation-B, Pollution degree PD3, Degree of protection IPX0, Material Group- IIIa, Type- Type Y

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 4 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	Test Method	Specified Requirements	Results	Verdict
1.	General Requirement (Cl.4 of IS: 302-1:2024	Cl.4 of IS: 302-1:2024)	Appliances shall be constructed so that in normal use, they function safely so as to cause no danger to persons or surroundings as per Cl. 4 of IS: 302-1:2024.	Complies	P
		Cl.4 of IS: 302-1:2024)	Appliance is tested as portable appliances, unless they are designed to be fixed to a support in normal use.	Not a Portable appliance	N/A
2.	Classification (Cl. 6 of IS 302-2-31:2009)	(Cl. 6.1 of IS 302-1: 2024)	Appliances shall be class-I, class-II or Class-III.	Class-I	P
		Cl. 6.2 of IS 302-1: 2024	Appliances shall have the appropriate degree of protection against harmful ingress of Water.	IPX0	N/A
3.	Marking (Cl. 7 of IS 302-231:2009)	(Cl. 7.1 of IS 302-1: 2024)	Appliance shall be marked with the Cl.7.1 of IS 302-1: 2024	See Below	P
			a) Rated voltage or voltage range in volts.	220-240V	P
			b) Symbol for nature of supply, unless the rated frequency is marked	50Hz marked	P
			c)Rated power input in watts or rated current in amperes	Motor: 92.5W	P
			d)Name, Trade-mark or identification mark of the manufacturer or responsible vendor.	SLP APPLIANCES	P
			e) Model or type reference	301	P
			f) Symbol for Class-II appliances	Class-I	N/A
			g) IP number according to degree of protection against ingress of water other than IPX0	IPX0	N/A
		Cl.7.1 of IS 302-2-31:2009	The marking for maximum power input of replaceable lamp shall be visible during replacement of the lamp.	See below	P
			Lamp, Max …. W	2.5 W	P
		(Cl. 7.2 of IS 302-1: 2024)	Stationary appliances for multiple supply shall be marked with the warning. Warning: Before obtaining access to terminals, all supply circuits must be disconnected.	No such type appliance	N/A
		(Cl.7.3 of IS 302-1: 2024)	Appliances having a range of rated values shall be marked with the lower and upper limits of the range separated by a hyphen.	220-240V	P

Report No.: PEL-2/ED/18800225	IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020	Dated: 26/07/2025 Page 5 of 48
Discipline: Electrical		Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	Test Method	Specified Requirements	Results	Verdict
			Appliances having different rated values and which have to be adjusted for use at a particular value by the user or installer shall be marked with the different values separated by an oblique stroke.	See above	N/A
		(Cl.7.4 of IS 302-1: 2024)	If the appliances can be adjusted for different rated voltages, the voltage to which the appliance is adjusted shall be clearly discernible.	220-240V	P
		(Cl.7.5 of IS 302-1: 2024)	For appliances marked with more than one rated voltage or with one or more rated voltage ranges, the rated power input or rated current for each of these voltage or ranges shall be marked.	Single rated power input	N/A
		(Cl.7.6 of IS 302-1: 2024)	When symbols are used, they shall be as per Cl.7.6 of IS 302-1: 2024	Complies	P
		(Cl.7.7 of IS 3021: 2024)	Appliances to be connected to more than two supply conductors and appliances for multiple supply shall have a connection diagram fixed to them, unless the correct mode of connection is obvious	No such construction	N/A
		(Cl.7.8 of IS 302-1: 2024)	Except for type Z attachment, terminal used for connection to the supply mains shall be indicated by letter N for neutral & Protective earthing terminal shall be indicated by symbol ⏚	Class I Appliance & L, N, ⏚	P
		(Cl.7.9 of IS 302-1: 2024)	Unless it is obviously unnecessary, Switches which may give rise to a hazard when operated shall be marked so as to indicate clearly which part of the appliance they control.	No such switch used	N/A
		(Cl.7.10 of IS 302-1: 2024)	The different position of switch on Stationary appliances and the different positions of controls on all appliances shall be indicated by figures, letters or other visual means	Controls on appliance indicated by figures and visual means	P
			The figure 0 shall not be used for any other indication unless it is positioned and associated with other number so that it does not give rise to confusion with the indication of the off position.	Figure 0 not used	N/A
		(Cl.7.11 of IS 302-1: 2024)	Controls intended to be adjusted during installation or in normal use shall be provided with an indication for the direction of adjustment.	Not applicable	N/A

Report No.: PEL-2/ED/18800225	IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020	Dated: 26/07/2025
		Page 6 of 48
Discipline: Electrical		Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	Test Method	Specified Requirements	Results	Verdict
		(Cl.7.12 of IS 302-1: 2024)	Instructions for use shall be provided the appliance so that the appliance can be used safely. If it is necessary to take precautions during user maintenance, appropriate details shall be given.	Instructions provided in manual	P
		(Cl. 7.12 of IS 302-2-31:2009)	The instructions shall state the substance of the following	See below	P
			a) There shall be adequate ventilation of the room when the range hood is used at the same time as appliances burning gas or other fuels (not applicable to appliances that only discharge the air back into the room)	Instructions provided in manual	P
			b) The details concerning the method and frequency of cleaning;	Instructions provided in manual	P
			C) There is a fire risk, if cleaning is not carried out in accordance with the instructions; and	Instructions provided in manual	P
			d) Do not flambé under the range hood	Instructions provided in manual	P
		(Cl.7.12.1 of IS 302-1: 2024)	If it is necessary to take precautions during installation of the appliance, appropriate details shall be given.	Instructions provided in manual	P
		(Cl. 7.12.1 of IS 302-2-31:2009)	The installation instructions shall include the substance of the following	See below	P
			a) The air shall not be discharged into a flue that is used for Exhausting fumes from appliances burning gas or other fuels (not applicable to appliances that only discharge the air back into the room).	Instructions provided in manual	P
			b) The minimum distance between the supporting surface for the cooking vessels on the hob and the lowest part of the range hood. When the range hood is located above a gas appliance, this distance shall be at least 65 cm. If the instructions for installation for the gas hob specify a greater distance, this has to be taken into account	Instructions provided in manual	P
			c) Regulations concerning the discharge of air have to be fulfilled.	Instructions provided in manual	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 7 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	Test Method	Specified Requirements	Results	Verdict
		(Cl.7.12.2 of IS 302-1: 2024)	If a stationary appliance is not fitted with a supply cord and a plug, or with other means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III conditions, the instructions shall state that means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules.	Appliance fitted with cord and plug	N/A
		(Cl.7.12.3 of IS 302-1: 2024)	If the insulation of the fixed wiring supplying an appliance for permanent connection to the supply mains can come into contact with parts having temperature rise exceeding 50K during the test of clause 11, the instructions shall state that the fixed wiring insulation must be protected, for example, by insulating slaving having an appropriate temperature rating.	As above	N/A
		Cl.7.12.4 of IS 302-1: 2024	The instructions for built-in appliances shall include Information with regard to as given.	Not a Built-in appliance	N/A
		(Cl.7.12.5 of IS 302-1: 2024)	For appliances with type X attachment having a specially prepared cord, the instructions shall contain the substance of the following.	No such type of attachment used	N/A
			If the supply cord is damaged, it must be replaced by a Special cord or assembly available from the manufacturer or its service agent	Type-Y attachment used	N/A
			For appliances with type Y attachment, the instructions Shall contain the substance of following	Type-Y attachment used	P
			If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.	Complies	P
			For appliances with type Z attachment, the instructions Shall contain the substance of the following.	No such type of attachment used	N/A
			The supply cord cannot be replaced. If the cord is Damaged the appliance should be scrapped	No such type of attachment used	N/A
		(Cl.7.12.6 of IS 302-1: 2024)	The instructions for heating appliances incorporating a non-self-resetting thermal cut-out that is reset by disconnection of supply mains shall contain Substance of following	No such type of attachment used	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 8 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	Test Method	Specified Requirements	Results	Verdict
			CAUTION: in order to avoid inadvertent resetting of thermal cut out this appliance must not be supplied through an external switching device, such as timer, or Connected to circuit that is regularly switched on and Off by the utility	No such type of attachment used	N/A
		(Cl.7.12.7 of IS 302-1: 2024)	Instructions for fixed appliances stating how the Appliance is to be fixed to its support	Instruction Provided	P
		(Cl.7.12.8 of IS 302-1: 2024)	Instructions for appliances connected to the water Mains shall state	No such construction used	N/A
		(Cl.7.12.9 of IS 302-1: 2024)	For each language, the instruction specified in 7.12.1 to 7.12.8 shall be in hard copy and functional using booklet and fallow the drawing /sketch common to be language of the instruction.	Complies	P
			In addition alternative format such as on a website or on request from the user in a format such as a DVD.	No DVD provide	N/A
		(Cl.7.13 of IS 302-1: 2024)	Instructions and other text required shall be written in an official language of the country in which the appliance is to be sold.	English	P
		(Cl.7.14 of IS 302-1:2024)	The marking shall be clearly legible & durable.	Complies	P
		(Cl.7.15 of IS 302-1: 2024)	The markings specified in 7.1 to 7.5 shall be on a main part of the appliance.	Complies	P
		(Cl.7.15 of IS 302-2-31:2009)	The marking for maximum power input of a replaceable lamp shall be visible during replacement of the lamp.	Marked	P
		(Cl.7.16 of IS 302-1: 2024)	If compliance with this standard depends upon the operation of a replaceable thermal link or fuse link, the reference number or other means for identifying the link shall be marked at such a place that it is clearly visible when the appliance has been dismantled to the extent necessary for replacing the link.	No such construction	N/A
		Cl.7.101 of IS 302-2-31:2009	The appliances may also be marked with the Standard Mark.	Not Marked	N/A
4.	Protection Against Access to live parts (Cl. 8 of IS 302-2-31:2009)	(Cl. 8 of IS 302-1: 2024)	Appliance shall be constructed and enclosed that there is adequate protection against accidental contact with live parts.	Complies	P
		(Cl. 8.1.1 of IS 302-1: 2024)	The requirement of 8.1 applies for all positions of the appliance when it is operated as in normal use, and after the removal of detachable parts. (Test probe B of IS 1401 is applied without appreciable force, the appliance being in every possible position except that appliances normally used on the floor and having a mass exceeding 40 kg are not tilted.	Complies	P

Report No.: PEL-2/ED/18800225	IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020	Dated: 26/07/2025 Page 9 of 48
Discipline: Electrical		Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	Test Method	Specified Requirements	Results	Verdict
		(Cl. 8.1.2 IS 302-1: 2024)	Test probe 13 of IS 1401 is applied without appreciable force through openings in class II appliances and class II constructions, except of those giving access to lamp caps and live parts in socket-outlets. The test probe is also applied through opening in earthed metal enclosures having a nonconductive coating such as enamel or lacquer.	No such construction	N/A
		Cl.8.1.3 of 302-1: 2024	Instead of test probe B and test probe 13, for appliances other than those of Class II, test probe 41 of IS 1401 is applied without appreciable force to live parts of visibly glowing heating elements	No such Construction	N/A
		Cl.8.1.4 of 302-1: 2024	An accessible part is not considered to be live if the part is supplied at safety extra-low voltage, provided that	Passes the test	P
		(Cl.8.1.5 IS 302-1: 2024)	Live parts of built-in appliances, fixed appliances and appliances delivered in separate units, shall be protected at least by basic insulation before installation or assembly.	Complies	P
		(Cl. 8.2 of IS 302-1: 2024)	Class II appliance and class II construction shall be constructed and enclosed so that there is adequate protection against accidental contact with basic insulation and metal parts by basic insulation only.	Class I appliance and no such construction used	N/A
		(Cl. 8.2 of IS 302-2-31:2009)	After the removal of detachable parts for the purposes of user maintenance, the basic insulation of internal wiring may be touched provided that it is electrically equivalent to the insulation of cords complying with IS 694 or IS 9968 (part 1).	Class I appliance and no such construction used	N/A
5.	POWER INPUT AND CURRENT (Cl. 10 of IS 302-2-31:2009)	(Cl.10 of IS 302-2-31: 2009 & IS 302-1: 2024)	Appliance is marked with rated power input, the power input at normal operating temperature shall not deviate from the rated power input by more than the deviation shown in table1.	Complies	P
			Power Motor+ Lamp (92.5 W + 2.5 W) +20 % Limit	86.59 W at 220V	P
			Power Motor+ Lamp (92.5 W + 2.5 W) + 20% Limit	91.18 W at 230V	P
			Power Motor+ Lamp (92.5W + 2.5 W) +20% Limit	94.33W at 240V	P
6.	Heating (Cl. 11 of IS 302-2-31:2009)	(Cl. 11.1 of IS 302-1: 2024)	Appliances and their surroundings shall not attain excessive temperatures in normal use.	Complies	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 10 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	Test Method	Specified Requirements	Results	Verdict
		(Cl. 11.2 of IS 302-2-31:2009)	Built-in appliances are installed in accordance with the instructions. Other appliances are fixed to a vertical support.	Considered	P
			If the range hood is intended to be installed over a hob having four hob elements, the hob shall have two 2 kW electric elements at the back and two 1.5 kW electric elements at the front.	Complies	P
			If the range hood is intended to be installed over a hob having six hob elements, the hob shall have three 2 kW electric elements at the back and three	No such construction	N/A
			The appliance is also tested without the hob elements in operation.	Complies	
		(Cl. 11.3 of IS 302-1: 2024)	Temperature rises, other than those of windings, are determined by means of fine-wire thermocouples positioned so that they have minimum effect on the temperature of the part under test.	Complies	P
			Temperature rises of windings are determined by the resistance method unless the windings are non-uniform or if it is difficult to make the necessary connections, in which case the temperature rise is determined by means of thermocouples	Complies	P
		(Cl. 11.4 of IS 302-1: 2024)	Heating appliances are operated under normal operation and at 1.15 times rated power input.	See below	N/A
		(Cl. 11.5 of IS 302-1: 2024)	Motor-operated appliances are operated under normal operation and supplied with the most unfavorable voltage between 0.94 times and 1.06 times the rated voltage.	Complies	P
		(Cl. 11.6 of IS 302-1: 2024)	Combined appliances are operated under normal operation and supplied with the most unfavorable voltage between 0.94 times and 1 .06 times the rated voltage.	Not a combined appliance	N/A
		(Cl. 11.7 of IS 302-2-31:2009)	Appliances are operated until steady state conditions are established	Complies	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 11 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause reference)	Test Method	Specified Requirements	Results	Verdict
		(Cl. 11.8 of IS 302-1: 2024)	The temperature rise of parts which in normal use are in contact with skin or hair or are held in the hand shall not exceed the limits specified for handles which in normal use are continuously held. The temperature rise of such parts is determined for every accessory intended to be used with the appliance as per Cl 11.8 of IS 302-2-32.	Complies	P
			1) Temperature rise of winding insulation Winding of Class --- insulation:, max -- K	No winding use	N/A
			2) Terminal for external conductor Max-60K	Not metallic part	N/A
			3) Rubber or PVC insulation of internal wiring a) Without temperature rating 50K	6K	P
			b) With temperature rating T-25K	Not Applicable	N/A
			Rubber or PVC insulation of external wiring, including supply cord a) Without temperature rating 50K	6k	P
			b) With temperature rating T-25K	Not Applicable	N/A
			4) Surfaces of handles, knobs, grips and similar parts which are held for short periods in normal use (rotary swi tch). **a)** Of metal. (in max. 35ºC **a)** Of porcelain or vitreous material.(in max. 45ºC). **b)** Of moulded material, rubber or wood.(in max. 60ºC).	See below 8K	P
			Wooden supports, walls, ceiling and floor of the test corner and wooden cabinet (in max. 65ºC).	Not applicable	N/A
			Thermoplastic material	9K	P
			Thermostat (30K)	Not applicable	N/A
			Lamp holder (55K)	Not applicable	N/A
			PCB	Not applicable	N/A
			5) Outer surface of capacitors (20K)	Not applicable	N/A
			6) External enclosure of motor-operated appliances, except handles held in normal use: - of bare metal -of coated metal -of glass and ceramic -of plastic having a thickness exceeding 0,4 mm1	Complies 9K	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 12 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	Test Method	Specified Requirements	Results	Verdict
		(Cl. 11.8 of IS 302-2-31:2009)	The temperature-rise limit for external enclosures and wood does not apply when the hob elements are in operation. When the appliance is tested without the hob elements in operation, only the temperature rises of the external enclosure and wood are measured, the temperature rise limit for wood being 65 K.	Complies	P
7.	Leakage current and Electric Strength at Operating Temperature (Cl. 13 of IS 302-2-31:2009)	(Cl. 13.1 of IS 302-1: 2024)	Motor-operated appliances and combined appliances supplied at 1.06 times rated voltage	Complies	P
		(Cl. 13.2 of IS 302-1: 2024)	The leakage current shall not exceed 3.5 mA (Max.) (for stationary Class I)	0.025mA	P
		(Cl. 13.3 of IS 302-1: 2024)	Electric Strength: Appliance shall withstand at 1000 volt for one minute.	Withstood & no Breakdown occurred	P
8.	Transient Overvoltage (Cl. 14 of IS 302-2-31	(Cl. 14 of IS 302-1: 2024)	Appliances shall withstand the transients over voltage The impulse test voltage is applied three times for each polarity with intervals of at least 1s. The impulse test voltage is specified in Table 6 of IS:302-1 : 2024	(Value of clearances more than table 16 of IS 302-1: 2024)	N/A
9.	MOISTURE RESISTANCE (Cl. 15 of IS:302-2-31:2009)	(Cl. 15.1 of IS 302-1: 2024)	The enclosure of the appliance shall provide the degree of protection against moisture in accordance with the classification of the appliance	IPX0	N/A
		(Cl. 15.1.1 of IS 302-1: 2024)	Appliances other than those classified IPX0 are subjected to the tests according to following clauses of IS 60529 as mentioned below	IPX0	N/A
		(Cl. 15.1.2 of IS 302-1: 2024)	Hand-held appliances are turned continuously through the most unfavorable positions during the test. Built-in appliances are installed in accordance with the instructions	Not a hand-held appliance	N/A
			Appliances normally used on the floor or table are placed on a horizontal unperforated support having a diameter of twice the oscillating tube radius minus 15 cm	No such appliance	N/A
			Appliances normally fixed to a wall and appliances with pins for insertion into socket-outlets are mounted as in normal use in the center of a wooden board having dimensions which arc 15 ±5 cm in excess of those of the orthogonal projection of the appliance on the board. The wooden board is placed at the center of the oscillating tube	See below	N/A
			For IPX3 appliances, the base of wall-mounted appliances is placed at the same level as the pivot axis of the oscillating tube	IPX0	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 13 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	Test Method	Specified Requirements	Results	Verdict
			For IPX4 appliances, the horizontal center line of the appliance is aligned with the pivot axis of the oscillating tube. However, for appliances normally used on the floor or table, the movement is limited to two times 90° from the vertical for a period of 5 min, the support being placed at the level of the pivot axis of the oscillating tube.	IPX0	N/A
			If the instructions for wall-mounted appliances state that the appliance is to be placed close to the floor level and specifies a distance, a board is placed under the appliance at that distance. The dimensions of the board are 15 cm more than the horizontal projection of the appliance	No such construction	N/A
			Appliances normally fixed to a ceiling are mounted underneath a horizontal unperforated support that is constructed to prevent water spraying onto its top surface. The pivot axis of the oscillating tube is located at the same level as the underside of the support and aligned centrally with the appliance. The spray is directed upwards	No such construction	N/A
			For IPX4 appliances, the movement of the tube is limited to two times 90° from the vertical for a period of 5min.	IPX0	N/A
		Cl.15.2 of IS 302-1: 2024	Appliances shall be constructed so that spillage of liquid in normal use does not affect their electrical insulation even if an inlet valve fails to close. Compliance is checked by the following test:	No such Construction	N/A
			Appliances with type X attachment, except those having a specially prepared cord, are fitted with the lightest permissible type of flexible cord of the smallest cross-sectional area specified in Table 13.	Type Y attachment	N/A
			The appliance shall then withstand the electric strength test of 16.3 and inspection shall show that there is no trace of water on insulation that could result in a reduction of clearances and creepage distances below the values specified in 29.	Withstood (No Breakdown occurred)	N/A
		Cl.15.3 of IS 302-1: 2024	Appliances shall be proof against humid conditions that may occur in normal use.	See below	P
			Appliances that were subjected to the tests of 15.1 or 15.2 are placed in normal ambient conditions for 24 h.	Complies	P
			Cable entries, if any, are left open. If knock-outs are provided, one of them is opened. Detachable parts are removed and subjected, if necessary, to the humidity test with the main part.	Complies	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 14 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

sl. No.	TESTS (Clause Reference)	Test Method	Specified Requirements	Results	Verdict
			The humidity test is carried out for 48 h in a humidity cabinet containing air with a relative humidity of (93 ± 3). The temperature of the air is maintained within 2 K of any convenient value *t* between 20 °C and 30°C. Before being placed in the humidity cabinet, the appliance is brought to a temperature *of* t^{+4}_{0} °C.	Complies	P
			The appliance shall then withstand the tests of 16 in the humidity cabinet or in the room in which the appliance was brought to the prescribed temperature after reassembly of those parts that may have been removed.	Complies	P
10.	Leakage current and electric strength (Cl. 16 of IS 302-2- 31:2009)	(Cl. 16.1 of IS 302-1: 2024)	The leakage current of the appliance shall not be excessive and its electric strength shall be adequate	See below	P
			Protective impedance is disconnected from live parts before carrying out the tests.	No such	N/A
			The tests are carried out on the appliance at room temperature and not connected to the supply mains.	Complies	P
		(Cl. 16.2 of IS 302-1: 2024)	Leakage Current: Appliances are operated at 1.06 times the rated voltage. The leakage current is measured within 5 sec after application of test voltage. Leakage current shall not exceed 3.5 mA	0.028mA	P
		(Cl. 16.3 of IS 302-1: 2024)	Electric Strength: A voltage of 1250 Vac is applied between accessible metal parts and supply cord. No breakdown shall occur during the test.	Withstood (No Breakdown occurred)	P
11.	Overload Protection of Transformer and Associated Circuits (Cl. 17 of IS 302-2-31:2009)	(Cl. 17 of IS 302- 1: 2024)	Appliance incorporating circuits supplied from a transformer shall be constructed so that in the event of short circuits which are likely to occur in normal use excessive temperature do not occur in the transformer in the circuit associated with the transformer. Compliance is checked by applying the most unfavorable short circuit or overload which is likely to occur in normal use, the appliance being supplied with 1.06 times or 0.94 times rated voltage, whichever is the more unfavorable. Transformer Insulation winding class: B, Limit:-175°C	No such transformer used	N/A
12.	Endurance test (Cl.18 of IS 302-	(Cl.18 of IS 302- 2-	This clause of Part 1 is not applicable.	Not applicable in this part	N/A
13.	Abnormal operation (Cl. 19 of IS 302-2- 31:2009)	(Cl.19.1 of IS 302-1: 2024)	Appliances shall be constructed so that as a result of abnormal or careless operation, the risk of fire, mechanical damage impairing safety or protection against electric shock is obviated as far as practicable.	Complies	P

sl.no	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			Electronic circuit shall be designed and applied so that a fault condition will not render the appliance unsafe with regard to electric shock, fire hazard, mechanical hazard or dangerous malfunction.	Complies	P
			Appliances incorporating heating elements are subjected to the tests of 19.2 and 19.3. In addition, such appliances having a control that limits the temperature during 11 are subjected to the tests of 19.4 and, when applicable, to the test of 19.5. Appliances incorporating PTC heating elements are also subjected to the test of 19.6.	Complies	P
			Appliances incorporating motors are subjected to the tests of 19.7 to 19.10, as applicable	Complies	P
			Appliances incorporating electronic circuits are also subjected to the tests of 19.11 and 19.12, as applicable.	Complies	P
			Unless otherwise specified, only one abnormal condition is simulated at any one time	Complies	P
			Unless otherwise specified, compliance with the tests of this clause is checked as described in 19.13	Complies	P
		Cl. 19.1 of IS 302-2-31:2009	Appliances are also subjected to the test of 19.101.	Complies	P
		Cl. 19.2 of IS 302-1: 2024	Appliances with heating elements are tested under the conditions specified in 11 but with restricted heat dissipation. The supply voltage, determined prior to the lest, is that required to provide a power input of 0.85 times rated power input under normal operation when the power input has stabilized. This voltage is maintained throughout the test	Complies	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 16 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		Cl. 19.3 of IS 302- 1: 2024	The lest of 19.2 is repeated but with a supply voltage, determined prior to the test, equal to that required to provide a power input of 1.24 times		P
		Cl. 19.4 of IS 302-1:2024	The appliance is tested under the conditions specified in 11. Any control that limits the temperature during the test of 11 is short-circuited	No such control	N/A
		Cl. 19.5 of IS 302-1: 2024	The test of 19.4 is repeated on Class I appliances incorporating tubular sheathed or embedded heating elements. However, controls are not short-circuited but one end of the element is connected to the sheath of the heating element	No such construction	N/A
			This test is repeated with the polarity of the supply to the appliance reversed and with the other end of the element connected to the sheath	No such construction	N/A
		Cl. 19.6 of IS 302-1:2024	Appliances with PTC heating elements are supplied at rated voltage until steady conditions with regard to power input and temperature are established	No PTC heating elements	N/A
		(Cl.19.7 of IS 302-1: 2024)	The appliance is operated under stalled conditions by; (a) Locking the rotor if the rotor torque is smaller than the full load torque; and (b) Locking moving parts of the other appliances. During the above test the temperature of the winding shall not exceed 190 for F insulation	Complies 97.6°C	P
		Cl. 19.8 of IS 302-1:2024	One phase of appliances incorporating three-phase motors is disconnected. The appliance is then operated under normal operation and supplied at rated voltage for the period specified in 19.7.	No such construction	N/A

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		Cl. 19.9 of IS 302-1:2024	A running overload test is carried out on appliances incorporating motors that are intended to be remotely or automatically controlled or liable to be operated continuously.	Withstood the test Temperature: 42°C	P
		(Cl.19.10 of IS 302-1: 2024)	Appliance incorporating series motor are operated with lowest possible load and supplied at 1.3 times rated voltage for 1 min. parts shall not be ejected from the appliance	No such Construction	N/A
		Cl. 19.11 of IS 302-1:2024	Electronic circuits are checked by evaluation of the fault conditions specified in 19.11.2 for all circuits or parts of circuits, unless they comply with the conditions specified in 19.11.1.	See below	P
			Appliances incorporating a protective electronic circuit are subjected to the tests of 19.11.3 and 19.11.4.	No protective electronic	N/A
			Appliances having a switch with an off position obtained by electronic disconnection, or a switch that can place the appliance in a stand-by mode, are subjected to the tests of 19.11.4.	Complies	P
			If the safety of the appliance under any of the fault conditions depends on the operation of a miniature fuse-link complying with IS/IEC 60127, the test of 19.12 is carried out.	Complies	P
			During and after each test, the temperature of the windings shall not exceed the values specified in Table 8. However, these limits do not apply to fail- safe transformers complying with 15.5 of IS 1401.	Complies	P
			The appliance shall comply with the conditions specified in 19.13. Any current flowing through protective impedance shall not exceed the limits specified in 8.1.4.	No such component used	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 18 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			If a conductor of a printed circuit board becomes open- circuited, the appliance is considered to have withstood the particular test, provided all three of the following conditions are met a) the base material of the printed circuit board withstands the test of annex E, b) any loosened conductor does not reduce clearances or creepage distances between live parts and accessible metal parts below the values specified in clause 29, c) the appliance withstands the tests of 19.11.2 with the open-circuited conductor bridged	No such condition	N/A
		Cl. 19.11.1 of IS 302-1:2024	Fault conditions (a) to (f) specified in 19.11.2 are not applied to circuits or parts of circuits when both of the following conditions are met a) the electronic circuit is a low-power circuit as described below; b) Protection against electric shock, fire hazard, mechanical hazard or dangerous malfunction of other parts of the appliance does not rely on the correct functioning of the electronic Circuit.	b) Complies	P
		(Cl.19.11.2 of IS 302-1: 2024)	The following fault conditions are considered and, if necessary, applied one at a time, consequential faults being taken into consideration:	See below	P
			a) short circuit of functional insulation if clearances or creepage distances are less than the values specified in clause 29;	Clearance and creepage values greater than cl. 29	P
			b) open circuit at the terminals of any component;	Complies	P
			c)short circuit of capacitors, unless they comply with IEC 60384-14;	Complies	P
			d) Short circuit of any two terminals of an electronic component, other than an integrated circuit. This fault condition is not applied between the two circuits of an optocoupler;	No such components	N/A
			e) failure of triacs in the diode mode;	No triacs used	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 19 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			f) Failure of an integrated circuit. In this case the possible hazardous situations of the appliance are assessed to ensure that safety does not rely on the correct functioning of such a component. All possible output signals are considered for faults occurring within the integrated circuit. If it can be shown that a particular output signal is unlikely to occur, then the relevant fault is not considered.	No fault possibility unlikely to occur in output signal of integrated circuit	N/A
			Fault condition 19.11.2 (f) is applied to encapsulated and similar components, if the circuit cannot be assessed by other methods	No such component used	N/A
			Positive temperature coefficient resistors are not short- circuited if they are used within the manufacturer's specification. However, PTC-S thermistors are short- circuited	No such component used	N/A
			In addition, each low-power circuit is short-circuited by connecting the low-power point to the pole of the supply source from which the measurements were made	See above	N/A
			For simulation of the fault conditions, the appliance is operated under the conditions specified in 11 but supplied at rated voltage	See above	N/A
			When any of the fault conditions are simulated, the duration of the test is	See above	N/A
			a)as specified in 11.7 but only for one operating cycle and only if the fault cannot be recognized by the user, for example, a change in temperature;	See above	N/A
			b) as specified in 19.7, if the fault can be recognized by the user, for example, when the motor of a kitchen machine stops	See above	N/A
			c)until steady conditions are established, for circuits continuously connected to the supply mains, for example, stand-by circuits	No such construction	N/A
			In each case, the test is ended if interruption of the supply occurs within the appliance	See above	N/A
		Cl. 19.11.3 of IS 302-1:2024	If the appliance incorporates a protective electronic circuit which operates to ensure compliance with 19, the relevant test is repeated with a single fault simulated, as indicated in (a) to (f) of 19.11.2.	(See Cl. No. 19.11.2)	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 20 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		Cl. 19.11.4 of IS 302-1:2024	Appliances having a switch with an off position obtained by electronic disconnection, or a switch that can be placed in the stand-by mode, are subjected to the tests of 19.11.4.1 to 19.11.4.7. The tests are carried out with the appliance supplied at rated voltage, the switch being set in the off position or in the stand—by	Complies	P
		(Cl.19.11.4.1 of IS 302-1: 2024)	The appliance is subjected to electrostatic discharges in accordance with IS 14700 (Part4/Sec 2),, test level 4	Complies	P
		(Cl.19.11.4.3 of IS 302-1: 2024)	The appliance is subjected to fast transient bursts in accordance with IS 14700(Part 4/Sec 4), test level 3 or 4 as specified	Complies	P
		(Cl.19.11.4.4 of IS 302-1: 2024)	The power supply terminals of the appliance subjected to voltage surges in accordance with IS14700 (Part 4/Sec5), test level 3 or 4 as specified	Complies	P
			An open circuit test voltage of 2 kV is applicable for the line-to-line coupling mode	Complies	P
			An open circuit test voltage of 4 kV is applicable for the line-to-earth coupling	Complies	P
			Earthed heating elements in class I appliances disconnected	No such type	N/A
		(Cl.19.11.4.6 of IS 302-1: 2024)	The appliance is subjected to the Class 3 voltage dips and interruptions in accordance with IS 14700 (Part 4/Sec 11). The values specified in Table 1 and Table 2 of IS 14700 (Part 4/Sec 11) are applied at zero crossing of the supply voltage.	Complies	P
		(Cl.19.11.4.7 of IS 302-1: 2024)	The appliance is subjected to mains signals in accordance with IEC 61000-4-13, test level class 2 being applicable.	Complies	P
		Cl. 19.12 of IS 302-1:2024	If safety of the appliance depends upon the operation of a miniature fuse-link complying with IS/IEC 60127 during any of the fault conditions specified in 19.11.2, the test is repeated but with the miniature fuse-link replaced by an ammeter. If the current measured	Complies	P
		(Cl.19.13 of IS 302-1: 2024)	During the test the appliance shall not emit flames, molten metal, or poisonous or ignitable gas in hazardous amounts and temperature rise shall not exceed as follows. (a) Wooden supports, walls, ceiling and floor of the test corner. 150K (Max)	Not for Motor operated appliance	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 21 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			When the insulation, other than that of class III appliances, has cool down to approximately room temperature, it shall withstand the electric strength test at 1250 Volt for one minute.	See above	N/A
		Cl. 19.13 of IS 302-2-31:2024	During the test of 19.101, the temperature of the motor windings shall not exceed the values specified in Table 8. The appliance shall not deform to	Complies	P
		(Cl.19.14 of IS 302-1: 2024)	Appliance are operated under the condition of Clause 11.contactor or relay contact then operate under the condition of (clause no. 11) is short –	No such construction	N/A
		(Cl.19.15 of IS 302-1: 2024)	For appliance incorporating a main voltage selector switch, this switch is set to the lowest rated voltage and the highest value of rated voltage is applied.	No such construction	N/A
		(Cl.19.16 of IS 302-1: 2024)	Appliance having main connection and batteries that are replaceable by the user are supplied at rated voltage and operated under normal operation	No such construction	N/A
		(Cl.19.17 of IS 302-1: 2024)	-Battery-operated appliance incorporating a battery that use metal-ion chemistry, the charging system and battery.	No such construction	N/A
		(Cl.19 .101 of IS 302-2-31:2009	Appliances are operated above a hob as specified in 11, but without vessels and with only the two outer hob elements at the back being energized.	Complies	P
14.	Stability & Mechanical Hazards (Cl. 20 of IS 302-2-31:2009)	(Cl. 20.1 of IS 302-1: 2024)	Appliances, other than fixed appliances and hand-held appliances, intended to be used on a surface such as the floor or a table shall have adequate stability.	Wall mounted fixed appliance	N/A
		Cl. 20.2 of IS 302-1:2024	Moving part of appliances shall, as far as is compatible with the use and working of the appliance, be positioned or enclosed to provide adequate protection against personal injury in normal use. Cl. 20.2 of IS 302-1:2024	Complies	P
			Protective enclosures, guards and similar parts shall be non- detachable parts and shall have adequate mechanical strength. Cl. 20.2 of IS 302-1:2024	Complies	P
		Cl. 20.2 of	Filters are considered to be detachable parts.	Complies	P

Report No.: PEL-2/ED/18800225	IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020	Dated: 26/07/2025
		Page 22 of 48
Discipline: Electrical		Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			Impact Test: The appliance is rigidly supported and three blows having impact energy of 0.5 J are applied to every point of the enclosure that is likely to be weak.	Complies (0.5 J applied on every point of enclosure likely to be weak No damage observed)	P
			If necessary, the blows are also applied to handles, levers, knobs and similar parts and to signal lamps and their covers but only if the lamps or covers protrude from the enclosure by more than 10 mm or if their surface area exceeds 4 cm^2. Lamps within the appliance and their covers are only tested, if they are likely to be damaged in normal use	Test carried on Lamp assembly	P
			After the test, the appliance shall show no damage that could impair compliance with this standard and compliance with8.1, 15.1 and clause 29 shall not be impaired. In case of doubt, supplementary insulation and reinforced insulation are subjected to the electric strength test of 16.3	No damage occurred	P
		(Cl. 21.2 of IS 302-1:2024)	Accessible parts of solid insulation shall have sufficient Strength to prevent penetration by sharp implements.	Complies	P
16.	Construction (Cl. 22 of IS 302- 2-31:2009)	(Cl. 22.1 of IS 302-1:2024)	If the appliance is marked with the first numeral of the IP system, the relevant requirements of IS/IEC 60529:2001 shall be fulfilled.	IPX0	N/A
		(Cl. 22.2 of IS 302-1:2024)	For stationary appliances, means shall be provided to ensure all pole disconnection from supply mains. Such means shall be one of the following a) a supply cord fitted with a plug b) a switch c) a statement in the instructions that a disconnection incorporated in the fixed wiring is to be provided d) an appliance inlet	Supply cord fitted with a plug	P
		Cl. 22.3 of IS 302-1:2024	Appliances with pins for insertion into socket- outlets shall not impose undue strain on these socket- outlets. The means for retaining the pins shall withstand the forces to which the pins arc likely to be subjected in normal use	No such construction	N/A
		Cl. 22.4 of IS 302-1:2024	Appliances for heating liquids and appliances causing undue vibration shall not be provided with pins for insertion into socket-outlets	No heating liquids & undue vibration	N/A
		(Cl. 22.5 of IS 302-1:2024)	Appliances intended to be connected to the supply mains by means of a plug shall be constructed so that in normal use there is no risk of electric shock from charged capacitors when pins of the plug are touched.	Appliance connected to the supply mains by	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 23 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			The appliance is supplied at rated voltage. Any switch is then placed in the off position and the appliance is disconnected from the supply mains at the instant of voltage peak. One second after disconnection, the voltage between the pins of the plug is measured with an instrument that does not appreciably affect the value to be measured	Measured voltage not exceeding	P
		Cl. 22.6 of IS 302-1:2024	Appliances shall be constructed so that their electrical insulation cannot be affected by water that could condense on cold surfaces or by liquid that could leak from containers, hoses, couplings and similar parts of the appliance.	Complies	P
		Cl. 22.7 of IS 302-1: 2024	Appliances containing liquid or gases in normal use or having steam-producing devices shall incorporate adequate safeguards against the risk of excessive pressure.	No such constructio n	N/A
		(Cl. 22.8 of IS 302-2-31:2024)	For appliances having compartments to which access is gained during user maintenance, the electrical connections shall be arranged so that they are not subjected to pulling during cleaning or other user maintenance.	Complies	P
			Detachable parts are removed. It shall not be possible to grasp wiring likely to be touched in such a way that the connections are subjected to undue stress. In case of doubt, the wiring is subjected to a pull of 10 N, applied without jerks three times in succession, in the most unfavorable direction likely to occur during user maintenance. There shall be no appreciable displacement of the connections	Complies	P
			In case of doubt, the wiring is subjected to a pull of 10 N, applied without jerks three times in succession, in the most unfavourable direction likely to occur during user maintenance. There shall be no appreciable displacement of the connections. NOTE 101 — Interconnection cords intended to be disconnected before cleaning or user maintenance are not subjected to the test.	Not required	N/A
		(Cl. 22.9 of IS 302-1: 2024)	Appliances shall be so constructed so that parts such as insulation, internal wiring, windings, commutators and slip rings are not exposed oil grease or similar substances, unless the substance has adequate insulating properties so that compliance with the standard is not impaired.	Not exposed to oil, grease or similar substances	P
		Cl. 22.10 of IS 302-1:2024	It shall not be possible to reset voltage- maintained non-self-resetting thermal cut-outs by (the operation of an automatic switching device incorporated within the appliance.	No such control used	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 24 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Cl. Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		(Cl. 22.11 of IS 302-1:2024)	Non-detachable parts that protect against access to live parts, moisture or contact with moving parts shall be flexed in a reliable manner and withstand the mechanical stress occurring during normal use. Snap- in devices used for fixing such parts shall have an obvious locked position. The fixing properties of snap- in devices used in parts that are likely to be removed during installation or servicing shall be reliable	Complies	P
			Parts that are likely to be removed during installation or servicing are disassembled and assembled 10 times before the test is carried out	Covers likely to be remove are disassembled and assembled 10 times	P
			The test is carried out at room temperature. However, if compliance may be affected by the temperature of the appliance, the test is also carried out immediately after it has been operated under the condition specified in 11.	Complies	P
			The test is applied to all parts that are likely to be detachable	Complies	P
			A force is applied without jerks for 10 s in the most unfavorable direction to parts likely to be weak. The force is as follows	Compiles	P
			a) push force, 50 N;	Push force of 50N applied on the enclosure	P
			b) pull force:	Pull force of 50N applied on the enclosure	P
			if the shape of the part is such that the fingertips cannot easily slip off, 50 N	Parts remain in position and not detached	P
			if the projection of the part that is gripped is less	No such construction	N/A
			The push force is applied by test probe 11 of IS	Push force applied	P
			The pull force is applied by a suitable means, such as a suction cup, so that the test results are not affected. While the force is being applied, the test fingernail of figure 7 is inserted in any aperture or joint with a force of 10 N. The fingernail is then slid sideways with a force of 10 N but is not twisted or used as a lever.	Complies	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 25 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Cl. Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			If the shape of the part is such that an axial pull is unlikely, the pull force is not applied but the test fingernail is inserted in any aperture or joint with a force of 10 N and is then pulled for10 s by means of the loop with a force of 30 N in the direction of removal.	Complies	P
			If the part is likely to be twisted, the following torque is applied at the same time as the pull or push force	No such twisted part	N/A
			a)2 Nm, for major dimensions up to 50 mm	See above	N/A
			b)4 Nm, for major dimensions over 50 mm	See above	N/A
			This torque is also applied when the test fingernail is pulled by means of the loop	See above	N/A
			If the projection of the part which is gripped is less than 10 mm, the torque is reduced by50 %.	See above	N/A
			Parts shall remain in the locked position and not	See above	N/A
		(Cl. 22.12 of IS 302-1:2024)	Handles, knobs, grips, livers and similar parts shall be fixed in a reliable manner so that they will not work loose in normal use. Compliance is checked by inspection, by manual test and by trying to remove the part by applying an axial pull force of: (a) 15N, if an axial pull is unlikely to be applied in normal use, (b) 30N, if an axial pull is likely to be applied in normal use, The force is applied for 1 min.	No such construction	N/A
		Cl. 22.13 of IS 302-1:2024	Appliances shall be constructed so that when handles are gripped in normal use, contact is unlikely between the operator's hand and parts having a temperature rise exceeding the value specified in table 3 for handles which are held for short periods only in normal use.	No such construction	N/A
		(Cl. 22.14 of IS	Appliance shall have no ragged or sharp edges	No such ragged or	
		Cl. 22.15 of IS 302-1:2024	Storage hooks and similar devices for flexible cords shall be smooth and well-rounded	No Storage hooks	N/A
		Cl. 22.16 of IS 302-1:2024	Automatic cord reels shall be constructed so that they do not cause.	No such automatic cord	N/A
		Cl. 22.17 of IS 302-1:2024	Spacers intended to prevent the appliance from overheating walls shall be fixed so that it is not possible to remove them from the outside of the appliance by hand or by means of a screwdriver or a spanner	No spacers used	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 26 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Cl. Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		(Cl. 22.18 of IS 302-1:2024)	Current carrying parts and other metal parts, the corrosion of which could result in a hazard, shall be resistant to corrosion under normal conditions of use; the relevant parts show no sign of corrosion.	Complies	P
		Cl. 22.19 of IS 302-1:2024	Driving belts shall not be relied upon to provide the required level of insulation unless they are constructed to prevent inappropriate replacement	No driving belts used	N/A
		(Cl. 22.20 of IS 302-1:2024)	Direct contact between live parts and thermal insulation shall be effectively prevented unless such material is non- corrosive, non-hygroscopic and non- combustible. Thermal insulation shall not be used for basic insulation of internal wiring. Compliance is checked by inspection as per Cl.22.20 of IS 302-1:2024	Complies	P
		(Cl. 22.21 of IS 302-1:2024)	Wood, cotton. Silk, ordinary paper and similar fibrous or hygroscopic material shall not be used as insulation, unless impregnated	No such type of material used as insulation	P
		(Cl. 22.22 of IS 302-1:2024)	Appliance shall not contain asbestos	No asbestos in the appliance	P
		(Cl. 22.23 of IS 302-1:2024)	Oils containing polychlorinated biphenyl shall not be used in appliances	Not used	P
		Cl. 22.24 of IS 302-1:2024	Bare heating elements shall be supported so that the heating conductor is unlikely to come into contact with accessible metal parts if they rupture	No such bare heating elements used	N/A
		Cl. 22.25 of IS 302-1:2024	Appliances, other than those of class III, shall be constructed so that sagging heating conductors cannot come into contact with accessible metal parts.	No sagging heating conductors	N/A
		Cl. 22.26 of IS 302-1:2024	Class II appliances having parts of class III construction shall be constructed so that the insulation between parts operating at safety extra-low voltage and other live parts complies with the requirements for double insulation or reinforced insulation	Class I appliance	N/A
		Cl. 22.27 of IS 302-1:2024	Parts connected by protective impedance shall be separated by double insulation or reinforced insulation	No such protective impedance used	N/A
		Cl. 22.28 of IS 302-1:2024	For class II appliances connected in normal use to the gas mains or to the water mains, metal parts conductively connected to the gas pipes or in contact with the water shall be separated from live parts by double insulation orreinforced insulation.	Class I appliance	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 27 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Cl. Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		Cl. 22.29 of IS 302-1:2024	Class II appliances intended to be permanently connected to fixed wiring shall be constructed so that the required degree of access to live parts is maintained after installation.	Class I appliance	N/A
		(Cl. 22.30 of IS 302-1:2024)	Parts of Class II construction which serve as supplementary or reinforced insulation, and which could be omitted during reassembly after servicing, shall be (a) fixed so that they cannot be removed without being seriously damaged. (b) Construction so that they cannot be replaced in an incorrect position and if they are omitted, the appliance is rendered inoperable or manifestly incomplete.	Class I Appliance	N/A
		(Cl. 22.31 of IS 302-1:2024)	Clearance and creepage distances over supplementary insulation & reinforced insulation shall not be reduced below the value specified in 29 as a result of wear, if a part such as a wire, screw, not or spring becomes loose or falls out of position, clearances and creep age distances between live parts and accessible parts shall not be reduced below the value specified for supplementary insulation. Compliance is checked by inspection, by measurement and by manual test.	Clearances and creepage distances not reduced below values specified in clause 29	P
		(Cl. 22.32 of IS 302-1:2024)	Supplementary and reinforced insulation shall be constructed and protected so that deposition of population resulting from wear of parts within the appliance does not reduce clearance and creepage distances below the values specified in 29.	Complies	P
			Parts of natural or synthetic rubber used as supplementary insulation shall be resistant to ageing or be located and dimensioned so that creepage distances are not reduced below the values specified in 29.2, even if cracks occur	No such natural or synthetic rubber used as supplementary or reinforced insulation	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 28 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Cl. Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			Ceramic material which is not tightly sintered, similar materials or beads alone shall not be used as supplementary insulation or reinforced insulation	No such ceramic or bead alone used as supplementary	N/A
			If the rubber part has to be resistant to ageing than ageing test will be performed as per this standard	As above	N/A
		Cl. 22.33 of IS 302-1:2024	Conductive liquids that are or may become accessible in normal use shall not be in direct contact with live parts. Electrodes shall not be used for heating liquids.	No conductive liquid used	N/A
		(Cl. 22.34 of IS 302-1:2024)	Shafts of opening knobs, handles, levers and similar parts shall not be live unless the shaft is inaccessible when the part is removed.	No such part used	N/A
		Cl. 22.35 of IS 302-1:2024	For constructions other than those of class III, handles, levers and knobs which are held or actuated in normal use shall not become live in the event of an insulation fault.	No such construction	N/A
			For stationary appliances this requirement does not apply to handles, levers and knobs, other than those of electrical components, provided that they are reliably connected to an earthing terminal or earthing contact or separated from live parts by earthed metal	No such construction used	N/A
		Cl. 22.36 of IS 302-1:2024	For appliance other than those of Class III, handles which are continuously held in the hand in normal use shall be constructed so that when gripped I normal use, the operator's hand is not likely to touch metal parts	No such construction used	N/A
		(Cl. 22.37 of IS 302-1:2024)	For Class II appliances, capacitors shall not be connected to accessible metal parts unless they comply with the requirements.	Class I Appliance	N/A
		(Cl. 22.38 of IS 302-1:2024)	Capacitors shall not be connected between the contacts of a thermal cut-out.	No thermal cutout used	N/A
		(Cl. 22.39 of IS 302-1:2024)	Lamp holders shall be used only for connection of lamps.	No such lamp holder used	N/A
		(Cl. 22.40 of IS 302-1:2024)	Motor operated appliances and combined appliances which are intended to be moved while in operation or which have accessible moving parts, shall be fitted with a switch to control the motor. The actuating member of this switch shall be easily visible and accessible.	No such construction	N/A
		(Cl. 22.41 of IS 302-1:2024)	Appliance shall not incorporate components other than lamp, containing mercury.	No such components	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 29 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Cl. Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		Cl. 22.42 of IS 302-1:2024	Protective impedance shall consist of at least two separate components whose impedance is unlikely to change significantly during the lifetime of the appliance.	No protective impedance used	N/A
		(Cl. 22.43 of IS 302-1:2024)	Appliance which can be adjusted for different voltages shall be constructed so that accidental changing of setting is unlikely to occur.	Not applicable	N/A
		(Cl. 22.44 of IS 302-1:2024)	Appliances shall not have an enclosure that is shaped and decorated so that the appliance is likely to be treated as a toy of children.	No such enclosure that is shaped or	P
		Cl. 22.45 of IS 302-1:2024	When air is used as reinforced insulation, the appliance shall be constructed so that clearances cannot be reduced below the values specified in 29.1.3 due to deformation as a result of an external force applied to the enclosure.	No such construction	N/A
		Cl. 22.46 of IS 302-1:2024	Software used in protective electronic circuits shall be software Class B or software Class C	No such software used	N/A
		Cl. 22.47 of IS 302-1:2024	Appliances intended to be connected to the water mains shall withstand the water pressure expected in normal use	Not intended for water mains	N/A
		Cl. 22.48 of IS 302-1: 2024.	Appliances intended to be connected to the water mains shall be constructed to prevent back siphonage of non-potable water into the water mains	Not applicable	N/A
		Cl. 22.49 of IS 302-1: 2024	For remote operation, the duration of operation shall be set before the appliance can be started unless the appliance switches off automatically at the end of a cycle or it can operate continuously without giving rise to a hazards as per Cl. 22.49 of IS 302-1:2024.	No such construction	N/A
		Cl. 22.50 of IS 302-1: 2024	Controls incorporated in the appliance, if any, shall take priority over controls actuated by remote operation.	Not applicable	N/A
		Cl. 22.51 of IS 302-1: 2024	A control on the appliance shall be manually adjusted to the setting for remote operation before the appliance can be operated in this mode. There shall be a visual indication on the appliance showing that the appliance is adjusted for remote operation. The manual setting and the visual indication of the remote mode are not necessary on appliances that can: operate continuously; or operate automatically; or be operated remotely; without giving rise to a hazard.	No such construction	N/A

Report No.: PEL-2/ED/18800225	IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020	Dated: 26/07/2025 Page 30 of 48
Discipline: Electrical		Group: Domestic Electrical Appliance

		Cl. 22.52 of IS 302-1: 2024	Socket-outlets on appliance accessible to the user shall be in accordance with the Socket-outlets system used in the country in which the appliance is sold.	No such construction	N/A
		Cl. 22.53 of IS 302-1: 2024	Class II appliance and class III appliance that incorporate functionally earthed parts shall have at least double insulation or reinforced insulation between live part and the functionally earthed part.	No such construction	N/A
		Cl. 22.54 of IS 302-1: 2024	Button cells and batteries designated R1 shall not be accessible without the aid of a tool unless the cover of their compartment can only be opened after at least two independent movements have been applied simultaneously	Not applicable	N/A
		Cl. 22.55 of IS 302-1: 2024	Devices that are operated by the user to stop the intended function of the appliance, if any, shall be distinguished from other manual devices by means of shape, or size, or surface texture, or position. This requirement concerning position does not preclude use of a push on push off switch.	Satisfactory	P
		Cl. 22.56 of IS 302-1: 2024	Detachable power supply part shall be provided with the part of class Ill construction of the appliance.	Satisfactory	P
		Cl.22.57 of IS 302-1: 2024	The properties of non-metallic materials shall not degrade from exposure to UV-C radiation generated from UV sources provided for microbiological control within the appliance such that they no longer comply with this standard. This requirement does not apply to glass, ceramics or similar materials.	No such construction	N/A
		Cl.22.58 of IS 302-1: 2024	Appliances connected to the supply mains by an appliance inlet , shall be provided with a cord set or a connector for attachment to a suitable flexible cord.	No such construction	N/A
		Cl.22.59 of IS 302-1: 2024	Protective extra-low voltage circuits shall be separated by at least supplementary insulation from circuits operating at safety extra low voltage.	Not applicable	N/A
		Cl.22.60 of IS 302-1: 2024	Functional earthing terminals and functional earthing contacts shall not be connected to the neutral terminal	Not applicable	N/A

Report No.: PEL-2/ED/18800225	IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020	Dated: 26/07/2025 Page 31 of 48
Discipline: Electrical		Group: Domestic Electrical Appliance

Sl. No.	TESTS (Cl. Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		Cl.22.61 of IS 302-1: 2024	Appliance outlets complying with the standard sheets in IEC 60320-3 accessible to the user and socket-outlets accessible to the user:	Not applicable	N/A
			a. that are incorporated in appliances connected to the supply mains;	See above	N/A
			b. that operate at rated voltage	Complies	P
			--shall be single-phase with a current rating not exceeding 16A	See above	P
		Cl.22.62 of IS 302-1: 2024	Remote communication through public networks shall not impair compliance with this standard. The requirement is only applicable to: a) remote communication that includes the download of software or the transmission of that includes: -- measures according to normative Annex R necessary for compliance with 22.46 -- means necessary for compliance with clauses 8 to 32 of this standard b) remote communication that includes the download of the software or transmission of data, that only effects that part of the software that is not covered by the above Case A but where compliance with this standard maybe impaired due to improper separation or partitioning from the software data. The requirement is not applicable to appliances :	No remote communication use	N/A
			-- where all measures to comply with this standard are independent of software;	See above	N/A
			-- using remote communication through public networks for send-only transmission of data; or	See above	N/A
			-- that only provide event driven messages or push remote monitoring	See above	N/A

Sl. No.	TESTS (Cl. Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		(Cl. 22.101 of IS 302-2-31:2009)	Appliances shall be constructed so that they can be fixed securely to a wall or other support. Brackets and similar means shall be of metal that shall not be liable to creep or deform.	Complies	P
		(Cl. 22.102 of IS 302-2-31:2009)	Appliances shall be constructed so that parts liable to accumulate deposits of grease can be cleaned. Compliance is checked by inspection.	Complies	P
17.	Internal Wiring (Cl. 23 of IS 302-2- 31:2009)	Cl. 23.1 of IS 302-1: 2024.	Wire ways shall be smooth and free from sharp edges.	Wire ways are smooth and free from sharp edges	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 33 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			Wires shall be protected so that they do not come into contact with burrs, cooling fins or similar edges which may cause damage to their insulation.	Complies	P
			Holes in metal through which insulated wires pass shall have smooth well-rounded surfaces or be provided with bushings.	Complies	P
			Wiring shall be effectively prevented from coming into contact with moving parts.	Wirings effectively prevented from	P
			Internal wiring and electrical connections between different parts of the appliance shall be adequately protected or enclosed.	Complies	P
		(Cl. 23.2 of IS 302-1: 2024.)	Beads & Similar ceramic insulators on live wires shall be fixed or located so that they cannot change their position or rest on sharp edges.	No such beads or ceramic insulators used	N/A
		(Cl. 23.3 of IS 302-1: 2024.)	Instead of moving the movable parts backwards and forwards, fans with an oscillating mechanism are tested as follows. Fans are with supplied at rated voltage and operated under normal operation, the angle of oscillation being the maximum allowed by the construction. The test is carried out for 100000 cycles of oscillation.	Not applicable (Oscillating mechanism not used)	N/A
		(Cl. 23.4 of IS 302-1: 2024.)	Bare internal Wiring shall be rigid & fixed so that, in normal use, clearances or creepage distances cannot be reduced.	No bare internal wiring	N/A
		(Cl. 23.5 of IS 302-1: 2024.)	The insulation of internal Wiring shall withstand the electrical stress likely occur in normal use, A Voltage of 2000V is applied for 15min, There shall be no breakdown	Complies Withstood the test	P
		(Cl. 23.6 of IS 302-1:2024)	When sleeving is used as supplementary insulation on internal wiring, it shall be retained in position by positive means.	Complies	P
		(Cl. 23.7 of IS 302-1:2024)	Conductors identified by the colour combination Green / yellow or by the colour green shall only be used for earthing Conductors.	Green/yellow colour used for earthing conductors	P
		(Cl. 23.8 of IS 302-1: 2024.)	Aluminum wires shall not be used for internal wiring.	Complies	P
		(Cl. 23.9 of IS 302-1: 2024.)	Stranded conductor shall not be consolidated by lead-tin soldering.	No soldering	N/A
		(Cl. 23.10 of IS 302-1: 2024.)	The insulation and sheath of internal wiring, incorporated in external hose for the connection of an appliance to the water mains, shall be at least equivalent to that of PVC sheathed flexible cord.	No such construction	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 34 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
18.	Components (Cl. 24 of IS 302-2-31:2009)	(Cl. 24.1 of IS 302-1:2024)	Components shall comply with the safety requirements specified in relevant Indian standard standards where ever exist as far as they reasonably apply.	See below	P
			Supply Cord	1100V, IS:694, 0.5mm SQ X 3 Core CM/L: 9512482620	P
			Power Plug	6A -250V, IS 1293:2019 CM/L: 9512458623	P
			Capacitors	2.5 µF ± 5 %, 440 VAC, 50 Hz CM/L: 9512488026	P
			led driver	12Z, 200-240VAC, 50/60Hz Output Voltage: 10-12VDC Watt: <3W,Connector Type : 1IN/2OUT	P
			Motors are not required to comply with IS 996 or IS 325	See below	P
			Unless components have been previously tested and found to comply with the relevant Indian Standards, wherever exists, for the number of cycles specified, they are tested in accordance with 24.1.1 to 24.1.6	Complies	P

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			Components that have not been separately tested and found to comply with the relevant Indian Standards, wherever exists, components that are not marked or not used in accordance with their marking, are tested in accordance with the conditions occurring in the appliance, the number of samples being that required by the relevant standard	Tested under the conditions occurring in the appliance which not marked and found tested	P
		Cl. 24.1.1 of IS 302-1: 2024.	The relevant standard for capacitors likely to be permanently subjected to the supply voltage and used for radio interference suppression or for voltage dividing is ISQC 302-100, If they have to be tested, they are tested in accordance with Annex F	No such capacitor used	N/A
		Cl. 24.1.2 of IS 302-1: 2024.	The relevant standard for safety isolating transformers is IS/IEC 61558-2-6. If they have to be tested, they are tested in accordance with Annex G.	No isolating transformers used	N/A
		Cl. 24.1.3 of IS 302-1: 2024.	The relevant standard for switches is IS/IEC 61058. The number of cycles of operation declared for 7.1.4 of IS/IEC 61058 shall be at least 10000. If they have to be tested, they are tested in accordance with Annex H.	No such switch used	N/A
		Cl. 24.1.4 of IS 302-1: 2024.	The relevant standard for automatic controls is IS/IEC 60730-1 together with its relevant part 2.	No such device used	N/A
			The number of cycles of operation declared for 6.10 and 6.11 of IEC 60730-1 shall not be less than the following:	See above	N/A
			a) thermostats 10 000	No such device used	N/A
			b) temperature limiters 1 000	No such device used	N/A
			c)self-resetting thermal cut-outs 300	No such device used	N/A
			d)voltage mentioned non-self-resetting thermal cut-outs 30	No such device used	N/A
			e) other non-self-resetting thermal cut out	No such device used	N/A
			f) timers 3 000	No such device used	N/A
			g) energy regulators 10 000	No such device used	N/A
			Automatic controls have to be tested, they are also tested in accordance with11.3.5 to 11.3.8 and clause 17 of IS/IEC 60730-1 as type 1 controls.	No such device used	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 36 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			Thermal motor protectors are tested in combination with their motor under the conditions specified in Annex D	No such device used	N/A
			For water valves containing live parts and that are incorporated in external hoses for connection of an appliance to the water mains, the degree of protection provided by enclosures against harmful ingress of water declared shall be IPX7	No such device used	N/A
		Cl. 24.1.5 of IS 302-1: 2024.	The relevant standard for appliance couplers is IS/IEC 60320-1. However, for appliances classified higher than IP20, the relevant standard is IS/IEC 60320-2-3	No such device used	N/A
		Cl. 24.1.6 of IS 302-1: 2024.	The relevant standard for small lamp holders similar to E10 lamp holders is IS10276, the requirements for E10 lamp holders being applicable.	No such device used	N/A
		(Cl. 24.2 of IS 302-1: 2024.)	Appliances shall not be fitted with a) switches or automatic controls in flexible cords; b) devices that cause the protective device in the fixed wiring to operate in the event of a fault in the appliance c) Thermal cut-outs that can be reset by a soldering operation.	Complies	P
		(Cl. 24.3 of IS 302-1: 2024.)	Switches intended to ensure all-pole disconnection of stationary appliances are directly connected to the supply terminals and having a contact separation in all poles, providing full disconnection under overvoltage category III conditions	No switch used	N/A
		Cl. 24.4 of IS 302-1: 2024.	Plugs and socket-outlets for extra-low voltage circuits, and those used as terminal devices for heating elements, shall not be interchangeable with plugs and socket-outlets listed in IS 1293 or with connectors and appliance inlets complying with the standard sheets of IEC 60320-1.	No such construction used	N/A
		(Cl. 24.5 of IS 302-1: 2024.)	Capacitors in auxiliary windings of motors marked with their rated voltage and capacitance and shall be used in accordance with these marking. In addition, for Capacitors connected in series with a motor winding. It is verified that when the appliance is supplied at 1.1 times rated voltage across the capacitor does not exceed 1.1 times rated voltage.	No such construction used	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 37 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		(Cl. 24.6 of IS 302-1: 2024.)	Working voltage of motors connected to the supply mains and having basic insulation that is inadequate for the rated voltage of the appliance, not exceeding 42V.		N/A
		(Cl. 24.7 of IS 302-1: 2024.)	Cl.24.7- Detachable hose-sets for the connection of appliances to the water mains shall comply with IEC 61770. They shall be supplied with the appliance. Appliances intended to be permanently connected to the water mains shall not be connected by a detachable	Not Applicable	N/A
		(Cl. 24.8 of IS 302-1: 2024.)	Cl.24.8- Motor running capacitors in appliances for which 30.2.3 is applicable and that are permanently connected in series with a motor winding shall not cause a hazard in the event of a capacitor failure	Not Applicable	N/A
19.	Supply Connection and External Flexible Cords (Cl. 25 of IS 302-2-31:2009)	(Cl. 25.1 of IS 302-1: 2024.)	Appliances, other than those intended to be permanently connected to fixed wiring shall be provided with one of the following means for connection to the supply mains: (a) Supply cord fitted with a plug. (b) Appliance inlet (c) Pins for insertion into socket-outlets	Type Y attachment provided Supply cord fitted with a plug.	P
		(Cl. 25.2 of IS 302-1: 2024.)	Appliances, other than stationary appliances for multiple supply, shall not be provided with more than one means of connection to the supply mains. Stationary appliances for multiple supply may be provided with more than one means of connection provided that the relevant circuits are adequately insulated from each other.	No such construction	N/A
		(Cl. 25.3 of IS 302-1: 2024.)	Appliances intended to be permanently connected to fixed wiring.	Not a permanently	N/A
		Cl. 25.4 of IS 302-1: 2024.	For appliances intended to be permanently connected to the fixed wiring and having a rated current not exceeding 16 A, cable and conduit entries shall be suitable for cables or conduits having a maximum over all diameter shown in table 10.	Not intended for fixed wiring	N/A
		(Cl. 25.5 of IS 302-1: 2024.)	Supply cords shall be assembled to the appliance by one of the following methods: (a) Type X attachment (b) Type Y attachment (c) Type Z attachment	Type Y attachment	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 38 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS		RESULTS	Verdict
		(Cl. 25.6 of IS 302-1: 2024.)	Plugs shall not be fitted with more than one flexible cord		Complies	P
		Cl.25.7 of IS 302-1: 2024.	Supply cords shall not be lighter than as specified in Cl. 25.7.		ordinary polyvinyl	
			a) braided cord, if allowed in the relevant part 2;		No such cord used	N/A
			b) ordinary tough rubber sheathed cord		No such cord used	N/A
			c) ordinary polychloroprene sheathed flexible		No such cord used	N/A
			d) flat twin tinsel cord, if allowed in the relevant		No such cord used	N/A
			e) light polyvinyl chloride sheathed cord, for		No such cord used	N/A
			f) ordinary polyvinyl chloride sheathed cord for		Complies	P
			Polyvinyl chloride sheathed cords shall not be used for appliances if the temperature rise of external metal parts exceeds 75 K during the test of clause 11. However, they may be used if		No such cord used	N/A
			a) the appliance is constructed so that the supply cord is not likely to touch such metal parts in normal use;		See above	N/A
			b) the supply cord is appropriate for higher temperatures. In this case, type Y attachment or type Z attachment shall be used.		See above	N/A
		Cl.25.8 IS:302-1: 2024.	Conductor of supply cord shall have nominal cross-sectional area not less as in table 11 of Cl.25 IS:302-1:2024		Complies	
			Total length of supply cord (Meter)		850mm	
			Conductors of supply cords shall have a nominal cross-sectional area not less than that shown in table 11	Red:	0.50 mm^2	
				Black:	0.50 mm^2	
				Yellow-	0.50 mm^2	
			Conductor resistance for the supply cord shall be 26.0 Ω/km max.	Red:	23.46 Ω/km	
				Black:	23.19 Ω/km	
				Yellow-	23.29 Ω/km	
		(Cl. 25.9 of IS 302-1: 2024.)	Supply cords shall not be in contact with sharp points or edges of the appliances.		Complies	P
		(Cl. 25.10 of IS 302-1: 2024.)	The supply cord of Class-I appliance shall have a green/yellow core that is connected to the earthing terminal of the appliance and to the earthing contact of the plug.		Green and yellow core used for earthing purposes	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 39 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		(Cl. 25.11 of IS 302-1: 2024.)	Conductors of the supply cords shall not be consolidated by lead-tin soldering where they are subjected to contact pressure, unless the clamping means is constructed so that there is no risk of a bad contact due to cold flow of the solder.	No such construction used	N/A
		(Cl. 25.12 of IS 302-1: 2024.)	The insulation of the supply cords shall not be damaged when moulding the cord to part of the enclosure.	Complies	P
		(Cl. 25.13 of IS 302-1: 2024.)	Inlet openings for supply cords shall be constructed so that the sheath of the supply cord can be introduced without risk of damage.	Cord with appropriate cord guard provided	P
		Cl. 25.14 of IS 302-1: 2024.	Appliances provided with a supply cord that are moved while in operation shall be constructed so that the supply cord is adequately protected against excessive flexing where it enters the appliance	Appliance not intended to be move while operation	N/A
		(Cl. 25.15 of IS 302-1: 2024)	Appliances provided with a supply cord shall have a cord anchorage as per Cl.25.15. During the test as per Cl.25.15 of IS 302-1:2024, the cord shall not be damaged and shall show no appreciable strain at the terminals. After pull force is reapplied the cord shall not be longitudinally displaced by more than 2 mm.	No such construction	N/A
		Cl. 25.16 of IS 302-1: 2024	For type X attachment cord anchorage shall constructed and located as per Cl. 25.16. After the test conductor shall not have moved by more than1 mm in the terminal.	Type Y attachment cord	N/A
		(Cl. 25.17 of IS 302-1: 2024)	For type Y attachment and type Z attachment, cord anchorage shall be adequate. Compliance is checked by the test.	Complies	P
		(Cl. 25.18 of IS 302-1: 2024)	Cord anchorages shall be arranged so that so that they are only accessible with the aid of a tool or shall be constructed so that the cord can only be fitted with the aid of a tool.	Complies (Only be fitted with aid of tool)	P
		Cl. 25.19 of IS 302-1: 2024	For type X attachment, glands shall not be used as cord anchorages in portable appliances. Tying the cord into a knot or tying the cord with string is not allowed.	Not Applicable	N/A
		(Cl. 25.20 of IS 302-1: 2024)	The insulated conductors of the supply cord for type Y attachment and type Z attachment shall be additionally insulated from accessible metal parts by basic insulation for class I appliance and by supplementary insulation for Class II appliances. This insulation may be provided by the sheath of the supply cord or by other means.	Complies	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 40 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		Cl. 25.21 of IS 302-1: 2024	The space for the connection of supply cords having type X attachment, or for the connection of fixed wiring, shall comply the requirements as per Cl. 25.21 of IS 302-1:2024	Type Y attachment	N/A
		Cl. 25.22 of IS 302-1: 2024	i) Appliance inlets shall: a) be located or enclosed so that live parts are not accessible during insertion or removal of the connector; b) Be located so that the connector can be inserted without difficulty; c) Be located so that, after insertion of the connector, the appliance is not supported by the connector when it is placed in any position of normal use on a flat surface; and d) The supply cord is unlikely to touch such metal parts in normal use.	No appliance inlet	N/A
		Cl.25.23 of IS 302-1: 2024	ii) Interconnection cords shall comply with the requirements for the supply cord, except that: a) The cross-sectional area of the conductors of the interconnection cord is determined on the basis of the maximum current carried by the conductor during the test of 11 and not by the rated current of the appliance. b) The thickness of the insulation of the conductor may be reduced if the voltage of the	No interconnection cord	N/A
		Cl.25.24 of IS 302-1: 2024	Interconnection cords shall not be detachable without the aid of a tool if compliance with his standard is impaired when they are disconnected. Compliance is checked by inspection and if necessary by appropriate tests.Cl.25.24 of IS 302- 1:2024	No interconnection cord	N/A
		25.25 of IS 302-1: 2024	The dimensions of pins of appliances that are inserted into socket outlets shall be compatible with the dimensions of the relevant socket-outlet. Dimensions of the pins and engagement face are to be in accordance with the dimensions of the relevant plug listed in IS 1293.Cl. 25.25 of IS 302- 1:2024	Certified plug used	P
20.	Terminals For External Conductors (Cl. 26 of IS 302-2-31:2009)	(Cl. 26.1 of IS 302-1: 2024)	Appliances shall be provided with terminals or equally effective devices for connection of external conductors. Terminals shall only be accessible after removal of a non-detachable cover. However, earthing terminals may be accessible if a tool is required to make the connections and means are provided to clamp the wire independently from its connection.	Complies	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 41 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		Cl. 26.2 of IS 302-1: 2024)	Appliances with type X attachment and appliances for connection to fixed wiring shall be provided with terminals in which connections are made by means of screws, nuts or similar devices, unless the connections are soldered.	No such construction	N/A
		Cl. 26.3 of IS 302-1: 2024)	Terminals for type X attachment and for connection to fixed wiring shall be so constructed that the conductor is clamped between metal surfaces with sufficient contact pressure and without damaging the conductor	No such construction	N/A
		Cl. 26.4 of IS 302-1: 2024)	Terminals for type X attachment, except those with a specially prepared cord, and those for connection to fixed wiring, shall not require special preparation of conductors, and so constructed or placed so that the conductors cannot slip out. Compliance is checked	No such construction	N/A
		Cl. 26.5 of IS 302-1: 2024)	Terminals for type X attachment shall be located or shielded so that if a wire of a stranded in a hazard. Compliance is checked	No such construction	N/A
		Cl. 26.7 of IS 302-1: 2024)	Terminals for type X attachment shall be accessible after removal of a cover or part of the enclosure shall be as	No such construction	N/A
		(Cl. 26.8 of IS 302-1: 2024)	Terminals for the connection to fixed wiring, including the earthing terminal, shall be located close to each other.	No such fixed Wiring	N/A
		(Cl. 26.9 of IS 302-1: 2024)	Terminals of the pillar type shall be constructed and located so that the end of a conductor introduced into the hole is visible, or can pass beyond the threaded hole for a distance equal to half the nominal diameter of the screw but at least 2.5mm.	No Pillar terminal used	N/A
		(Cl. 26.10 of IS 302-1: 2024)	Terminals with screw clamping and screw less terminals shall not be used for flat twin tinsel cords, unless conductor's ends are fitted with means suitable for screw terminals.	No such terminal used	N/A
		(Cl. 26.11 of IS 302-1: 2024)	For type Y or Z attachment: soldered, welded, crimped and similar connections may be used.	Complies	P
21.	Provision for Earthing (Cl. 27 of IS 302-2-31:2009)	(Cl. 27.1 of IS 302-1: 2024)	Accessible metal parts of Class-I appliances that may become live in the event of an insulation fault, shall be permanently and reliably connected to an earthing terminal within the appliance or to the earthing contact of the appliance inlet.	Complies	P
			Earthing terminals and earthing contacts shall not be connected to the neutral terminal.	Complies	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 42 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		Cl. 27.1 of IS 302-2-31:2009	Metal parts that become accessible during user maintenance are considered to be accessible metal Parts.	Complies	P
		(Cl. 27.2 of IS 302-1: 2024)	The clamping means of earthing terminals shall be a adequately secured against accidental loosening.	Complies	P
		(Cl. 27.3 of IS 302-1: 2024)	If a detachable part having an earth connection is plugged into another part of the appliance, the earth connection shall be made before the current carrying connection when removing the part.	Complies	P
		(Cl. 27.4 of IS 302-1: 2024)	All Parts of the earthing terminal intended for the connection for external conductors shall be such that there is no risk of corrosion.	Complies	P
		(Cl. 27.5 of IS 302-1: 2024)	A current derived from source having no load voltage not exceeding 12 V (ac or dc) and equal to 1.5 times rated current of the appliance or 25 A, whichever is higher. The resistance calculated from the current and this voltage drop shall not exceed 0.1 Ω	Complies 0.031Ω	P
		Cl. 27.6 of IS 302-1: 2024	The printed conductors of printed circuit boards shall not be used to provide earthling continuity in hand-held appliances.	Not a hand-held	N/A
22.	Screws and Connections (Cl. 28 of IS 302-2-31:2009)	Cl. 28.1 of IS 302-1: 2024)	Fixings, the failure of which may impair compliance with this standard, electrical connections and connections providing earthing continuity shall with stand the mechanical stresses occurring in normal use.	Complies	P
			Screws used for these purposes shall not be of metal which 'is soft or liable to creep, such as zinc or aluminium. If they are of insulating material, they shall have a nominal diameter of at least 3 mm and they shall not be used for any electrical connections or connections providing earthing continuity.	Complies	P
			Screws used for electrical connections or for connections providing earthing continuity shall screw into metal	Complies	P
			Screws shall not be of insulating material if their replacement by a metal screw could impair supplementary insulation or reinforced insulation. Screws that may be removed when replacing a supply cord having a Type X attachment or when undertaking user maintenance shall not be of insulating material if their replacement by a metal screw could impair basic insulation.	Complies	P

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 43 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			Compliance is checked by inspection and by	See below	P
			Screws and nuts are tested if they are: a) used for electrical connections; b) used for connections providing earthing continuity, unless at least two screws or nuts are used; and c) likely to be tightened 1) during user maintenance,	Screw used for electrical connections during installation are complies the requirement	P
			The screws or nuts are tightened and loosened without jerking:	See below	P
			a) 10 times for screws in engagement with a thread of insulating material; and	No such construction	N/A
			b) 5 times for nuts and other screws	1.2Nm (Screw with diameter 4.04mm, fixed to PCB Box)	P
			Screws in engagement with a thread of insulating material are completely removed and reinserted each time.	Complies	P
			When testing terminal screws and nuts, a cable or flexible cord of the largest cross-sectional area specified in Table 13 is placed in the terminal. It is repositioned before each tightening.	No such screw	N/A
			The test is carried out by means of a suitable screwdriver, spanner or key and by applying a torque as shown in Table 14.	Complies	P
			Column I is applicable for metal screws without heads if the screw does not protrude from the hole when tightened.	No such screw used	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 44 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
			Column II is applicable a)for other metal screws and for nuts; and b) for screws of insulating material 1) having a hexagonal head with the dimension across flats exceeding the overall thread diameter: 2) with a cylindrical head and a socket for a key, the socket having a cross-corner dimension exceeding the overall thread diameter; and 3) with a head having a slot or cross—slots, the length of which exceeds 1.5 times the overall thread diameter.	Complies	P
			Column III is applicable for other screws of	No such screw used	N/A
			No damage impairing the further use of the fixings or connections shall occur.	Complies	P
		Cl. 28.2 of IS 302-1: 2024	Electrical connections and connections providing earthing continuity shall be constructed so that contact pressure is not transmitted through insulating material that is liable to shrink or to distort unless there is sufficient resiliency in the metallic parts to compensate for any possible shrinkage or distortion of the insulating material.	Complies	P
			This requirement does not apply to electrical connections in circuits carrying a current not exceeding 0.5 A.	Complies	P
		Cl. 28.3 of IS 302-1: 2024	Space-threaded (sheet metal) screws shall only be used for electrical connections if they clamp the parts together	No such screw used	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 45 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
		Cl. 28.4 of IS 302-1: 2024	Screws and nuts that make mechanical connection between different parts of the appliances shall be secured against loosening if they also make electrical connections or connections providing earthing continuity compliance is checked as per Cl. 28.4 of IS 302- 1: 2024.	Complies	P
23.	Creepage distances and Clearances (Cl. 29 of IS 302-2-31:2009)	(Cl. 29 of IS 302- 2-31:2009 & IS 302-1: 2024)	i) Minimum Clearance distance: 1.5mm	Clearances: 10.27 mm	P
			ii) Minimum Creepage distance: 4.0 mm	Creepage: 10.27 mm	P
		Cl. 29.2 of IS 302-1: 2024	Appliances shall be constructed so that creepage distance are not less than those appropriate for the working voltage, taking into account the material group and the pollution degree	Pollution degree 3 and Material group IIIa declared by manufacturer	P
		Cl. 29.2 of IS 302-2-31: 2009	The microenvironment is pollution degree 3 unless the insulation is enclosed or located so that it is unlikely to be exposed to pollution during normal use of the appliance.	Pollution degree 3 and Material group IIIa declared by manufacturer	P
		Cl. 29.3 of IS 302-1: 2024	Supplementary insulation and reinforced insulation shall have adequate thickness, or have a sufficient number of layers, to withstand the electrical stresses that can be expected during the use of the appliance compliance is checked.	Complies	P
		Cl. 29.3.1 of IS 302-1: 2024	The thickness of the insulation shall be at least a) 1 mm for supplementary insulation; and b) 2 mm for reinforced insulation	Complies	P
		Cl. 29.3.2 of IS 302-1: 2024	Each layer of material shall withstand the electric strength test of 16.3 for supplementary insulation. Supplementary insulation shall consist of at least 2 layers of material and reinforced insulation of at least 3 layers	No such material	N/A
		Cl. 29.3.3 of IS 302-1: 2024	The insulation is subjected to the dry heat test Bb of IS 9000 (Part 3/Sec 1) for 48 h at a temperature of 50 K in excess of the maximum temperature rise measured during the test of 19. At the end of the period, the insulation is subjected to the electric strength test of 16.3 at the conditioning temperature and also after it has cooled down to room temperature	No such material	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 46 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
24.	Resistance to Heat and Fire (Cl. 30 of IS 302-2-31:2009)	Cl. 30.1 of IS 302-1: 2024	Resistance to heat: (75±2)°C for external parts allowed impression of diameter not more than 2.0 mm	Complies (0.9mm)	P
			Resistance to heat: (125±2)°C for part supporting live parts allowed impression of diameter not more than 2.0 mm.	Complies (1.0mm)	P
		Cl. 30.1 of IS 302-2-31:2009	The ball pressure test is carried out on the exposed parts of the underside of the appliance at temperature of at least 105°C.	Complies	P
		Cl. 30.2 of IS 302-1: 2024	Resistance to fire glow-wire test is carried out at a temperature of 550°C & 850°C compliance is checked as per cl. 30.2 of IS 302-1: 2024.	Complies	P
			The needle flame test carried out as per annex E compliance is checked as per cl. 30.2 of IS 302-1:2024.	Complies	P
		Cl. 30.101 of IS 302-2-31:2009	Appliances shall not incorporate combustible material liable to appreciably propagate a fire originating underneath the hood. Compliance is checked as follows:	See below	P
			Filters of non-metallic material intended for the absorption of grease shall meet the requirements specified in ISO 9772 for category FH3 material, except that the thickness of the specimen is that of the filter. NOTE 1— It may be necessary to support the specimen during the test.	No such construction	N/A
			Lamp diffusers and external air-guides having a total mass not exceeding 0.35 kg are subjected to the glow wire test of IS 11000 (Part 2/Sec 1) at a temperature of 550 °C. The glow-wire test is not carried out on parts of material classified at least HB40, provided that the test sample was no thicker than the relevant part.	Complies	P
			Other accessible parts of the enclosure are subjected to the needle-flame test of Annex E of Part 1 of this standard	No such material used	N/A
			Internal air-ducts and parts within them, such as fans, are subjected to the needle-flame test of Annex E of Part 1 of this standard, droplets of material being Ignored. NOTE 2 — Grease filters are not subjected to this test.	No such material used	N/A

Report No.: PEL-2/ED/18800225 IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020 Dated: 26/07/2025
Page 47 of 48
Discipline: Electrical Group: Domestic Electrical Appliance

Sl. No.	TESTS (Clause Reference)	TEST METHOD	SPECIFIED REQUIRMENTS	RESULTS	Verdict
25.	Resistance to Rusting (Cl. 31 of IS 302-2- 31:2009)	(Cl. 31 of IS 302-1: 2024)	Ferrous parts, the rusting of which might cause the appliance to fail to comply with this standard, shall be adequately protected against rusting.	Complies	P
26.	Radiation, Toxicity And Similar Hazards (Cl. 32 of IS 302-2- 31:2009)	(Cl. 32 of IS 302-1: 2024)	Appliances Shall not emit harmful radiation or present toxic or similar hazards.	Complies	P
27	ROUTINE TESTS (Cl. ANNEX A of IS: 302-1:2024)	(Cl. ANNEX A of IS: 302-1:2024)	ROUTINE TESTS	Complies	P
			A.1. Routine tests are intended to be carried out by the manufacturer on each appliance to detect a production variation that could impair safety. They are normally carried out on the complete appliance after assembly but the manufacturer may perform the tests at an appropriate stage during production, provided that later manufacturing processes do not affect the results. If a product fails any of the tests, it is to be retested after rework or adjustment.	See Above	P
			A.2- Earth continuity test: A current of at least 10 A, derived from a source having a no-load voltage not exceeding 12 V (AC or DC), is passed between each of the accessible earthed metal parts.	See Above	P
			A.3- Electric strength test: The insulation of the appliance is subjected to a voltage of substantially sinusoidal waveform having a frequency of approximately 50 Hz or 60 Hz for 1 s. The value of the test voltage and the points of application are shown in Table A.1.	See Above	P
			A.4- Functional test: The correct functioning of an appliance is checked by inspection or by an appropriate test if the incorrect connection or adjustment of components has safety implications.	See Above	P

Report No.: PEL-2/ED/18800225	IS 302 PART 2: SEC 31: 2009 & IS 302(Part 1): 2024/IEC60335-1:2020	Dated: 26/07/2025
		Page 48 of 48
Discipline: Electrical		Group: Domestic Electrical Appliance

Photo Document



End of Test Report