
CANDRON · PRODUCT BROCHURE

Liquid-Filled Transformers

04

Oil-immersed transformers that step utility voltage down to a usable level — from a 15 kVA padmount to a 100 MVA+ substation unit.

FIG. 1

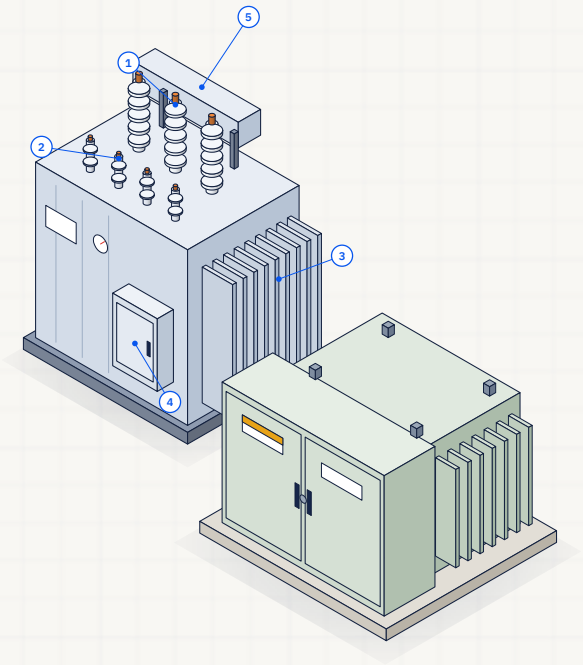

ISOMETRIC VIEW · ILLUSTRATIVE

AT A GLANCE

PADMOUNT RATING **15 – 2,500 kVA**

15 · 1,250 · 2,500 kVA

SUBSTATION RATING **1 – 100+ MVA**

1 · 25 · 50 · 75 · 100+ MVA

PRIMARY VOLTAGE **5 – 345 kV**

5 · 90 · 175 · 260 · 345 kV

QUOTE TURNAROUND	FACTORY TESTED
Same day	Every unit

ANSI / IEEE C57 · CSA C88 · ONAN · ONAF · OFAF · Witnessed FAT · Full documentation

A What you are looking at

1. **HV bushings.** Porcelain bushings bring the high-voltage line into the tank.
2. **LV bushings.** Low-voltage terminals feed your switchgear or switchboard.
3. **Radiators.** Fluid circulates through fins to shed heat — fans added for ONAF.
4. **Control cabinet.** Gauges, alarms, fan control and CT terminations in one place.
5. **Conservator.** Allows the oil to expand and contract with temperature.

B In plain words

Q1 What it is
A steel tank filled with insulating fluid around a copper or aluminium core-and-coil — no moving parts, decades of service.

Q2 Why it matters
Fluid carries heat away efficiently, so the unit handles overloads and outdoor weather in a compact footprint.


Q3 Where it goes
Padmounts on concrete pads at sites and subdivisions; substation units in utility and industrial yards.


C Where it is used

Utility substations · Industrial yards · Renewable step-up · Commercial sites · Mining · EV charging hubs

ISSUED BY	TITLE	DOC NO.	REV	DATE	SHEET
CANDRON ENERGY INC.	Liquid-Filled Transformers	CE-PB-LFT-01	A	2026-10	01 / 02

D Technical drawing

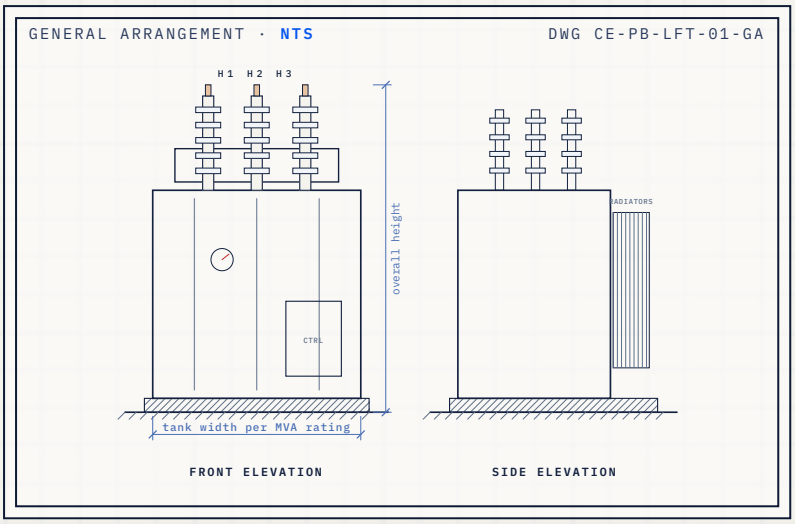

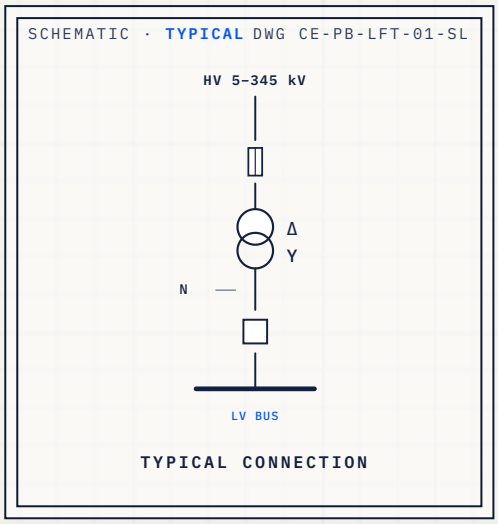

E Configurations

Three-phase padmount
Dead-front, tamper-resistant cabinet for underground loops.

Single-phase padmount
Residential and light commercial underground service.

Power substation
1 – 100+ MVA, 34.5 – 345 kV, ONAN / ONAF / OFAF cooling.

Polemount
Overhead distribution for rural and utility lines.

F Specifications

PADMOUNT	15 – 2,500 kVA · 5 – 34.5 kV primary · 1Φ or 3Φ
SUBSTATION	1 – 100+ MVA · 34.5 – 345 kV primary
COOLING	ONAN, ONAF, OFAF
CONSTRUCTION	Compartmentalised, tamper-resistant (padmount)
FACTORY TESTS	Applied potential, induced voltage, resistance, ratio, impedance
DELIVERABLES	As-built drawings, test reports, nameplate data, connection diagrams, O&M manual
STANDARDS	ANSI C57, IEEE C57.12, CSA C88

G Features

STANDARD

- ✓ Routine tests on every unit before shipping
- ✓ Nameplate and connection diagram on the tank
- ✓ Lifting lugs and jacking provisions
- ✓ Grounding pads on tank
- ✓ Fluid level and temperature indication
- ✓ Full documentation pack with delivery

OPTIONS

- + Fan cooling stage (ONAF)
- + On-load or de-energised tap changer
- + Bay-O-Net / current-limiting fusing
- + Surge arresters
- + Monitoring: DGA, temperature, alarms to SCADA
- + Witnessed FAT by owner or inspector

H Built & tested to

ANSI C57 · IEEE C57.12 · CSA C88 · IEEE · NETA

Every unit is factory tested in our Toronto facility before it ships. Witnessed FAT available for owners, engineers of record and third-party inspectors. Drawings are indicative — final dimensions and ratings are confirmed on approved submittal drawings.

To get a same-day quote, send us

01 kVA / MVA rating
02 Primary and secondary voltage
03 Vector group / connection
04 Cooling class
05 Padmount or substation; indoor / outdoor
06 Taps, fusing and monitoring needs

+1 (647) 616-2595 · sales@candron.com