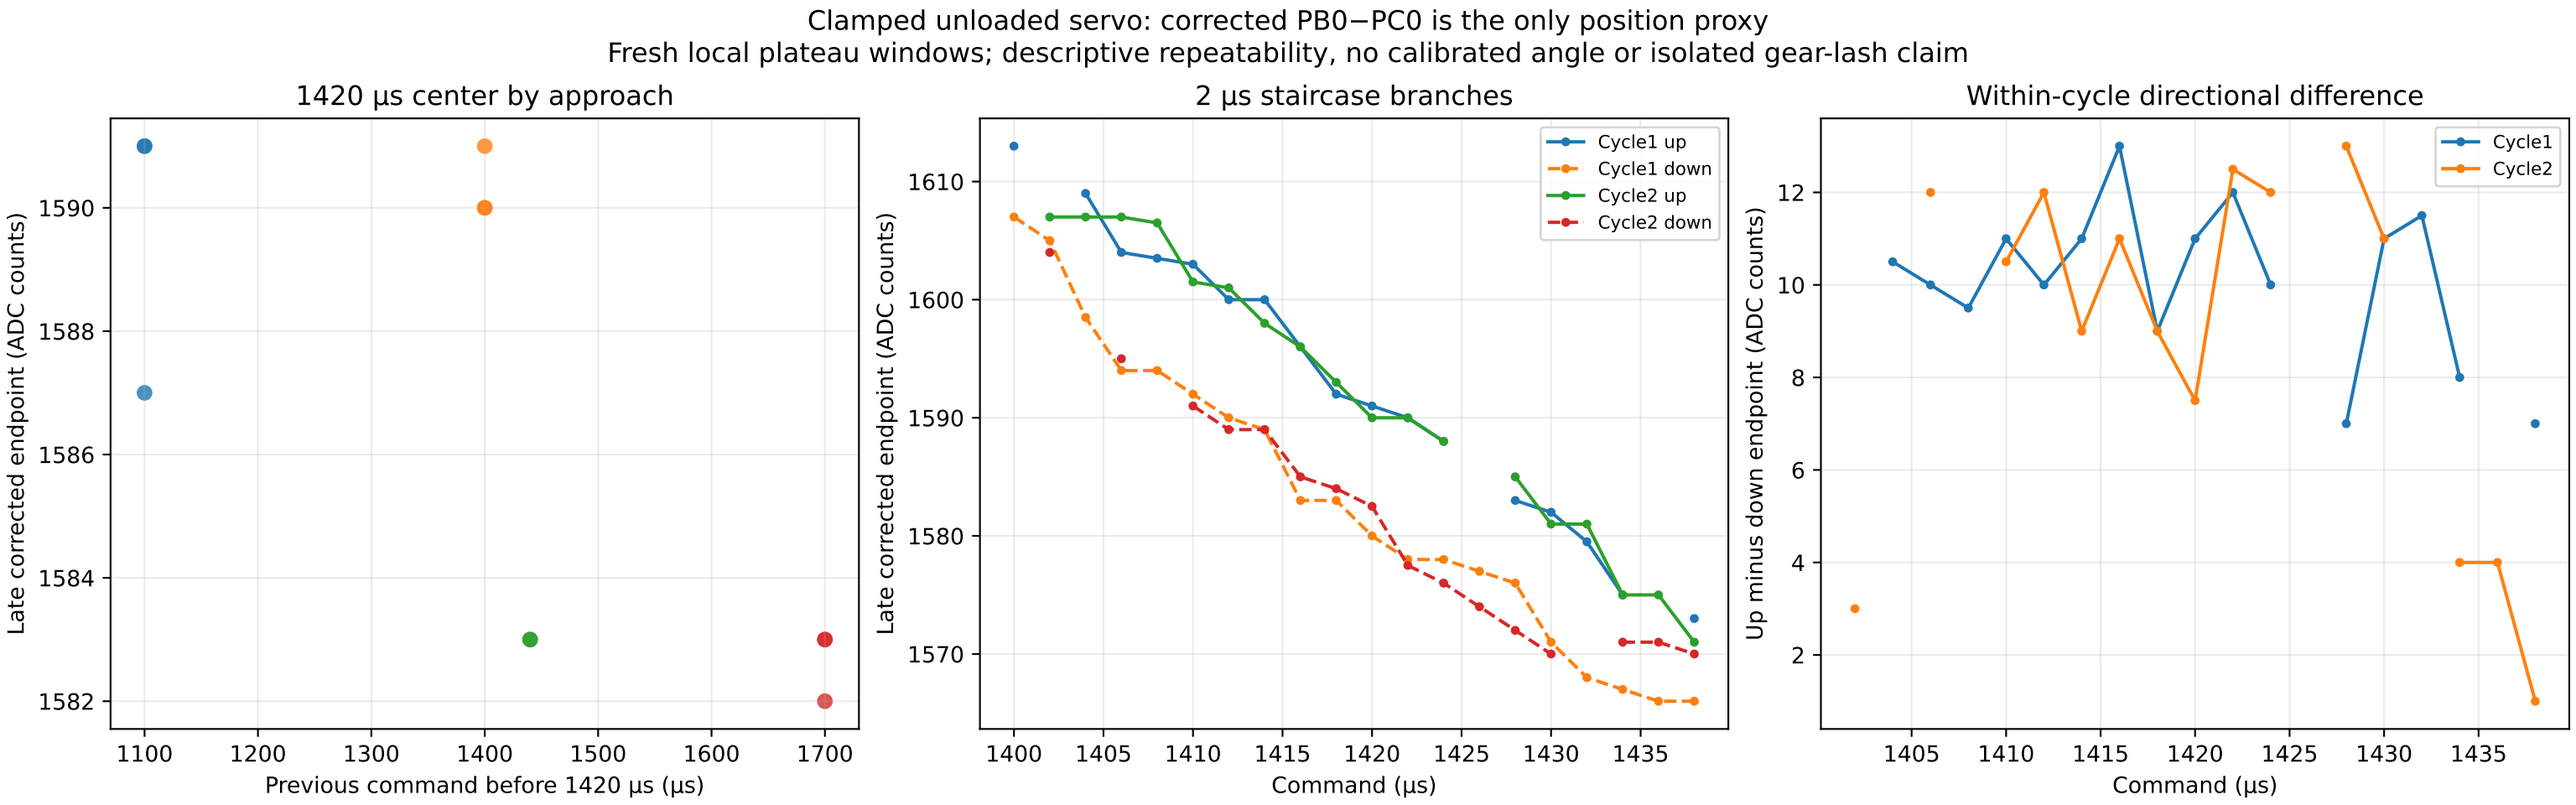
Clamped unloaded servo: corrected PB0−PC0 is the only position proxy
Fresh local plateau windows; descriptive repeatability, no calibrated angle or isolated gear-lash claim
1420 µs center by approach
Late corrected endpoint (ADC counts)
Previous command before 1420 µs (µs)
2 µs staircase branches
Cycle1 up
Cycle1 down
Cycle2 up
Cycle2 down
Command (µs)
Within-cycle directional difference
Up minus down endpoint (ADC counts)
Cycle1
Cycle2
Command (µs)