

Project Smores

Full Build Plan — Modular Lift-Out Design

Contents

- 0. Measurements to Take
- Renders
- 1. Overview
- 2. Dimensions & Layout
- 3. Full Lumber Sizing & Cut List
- 4. Bill of Materials (BOM)
- 5. Power Cord Routing
- 6. Illustrated Build Manual — By Component
- 7. Induction Cooktop & Power Strip Design
- 8. Modular Lift-Out Design & Weight
- 9. Seat Removal & Reinstall (Camper ↔ Passenger Mode)

Project Smores — Full Build Plan



Two-person setup, 2nd row seats **removed entirely** (3rd row folded flat; seat removal/reinstall procedure incl. the SRS airbag emulators: Section 9). Layout, tailgate to front seats: **Kitchen (Panel C's fridge/kitchen void) → Headboard/pantry (mounted on Panel C's own deck) → Bed (Panel B + Panel A) → front seats**. The headboard/pantry is no longer its own module — it's a double-sided shelving unit, clamped down to Panel C's existing deck with cam levers at the tailgate end and braced by 2 steel L-angle sway braces tied into Panel C's own side rails: 3 fixed tiers plus an adjustable shelf in the tall bottom bay, with an enclosed bed cubby facing the mattress in the middle tier. Panel A and B have no top of their own (capped by the one-piece bed frame), while Panel C keeps its fixed top — all three on uniform legs, forming one continuous deck with 80" of sleeping length for the HEST Dually Long mattress (78" x 50" x 4") (Panel A now sits flush with the front seatbacks, using up the floor space that used to sit empty in front of it). Panel B is a bare-frame deep-storage bay — the side doors don't reach it, so it has no drawers and loads from above by lifting the platform; Panel A holds a right drawer (EcoFlow DELTA 3) plus a left open-storage bay (EcoFlow WAVE 3, no drawer box); Panel C's under-deck void instead houses a real BougeRV compressor fridge and a real JAGAHABA slide-out camp kitchen, both on heavy-duty slides pulling straight out the open tailgate — bought products, not built from plywood — plus a shallow slide-out **kitchen drawer** hung under the deck in the dead air above the kitchen unit. The fridge and its cooling fans run off the EcoFlow DELTA 3 stack (Panel A) via their own DC line, so they keep running when people are away from the van regardless of ignition state; the DELTA 3 itself gets AC-charged from the front console outlet while driving, alongside the induction cooktop's own cord and

Power strip 1's own cord (now a long run too, since the headboard/pantry it's mounted on is at the tailgate end, not the front).

0. Measurements to Take

Start here once you have the van (2nd row out), the fridge, and the kitchen unit in hand. Every number below either says UNVERIFIED somewhere in this plan (an estimate that drives real cut dimensions) or came from an online listing/photo rather than a hands-on measurement. All of them feed directly into `params.scad` — update the value there, re-run `./render.sh`, and every diagram, cut list, and BOM total in this plan updates to match. If a measurement comes in smaller than the estimate, the `assert()` guards in `params.scad` will fail loudly (not silently overflow the van) until the design is adjusted.

The van (once the 2nd row is physically out)

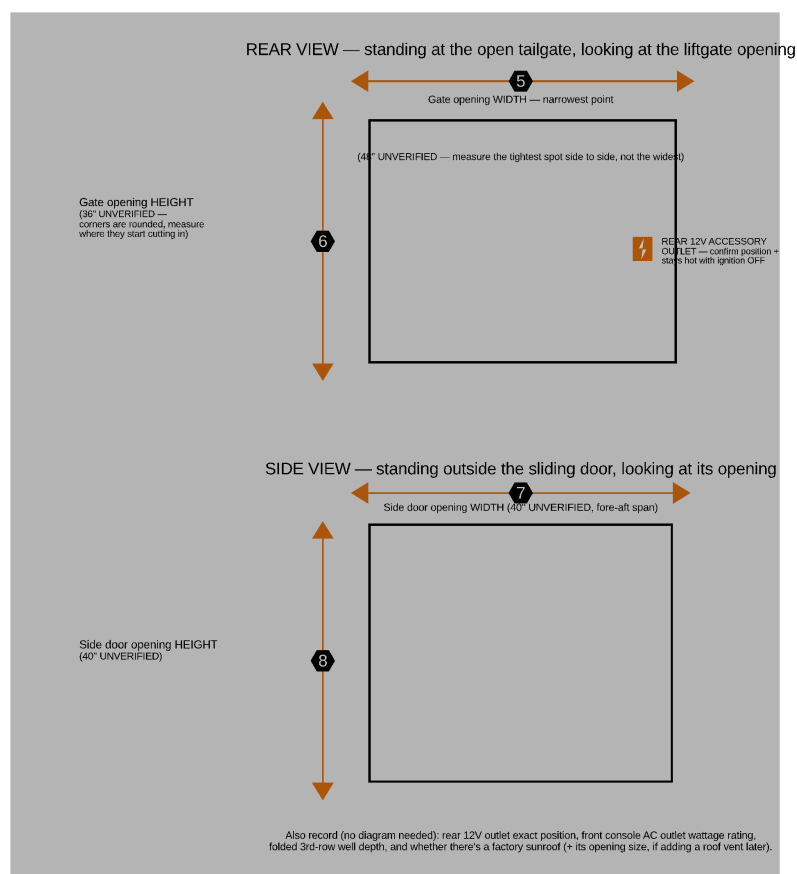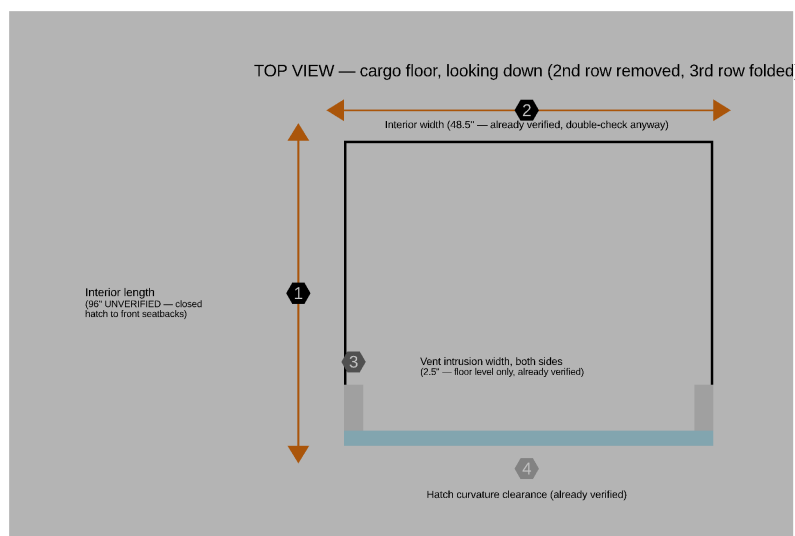


Measurement guide: the van

#	Measure	Goes in params.scad as	Current estimate	Your measurement
1	Interior length, closed hatch to front seatbacks	van_interior_length	96" — UNVERIFIED	
2	Interior width, between wheel wells	van_interior_width	48.5" — already verified	
—	Interior height, floor to headliner	van_interior_height	44" — already verified	
3	Vent intrusion width, each side (floor level)	vent_intrusion_width	2.5" — already verified	
4	Hatch curvature clearance	hatch_curvature_clearance	2" — already verified	
5	Gate opening width — the narrowest point, not the widest	gate_opening_width	48" — UNVERIFIED	
—	Interior wall-to-wall width at ~19" AND ~23" above the floor, along the whole 80" sleeping run	gates bed_frame_width (52" platform needs >=53" at platform height — the 48.5" figure is the FLOOR pinch between the wheel wells; the walls are wider up here)	— UNVERIFIED, the platform-width gate	
6	Gate opening height — where the rounded corners start cutting in	gate_opening_height	36" — UNVERIFIED	
7	Side door opening width (fore-aft span)	side_door_opening_width	40" — UNVERIFIED	
8	Side door opening height	side_door_opening_height	40" — UNVERIFIED	
—	Rear 12V accessory outlet — exact position	(no longer used by this design — the fridge and fan system now run off the DELTA 3 stack instead, Section 1. Informational only, not a blocker.)	—	

#	Measure	Goes in <code>params.scad</code> as	Current estimate	Your measurement
—	Front console AC outlet — wattage rating	(Section 1/7 — drives the DELTA 3's AC charge rate and the cooktop's power check)	1500W — VERIFIED	1500W
—	Front console — how many physical AC outlets (1 or 2)?	(Section 5 — the cooktop, Power strip 1, and the DELTA 3's charging cord are now 3 independent lines wanting console power; if there's only 1 physical outlet, or even with 2, a splitter combines them — no change to the wiring itself, just shared wattage budget, see Section 5's shared-circuit note)	—	
—	Folded 3rd-row well depth	(confirms <code>leg_height</code> — 17", fridge-driven — actually clears it)	—	
—	Factory sunroof present? Opening size if so	(only relevant if you pursue a roof vent later)	—	
9	Cargo floor level — does it slope front-to-back, or is it flat?	(not currently modeled — every module's 4 legs are the same <code>leg_height</code> , which only gives a level deck if the floor itself is level)	assumed flat — UNVERIFIED	
—	Side sliding door — usable clear width AND height at the door's actual stopping point, not just the rough opening	<code>side_door_opening_width</code> / <code>side_door_opening_height</code>	40" / 40" — UNVERIFIED (see the reachability note in Section 1 — this number decides whether the DELTA 3 stack stays in Panel A or needs to move)	


The fridge (BougeRV) and kitchen unit (JAGAHAHA), once purchased

BougeRV FRIDGE — top-down view (lid up)

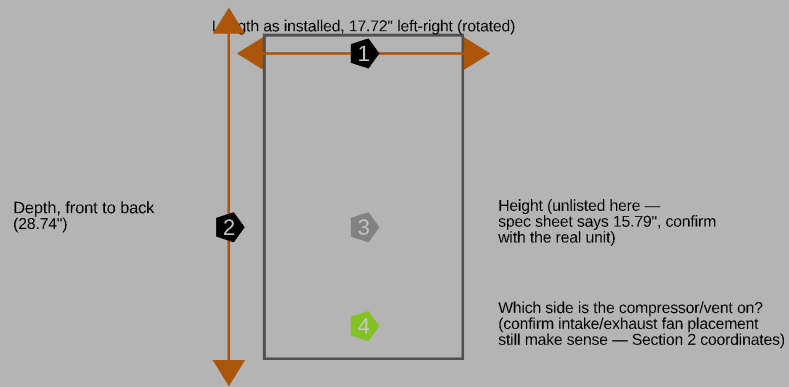

Also record: empty weight, cord length, and how far it must slide out before the lid can open fully clear of the deck above (fridge_slide_length assumes 24" is enough).

JAGAHABA KITCHEN UNIT — top-down view, closed

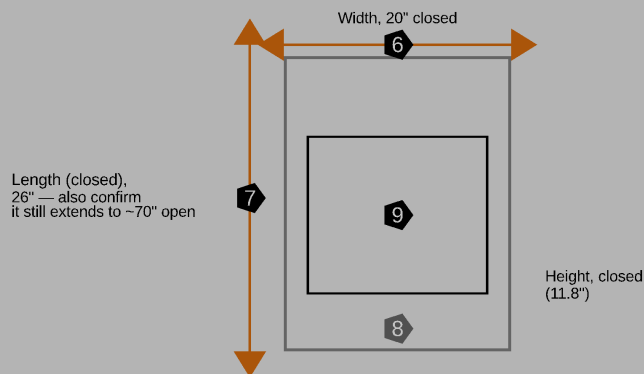

Stove tray L x W x clearance-height
(this plan estimated 23" x 15.7" x 5.7" from listing PHOTOS, not a spec sheet — the COOKTRON cooktop's fit depends on this)

Also record: empty weight, and the cord pass-through location for the cooktop's power cord.


Measurement guide: fridge and kitchen

#	Measure	Goes in <code>params.scad</code> as	Listing spec (unverified)	Your measurement
1	Fridge length as installed (left-right, the 450mm side)	<code>fridge_ext_length</code>	17.72"	
2	Fridge depth, front to back incl. handles	<code>fridge_ext_width</code>	28.74" (body 28.03")	
3	Fridge height	<code>fridge_ext_height</code>	15.79"	
4	Which side is the compressor/vent on?	(confirms the intake/exhaust fan placement in Section 2 still makes sense)	—	
5	Fridge empty weight	(Section 8 weight table)	40.6 lb (18.4 kg, manual)	
5b	Floor vents at Panel C's REAR corners	Panel C's rear legs sit at the TRUE corners now	must be vent-free for ~4"	
—	Fridge cord length	(confirms it reaches the new DC line's connection point inside Panel C's void — Section 5)	—	
—	Fridge slide clearance — how far it must come out before the lid opens fully	<code>fridge_slide_length</code> (confirms 24" is enough)	24" slide	
6	Kitchen unit width, closed	<code>kitchen_box_width</code>	20"	
7	Kitchen unit length, closed	<code>kitchen_box_length</code>	26"	
8	Kitchen unit height, closed	<code>kitchen_box_height</code>	11.8"	
9	Stove tray length x width x clearance height	(Section 7 — the COOKTRON cooktop's fit depends on this; the current numbers came from listing photos, not a spec sheet)	23" x 15.7" x 5.7"	
10	Kitchen unit empty weight	(Section 8 weight table)	~45 lb	
—	Cord pass-through location for the cooktop's power cord	(Section 5/6 cord routing)	—	
—	Confirm it still extends to ~70" open	(sanity check — this happens outside the vehicle, doesn't affect interior length)	~70"	

Renders


Parametric 3D model: `platform.scad` (dimensions in `params.scad` — edit one file to regenerate every view via `./render.sh`).

Whole-Vehicle Overview

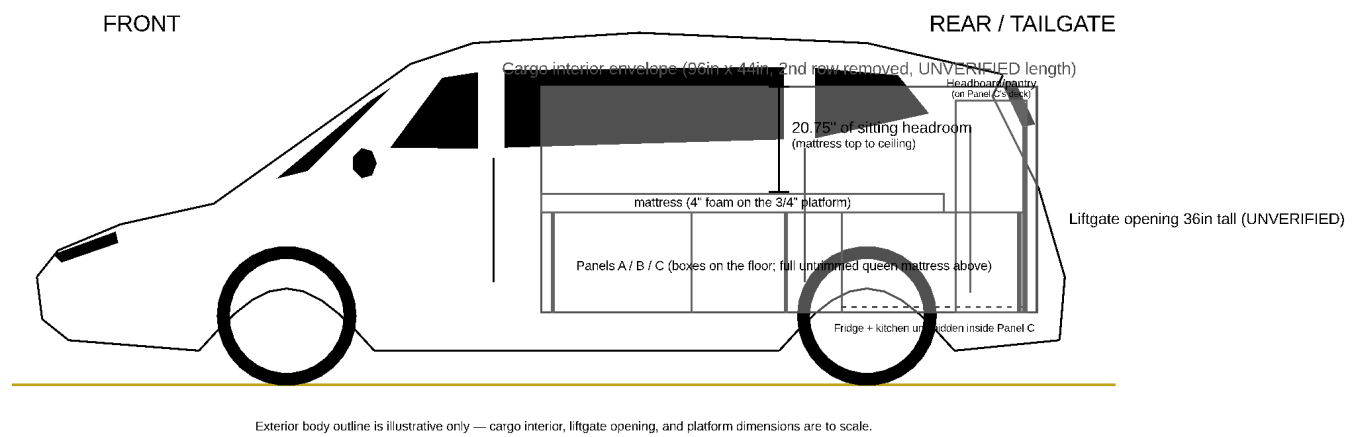


Side profile of the van itself (illustrative exterior body outline — hood, windshield, roofline, tailgate, wheels) with the cargo interior envelope, liftgate opening, and platform assembly drawn to scale inside it. Front at left, tailgate at right.

Overhead Floorplan

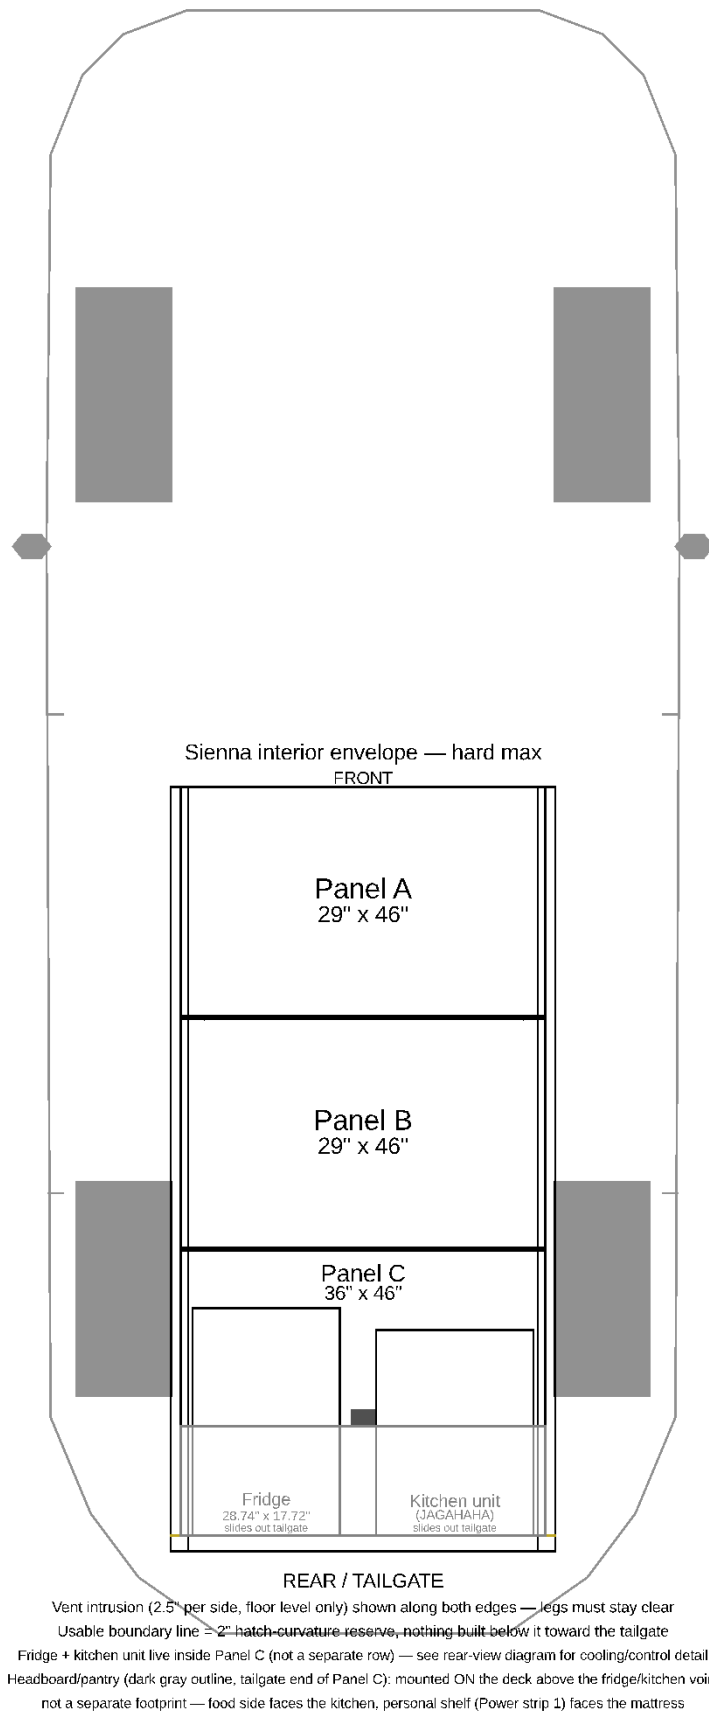

Top-down view: Panel A/B/C plus the fridge and kitchen unit living inside Panel C's footprint, drawn to scale inside the interior envelope. Front of the vehicle is at the top, tailgate at the bottom. Seam bumpers, alignment pins, and grab-handle positions are all marked.

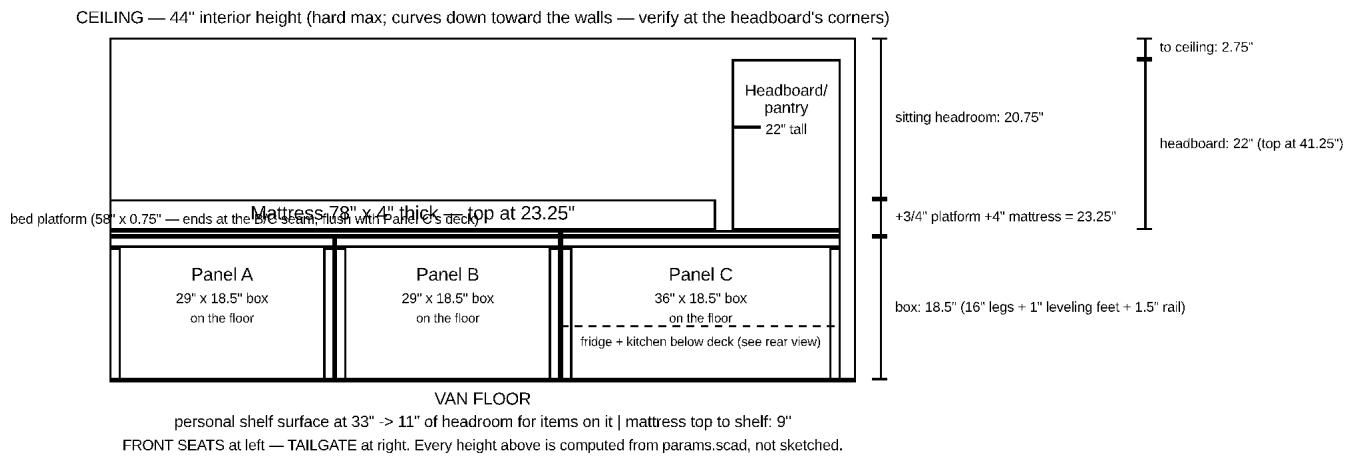


Side profile

The interior envelope used for fit checks (Section 1: 96" x 48.5" x 44" — the 96" length is an UNVERIFIED estimate) is a simplified rectangular box — the real hatch curvature, vent shapes, and wall taper aren't modeled beyond the reserves called out in `params.scad`.

Rear view, looking forward from the open tailgate at Panel C with the fridge and kitchen unit both stowed for driving:

Sienna interior envelope (width x height) — hard max

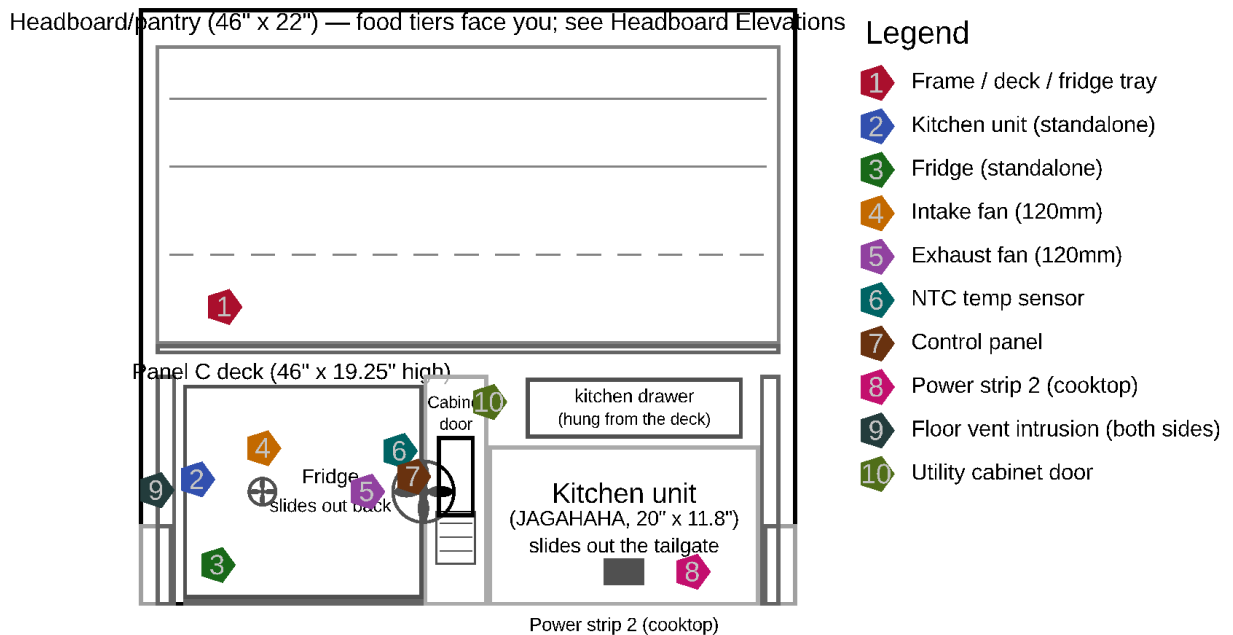

Exhaust fan: fridge's right wall, blows INTO the cabinet | NTC probe: just inside the bay at that wall (in the hot exhaust, NOT the cabinet)

Intake fan + a passive LOW cool-air louver: both on Panel C's FRONT wall (see its render) | cabinet door has a LOW exhaust louver

Control panel: switches + surge protector — INSIDE the cabinet, behind the door

Looking forward from the open tailgate at Panel C — both units shown stowed for driving

Rear view


Fridge Installation Detail

The rear view above is too small-scale to label the fridge's 2 cooling fans and temperature sensor clearly. This top-down detail of Panel C zooms in on just that area, with numbered markers and a coordinate list (see

Section 2 for the coordinate system and the full component coordinate table):

{4 is INSIDE the cabinet behind the door — Z in the list. CO monitor + fire extinguisher: owner-placed, not located here)

PANEL C — 46" wide x 36" deep, looking down from above

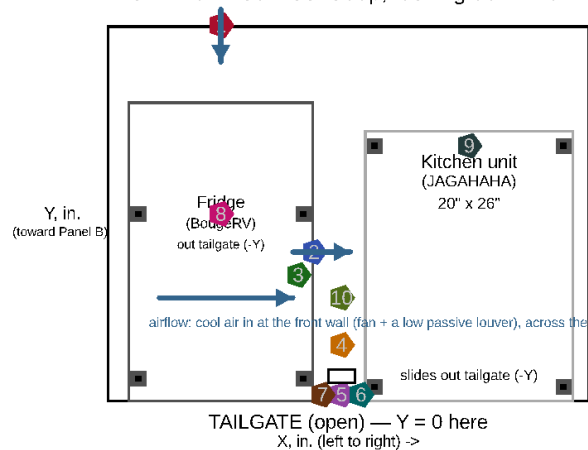

Component
Position / fastener


- 1 Intake fan (120mm) — blows IN
X=10.86 Y=36 (Panel C's FRONT wall) Z=8.4
4x M4x20 machine screws over the wall's fan hole (Front Wall render)
- 2 Exhaust fan (120mm) — blows INTO the cabinet
X=19.72 Y=14.4 Z=8.4
4x M4x20 machine screws, 105mm bolt circle, into a plywood fan ring
- 3 NTC temp sensor
X=18.22 Y=12.2 Z=8.4
Adhesive thermal tape or 1x #4 screw through its bracket tab
- 4 Control panel enclosure
X=21.23.8 Y=-2 Z=6.5-12.5 — INSIDE the cabinet
backer board (3/4" offcut) hung from the deck; 4x #8x1" screws
- 5 Cabinet door
X=20.2-24.5 Y=0-1.5
1/2" ply panel, closes the kitchen/fridge gap (not airtight — by design)
- 6 Door hinges (x2)
on the kitchen-side (high-X) edge
2x small butt hinges, 4x #6x5/8" screws each
- 7 Door catch
on the fridge-side (free) edge
1x magnetic or roller catch, 2x #6x5/8" screws
- 8 Fridge slide floor anchors (x4)
E-track, 2 per slide rail, front+back
1000lb WLL each — 2x 5/16" carriage bolts through the floor per anchor
- 9 Kitchen floor anchors (x4)
E-track, one per corner
1000lb WLL each — 2x 5/16" carriage bolts through the floor per anchor
- 10 WAVE 3 hose/cord hook
inside the cabinet, kitchen-side wall
1x heavy-duty wall hook, #8x1.5" screw — stows hoses+cord when not in use

All coordinates measured from Panel C's tailgate-facing left corner, floor level (see file header).
Floor-anchor bolts go THROUGH the van's floor pan — inspect underneath for fuel/brake lines and wiring before drilling any hole (Section 8).

Fridge install detail

And the electrical side — a schematic (not to physical scale) of how the fridge, both fans, and the NTC sensor are powered and wired:

Fridge System Wiring — schematic, not to physical scale

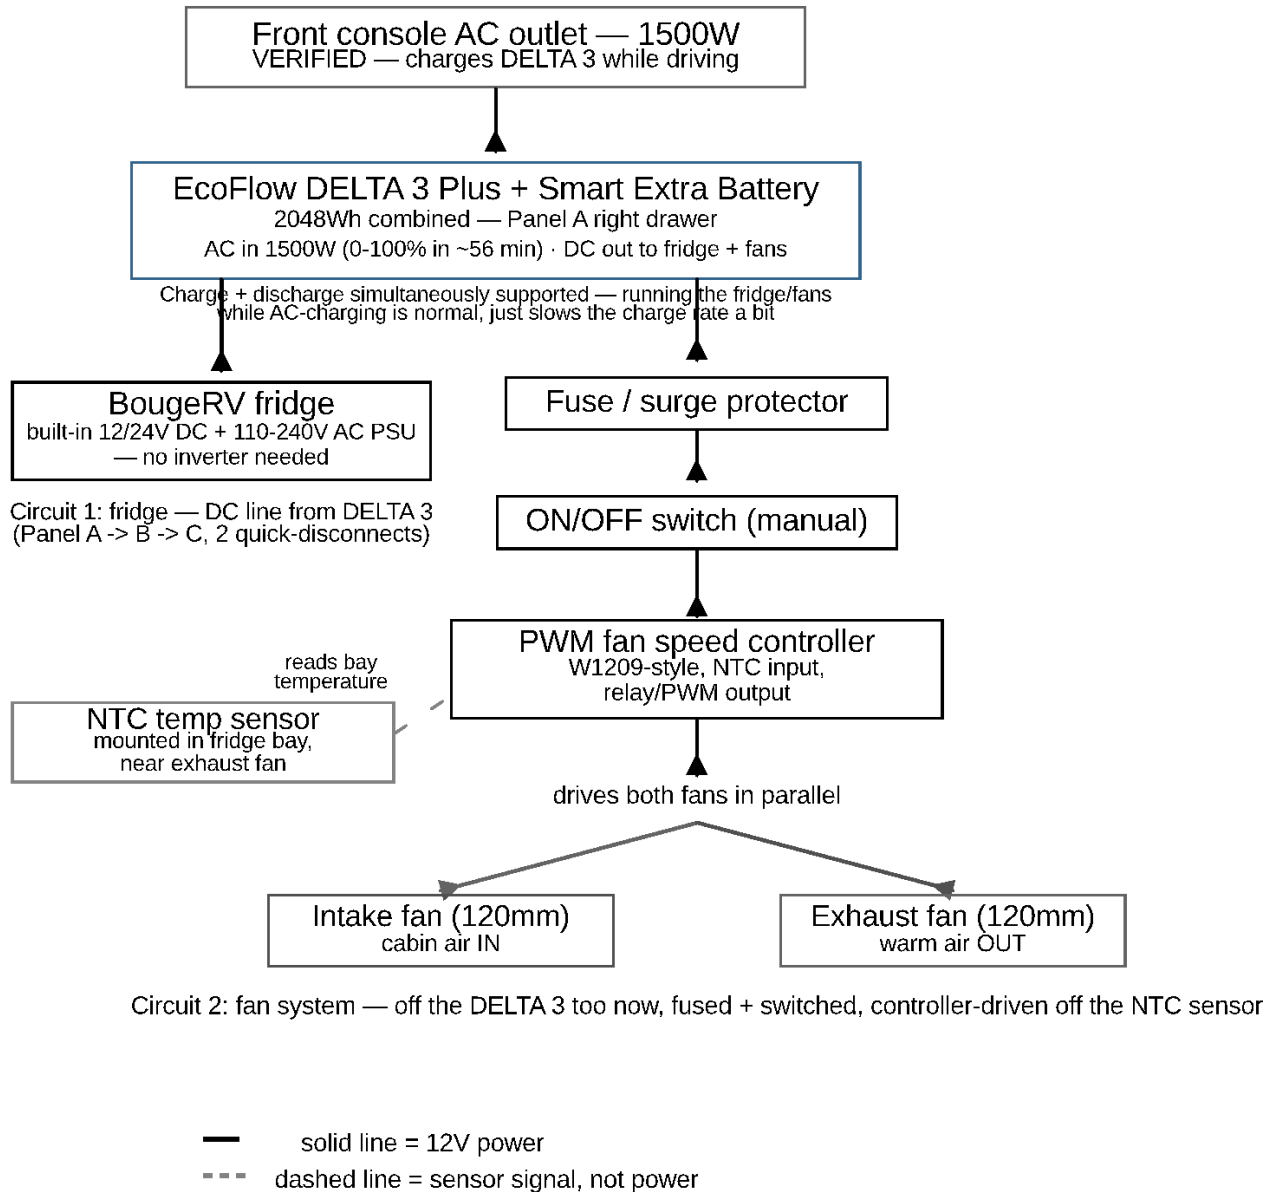


Fridge wiring diagram

The fridge's slide mechanism itself, closed vs. fully extended, with the E-track floor anchors it bolts to:


Fridge Slide Mechanism — side view (one of 2 parallel slides shown)

CLOSED (solid) vs fully OPEN (dashed) — pulled out through the tailgate for top-lid access

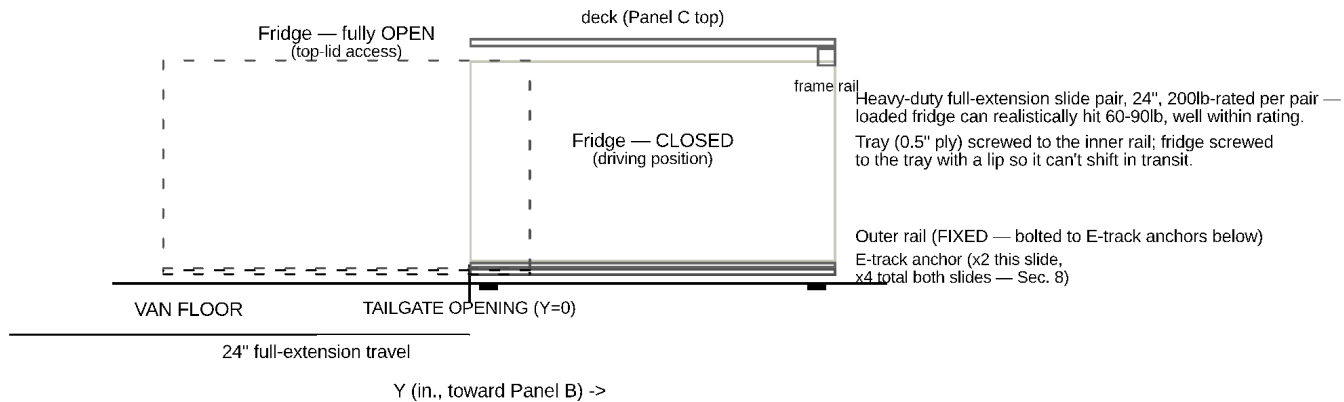

Fridge slide detail

The utility cabinet door that closes off the gap between the kitchen unit and the fridge, exploded so the 2 hinges and magnetic catch each get their own numbered marker (companion to item 8 in the fridge install detail above):

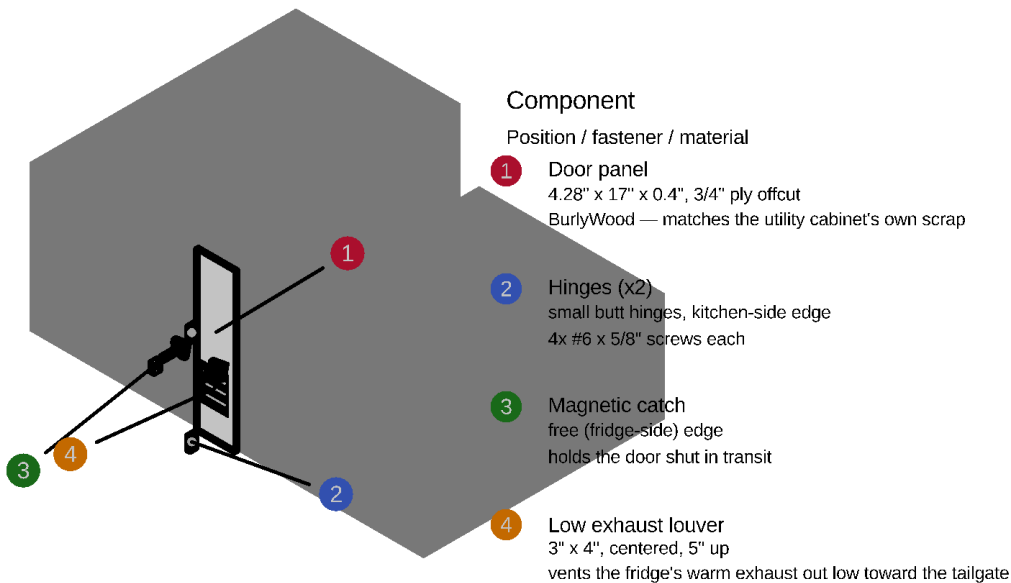

UTILITY CABINET DOOR — exploded detail (4.28" wide x 17" tall x 0.4" thick)


Hinged on the kitchen-side edge, swinging open toward the fridge — magnetic catch holds it shut on the free edge. A low louver (4) gives the exhaust fan's warm air a direct path OUT toward the tailgate — the rest stays dust/draft control.

Cabinet door detail


The kitchen drawer — a shallow slide-out drawer hung under Panel C's deck in the dead air above the kitchen unit (11.8" unit, 17" clear void), riding a 24" full-extension slide pair and pulling out the open tailgate; ~3.5" clear inside for utensils, cutting board, flat dry goods, and the cooktop's griddle plate:

KITCHEN DRAWER — hung under Panel C's deck, above the kitchen unit (Component 7)

Box: 1/2" ply, glue + 1-1/4" screws, ~3.5" clear inside — utensils / cutting board / flat dry goods / griddle plate.
Face matches the utility-cabinet door look, with the same magnetic catch so nothing rattles in transit.

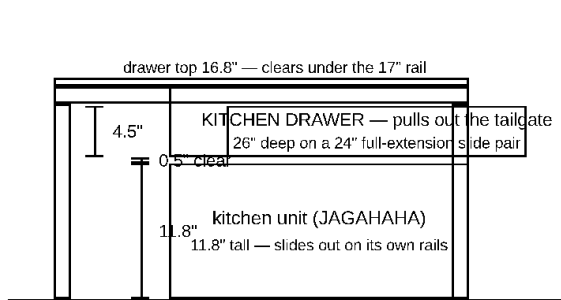

SIDE SECTION — front (B/C seam) at left, TAILGATE at right

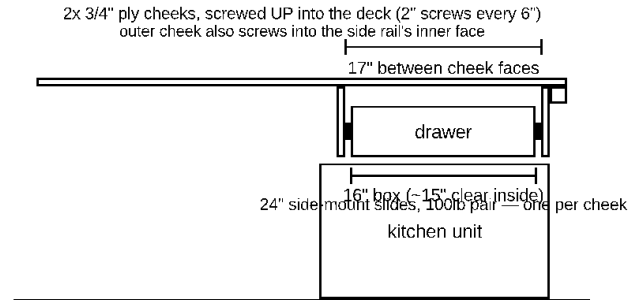


REAR SECTION — looking in from the open tailgate (passenger side at right)

Kitchen drawer detail

Headboard Storage Detail

The headboard/pantry's shelving, mounted on Panel C's deck at the tailgate end — exploded isometric detail: the shell (just the 2 side panels — no full-height divider, no top) lifted slightly to show the cam-lever clamp-down base cleats, the 2 fixed full-depth shelves plus the pin-mounted adjustable shelf pulled out along their installed axis, and the nook divider hovering over its middle-tier slot (sway braces in the Sway Brace Detail view below):

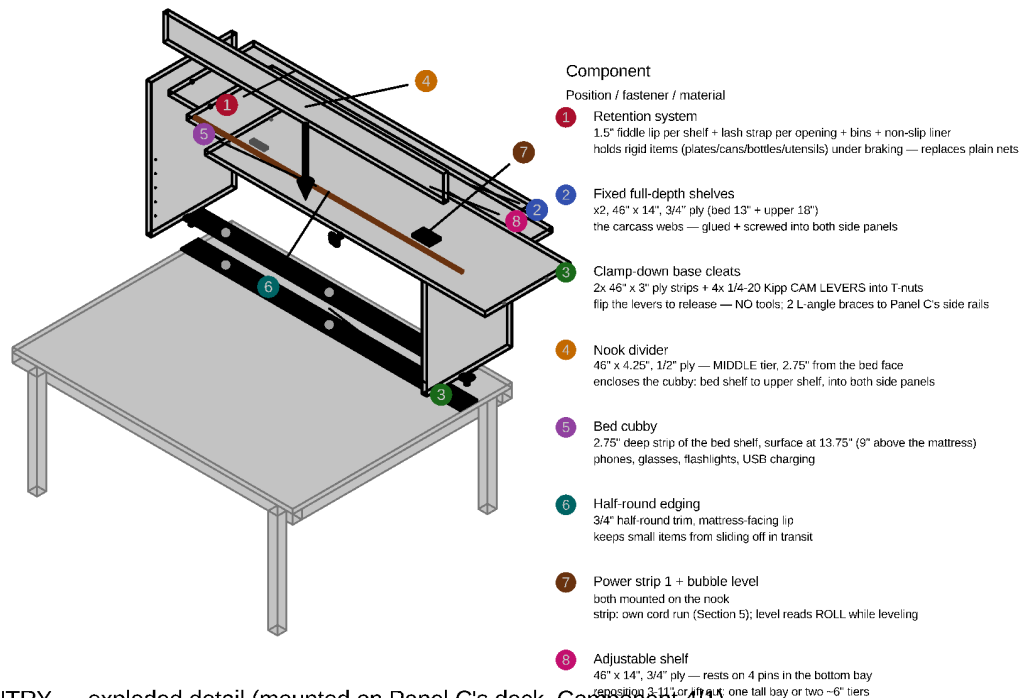

HEADBOARD/PANTRY — exploded detail (mounted on Panel C's deck, Component 4/1)

2 FIXED shelves + 1 ADJUSTABLE (8) -> up to 4 food tiers; nook divider (4) makes the MIDDLE tier an ENCLOSED bed cubby 2.75" (bed) | food 10.5" (kitchen)

The 13" bottom bay runs as one tall bay OR splits into two ~6" tiers on the pin holes. NO full-height divider, NO TOP. Shell clamps to Panel C's deck (3) + 2 L-angle braces.


RETENTION (1): a 1.5" fiddle lip on EVERY food shelf + a lash strap across each opening + bins for small items + non-slip liner (a net only on the soft-goods tier).

Headboard storage detail


All 4 sides of the headboard/pantry as flat, dimensioned elevations — mattress-facing (what you see from the bed: the enclosed bed cubby in the middle band, open food tiers above and below), kitchen-facing (the food

tiers with their fiddle lips + lash straps, what the rear view above looks at), and both 14"-deep sides — every piece labeled with its material and cut size:


MATTRESS-FACING (looking from the bed toward the tailgate)
BED CUBBY (enclosed) in the middle band: floor 9" above the mattress, 2.75" deep




KITCHEN-FACING (looking forward from the open tailgate)
 2 fixed shelves + 1 ADJUSTABLE (dashed) -> 4 food tiers, no top

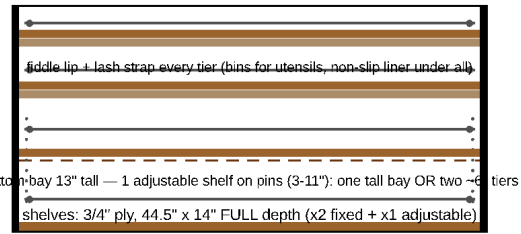

LEFT SIDE (driver side)
 mattress <- | -> kitchen



RIGHT SIDE (passenger side)
 kitchen <- | -> mattress



HEADBOARD/PANTRY — ALL 4 SIDES (14" deep x 46" wide x 22" tall, on Panel C's deck — NO TOP)


Carcass: 2 side panels + 2 FIXED full-depth shelves (at 13" bed + 18" upper) + 1 ADJUSTABLE shelf on pins in the bottom bay, 3/4" ply; nook divider 1/2" ply, MIDDLE tier.
 Legend: Peru bars = 1.5" fiddle lips (front rails, both faces); grey = elastic lash straps; green = nook divider; dotted columns = shelf-pin holes (1" o.c.); crimson = Power strip 1 cord.
 Retention: a fiddle lip on EVERY food shelf + a lash strap across each opening + bins for utensils/small items + non-slip liner under all (a net only on the soft-goods tier).
 Clamped to Panel C's deck (4x Kipp CAM LEVERS into T-nuts) + 2 L-angle braces (base: 2x 46"x3" ply cleats) — flips off in a minute, NO tools.

Headboard elevations

How the tall unit is kept from rocking fore-aft under braking: one steel L-angle brace per side, from ~20" up the side panel down at ~45° to Panel C's OWN side rail. (Re-anchored from Panel B: the flush bed platform now caps Panel B's rails right where the old arms landed — and this way Panel B lifts out without touching the braces at all.)

HEADBOARD SWAY BRACE — L-angle to Panel C's OWN side rail (side elevation, one of 2)

Anchored WITHIN Panel C (not Panel B): the flush platform now caps Panel B's rails where the old arms landed, and Panel B lifts out without touching the braces. Slotted angle is pre-punched — no steel drilling, pick the slots that line up.

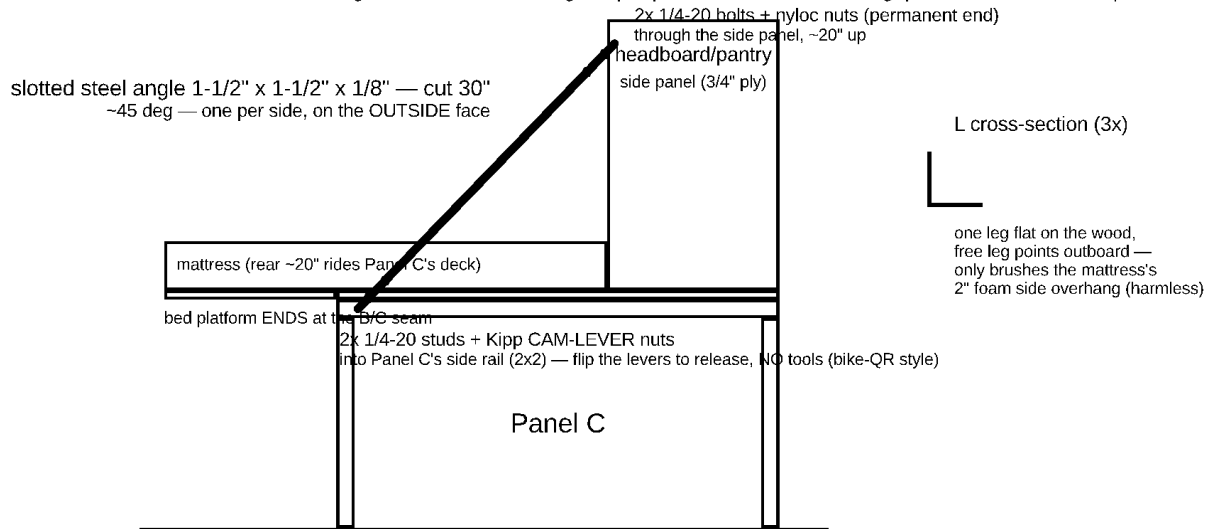


Why an L-profile and not flat strap: under braking one brace loads in COMPRESSION — 30" of 1/8" flat strap buckles; the angle's second leg resists it. FRONT (B/C seam) at left — TAILGATE at right. Heights computed from params.scad.

Sway brace detail

Floor Panel Detail

Each floor panel, exploded (Panel A: frame + legs + center divider + one right drawer, left bay is WAVE 3 open storage; Panel B: a bare cube frame — no divider or drawers; Panel C: no divider or drawers — the fridge/kitchen units live in its void, shown here as reserved footprint):

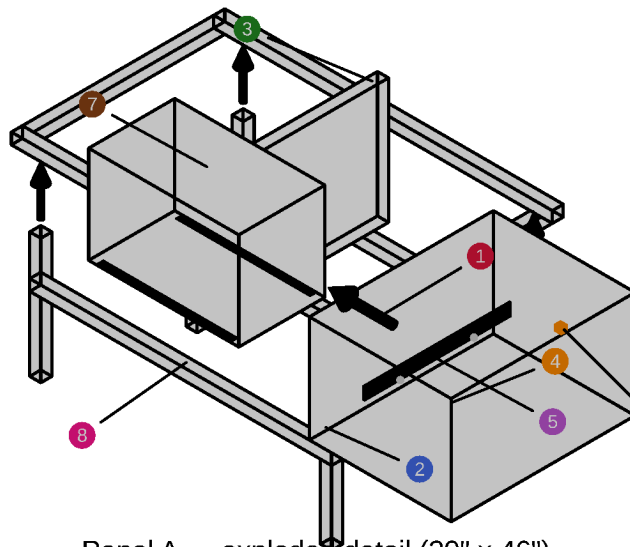

Panel A — exploded detail (29" x 46")

Left (driver-side) bay: WAVE 3 open storage, no drawer box or slide — the unit is too wide for a boxed drawer.

Component

Position / fastener / material

- 1 End rails (x2) + side rails (x2)
29" x 46" perimeter, 2x2 pine
corner brackets + 2" screws + glue
- 2 Legs (x4)
16" cut + leveling foot, inset 2.5" from the edge
1/2" x 3/4" inset hole in each bottom (Panel B detail's inset)
- 3 Center divider
26" cut, 2x2 pine
splits the bay — drawer (right) / WAVE 3 (left)
- 4 Drawer box (right, DELTA 3 side)
19.25" x 25" x 14.5", 1/2" ply
5 pieces, glued + pinned
- 5 Drawer slide (right)
20" full-extension pair
box-to-rail + box-to-divider
- 6 Drawer catch (right)
friction catch or small turn latch
keeps the drawer shut in transit
- 7 WAVE 3 + glide strips (left)
2x glide strip, UHMW/laminate scrap
no box, no slide — rests directly on the bay floor
- 8 Bottom rails (x2, END faces only)
2x2 pine, underside at 1"
the SIDE faces stay open — the drawer + WAVE 3 exit there at floor level


Panel A detail

LEG BOTTOM, zoomed — same hole on all 12 legs
1/2" dia x 3/4" deep, dead center of the
1.5" x 1.5" end grain -> 3/8-16 insert




drill BEFORE assembly (Leveling Foot render)

END-RAIL SEAM FACE — both ends
2x 3/8" dia x 3/8" deep pin holes, 3" in from each side edge, centered on the rail



drill the mating panel's face as a matched pair — clamp both, drill through the glue block (Component 5)

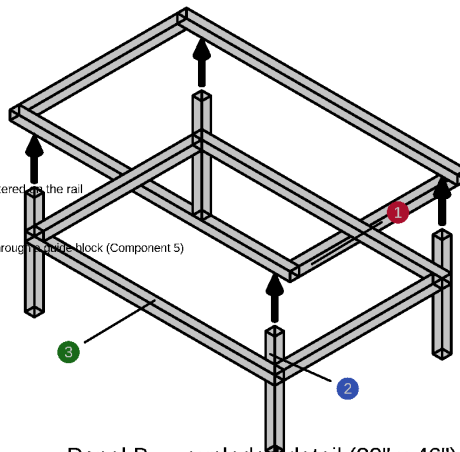

Panel B — exploded detail (29" x 46")


NO divider, NO drawers, no skirts — the side doors don't reach Panel B, so its whole bay is deep storage, loaded from above.
THE FULL CUBE: bottom rails on all 4 faces (nothing exits Panel B sideways). Both hole types dimensioned in the insets at left.

Component

Position / fastener / material

- 1 End rails (x2) + side rails (x2)
29" x 46" perimeter, 2x2 pine
corner brackets + 2" screws + glue; grip these rails to lift the panel
- 2 Legs (x4)
16" cut + leveling foot, inset 2.5" from the edge
1/2" x 3/4" inset hole in each bottom (inset at left)
- 3 Bottom rails (x4 — full cube)
2x2 pine, underside at 1" (clears the feet/knobs)
2x 2" screws + glue into each leg — the frame racks far less as a closed box

Panel B detail

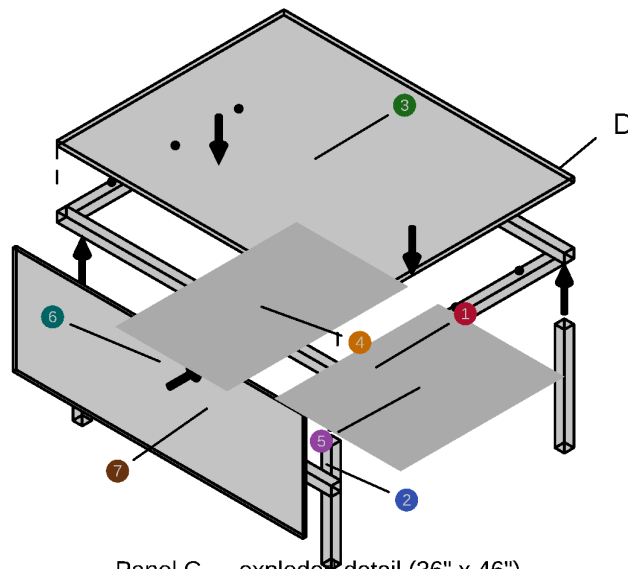

Panel C — exploded detail (36" x 46")

No divider, no drawers — the void stays open for the bought fridge + kitchen unit (Component 7). ONE wall: the front (B-facing) face.

Panel C detail


Component

Position / fastener / material

- 1 End rails (x2) + side rails (x2)
36" x 46" perimeter, 2x2 pine
corner brackets + 2" screws + glue
- 2 Legs (x4)
16" cut + leveling foot, inset 2.5"
insert hole in each bottom — see the Panel B detail's inset
- 3 Fixed top
46" x 36", 3/4" ply
screwed down — NOT a lift-off lid, unlike Panel A/B's bed-frame cap
- 4 Fridge zone (reserved)
17.72" x 28.74", flush LEFT/driver
bought product — see fridge-install-detail
- 5 Kitchen zone (reserved)
20" x 26", flush RIGHT/passenger
bought product — see fridge-install-detail
- 6 Front wall (the ONLY wall)
46" x 17", 1/2" ply, on the B-facing face
fan hole + 2 grommets — Panel C Front Wall render
- 7 Bottom rail (x1, FRONT face only)
2x2 pine, underside at 1", behind the wall
tailgate face stays open (appliances exit there); REAR legs at the TRUE corners

Bed Platform Detail

Component 2's one-piece slatted bed platform (58" x 52", 10 slats pocket-screwed between two full-length 1x4 side rails — one flush 3/4" plane, cantilevered 3" past the boxes on each side), exploded. It rests DIRECTLY on Panel A/B's top rails and ENDS at the B/C seam — Panel C's own fixed deck sits at exactly the same surface height, so the two meet flush and the mattress's last ~20" rides that deck. It lifts straight off; leveling happens at the leg feet, down at the floor, and an RV bar bubble level screwed to the driver-side rail's outer edge reads fore-aft pitch while you turn the knobs (its twin on the headboard nook reads roll):

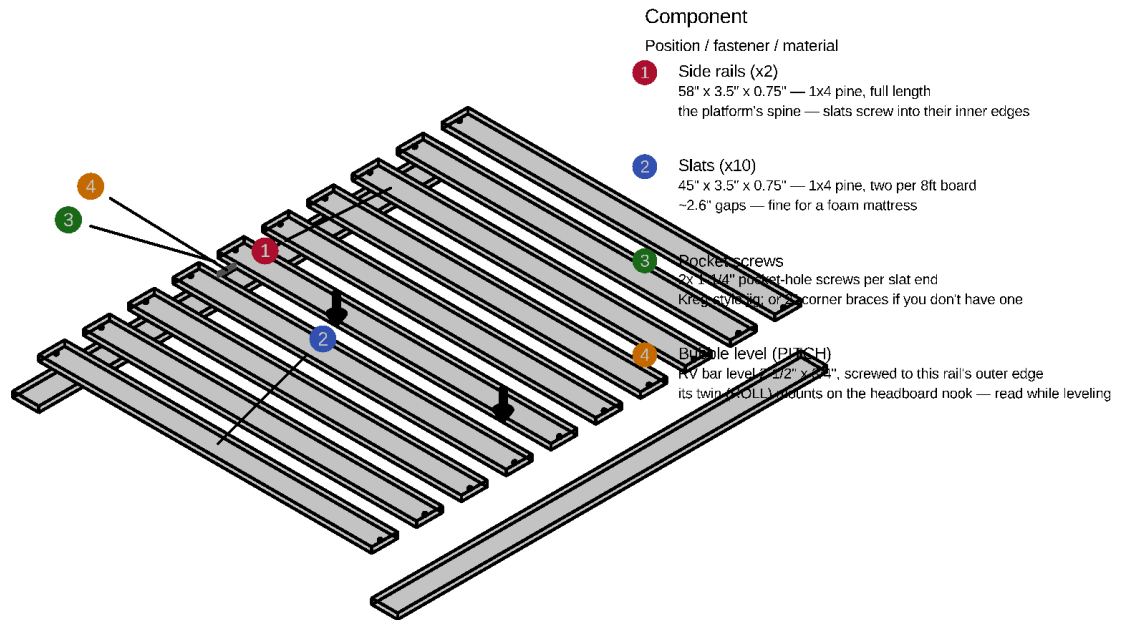

BED PLATFORM — flush ladder, exploded (Component 2, 58" x 52", 10 slats, 0.75" thick total)

One 3/4" plane: slats sit BETWEEN the two full-length side rails, pocket-screwed — no battens below, nothing above.

Rests DIRECTLY on Panel A/B's top rails and ENDS at the B/C seam, flush with Panel C's deck (the mattress's last ~20" rides that deck).

Bed frame detail


Leg Leveling Foot Detail

Leveling lives at the floor: each leg is cut 1" short and gets a 3/8-16 insert in its bottom end grain, taking a leveling glide bolt with a floor pad and a ~2" star-knob hand grip (12 total: 4 per panel x 3). Effective leg height stays 17", but dropping the old between-layers adjusters and platform battens buys 1.25" of extra headroom. To adjust: tip that corner of the box slightly and spin the knob — every leg is exposed at floor level:

Component

Position / fastener / material

- 1 Leg (bottom end shown)
2x2 pine (1.5" x 1.5" actual), cut to 16"
drill centered, 1/2" dia x 3/4" deep for the insert
- 2 3/8-16 threaded insert
driven UP into the leg's end grain
T-nut style, epoxy or press-fit
- 3 Star knob, ~2" dia (hand grip)
3/8-16 thru-hole knob + jam nut on the bolt shaft
the adjustment — big enough to turn with the box tipped
- 4 Leveling glide bolt + pad
1.5" floor pad; +/-0.5" travel around 1" nominal
threads into the insert — leveling only, not height changes

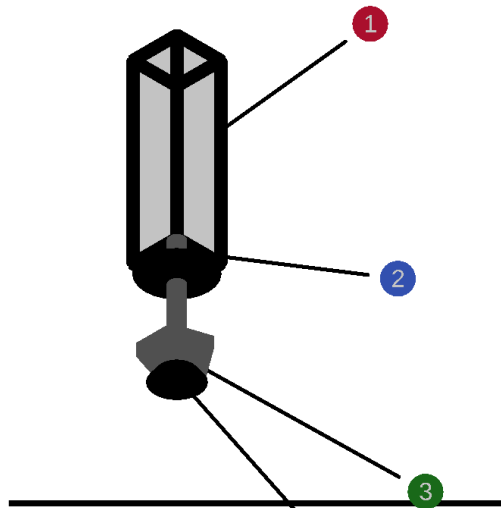

LEG LEVELING FOOT — shown 3x actual size (12 total: 4 per panel x 3 panels)

Legs are CUT to 16" — the foot makes up the last 1", keeping the effective 17" leg height.

To level: kneel at the side door, tip that corner of the box slightly, spin the star knob. Every leg is exposed at floor level — nothing boxes it in. The platform above rests DIRECTLY on the box rails (no adjusters up top anymore).

Leveling foot detail

Load: worst case is ~700 lb total (2 people + mattress + platform + boxes + cargo) spread over 12 feet — ~60 lb per foot against the feet's 330 lb rating each, a 5x margin before dynamic factors. The feet are not the weak point. If you want more margin anyway, 1/2"-13 leveling mounts (1,100 lb each) are a drop-in upgrade — same install, just a 5/8" insert hole instead of 1/2".

Access: the practical answer is to stop crawling under the bed at camp entirely — **level the VAN at the wheels** (Andersen/Camco-style curved ramps, standard van-life practice) each site, and set the interior feet ONCE against the van's own floor irregularities. After that first setup you shouldn't need to touch a knob; the two bubble levels tell you at a glance whether the wheels need a ramp.

Blocks + calculator (the no-feet workflow): the two bubble levels read DEGREES (-7 to 7). Degrees plus the wheelbase are all the math needs, so there's a phone calculator for it — [Sienna Block Calculator](#) (also saved in the repo as `leveling_calculator.html`): enter the two readings and which end/side is low, and it returns how many Lynx-style leveling blocks to stack under each tire, the total, and the residual tilt after driving up. One 10-pack of blocks covers ~2.9° of correction at 1.5"/block over the 120.1" wheelbase — beyond ~4 blocks per tire, find a flatter spot. This makes the interior feet a ONE-TIME set (against the van's own floor irregularities), not a per-site chore — and if you'd rather delete the feet entirely, replace them with fixed shims set once and let the blocks do all site leveling (saves ~\$72, loses the fine-trim option).

Installing the calculator on a phone (two ways):

1. *Online:* open the [calculator link](#) in Chrome on the phone (it needs the claude.ai login), then Chrome menu → **Add to Home screen** — it gets an icon and opens full-screen. Needs signal at launch.

2. *Offline — the one to rely on at camp:* `leveling_calculator.html` is a single self-contained file with zero network dependencies. Send the copy from this repo (or `~/Downloads/sienna_block_calculator.html`) to the phone by email/Drive/Nearby Share, open it once via **Files** → **Open with** → **Chrome**, and bookmark it. It runs with no signal forever and remembers the settings below.


Using it at a site:

1. Park in the spot you actually want, engine off, **parking brake on**.
2. Read the two bed-mounted levels: the fore-aft level on the platform's driver-side rail (pitch) and the side-to-side level on the headboard nook (roll). Each reads in degrees; the bubble floats toward the HIGH side, so the opposite end/side is the LOW one.
3. Enter both degree readings and tap which end (nose/tail) and side (driver/passenger) are low. One-time settings under "Van & block settings": wheelbase 120.1", track ~68", and the height each block adds — Lynx-style ≈ 1.5 ", but **measure your own stack once** and enter that.
4. The van diagram shows blocks per tire. Lay each stack just ahead of its low tire, **drive up slowly**, and chock a wheel.
5. Re-read the levels and refine once if needed — suspension squish and block nesting make a second small pass normal. If any tire calls for more than 4 blocks, the calculator says so: re-park (turning the van around often halves the stack) rather than building a tower.

DELTA 3 / WAVE 3 Stowage Detail

Stowage for the EcoFlow gear: the DELTA 3 Plus + Smart Extra Battery, stowed unstacked side by side in Panel A's right drawer, and the WAVE 3, stored as open bay storage (no drawer box, no slide) in Panel A's left bay (its hoses/cord stow separately — item 12 in the fridge installation detail above):


PANEL A — RIGHT DRAWER (top-down)
EcoFlow DELTA 3 Plus + Extra Battery, stowed



clear interior 19" x 24"
Y: to Panel C/tailgate <-
X: divider -> outer (pull)
Combined 15.95" wide
drawer clear width 19"

- Component**
- 1** Position / fastener
DELTA 3 Plus (main unit)
7.95" x 15.7" x 11.16", ~28 lb
outboard (pull wall) — WAVE 3 plugs into this always
- 2** Smart Extra Battery
8" x 15.7" x 7.8", ~20 lb
inboard — grabbed less often, extra runtime only
- 3** Locating cleats (x4)
1x1 pine blocking, drawer floor
glued + screwed — #6 x 1" screws
- 4** Vent slots (x5)
1" x 0.5" slots, outer wall
lets cooling fans breathe if run while closed
- 5** Cam-strap anchors (x2)
screw-eye D-rings, divider + outer wall
#8 x 1" screws, strap over both units
- 6** Cable pass-through
1" grommet, Y=0 tailgate-facing wall
WAVE 3 cord exits here toward the tray below


PANEL A — LEFT (DRIVER-SIDE) BAY (top-down)
EcoFlow WAVE 3 — open storage, no box or slide



raw bay 20.75" x 25" (no box walls to eat into it)
Y: Panel B/tailgate <-
X: divider -> outer (driver door)
Clearance is tight: 0.35in on the pull side — a boxed drawer (19in clear) would NOT fit; this raw bay does, which is why this is open storage, not a normal drawer like Panel A's right side.
Storage-only: for camp use, carry the unit to Panel C's tailgate deck (tent) or the front seat (no tent) — see the sleeping-configurations note, Section 1.
Hoses + cord stow on a hook inside the utility cabinet (between fridge + kitchen) when not in use.

- Component**
- 7** Position / fastener
WAVE 3 unit
20.4" x 11.7" x 13.2", 33.7 lb
rests directly on the bay floor — no box, no slide
- 8** Bay opening
20.75" x 25" raw void
reached through the driver's side door
- 9** Glide strips (x2)
UHMW or laminate scrap, full bay depth
cuts friction sliding the unit in/out by hand

FOUND STORAGE — dead headroom reclaimed (side sections)



DELTA 3 drawer: 14.5" tall, unit 11.16" -> ~3.3" of dead air on top = a cable/cord tray
WAVE 3 bay: 17" tall, unit 13.2" -> ~3.8" of dead air on top = a shelf on cleats (unit slides out under it)

DELTA 3 and WAVE 3 stowage detail


Panel C Front Wall

The one wall any panel gets, as a flat pattern with **every hole dimensioned**: the 120mm intake-fan hole (with its 105mm screw square) centered on the fridge bay, TWO 1" grommets (fridge DC line low, Power strip 1's line above it), and the 8 perimeter mounting screws (2 now landing in the cube-frame bottom rail). Panels A and B have no walls or skirts at all, Panel C's sides stay open, and its tailgate face needs no wall — the fridge, cabinet door, kitchen unit, and kitchen drawer face fill it completely:

PANEL C FRONT WALL — 1/2" ply, flat pattern (the ONLY wall on any panel)

Mounts on Panel C's front (B-facing) face, floor to rail underside. Intake fan bolts over the big hole (blows IN); the low louver is a passive cool-air scoop below it.
Panel A/B: no walls or skirts anywhere. Panel C sides: open. Panel C tailgate face: no wall — fridge + cabinet door + kitchen + kitchen drawer fill it.

8x #8 x 1-1/4" perimeter screws: 2 into each front leg + 2 into the top rail + 2 into the bottom rail

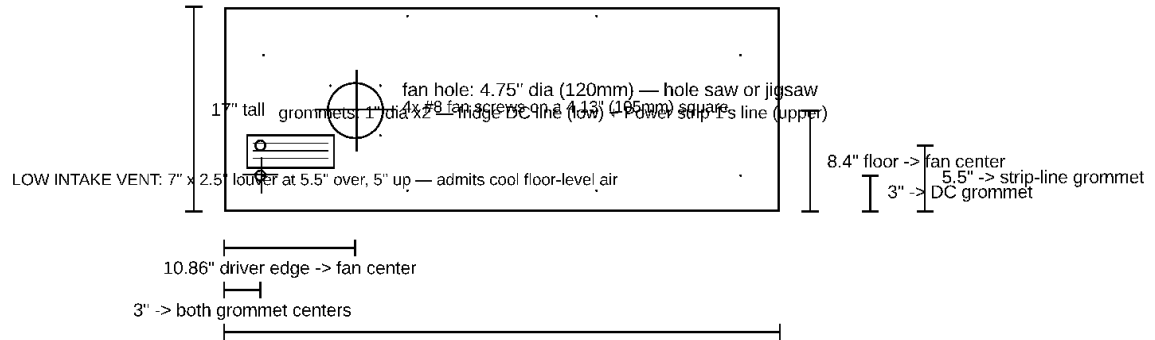

DRIVER side at left (the fridge bay's side) — PASSENGER at right. All positions computed from params.scad.

Panel C front wall detail

1. Overview

Vehicle constraints (hard limits — everything below is designed inside them)

The 2nd row seats are being **removed entirely** (not just pushed forward), with the 3rd row folded flat as before. Width, height, vent intrusion, and hatch clearance are unaffected by seat removal and remain the originally verified figures. Interior length is **not yet measured with the seats actually out** — see the UNVERIFIED note below.

Constraint	Value	Notes
Max interior length	96"	UNVERIFIED ESTIMATE — closed rear hatch to the front seatbacks, 2nd row removed. See note below.
Max floor width	48.5"	Between the wheel wells — verified
Max height	44"	Load floor to headliner — verified
Vent intrusion	2.5" per side	Rear lower heat vents, at floor level only — legs must stay clear; the raised deck may overhang — verified
Hatch curvature reserve	2"	Nothing is built into the last 2" before the closed hatch — verified

Why 96" is a placeholder, not a fact: the earlier 72" figure was measured with the 2nd row seats still installed, pushed fully forward on their tracks. Removing the seats entirely gains roughly the depth the seats themselves occupied at that forward position — typically 24-26" for a minivan 2nd-row bench/captain's chair plus a bit of track. 96" is that estimate, rounded, and it is **not a measurement**. Treat it exactly like the liftgate opening numbers below: **measure the actual empty interior (closed hatch to the front seatbacks) once the seats are physically out, and correct `van_interior_length` in `params.scad` before cutting anything**. Every downstream number in this plan (panel sizes, cut list, BOM) flows from this one value — re-run `./render.sh` after correcting it and check that all the `assert()` guards still pass.

That leaves a **94" usable length** and a **43.5" floor-level width** (full 48.5" available at deck height). The math: Panel A 29" + Panel B 29" + Panel C 36" = **94" of panels — Panel A sits flush with the front seatbacks (no open floor left over)**, filling `usable_length` exactly. Unlike the earlier "three panels + a separate rear row" layout, there's no length lost to a dedicated fridge/kitchen zone — the fridge and kitchen unit both live in the void *underneath* Panel C's deck, sharing space with the same legs that hold up the mattress. The headboard/pantry claims the last 14" of Panel C's own 36" (the tailgate-most strip, right next to the fridge/kitchen void), leaving **80" of continuous sleeping run** (Panel A + Panel B + the first 22" of Panel C) for the mattress — the HEST Dually Long (78" long) rides here with ~2" of spare at the head end. If the real measured interior comes in shorter than 96", every panel shrinks proportionally — this is exactly what the `assert()` guards in `params.scad` are there to catch. These limits live at the top of `params.scad`: bump any dimension past the envelope and every render fails loudly instead of silently overflowing the van.

Rear liftgate opening (UNVERIFIED — confirm by physical measurement)

Every module has to physically pass through the liftgate opening to be lifted in and out — that's the entire point of the modular design, so this matters as much as fitting once installed. Unlike the constraints above, these numbers came from an AI-summarized web search (Reddit/YouTube-sourced), **not a direct measurement** — treat them as a working estimate, not a fact, until you confirm with a tape measure.

Constraint	Value	Notes
Gate opening width	48"	Widest point — UNVERIFIED
Gate opening height	36"	Upper corners are heavily rounded, reducing effective clearance near the edges — UNVERIFIED, treat as optimistic

Fit check (each module carried upright, legs down, the way it sits once installed):

Module	Passes through as	Width margin	Height margin
Panel A, Panel B, Panel C	46"W x 19.25"H	1" per side	16.75" to spare
Headboard/pantry shelving (separate piece — Component 1)	46"W x 22"H	1" per side	14" to spare

The fridge and kitchen unit never need to pass through the gate opening at all — they live inside Panel C's own void as bought products, installed once and left in place, not lifted in and out. The one tight spot that remains: **1" of clearance per side on width** (a rigid 46" wood frame through a 48" opening — real-world weatherstripping intrusion and an imperfect carrying angle could eat that margin). `params.scad` asserts against this the same as every other hard limit — if you measure the real opening and it's smaller, every render will fail until the design is adjusted. **Measure the actual opening (narrowest width, height, corner rounding) before cutting anything.** The headboard/pantry's shelving unit is a separate piece from Panel C specifically so each clears this opening on its own (flip the 8 cam levers — no tools, Component 1) — the combined height (41.25", Panel C plus the shelving) would not need to pass through in one piece.

Side door openings (UNVERIFIED — confirm by physical measurement)

The side doors only matter for **Panel A**: its right drawer (DELTA 3) pulls out the passenger door and its left bay (WAVE 3) is reached through the driver door — the door openings sit over the old 2nd-row footprint, which is exactly where Panel A lives. **Panel B is beyond the door openings entirely** (owner-confirmed), which is why it has no drawers: nothing pulled sideways from it could clear a door, so its bay is top-loaded deep storage instead. Panel C's void houses the fridge and kitchen unit, both pulling out through the open tailgate. Same status as the liftgate numbers above: a typical estimate, not a measurement — confirm the door openings do overlap Panel A's footprint.

Constraint	Value	Notes
Side door opening width (fore-aft)	40"	UNVERIFIED
Side door opening height	40"	UNVERIFIED

Reach caveat: a ~40"-wide door opening won't expose the full 58" drawer run (Panel A + Panel B) from one position. The drawers nearest the door are an easy reach; the far ones need a lean or a step inside. Once you've measured your door's actual fore-aft position, consider putting your most-used gear in whichever panel's drawers land closest to the opening.

Layout

- **Headboard/pantry** (14" deep x 46" wide x 22" tall above the deck — as tall as the roof allows, ~2.75" of ceiling clearance to spare against the verified 44" interior height): **no longer its own module** — no frame, no legs, no floor contact of its own. It's a shelving superstructure, **clamped down to Panel C's existing deck** (4x Kipp cam levers into T-nuts under the deck — tool-free, bike-QR style) and braced against driving sway by **2 steel L-angle braces running forward/down to Panel C's OWN side rails** (cam-lever nuts at the rail ends) (~45°, one per side — triangulates the fore-aft rocking that braking/accel would otherwise work into the tall unit; re-anchored from Panel B, whose rails the flush bed platform now caps — Sway Brace Detail render), occupying the last 14" of Panel C's own 36" length (the end flush to the tailgate, right next to the fridge/kitchen void). **3 fixed tiers + an adjustable shelf, no full-height divider, no top:** two FULL-DEPTH (14") shelves — the **bed shelf** at 13" above the deck and an **upper shelf** at 18" — split the 22" height into 3 tiers. The tall 13" bottom bay (deck up to the bed shelf) takes an **adjustable shelf on pins** — run it as one tall bay for bottles/boxes/pots, or split it into two ~6" tiers for cans/plates/packets, per trip — and the top tier (above the upper shelf) is full-depth food storage. Retention is the **marine-galley system**: a 1.5" front **fiddle lip** on every food shelf (the primary stop against the forward slide braking causes) + an elastic **lash strap** across each opening + **bins** for utensils/small items + **non-slip liner** — a bungee net stays only on the one soft-goods tier (bread/chips/produce). The MIDDLE tier, between the two shelves, is split by a 4.25" nook divider into an **enclosed bed cubby** facing the mattress: 2.75" deep, floored by the bed shelf (surface 9" above the mattress top), backed by the divider, and ceilinged by the upper shelf — carrying the half-round edging lip, Power strip 1 (phones/glasses/flashlights/USB), and the roll bubble level. The remaining 10.5" of that middle tier faces the kitchen as food storage. It still comes off Panel C separately — flip the 4 base cam levers and the 4 brace-end cam levers (8 total, no tools) — so its own height clears the liftgate opening on its own. See the Headboard Storage Detail render and Section 6, Component 1.
- **One continuous sleeping deck**, 46" wide x 94" long (Panels A + B + C, on uniform legs, flush with the front seatbacks — no gap), deck surface sitting 19.25" above the van floor (17" legs + 1.5" frame rail + 3/4" ply). `leg_height` is driven by the fridge's 15.79" height (see below), not by the folded 3rd-row well depth — confirm 17" clears your actual well before cutting.
- **Panel A and Panel B share the same frame, and neither has a top of its own.** Panel A has a center divider splitting its bay in two, reached through the side doors: the right (passenger) side is the one real drawer (DELTA 3), the left (driver) side is WAVE 3 open storage (the unit is too wide for a boxed drawer — Section 1). **Panel B has NO drawers and no divider** — the sliding-door openings sit over the old 2nd-row footprint (Panel A), not over Panel B, so nothing pulled sideways from Panel B

could clear a door. Its whole bay is deep storage instead: lift the platform + mattress and load it from above (long-term/bulky items you don't touch at camp). The one-piece slatted bed platform (Component 2, 10 slats between 2 full-length side rails, 58" x 52" — cantilevered 3" past the boxes each side, 3/4" thick) spans Panel A + B ONLY and ENDS at the B/C seam: Panel C's own fixed deck is at exactly the same surface height, so the two meet flush and the mattress's last ~20" rides that deck (an 80" platform would have to sit ON that deck — 3/4" too high). It rests DIRECTLY on Panel A/B's top rails as one flush 3/4" plane (slats pocket-screwed between the two side rails). Leveling happens at the leg feet down at the floor — each leg is cut 1" short and carries a hand-adjustable leveling foot. Sourcing: cut ten 45" slats from five 1x4 x 8ft pine boards (two per board) plus two 58" side rails from two more — seven boards total, no bought slat kit to fight with (many queen slat sets ride on metal frames or webbing that don't survive cutting down — Section 4 + Component 2). It lifts off (as a whole) for bay access from above — that's Panel B's ONLY access, and the occasional deep-cleaning route for Panel A.

- **Trade-off: no top means no enclosure — answered with CUBE FRAMES.** Removing the plywood tops loses torsional rigidity and a dust barrier. Two fixes are now specified: diagonal corner braces up top, and **bottom rails closing each frame into a box** (underside 1" up — dropped to the leg bottoms, just clear of the leveling feet, for the tallest box section and the lowest floor-edge curb) on every face that can take one — Panel A's two END faces (its sides must stay open for the drawer/WAVE 3), ALL 4 faces of Panel B (the full cube), and Panel C's FRONT face (its tailgate face stays open for the appliances; its fixed top + new front wall already stiffen it). A closed frame racks far less than rails + brackets alone. The bed frame's slats still have gaps — small items can fall through into the bays below.
- **Panel C has no drawers.** Its under-deck void instead holds two bought products side by side across the 46" width: a **BougeRV Rocky 40 (41-quart, dual-zone)** — 17.72" side left-right, reversible lid (manual §4.4), optional detachable B240 battery at the tailgate-facing end — on a heavy-duty slide, against the driver-side REAR CORNER leg (1.5" in from the edge); and a **JAGAHABA slide-out camp kitchen** (26"L x 20"W x 11.8"H closed, with its own 2-burner stove space and built-in slide), against the passenger-side rear corner leg — its shelves swing out on that side. (Panel C's rear leg pair sits at the TRUE corners — inset legs would stand exactly in the appliances' slide paths, a collision the Rocky 40's extra width exposed. Verify the floor vents don't reach those corners — Section 0.) **Both pull straight out the open tailgate** (not a side door). Neither is something this plan builds from plywood — both are bought, standalone units. Unlike everything else in this build, both are **bolted through the van's floor pan** via E-track anchors (Section 8) — too heavy to rely on the same "rests unbolted" approach as the sleeping panels. A utility cabinet with a hinged door fills the gap between them: the exhaust fan blows the fridge bay's warm air INTO it, and a low louver in the door lets that warm air escape low toward the tailgate (rather than only bleeding around the door edges); the control panel (switches + surge protector) mounts INSIDE the cabinet, just behind the door on a backer board hung from the deck underside — open the door to reach everything electrical.
- A **HEST Dually Long mattress (78" x 50" x 4", solid foam — no air chambers)** rides on the 52" cantilevered platform: **25" of width per person** (vs 23" at the old 46") and ~2" of spare length parked at the head end under the headboard shelf. The platform overhangs the 46" boxes by 3" per side — the boxes stay at 46" (floor vents + liftgate pass-through), but the mattress lives 19-27" up where the van is wider than its 48.5" floor pinch. **UNVERIFIED: measure wall-to-wall at ~19" and ~23" above the floor along the whole run (need >=53") before cutting the platform** — Section 0. Budget fallback: the DIY 2-layer foam build (Section 4/Component 9), same 50x78 footprint.

- Panel legs sit inset 2.5" from the deck's side edges so they land clear of the floor-level vent intrusion (the deck itself overhangs the vents harmlessly at height).
- **Power:** the fridge is 12V-native, but now runs off the EcoFlow DELTA 3 stack (Panel A) via its own dedicated DC cord rather than the van's rear accessory outlet — see Section 1 for why. **The cooktop, Power strip 1, and the DELTA 3's own AC charging cord each get their own dedicated run to the front console now** (previously the cooktop and Power strip 1 shared one line) — see Section 5 for all three routes.
- **Fire safety + CO safety (owner-placed):** the fire extinguisher and the low-level CO monitor are **deliberately not located in this plan** — both are owner-supplied and will be positioned manually once the build is in the van. Two reminders that survive from the earlier analysis: the design has no propane at all (electric induction cooktop), so the only combustion-gas risk is the Sienna's own engine exhaust while idling parked; and a generic 70ppm home-style CO detector is too slow for that job — use a low-level unit (alarms at 9/25ppm within ~60s).
- **Camp power/cooling (EcoFlow):** an EcoFlow DELTA 3 Plus + Smart Extra Battery (~48 lb combined) stows unstacked, side by side, in Panel A's **right (passenger-side) drawer** — a normal drawer, not E-track anchored, since 48 lb is well within what the drawer slides already handle and this gear is never used while driving. Within the drawer, the **DELTA 3 Plus sits outboard** (nearest the pull wall — it's what the WAVE 3 actually plugs into, used whether or not the extra battery is along) and the **Smart Extra Battery sits inboard** (grabbed less often, for extra runtime only). The **WAVE 3 portable AC/heater stores in Panel A's LEFT (driver-side) bay as open storage, not a drawer** — it's 20.4" wide, too wide for a boxed drawer's 19" clear interior, but the raw bay (20.75", no box walls to eat into it) fits it with ~0.35" to spare. It rests directly on the bay floor on 2 UHMW glide strips, reached by hand through the driver's side door — Panel A ends up with only one actual drawer (right/DELTA 3), since the left side gave up its drawer to make room for the WAVE 3. For camp use, the unit gets carried to wherever it actually runs (Panel C's tailgate deck or the front seat — see the sleeping-configurations note below); it's storage-only in Panel A, not used in place there.
- **Side-door access isn't confirmed yet.** The side door opening is only an UNVERIFIED ~40" estimate, narrower than Panel A + Panel B's combined 58" drawer run — so only part of that run lands within reach from any one real door position, and whether that favors Panel A or Panel B depends on the door's actual fore-aft position (still unmeasured — see Section 0). This design puts the DELTA 3 stack in **Panel A** since Panel A currently checks out as reachable against the placeholder door estimate, while Panel B comes back **severely limited (only ~3" of overlap)** — functionally blocked by the van's own body structure. **Panel B no longer has its own hinged 2nd access path** (removed along with its top — Section 1/6), so unlike before, there's no fallback if Panel A turns out to be the wrong choice once you measure the real door position: re-check both panels' numbers early, since moving the DELTA 3 stack to Panel B afterward would mean living with that ~3" reach for it, and the WAVE 3's open-storage bay along with it. Both units are charged at camp via shore power or solar — this design does not route van power to either (see Section 5).
- **Why the fridge (and its fan system) now run off the DELTA 3 stack, not the van's rear outlet.** The earlier design kept the fridge on the Sienna's rear 12V accessory outlet specifically to avoid two costs: a long cord run across all 3 module seams, and competing with the WAVE 3 for the DELTA 3's battery budget. This design accepts both costs deliberately, for a concrete reliability win: **the fridge keeps running when people are away from the vehicle, regardless of the van's ignition state** — the original design's whole fridge-on-the-van's-outlet approach had exactly one open risk (many factory 12V outlets cut off with the key out, which would mean the fridge stops cooling every time the van is

parked and locked), and putting the fridge on the DELTA 3 instead makes that risk moot rather than just hoping the outlet turns out to be always-hot. **The real numbers make this hold up:** the DELTA 3 Plus + Smart Extra Battery combined is 2048Wh; the Rocky 40 is rated 60W max / 45W ECO (dual-zone, compressor duty-cycled) — realistically ~450–1050Wh/day depending on mode, partition use, and ambient temp, so a full charge runs the fridge alone for roughly **2 to 4.5 days** unattended, worst case to best case. And recharging is fast: the DELTA 3 Plus's AC input maxes out at 1500W, an almost exact match for the Sienna's front console outlet (**confirmed 1500W**) — a full 0-100% charge takes about 56 minutes, so even a short errand run tops it back off. EcoFlow's DELTA 3 line supports charging and discharging at the same time (running the fridge while AC-charging is normal, it just slows the charge rate somewhat), so there's no need to choose one or the other. **The fan system moves to the DELTA 3 too, not just the fridge** — the fans exist to vent the compressor's heat, so they need to stay available under the exact same conditions the fridge does (parked, people away, ignition off); leaving them on the van's outlet while moving only the fridge would defeat the point. The old rear 12V accessory outlet is simply unused by this design now — free for anything else you'd like to plug in there later. **One real trade-off to plan around:** the front console circuit now has 3 things wanting it (the cooktop, Power strip 1, and the DELTA 3's AC charging, which alone can draw up to the circuit's full 1500W) — see the shared-circuit note in Section 5.

- **Modular lift-out design:** Panel A, Panel B, and Panel C are each built as an independent, self-supporting module — own frame, own 4 legs (the fridge and kitchen unit are bought products with no frame of their own, and aren't lifted out as part of this; the headboard/pantry isn't its own module either — see below). All three now lift straight out and drop straight back in without touching the others (for deep cleaning or reconfiguring — day-to-day storage access is through the drawers/shelves, not by removing a module). With no tops or skirts, each panel is gripped by its exposed 2x2 top rails (no routed hand-holds needed — those were dropped along with the router jig), and anti-rattle bumpers/alignment pins at the A/B and B/C seams keep things fast to install/remove and quiet in transit — see Section 8. The headboard/pantry's shelving superstructure clamps to Panel C with Kipp cam levers — bike-QR-style bolts with a lever at the end: flip 4 base levers + 4 brace levers and it's free, no tools (Component 1) — empty the food side before lifting it. The braces tie into Panel C's own side rails, so Panel B lifts out without touching them.

WAVE 3 sleeping configurations: tent vs. no tent

The WAVE 3 is **stored** in Panel A's left bay either way (see the DELTA 3/WAVE 3 stowage detail, Renders) — these two configurations are about where it gets carried to and set up for actual camp use, and where its hoses vent. Both use the same unit and DELTA 3 stack.

With a tent (tailgate open): carry the WAVE 3 from its Panel A storage bay back toward the tailgate, setting it down on the mattress-covered part of Panel C's deck just forward of the headboard/pantry (the headboard/pantry's own 14" now occupies the tailgate-most strip of Panel C, so the WAVE 3's spot shifted a few inches forward of where it used to sit) — still blowing toward the open tailgate so the shared van+tent air volume gets conditioned together. A cheap non-slip mat under it keeps it from creeping while it runs. Its intake/exhaust hoses route the extra short distance past the headboard/pantry and through the open tailgate gap to true outside air — the open tailgate itself is the path outside, no window seal needed. Power cord runs from the DELTA 3 stack in Panel A's right drawer, the length of Panels A/B/C.

No tent (sleeping in the Sienna alone, tailgate closed): with the tailgate shut for security/weather, there's no gap to vent hoses through and nothing to usefully blow into at the tailgate — so the WAVE 3 instead

moves to the front of the van:

- Move the WAVE 3 forward to the front passenger seat (seatback reclined or folded flat, whichever the unit sits more level on) — the only open seat/floor space once Panels A/B/C fill the rear cargo area. A non-slip mat or a simple bungee strap around the seat frame keeps it from sliding off during setup; it isn't a permanent mount, just an occasional-use position.
- Vent the hoses out a front window using the **EcoFlow WAVE Series Car Vent Kit** — a real EcoFlow accessory, **\$39, officially compatible with both WAVE 2 and WAVE 3**: a 47.2" x 27.6" waterproof, UV-resistant nylon cover that velcros over the window opening (window cracked, not removed) with sealed duct pass-throughs for both hoses. 15-second install, no permanent modification, fully reversible.
- With the front window sealed around the hoses and every other window/door shut, the WAVE 3 conditions the **entire sealed cabin**, not just the back — likely more effective in this configuration than the tent setup, since the whole volume it's blowing into is the one you're sleeping in.
- Power cord routes back to the DELTA 3 stack in Panel A's drawer — roughly the same length run as the induction cooktop's own forward cord (Section 5), just the opposite direction (front seat instead of tailgate). Budget for an extension or a quick-disconnect if the stock WAVE 3 cord doesn't reach.
- **This configuration seals the cabin more tightly than the tent setup, with no open tailgate providing passive fresh-air exchange — the owner-placed low-level CO monitor (see the safety note above; Section 4) matters even more here.** Confirm it's active and audible from the sleeping position before using this configuration, same engine-exhaust-while-idling risk as always, just less passive ventilation to dilute it.

2. Dimensions & Layout

Section	Length	Width	Notes
Headboard/pantry (mounted on Panel C, tailgate end)	14" (of Panel C's own 36")	46"	No frame/legs of its own — clamped to Panel C's deck (4x Kipp cam levers into T-nuts) with 2 steel L-angle sway braces down to Panel C's own side rails, rising 22" above deck level; 3 fixed tiers + an adjustable shelf in the 13" bottom bay, no top (unbolts separately) — full-depth food storage held by fiddle lips + lash straps on every food shelf, an enclosed bed cubby facing the mattress in the middle tier.
Panel A	29"	46"	No top of its own — capped by the one-piece bed frame (Component 2); right (DELTA 3) drawer through the passenger door, left bay is WAVE 3 open storage through the driver door (no drawer box)
Panel B	29"	46"	No top of its own — capped by the same bed frame; no drawers, no divider, no skirts (the side doors don't reach it): a bare 2x2 frame whose bay is deep storage, loaded from above by lifting the platform + mattress
Panel C	36" (22" mattress-covered + 14" headboard/pantry)	46"	Keeps its fixed top (screwed down) — the mattress-covered part only reaches ~22" into it (the headboard/pantry claims the last 14", Section 1), and the fridge/kitchen void underneath needs the enclosure regardless; no drawers
Fridge (BougeRV Rocky 40, in Panel C's void)	28.74" deep (incl. handles)	17.72" wide	15.79" tall — drives <code>leg_height</code> (0.71" spare under the deck); on a 24" heavy-duty slide, against Panel C's driver-side rear corner leg (1.5" in from the edge)
Kitchen unit (JAGAHABA, in Panel C's void)	26" deep (closed)	20" wide	11.8" tall; against Panel C's passenger-side rear corner leg (1.5" in from the edge) — shelves swing out that side; own built-in tailgate slide

Drawer dimensions (Panel A's single right-side DELTA 3 drawer — its left bay is WAVE 3 open storage, and Panel B and Panel C have no drawers):

Drawer dimension	Value	Notes
Travel (pull-out direction)	20"	Matches a standard 20" full-extension slide
Depth (fore-aft)	25"	Fits between the panel's front and back legs
Height	14.5"	Inside the 17" leg-height storage bay, under the removable bed platform (Panel A has no fixed deck of its own)

`leg_height` (17") is driven by the fridge's 15.79" height plus its 1/2" tray, not by the folded 3rd-row well depth. Measure your actual well and confirm 17" clears it before cutting — if your well is shallower, the fridge (and therefore every leg on the platform) still needs the full 17" of standing height regardless, so the platform would simply sit a bit higher off the true floor than the well alone would require.

Walls & skirts, by panel

The panels are open 2x2 frames — plywood skins exist only where something needs one:

Panel	Walls/skirts	Why
Panel A	None	Both bays face the side doors — a skirt would block the only access. Passenger side: DELTA 3 drawer. Driver side: WAVE 3 open bay.
Panel B	None	Nothing to see or reach — it sits under the platform between A and C. Bare frame, deep storage from above.
Panel C — front (B-facing)	The ONE wall: 1/2" ply, 46" x 17"	Mounts the 120mm intake fan, holds the low intake louver, and passes both the fridge DC line and Power strip 1's line (two 1" grommets) — every opening dimensioned in the Panel C Front Wall render.
Panel C — sides	None	The van wall is ~1" away; the exhaust fan still pulls a net flow across the fridge, so side leakage doesn't matter.
Panel C — rear (tailgate)	None needed	Fully occupied already: fridge face + utility-cabinet door + kitchen unit face + kitchen drawer face.

With no tops and no skirts, every panel's top rails are exposed — **grip those to lift a panel out**. The old routed hand-hold holes (and the router jig for them) are gone from the plan.


Component coordinates

Two coordinate conventions, each picked to match how you'd actually stand at the access point in question — full reasoning and diagrams in `fridge_install_detail.scad` / `rear_view.scad`:

- **Panel C** (fridge + kitchen system, AND the headboard/pantry — it mounts on Panel C's deck, sharing this same coordinate frame): origin (0,0) at Panel C's **tailgate-facing left corner**, floor level. X increases right (0-46"), Y increases forward toward the Panel B seam (0-36"). Z increases up from the van floor. The headboard/pantry occupies Y 0-14 (the tailgate-most 14", above deck level) — the SAME Y range the fridge/kitchen's own tailgate-facing ends sit in, just at a different Z height (Z 19.25+ for the headboard/pantry vs. Z 0-16ish for the fridge/kitchen below deck).
- **Panel A, Panel B**: origin (0,0) at that panel's **own front-left corner** (front = toward the front seats). X increases right (0-46"), Y increases toward the tailgate (0 = that panel's own length). Z from the van floor.

(4 is INSIDE the cabinet behind the door — Z in the list. CO monitor + fire extinguisher: owner-placed, not located here)

PANEL C — 46" wide x 36" deep, looking down from above

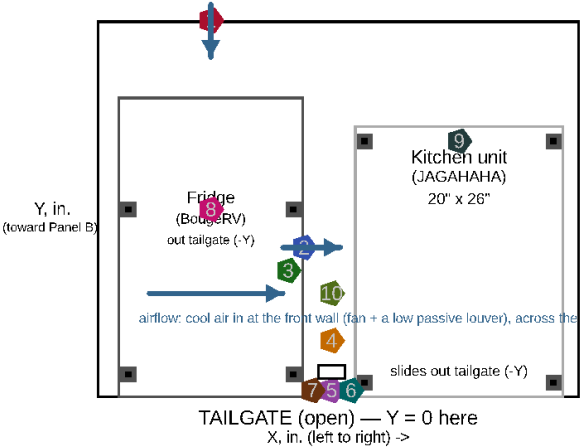

Component
Position / fastener

- 1 Intake fan (120mm) — blows IN
X=10.86 Y=36 (Panel C's FRONT wall) Z=8.4
4x M4x20 machine screws over the wall's fan hole (Front Wall render)
- 2 Exhaust fan (120mm) — blows INTO the cabinet
X=19.72 Y=14.4 Z=8.4
4x M4x20 machine screws, 105mm bolt circle, into a plywood fan ring
- 3 NTC temp sensor
X=18.22 Y=12.2 Z=8.4
adhesive thermal pad or 1x #4 screw through its bracket tab
- 4 Control panel enclosure
X=21.23.8 Y=-2 Z=6.5-12.5 — INSIDE the cabinet
backer board (3/4" offcut) hung from the deck; 4x #8x1" screws
- 5 Cabinet door
X=20.2-24.5 Y=0-1.5
1/2" ply panel, closes the kitchen/fridge gap (not airtight — by design)
- 6 Door hinges (x2)
on the kitchen-side (high-X) edge
2x small butt hinges, 4x #6x5/8" screws each
- 7 Door catch
on the fridge-side (free) edge
1x magnetic or roller catch, 2x #6x5/8" screws
- 8 Fridge slide floor anchors (x4)
E-track, 2 per slide rail, front+back
1000lb WLL each — 2x 5/16" carriage bolts through the floor per anchor
- 9 Kitchen floor anchors (x4)
E-track, one per corner
1000lb WLL each — 2x 5/16" carriage bolts through the floor per anchor
- 10 WAVE 3 hose/cord hook
inside the cabinet, kitchen-side wall
1x heavy-duty wall hook, #8x1.5" screw — stows hoses+cord when not in use

All coordinates measured from Panel C's tailgate-facing left corner, floor level (see file header).
Floor-anchor bolts go THROUGH the van's floor pan — inspect underneath for fuel/brake lines and wiring before drilling any hole (Section 8).

Fridge install detail

Component	Panel	X (in.)	Y (in.)	Z (in.)
Kitchen unit (JAGAHABA)	C	24.5–44.5	0–26	0–11.8
Fridge (BougeRV Rocky 40)	C	2–19.7	0–28.74	0–16.29 (incl. tray)
Intake fan (120mm)	C	10.86 (on the front wall)	~35 (Panel C's front wall)	8.4
Exhaust fan (120mm)	C	19.7 (fridge's kitchen-facing wall)	~14.4	8.4
NTC temp sensor	C	~18.2 (just inside the fridge's exhaust wall)	~12.9	8.4
Control panel (switches, surge protector)	C	21.1–25.1	~2 (just behind the cabinet door)	6.5–12.5 — INSIDE the utility cabinet, on a backer board hung from the deck underside
Power strip 2 (cooktop)	C	~34.5–37.5	~26 (kitchen unit's front face)	~1.5
Right drawer (the only one)	A	23.75–43.75	2–27	0–14.5
Center divider	A	22.25–23.75	1.5–27.5	0–17
Headboard/pantry side panels (x2)	C	0–0.75, 45.25–46	0–14	19.25–41.25
Headboard/pantry full-depth shelves (x2)	C	0–46	0–14 (full depth)	32.25 (bed shelf), 37.25 (upper)
Headboard/pantry base cleats (cam-lever clamp-down, x2)	C	0–46	5.5–8.5	19.25 (shelving floor)
Headboard/pantry sway braces (x2, to Panel C's own side rails)	within Panel C	0.75 & 45.25	headboard side panel → Panel C's side rail at the B/C-seam corner	39.25 down to ~17.75 (~45° diagonal)
Headboard/pantry bed cubby (bed shelf's mattress-facing strip) + nook divider	C	0–46	11.25–14 (cubby 2.75" deep)	cubby surface 33.0 (9" above the mattress top); divider 33.0–37.25 (4.25", enclosed by the upper shelf)
Power strip 1 (relocated, phone/light/Claymore fan)	C	~31	on the bed cubby shelf, Y~11.25-14	~33.8, on the cubby surface

Coordinates for the fixed/structural items (drawers, panels, fridge, kitchen) come directly from `params.scad / platform.scad`'s real geometry. Power strip 1/2 positions are schematic markers in the 2D diagrams (approximate, not separately modeled in the 3D assembly) — confirm exact placement against the real frame once built.

How under-deck storage is accessed, by panel

- **Panel A:** a **center divider** splits its under-deck void in two. The right (passenger) side is the one real drawer on a 20" full-extension slide (the DELTA 3 stack); the left (driver) side is **WAVE 3 open storage** — no box, no slide, the unit rests on 2 glide strips, reached by hand through the driver's side door. Both van side doors are used, both for Panel A only.
- **Panel B: no drawers, no divider** — the side-door openings don't reach it. Its whole bay is deep storage: lift the platform + mattress off and load from above. Use it for the long-term/bulky stuff you don't touch at camp.
- **Panel C:** no drawers at all. Its entire under-deck void is split between the fridge (left/driver side, on its own slide) and the kitchen unit (right/passenger side, on its own slide) — both bought products, both accessed by pulling them out through the **open tailgate**, not a side door. There's no "storage bay" here in the drawer sense; the fridge and kitchen units *are* the storage, permanently installed rather than removable containers. (There's a ~7–10" strip of under-deck space in *front* of the stowed appliances, but it's deliberately **left empty** — it's the intake fan's cool-air plenum, and it's boxed in with poor access, so filling it would choke the fridge cooling. The found-storage additions instead reclaim the dead headroom above the DELTA 3 and WAVE 3, and the utility cabinet's spare volume — see Component 8.)
- None of the 3 panels needs to be lifted out for routine storage access — lifting a panel (gripping its exposed top rails) is only for deep cleaning or reconfiguring, per Section 8. (Panel B's bay is the exception in spirit: loading it means lifting the platform, though never the panel itself.) The headboard/pantry, mounted on Panel C's deck, is the one exception with routine lift-off access: it comes off in a minute (flip the 8 cam levers — no tools) for deep cleaning — day-to-day restocking happens through the open tiers, nothing needs removing.

3. Full Lumber Sizing & Cut List

The fridge and kitchen unit are bought products (Section 4) — **neither needs any plywood or lumber**, which is why this cut list is smaller than it would be if they were built. `render.sh` still generates a top-down/side/rear-view diagram of everything assembled, but the cutting layouts below are given as plain tables rather than bespoke nested-piece diagrams — simpler to keep correct as dimensions change, and just as usable at the saw.

Plywood — 1 sheet 3/4" Baltic birch + 1 sheet 1/2" Baltic birch (or shop-grade), 48"x96" (4x8) each

3/4" ply is for the structural pieces that still need it (Panel C's top, the headboard/pantry's side panels/full-depth shelves/base cleats — it has no top of its own, since it mounts right on Panel C's); 1/2" is for the one drawer box, the fridge's tray, the kitchen drawer, the headboard/pantry's nook divider, and Panel C's front wall — pieces that don't need to be as stiff or as show-quality. **Panel A and Panel B no longer have their own tops at all** (Component 2), the headboard/pantry uses Panel C's, and **Panel B's two drawers are gone** (side doors don't reach it) — dropping the count to one sheet of each:

3/4" sheet 1 — Panel C's top, the headboard/pantry's side panels/full-depth shelves/base cleats, and the kitchen drawer's 2 hanging cheeks, ~90% of the sheet — save the remaining offcut for the control-panel backer board (Section 6):

Piece	Qty	Dimensions
Panel C top	1	36" x 46"
Headboard/pantry side panel	2	14" x 22"
Headboard/pantry FIXED full-depth shelves	2	46" x 14" (3/4", the carcass webs — glued + screwed to the sides)
Headboard/pantry base cleats	2	46" x 3" (plain rip — screwed to the shelving underside; cam levers clamp cleats + deck into T-nuts)
Kitchen drawer hanging cheeks	2	26" x 6.2" (screwed up into Panel C's deck, flanking the drawer)

1/2" sheet 1 — 1 drawer box (Panel A right — Panel A's left bay is WAVE 3 open storage, no box, and Panel B has no drawers at all), the fridge's tray, the kitchen drawer's box, Panel C's front wall, the headboard/pantry's nook divider, and the headboard/pantry's adjustable food shelf (46" x 14"), ~30.5 sq ft of material against ~32 sq ft of usable sheet area — tight, so nest carefully (the bed platform is 1x4 board lumber — Section 4 — not cut from this sheet):

Piece	Qty	Dimensions
Drawer bottom (Panel A right)	1	20" x 25"
Drawer side wall	2	25" x 14.5"
Drawer front/back wall	2	20" x 14.5"
Panel C front wall	1	46" x 17" — 120mm fan hole + two 1" grommet holes, positions in the Panel C Front Wall render
Fridge tray	1	17.72" x 28.74"
Headboard/pantry nook divider	1	46" x 4.25" (middle tier, 2.75" from the mattress face — encloses the cubby)
Headboard/pantry ADJUSTABLE shelf	1	46" x 14" (1/2" ply — rests on 4 pins in the 13" bottom bay; the front fiddle lip stiffens it)
Kitchen drawer box	5 pieces	bottom 16" x 26"; 2 sides 26" x 4"; front/back 15" x 4" (4.5" exterior height)
WAVE 3 glide strips (scrap, not from these sheets)	2	20" x 1", UHMW or laminate offcut

Frame lumber — 2x2 pine (or 1"x1" aluminum L-channel), sold in 8ft (96") lengths

Panel A, Panel B, and Panel C each get their own independent perimeter frame — 2 long rails + 2 end rails sized to that module's own footprint — plus its own 4 legs. No rail is shared between modules, which is what makes each one lift straight out on its own. **The headboard/pantry needs no frame lumber at all** — it mounts directly onto Panel C's already-built frame. The fridge and kitchen unit need no frame lumber either.

Piece	Qty	Cut length	Notes
Panel A long rails	2	29"	
Panel B long rails	2	29"	
Panel C long rails	2	36"	
End rails (all 3 modules)	6	46"	2 per module
Center divider	1	26"	Panel A only — splits its bay into drawer (right) + WAVE 3 (left) runs, see Step 2 diagram. Panel B and C have none.
Legs (all 3 modules)	12	16"	4 per module — cut 1" short; the leveling foot makes each leg an effective 17" (Leg Leveling Foot Detail). Panel C's REAR pair sits at the true corners
Bottom rails (cube frames)	5x 46" + 2x 26"	see notes	underside at 1" (dropped to the leg bottoms): Panel A both END faces (2x46), Panel B all 4 faces (2x46 + 2x26), Panel C FRONT face only (1x46) — 2x 2" screws + glue into each leg

Total linear footage needed: 964" (4@29 + 2@36 + 6@46 + 1@26 + 12@16, plus the cube-frame bottom rails: 5@46 + 2@26). Eleven 8ft (96") boards hold 1,056" — a ~9% margin for kerf and layout waste. **Buy 12 boards** to allow for a mis-cut.

Hardware sizing

Item	Size needed
Drawer slides	1 pair, 20" full-extension — Panel A's right (DELTA 3) drawer, mounted between the drawer box and the frame's long rail / center divider. Panel B has no drawers (side doors don't reach it)
Drawer catches	1, simple friction catch or small turn latch — Panel A's drawer
WAVE 3 glide strips	2, UHMW or laminate scrap, ~20" x 1", glued/screwed to Panel A's left bay floor — cuts friction sliding the unit in/out by hand (no slide hardware there)
Wood screws	1.25" for plywood-to-frame, 2" for frame-to-frame joints
Corner brackets	2" or 3" steel L-brackets, 12 total (4 per module x 3 modules — the headboard/pantry has no frame of its own, no brackets needed)
Cable grommets	1" diameter, 10 needed (2 cooktop line, 3 Power strip 1's own line, 3 fridge DC line, 2 DELTA 3 AC charging line — see Section 5)
Hand-hold holes	REMOVED — with no tops or skirts, every panel's 2x2 top rails are exposed; grip those to lift. (The router jig went with them.)
Anti-rattle bumper strips	2 strips (one at each lift-out seam: A/B, B/C — no separate headboard seam anymore, no fridge/kitchen seam since they're not lift-out modules). Adhesive-backed felt or closed-cell foam weatherstrip
Alignment dowel pins	4 pins (2 per seam x 2 seams), 3/8" dowel rod, ~3/4" long, friction-fit into a matching hole on each module face
Headboard/pantry clamp-down base	2 base cleats 46" x 3" (3/4" ply, screwed to the shelving's underside) + 4x Kipp 1/4-20 cam levers w/ fender washers through the cleats and Panel C's deck into T-nuts underneath — solid, rattle-free, and released tool-free by flipping the levers (bike-QR style)
Headboard/pantry sway braces	2x slotted steel angle (L-profile — resists the compression a flat strap would buckle under), 1-1/2" x 1-1/2" x 1/8" x ~30" — one per side, from high on each side panel (~20" up) forward/down at ~45° to Panel C's OWN side rail, just below the deck at the B/C-seam corner. 2x 1/4-20 per end; nyloc nuts at the top (permanent), Kipp CAM-LEVER nuts at the rail end — bike-QR style, flip to release, no tools. This triangulates the tall unit against fore-aft sway under braking/acceleration, and Panel B lifts out without touching it
Headboard/pantry retention	1.5" front fiddle lip on every food shelf (ripped ply/pine) + ~6 elastic lash straps (one per opening) + 2-3 utensil bins + non-slip shelf liner + 1 soft-goods bungee net (one tier). The fiddle lip is the primary stop against the forward slide braking causes
Headboard/pantry half-round edging	1, 3/4" half-round pine trim, 46" long — glued/pinned along the bed cubby shelf's mattress-facing lip
Panel A/B diagonal corner braces	8 total (2 per panel), steel flat-strap or angle bracket — recovers some of the racking rigidity lost by removing each panel's own top
Leg leveling feet	12 total (4 per panel x 3 panels), 3/8-16 T-nut + leveling glide bolt with a 1.5" floor pad and ~2" star-knob hand grip. Legs are CUT to 16" and drilled in the bottom end grain (1/2" dia x 3/4" deep) — the foot brings each back to an effective 17" (Leg Leveling Foot Detail render). Tip a corner slightly and spin the knob to level

Item	Size needed
Bed platform side rails	2, 58" x 3.5" x 3/4" (1x4 pine), set 52" apart outside-to-outside — the 45" slats pocket-screw between them into one flush 3/4" plane cantilevered 3" past the boxes per side (Bed Platform Detail render); the platform rests directly on Panel A/B's top rails and ends at the B/C seam

4. Bill of Materials (BOM)

Item	Qty	Est. Unit Cost	Est. Total
3/4" Baltic birch plywood, 4x8 sheet (Panel C top + headboard/pantry side panels/full-depth shelves/base cleats + kitchen drawer cheeks)	1	\$65	\$65
Headboard/pantry mounting: 4x Kipp cam levers w/ 1/4-20 studs + fender washers + T-nuts (hold-down), 2x 30" slotted steel angle braces, 4x 1/4-20 bolts + nylocs (brace tops), 4x 1/4-20 studs + Kipp cam-lever NUTS (brace rail ends)	1 set	\$85	\$85
1/2" Baltic birch or shop-grade plywood, 4x8 sheet (Panel A drawer box + fridge tray + kitchen drawer box + Panel C front wall + nook divider)	1	\$50	\$50
2x2 pine (8ft lengths) or aluminum L-channel	12	\$8–15	\$96–180
Panel drawer slides, 20" full-extension (1 pair — Panel A's right/DELTA 3 drawer; Panel B has no drawers, Panel A's left bay has none either)	1 pair	\$16	\$16
Drawer catches (friction catch or small turn latch)	1	\$3	\$3
WAVE 3 glide strips (Panel A's left bay floor, UHMW or laminate scrap)	2	\$3	\$6
Corner brackets (frame joints, 4 per module x 3 modules — headboard/pantry has no frame, no brackets needed)	12	\$1	\$12
Wood screws (1.25" and 2", assorted box)	2 boxes	\$10	\$20
Anti-rattle bumper strip (adhesive felt/foam weatherstrip roll)	1	\$10	\$10
Alignment dowel pins (3/8" dowel rod, cut to 4 pins)	1	\$3	\$3
Headboard/pantry retention + adjustable-shelf hardware — 1.5" fiddle-lip stock (ripped ply/pine, ~7 lips), ~6 elastic lash straps, 4x 5mm shelf pins (+ spares), 2-3 utensil bins, a non-slip shelf-liner roll, + 1 soft-goods bungee net (the adjustable shelf itself is 1/2" ply off the spare sheet)	1 set	\$45	\$45
Headboard/pantry half-round edging (3/4" half-round pine trim, 46")	1	\$7	\$7
Wood glue	1	\$8	\$8
Panel A/B diagonal corner braces (x8, recovers racking rigidity lost with the tops)	8	\$3	\$24
Leg leveling feet — Heavy Duty 3/8-16 furniture levelers w/ T-nut kit, 4-pack (330 lb per foot; buy 3 packs = 12)	3 packs	\$12	\$36
Foot hand-grip knobs — Peachtree 3/8-16 thru-hole star knobs, ~2" dia, 4-pack (1 per foot, jam-locked on the bolt; buy 3 packs = 12) + 12x 3/8-16 jam nuts	3 packs	\$12	\$36
Bed platform lumber — 1x4 x 8ft pine boards (two 58" side rails + ten 45" slats, two per board)	7	\$5	\$35

Item	Qty	Est. Unit Cost	Est. Total
Kitchen drawer slide pair — 24" full-extension side-mount, 100lb class	1	\$16	\$16
Kitchen drawer magnetic catch (box + cheeks come from the plywood sheets' spare area)	1	\$3	\$3
RV bar bubble levels — RV Designer E409 screw-on 2-pack (PITCH on the platform's driver-side rail edge, ROLL on the headboard nook)	1	\$9	\$9
RV leveling blocks, Lynx-style 10-pack + 1 wheel chock (per-site leveling at the WHEELS — see the Block Calculator note, Section 6)	1	\$40	\$40
HEST Dually Long mattress (hest.com/products/dually — 78" x 50" x 4" solid foam, memory-foam top, washable waterproof cover INCLUDED; no air chambers)	1	\$530–590	\$530–590
— Budget fallback: DIY 2-layer foam (queen 4" HD base + 1.5" memory topper, both cut to 50" x 78" with a serrated/electric knife + spray adhesive + a separate waterproof cover) — swaps in for the HEST at ~\$185–255 total	(alt)	(\$185–255)	(\$0 in total below)
Cable grommets (2 cooktop line, 3 Power strip 1's own line — deck + front wall + console end, 3 fridge DC line, 2 DELTA 3 AC charging line)	10	\$6	\$60
16 AWG extension cord (household AC-rated — cooktop to console outlet run, ~8ft)	1	\$15	\$15
16 AWG extension cord (household AC-rated — Power strip 1's own dedicated run, headboard/pantry at the tailgate end straight to the console, ~8ft — now one of the longest lines)	1	\$15	\$15
16 AWG DC cord (automotive/solar SAE-rated — fridge line, DELTA 3 in Panel A back to the fridge in Panel C, ~8ft)	1	\$15	\$15
16 AWG cord (household AC-rated — DELTA 3 AC charging line, front console to Panel A, ~3-4ft)	1	\$8	\$8
Cord clips/channel cover strip	1	\$10	\$10
Inline male/female extension-cord connector pairs (2 for the cooktop line's 2 seams, 2 for Power strip 1's line's 2 seams — AC-rated, only the DELTA 3 charging line crosses no seams, see Section 5)	4	\$8	\$32
SAE quick-disconnect connectors (2 for the fridge DC line's 2 seams — DC-rated, matches the fridge's actual 12V circuit)	2	\$8	\$16
3-way AC outlet splitter (front console — the cooktop, Power strip 1, and the DELTA 3's charging cord are now 3 lines wanting console power, whether there are 1 or 2 physical outlets — see Section 5's shared-circuit note)	1	\$10	\$10

Item	Qty	Est. Unit Cost	Est. Total
BougeRV Rocky 40 (CR04001), 41QT dual-zone (bougerv.com Rocky V3.0 — specs verified against the saved user manual: 28.74" x 17.72" x 15.79", 40.6 lb (18.4 kg), 60W max / 45W ECO, reversible lid, optional B240 battery)	1	\$400–500 (UNVERIFIED — check the live listing)	\$400–500
Heavy-duty 24" full-extension drawer slide pair, 200lb-rated (fridge tray — loaded fridge can realistically hit 60–90lb)	1 pair	\$25–40	\$25–40
JAGAHAHA wooden slide-out camp kitchen , left side, built for a 2-burner stove (confirmed product link — no listed price found in research; treat as an UNVERIFIED estimate until you check the live listing)	1	\$300–350	\$300–350
COOKTRON Portable Induction Cooktop 2 Burner w/ Removable Iron Cast Griddle Pan — confirmed exact product, 18.1"x9.1"x4.3" (fits the JAGAHAHA's 23"x15.7"x5.7" stove tray with margin on every axis); see Section 7 for why the Duxtop 9620LS was dropped	1	\$189.99	\$189.99
120mm 12V fan + PWM temperature controller w/ NTC probe (W1209-style, fridge-bay cooling)	1	\$15–20	\$15–20
Snap-in louvered RV vents — 1 low intake (front wall, cool-air scoop) + 1 low exhaust (cabinet door)	2	\$6	\$12
12V fused distribution block (control panel) — PURCHASED July 2026: Nilight 6-way blade fuse block w/ negative bus, waterproof cover, label stickers, fuse assortment included (no separate ATO fuse pack needed)	1	\$17.98	\$17.98
Illuminated toggle switches (fridge, cooktop, fan — 3)	3	\$5	\$15
Small electrical project enclosure (control panel housing)	1	\$10–15	\$10–15
Claymore V600+ tripod fan (personal comfort, Power Strip 1)	1	\$46	\$46
Snap-Loc E-Track anchors, 1000lb WLL / 3000lb break strength each, bolt-on (4 for the fridge slide + 4 for the kitchen unit — see "Securing heavy components," Section 8; the Sienna's factory cargo hooks are rated for cargo nets only, not this)	8	\$6.99	\$56
5/16" stainless carriage bolts + nuts + fender washers (2 per E-track anchor, through the floor pan)	16	—	\$12
Erickson ratchet straps, 500lb WLL, 1" x 10' (kitchen unit, criss-crossed over the top to the E-track anchors)	1 pack of 4	\$32	\$32
Tension rod + blackout curtain fabric	1	\$40	\$40
Wood sealant/varnish	1	\$20	\$20

Item	Qty	Est. Unit Cost	Est. Total
Sandpaper, misc finishing supplies	—	\$15	\$15
6-outlet power strip, individual switches (Power strip 1 + Power strip 2)	2	\$18	\$36
Cook N Home 10-Piece Stainless Steel Cookware Set — 1qt + 2qt saucepans w/ lids, 3qt casserole w/ lid, 5qt stockpot w/ lid, 10" fry pan w/ lid; 18/10 stainless with an aluminum-encapsulated base (real stainless, not a nonstick coating that scratches/dents), confirmed induction-compatible, dishwasher-safe — swapped in for a cheaper, tougher pick than the marine-grade Magma nesting set (if needed)	1 set	\$65–90	\$65–90
PeaceOut Toyota Sienna Sliding Doors Bug Nets — Sienna-specific, sold as a pair (driver + passenger sliding doors), no-see-um mesh, magnetic + hook-and-loop attachment (temporary, no screws), carry bag included — lets both side doors stay open for ventilation while sleeping without bugs getting in. Real listed price is in CAD; \$ figure here is an approximate USD conversion — confirm current exchange rate before ordering.	1 pair	~\$197 (CAD \$269.99)	~\$197
DELTA 3 drawer hardware: 1x1 pine locating cleats, 2 screw-eye D-rings + cam strap, 1" cable grommet (Panel A right drawer — see Renders)	1 set	\$15	\$15
WAVE 3 hose/cord storage hook, inside the utility cabinet (kitchen-side wall — see Renders)	1	\$4	\$4
Non-slip mat, WAVE 3's point-of-use surface (Panel C's deck or the front seat — not the Panel A storage bay, see Renders)	1	\$12	\$12
FOUND STORAGE — DELTA 3 drawer top tray (reclaims ~3.3" of dead headroom above the DELTA 3 stack: cables, the DELTA 3's own cords, dongles) — shallow lift-out bin	1	\$8	\$8
FOUND STORAGE — WAVE 3 bay overhead shelf (reclaims ~2.9" above the WAVE 3: hoses, remote, flat soft goods; the unit still slides out beneath it) — 1/2" ply on 1x1 cleats, from offcut/scrap	1	\$5	\$5
FOUND STORAGE — utility-cabinet bins (the cabinet's spare volume beside the control panel: dish soap, sponges, utility odds)	2	\$4	\$8
EcoFlow WAVE Series Car Vent Kit — official accessory, WAVE 2/3 compatible, velcro window seal + duct pass-throughs, no permanent modification (no-tent sleeping configuration, Section 1)	1	\$39	\$39
Ling Labs SRS seat emulators, Sienna 2nd row (0651 Round + 6134 Rectangle) — click into the van-side yellow floor plugs when the seats are out so the airbag system reads normally (removal/reinstall procedure: Section 9). Price is an UNVERIFIED estimate — check the live listing	1 set	~\$50–100	~\$50–100

EcoFlow DELTA 3 Plus + Smart Extra Battery and WAVE 3 (already owned, not priced here) — see the DELTA 3/WAVE 3 stowage detail in Renders and Section 1.

Recommended purchase links — slides + electrical (checked July 2026)

- **Cam levers (the bike-QR-style bolt-with-a-lever):** [Kipp 1/4-20 external-thread cam lever, 30mm stud](#) (headboard hold-down, 4x) and [Kipp 1/4-20 internal-thread cam lever](#) (brace-end nuts, 4x) — flip to clamp, flip to release, no tools.
- **Leveling blocks:** [Lynx Levelers 10-pack](#) — the "legos"; pair with the [Sienna Block Calculator](#).
- **Bubble levels:** [RV Designer E409 screw-on bubble level, 2-pack, screws included](#) — the 3/4" body height matches the platform rail's exposed edge exactly. Alternate if you'd rather have 2-axis pucks: [4-pack 2" bullseye levels with mounting holes](#) (these need a horizontal surface — deck corner, not the rail edge).

Specific products verified against this plan's specs, full URLs shown for copy-paste. Quantities refer to what THIS build needs; several listings are multi-packs. The AITRIP W1209 3-pack originally recommended went **Currently unavailable** — the HiLetgo 2-pack below is the same W1209 board with case, in stock. The low-level CO monitor is owner-supplied (battery-powered, see the BOM note above) and deliberately absent here.

Item (plan spec)	Product	Link
Panel drawer slides — only 1 pair needed now (Panel A's right/DELTA 3 drawer; Panel B has no drawers — the side doors don't reach it — and Panel A's left bay is WAVE 3 open storage, Section 1), 20" full-extension, 100 lb class — PURCHASED (July 2026)	GlideRite 20" 100 lb ball-bearing slides, 5-pair pack (\$46.99; 4 spares now — one could serve as the kitchen drawer's pair if you go 20" instead of 24" there)	https://www.amazon.com/20-inch-Extension-Ball-Bearing-Drawer-Over-Travel/dp/B07KFLS2C9
Fridge slide — 1 pair, 24" — PURCHASED (July 2026)	VADANIA #D76 (VD2576) 24" industrial heavy-duty WITH LOCK — 379 lb, 3" (76mm) rail, 3-fold full extension, locks both closed (transit) and extended (loading), 1 pair (\$79.20). The lock is an upgrade over the original non-locking 200 lb spec. INSTALL NOTE: the 76mm rail wants ~3" of flat vertical face — add a 1x3 (or plywood strip) apron along each side of the fridge tray for the inner rail to screw into; the outer rail still bolts to the E-track anchors per the fridge slide detail.	https://www.amazon.com/VADANIA-Industrial-Extension-Bearing-Widening/dp/B08C56Z6GF
Fridge slide, premium alternate	Hettich 24" full-extension, 500 lb (~\$70+)	https://www.amazon.com/Drawer-Slide-Extension-Capacity-Hettich/dp/B0016LEBBG
120mm 12V fans — need 2 (intake + exhaust)	GDSTIME 120mm x 25mm 12V dual-ball-bearing fan, ~\$9 — sold singly, ORDER QTY 2. (The UMLIFE 2-pack link originally here started redirecting to a 60mm 5V USB variant — verify 12V / 120x120x25mm on the spec table before buying any fan listing.)	https://www.amazon.com/GDSTIME-Bearings-Brushless-Cooling-Exhaust/dp/B00N1Y4BMA
W1209 temp controller + NTC probe (need 1; 2nd is a spare)	HiLetgo 2pcs W1209 12V with case + waterproof probe (~\$10)	https://www.amazon.com/HiLetgo-Temperature-Controller-Thermostat-One-Channel/dp/B07VDWRZKB
Fused 12V distribution block — PURCHASED (July 2026)	Nilight 6-way blade fuse block w/ negative bus, waterproof cover, label stickers + fuse assortment included (\$17.98 — replaces the Blue Sea 5025 pick and the separate ATO fuse pack)	https://www.amazon.com/Nilight-Negative-Standard-Waterproof-

		Automotive/dp/B09NPQBXC
Illuminated toggle switches — need 3 — PURCHASED (July 2026)	Ampper 12V 20A illuminated round rockers, 10-pack (\$8.99)	https://www.amazon.com/Illuminated-Rocker-Switches-Ampper-Terminals/dp/B0BZPY5D9L
Control panel enclosure	LMioEtool IP65 hinged ABS junction box, 5.9" x 3.9" x 2.8" (~\$12)	https://www.amazon.com/LMioEtool-Waterproof-Dustproof-Universal-Electrical/dp/B0CJJCKXK3
16 AWG cord run + 2 seam disconnects (cooktop line — corrected: this is a 120V AC household circuit, not 12V DC, so it needs AC-rated cord, not an automotive/solar SAE connector)	DEWENWILS 3ft 16AWG SJTW indoor/outdoor extension cord, ETL listed, 2-pack (~\$13) — buy 2 packs (4 cords) and chain 3 of them in series from the kitchen unit to the console; each male/female plug joint between segments IS the disconnect at that seam, no splicing needed	https://www.amazon.com/DEWENWILS-Extension-Weatherproof-Outdoor-Grounded/dp/B0891VDLV5
16 AWG DC cord run + 2 seam disconnects (fridge line — this one really is 12V DC, DELTA 3 to fridge, so the SAE connector IS the right part here)	OYMSAE 12 ft 16AWG SAE-to-SAE quick-disconnect cables, 2-pack — the SAE plugs ARE the seam disconnects (~\$14)	https://www.amazon.com/OYMSAE-Extension-Disconnect-Connector-Automotive/dp/B0B2JLGJCR
16 AWG cord, ~3-4ft (DELTA 3 AC charging line, front console to Panel A — household AC-rated, no seam crossing)	DEWENWILS 3ft 16AWG SJTW indoor/outdoor extension cord, ETL listed, 2-pack (~\$13) — same product as the cooktop line above, 1 pack covers this with a spare	https://www.amazon.com/DEWENWILS-Extension-Weatherproof-Outdoor-Grounded/dp/B0891VDLV5

3-way AC outlet splitter (front console — cooktop, Power strip 1, and the DELTA 3's charging cord all want console power now)	GE 3-Outlet Extender Wall Tap, 52203, UL listed, 125VAC (~\$6-13)	https://www.amazon.com/GE-Adapter-Grounded-Outlets-52203/dp/B00006IBFC
Leg leveling feet — 12 needed (buy 3 four-packs); 3/8-16 leveling feet WITH T-nut kit, 330 lb per foot	Heavy Duty Furniture Levelers w/ T-Nut Kit, 4-pack (~\$12/pack)	https://www.amazon.com/Furniture-Levelers-Adjustable-Leveling-Cabinets-Sofa/dp/B081ZT4Q4G
Foot hand-grip knobs — 12 needed (buy 3 four-packs), jam-nutted onto each foot bolt as the easy hand grip	Peachtree PW6103 Star Thru-Hole Knob 3/8-16, 4-pack (~\$12/pack) + 8x 3/8-16 jam nuts	https://www.amazon.com/Star-Thru-Hole-Knob-Woodworking/dp/B000UH7Y84
1" cable grommets — need 10 (the 20-pack covers all pass-throughs) — PURCHASED (July 2026)	EASYEAH 1" rubber grommets, 20-pack (\$9.99)	https://www.amazon.com/Diameter-Hole-EF%BC%8CRubber-Synthetic-Protection-Double-Sided/dp/B085S6S6KH
6-outlet power strips, individual switches — need 2	CRST 6-outlet metal strip, individual switches, 1200J (~\$25 each)	https://www.amazon.com/CRST-Individual-Protectors-ECO-Friendly-Protector/dp/B097JH3W3W
Cord clips — ~10-12 along the cooktop cord run	VIPMOON 100x 1/4" R-type nylon screw-mount clamps w/ screws (~\$9) — screw-mount, NOT adhesive: stick-on clips let go under vehicle vibration and temperature swings. Size up to 3/8" if the SAE cable measures over ~0.28"	https://www.amazon.com/VIPMOON-Mounting-Fastener-Electrical-Management/dp/B07HGX83JB


Slides + electrical together run ~\$290-305. These links satisfy the corresponding BOM rows above — don't double-count.

Estimated total (summing the BOM table above): ~\$2,980–3,375 with the fridge + kitchen included, or ~\$2,280–2,525 if you already own equivalents — the owner-supplied CO monitor and fire extinguisher aren't priced here. The itemized BOM table is the authoritative figure; the breakdown below traces where the money goes and how the design's cost evolved. It includes ~\$116 for the bed platform and its leveling — seven 1x4 boards (~\$35), 12 leg leveling feet w/ T-nuts (3 four-packs, ~\$36), 12 star-knob grips + jam nuts (~\$36), and the RV Designer E409 bubble-level 2-pack (~\$9: pitch on the rail edge, roll on the headboard nook); ~\$19 for the kitchen drawer hung above the kitchen unit (slide pair + catch — its box and cheeks come out of the plywood sheets' spare area); ~\$24 for Panel A/B's diagonal corner braces, added to recover some of the racking rigidity lost when their tops came off, ~\$50–100 UNVERIFIED for the Ling Labs SRS seat emulators (Section 9), ~\$43 for Power strip 1's own dedicated cord run (now one of the longest lines, crossing 2 seams — its own ~8ft cord, 2 grommets, and 2 inline connector pairs), and ~\$52 for the headboard/pantry's retention system (fiddle lips, ~6 lash straps, bins, non-slip liner, shelf pins, a soft-goods net) + the adjustable bottom-bay shelf (1/2" ply off the spare sheet) + half-round shelf edging). The July-18 round adds ~\$175: a Lynx-style leveling-block 10-pack + chock (+\$40 — per-site leveling moves to the wheels, driven by the Block Calculator), Kipp cam levers replacing the headboard's hex bolts and wing nuts (+\$60 — tool-free, bike-QR style), three extra 2x2 boards for the cube-frame bottom rails (+\$24 mid-range), a 10th cable grommet (+\$6), two passive louvered cooling vents — a low cool-air intake scoop in the front wall and a low exhaust louver in the cabinet door (+\$12), and a pantry upgrade — an adjustable bottom-bay shelf plus the fiddle-lip/lash-strap/bins/liner retention system replacing the plain net (+\$33 net over the old \$12 net); Panel B losing its drawers entirely (owner-confirmed: the side doors don't reach it — its bay is top-loaded deep storage now) saves ~\$86: two slide pairs, two catches, and a whole 1/2" plywood sheet, less ~\$8 for Panel C's new front wall hardware coming out of that freed sheet. Panel A's left bay going to WAVE 3 open storage instead of a 4th drawer nets out close to a wash: -\$19 (one less drawer slide pair, one less catch, no more plywood tray) offset by the glide strips and a non-slip mat. Moving the fridge and fan system onto the DELTA 3 stack (instead of the van's rear outlet) adds ~\$79: a 2nd cord (fridge DC line, Panel A to Panel C) and its own charging cord (front console to Panel A), the grommets and disconnects both need, and a 3-way splitter now that 3 lines want the console's power instead of 2. Relocating the headboard/pantry onto Panel C's deck instead of its own module saves ~\$20-34: one fewer module's worth of frame lumber (2 fewer 2x2 boards) and corner brackets, since it no longer needs a frame of its own. This is above the old built-from-plywood design's ~\$1,245–1,452 mainly because of three swaps that trade DIY labor (or an inadequate factory feature) for bought reliability: a real BougeRV Rocky 40 + JAGAHABA kitchen (~\$700–850 combined, Rocky price UNVERIFIED) instead of building fridge/kitchen boxes from the same plywood as the panels, the fridge cooling/control electronics (2 fans, controller, sensor, surge protector — new this redesign, ~\$85–120 combined), and real E-track floor anchors + rated straps (~\$100) replacing the factory cargo hooks once those turned out to be rated for cargo nets only, not securing a 45-90lb item. The mattress is now a bought HEST Dually Long (~\$530–590, cover included) — the DIY 2-layer fallback (~\$185–255) stays in the BOM as the budget swap. The plywood total dropped to ~\$115 across 2 sheets (one 3/4", one 1/2") now that Panel A and B have no tops, Panel B has no drawers, and the headboard/pantry uses Panel C's top — down from 4 sheets earlier in this redesign.

5. Power Cord Routing

Every purchased electrical component at its real position — icon-based top-down layout, the control-cluster mounting elevation, and the fan installation detail (screw pattern + airflow direction):


ELECTRICAL LAYOUT — top-down (front of van at bottom, tailgate at top)

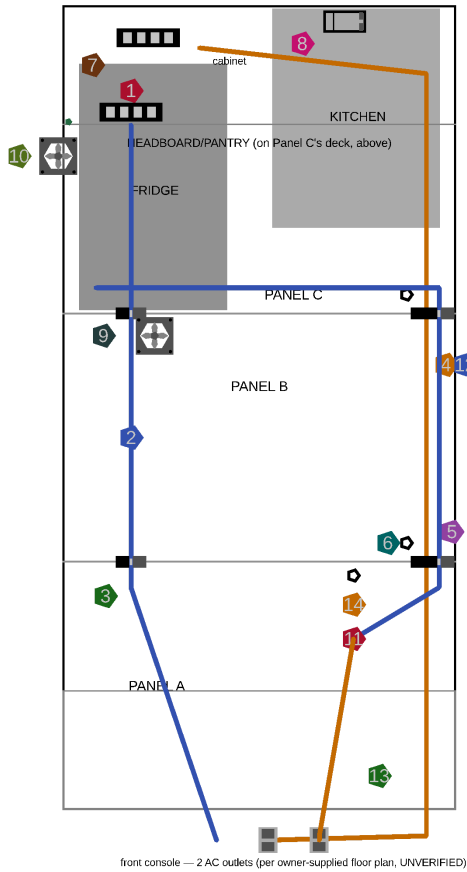

Legend

- 1 Power strip 1 — in the headboard's bed cubby (phone/light/Claymore fan)
- 2 Power strip 1's OWN dedicated cord — headboard/pantry (Panel C's tailgate end) down to the front console
- 3 Inline connector pairs — Power strip 1's line, one at each of the 2 seams it now crosses (C->B, B->A)
- 4 Cooktop cord run — 16AWG SAE cable, along the right frame rail, its own dedicated line
- 5 SAE quick-disconnects — cooktop line, one at each seam it crosses
- 6 1" grommets — cooktop line pass-throughs through the end rails
- 7 Power strip 2 — ON the slide-out kitchen unit (cooktop); cord has slack for the slide
- 8 Control enclosure — inside the cabinet, behind its door (Section 2 below)
- 9 Intake fan 120mm — on Panel C's FRONT wall, over the fridge's B-facing end
- 10 Exhaust fan 120mm (into cabinet) + NTC probe (inside the bay at that wall, in the hot exhaust)
- 11 Fridge DC line — DELTA 3 (Panel A) forward to the fridge (Panel C), own dedicated run
- 12 SAE quick-disconnects — fridge DC line, one at each seam it crosses
- 13 DELTA 3 AC charging cord — front console (1500W, verified) back to Panel A's drawer
- 14 DELTA 3 drawer grommet — WAVE 3 charge cable exit (see stowage detail)

CONTROL CLUSTER — inside the cabinet on its backer board, elevation (looking forward from tailgate)



- A LMioEtool enclosure — 4x #8 x 1" screws through its mounting ears into the wall
- B W1209 controller (in its case) — NTC probe wire exits the bottom grommet, runs to the fridge's kitchen-facing wall (Section 3)
- C Nilight 6-way fuse block — feed from the DELTA 3's DC output (Panel A); fans + W1209 each get their own fused circuit (5A is plenty)
- D 3x Ampere switches (fridge / cooktop strip / fans) — 20mm holes in the enclosure face, switches snap in from the front

FAN MOUNTING — face-on, both fans identical hardware



Cut a 4.5" round hole (or 4.5" square) in the wall; fan mounts over it with 4x #8 x 1-1/4" screws through the corner holes. Grill goes on the AIR ENTRY side. Arrow on the fan's side frame shows its blow direction — point it per the labels above. Wiring: both fans in parallel off the W1209 relay (Section 5 wiring schematic).

Electrical layout

The fridge (and its fan system) now runs off the DELTA 3 stack, not the van's rear outlet — see the "Why the fridge and fan system now run off the DELTA 3 stack" note in Section 1 for the full reasoning (reliability while people are away from the vehicle, backed by real runtime/recharge numbers). This does mean the fridge needs a cord after all, unlike the previous design's direct-plug simplification — a DC line from the DELTA 3 (Panel A's right drawer) forward to the fridge (Panel C), crossing the same 2 module seams the cooktop's cord does. The Sienna's rear 12V accessory outlet is simply unused now — nothing in this design plugs into it, so it's free for anything else later.

Four cords need routing in total, each on its own independent line — none of them share a run:

Cooktop line (Power strip 2 → front console)

From the kitchen unit forward to the front console AC outlet — this is a full 120V AC household circuit (the induction cooktop draws real wattage, not a low-voltage DC load), so it uses a proper household-rated extension cord, not an automotive/solar DC connector. Because Panel A, Panel B, and Panel C are still independent lift-out modules, the cord crosses a seam at each of the two remaining module boundaries (Panel C → Panel B, Panel B → Panel A) on its way forward. Each crossing gets an inline male/female extension-cord connector pair (the AC-rated equivalent of a quick-disconnect) so any single panel lifts out without cutting or re-threading the cord. See the [Step 8 diagram](#).

Power strip 2 rides the slide-out kitchen unit so it travels to wherever you're actually cooking — the JAGAHABA extends to ~70" out the tailgate in use. Mount the strip on the unit itself, and leave a **slack loop** of cord (a coil or a short cord reel near the kitchen's stowed position) that pays out as the unit slides — size it to the unit's full extension so the cooktop keeps power at the cook position without straining the connector at the first seam.

1. Drill a 1" grommet hole in the frame rail at the kitchen unit's corner post nearest the cord's exit path.
2. Route a channel: either dado a 3/4"-wide, 1/2"-deep groove along the inside face of one long side rail, or simply zip-tie the cord along the rail's inner face under a cord-clip cover strip — no routing tools needed if you skip the dado.
3. At each of the 2 remaining seams the cord crosses (Panel C → Panel B, Panel B → Panel A), splice in an inline male/female extension-cord connector pair so the cord separates cleanly when that panel is lifted out.
4. Run the cord from the kitchen unit, along the channel, forward to a grommet hole near Panel A's front edge (flush with the front seatbacks, closest to the front seats — no open floor gap to cross anymore, Section 1).
5. From there, route the cord along the van floor track (under the edge of the deck, not through it) forward to the front console AC outlet.
6. Leave 12-18" of slack coiled near the kitchen unit so it can be pulled slightly forward on its own slide for use without disconnecting.

Power strip 1 line (Headboard/pantry → front console) — the long way now

The first leg is drawn in crimson on the Headboard Elevations (right-side view): from the strip on the bed cubby shelf, the cord is cable-clipped down the passenger side panel's inner face, exits through a 1" grommet in Panel C's deck at the headboard's back corner, crosses under the deck, and leaves Panel C

through the front wall's UPPER grommet (3" in from the driver edge, 5.5" up — the fridge DC line uses the lower one). From there it runs the floor channel forward.

Power strip 1 (phone/device charging, reading light, the Claymore fan) mounts in the **headboard/pantry's bed cubby** (Component 1) — the enclosed middle-band nook, which sits at the **tailgate end of Panel C**, not the front. This flips Power strip 1's cord from the simplest line in the design to one of the longest: it now runs the full length of the platform, crossing the same 2 seams (Panel C → Panel B, Panel B → Panel A) the cooktop and fridge DC lines do. Like the cooktop line, this is a 120V AC cord — household-rated extension cord, not a DC connector.

1. Drill a 1" grommet hole in Panel C's frame rail near the headboard/pantry's mattress-facing edge, where the cord exits toward the mattress-covered part of the deck.
2. Route the cord forward along the same rail-channel approach as the cooktop and fridge DC lines (its own dedicated run, not sharing their channel) — a dado groove or a zip-tied cord under a clip-cover strip.
3. At each of the 2 seams the cord crosses (Panel C → Panel B, Panel B → Panel A), splice in an inline male/female extension-cord connector pair, same as the cooktop line.
4. Continue forward to a grommet hole near the front of the platform, then along the van floor track to the front console AC outlet.
5. Leave about a foot of slack coiled where the cord exits the shelving superstructure — that's the only place this cord needs any give, so unbolting the shelving from Panel C (Component 1) never requires unplugging anything.
6. Terminate at the front console's 2nd AC outlet if one exists (see below); if there's only one physical outlet, this cord, the cooktop's, and the DELTA 3's charging cord all land on it through a splitter at the plug end (see the shared-circuit note below) — the lines stay electrically independent all the way back to that point, so this doesn't reintroduce the old shared-line limitation, it just means the console's total wattage budget is now the shared constraint instead of an in-line splice.

Fridge DC line (DELTA 3 → Panel C fridge bay)

The fridge's DC line runs from the DELTA 3 Plus's DC output (Panel A's right drawer) back toward the tailgate, through Panel B, into Panel C's fridge bay. Unlike the cooktop and Power strip 1's lines, this one really is 12V DC, so an automotive/solar SAE quick-disconnect is the right connector type here. Like the cooktop's line, it crosses the same 2 remaining module seams (Panel A → Panel B, Panel B → Panel C), so it needs its own quick-disconnects too. This is the trade-off Section 1 already flagged: reintroducing a long cord run in exchange for the fridge no longer depending on the van's ignition state.

1. Drill a 1" grommet hole in Panel A's frame rail near the DELTA 3 drawer, and one more at each of the 2 seams it crosses (Panel A → B, Panel B → C) — 3 total, reusing the same rail-channel approach as the cooktop line (a dado groove or a zip-tied cord under a clip-cover strip both work).
2. Install a quick-disconnect connector at each of the 2 seams so Panel A and Panel B still lift out independently.
3. Terminate the cord at the fridge's DC input inside Panel C's void, near the control enclosure (Component 7).
4. Leave a few inches of slack at the DELTA 3 end so opening/closing that drawer doesn't strain the connection.

The fan system's own wiring (fuse/switch/PWM controller/fans, Section 1) taps off this same DELTA 3 source rather than a separate line — see the fridge wiring schematic in Renders.

DELTA 3 AC charging line (front console → Panel A drawer)

A second, independent cord charges the DELTA 3 stack itself from the front console's AC outlet while driving — this is what makes the fridge's long runtime (Section 1) actually sustainable trip after trip, instead of draining down with no way to recharge until you're back home. Like the cooktop and Power strip 1's lines, this is a 120V AC household cord (charging the DELTA 3's AC input), not a DC connector. Panel A is now the module closest to the front seats (the headboard/pantry moved to the opposite end, onto Panel C — Section 1), so this cord **crosses zero panel seams**, just a short run through the open floor gap in front of Panel A.

1. Drill a 1" grommet hole in Panel A's front end rail, near the DELTA 3 drawer.
2. Run the cord forward, through the open floor gap (nothing built there — Section 1), to a grommet hole near the front of the platform.
3. Continue along the van floor track to the front console AC outlet — same routing as the other two forward-running lines.
4. Leave enough slack at the Panel A end that pulling the DELTA 3 drawer open doesn't strain the connection.

Front console outlet count is UNVERIFIED. An owner-supplied reference floor plan shows 2 separate 110V AC outlets at the center console (plus a 3rd near the rear cargo area, which this design doesn't use). Confirm the actual count and position against the real van (Section 0) before cutting the grommet holes for any of the 3 AC lines that terminate there.

Note on power source: confirm your Sienna trim actually has a household 120V AC outlet in the front console (common on Hybrid/XLE trims) before planning either route — if yours doesn't, the cooktop needs a portable power station instead (Section 7).

Shared-circuit wattage: 3 AC lines now want the console's power, and the DELTA 3 alone can ask for all of it. The console outlet is confirmed at 1500W — a duplex outlet's 2 sockets are typically the same underlying circuit, not independent budgets, so whichever socket the DELTA 3 charges from, its AC input (up to 1500W at full X-Stream speed) can consume the circuit's entire rated capacity by itself. Running the induction cooktop at the same time you're fast-charging the DELTA 3 could oversubscribe the circuit. In practice this rarely collides — cooktop use happens at camp with the engine off, DELTA 3 charging is most useful while driving — but if you ever want both at once (e.g., cooking during a highway rest stop with the engine idling), cap the DELTA 3's AC charge rate in its app (EcoFlow lets you limit input wattage) to leave headroom for the cooktop, rather than relying on not noticing a tripped breaker.

The WAVE 3 is the one thing still fully self-contained. It draws from the DELTA 3 Plus (in Panel A's drawer) via its own charge cable, and isn't wired to any van circuit at all.

6. Illustrated Build Manual — By Component

Everything from Sections 3-4 reorganized around **10 self-contained components**, in the order you'd actually build them. Each component lists its parts, then walks through numbered steps in instruction-manual format: **the new parts for that step on the left, an exploded assembly view showing how they go in on the right** — drawn as woodworking-plan line art (white parts, black edges, letter labels keyed to the parts list, arrows showing insertion direction). Every piece dimension traces back to the cut list (Section 3) and every hardware item to the BOM (Section 4). Panels A and B share identical frame/divider/drawer construction, so those steps intentionally reuse the same diagrams in both components.

Cut every piece for every component up front, per Section 3's cut list, before starting Component 1 — sand all edges once cut.

Component 1: Headboard/Pantry



No longer its own module — no frame, no legs, no top of its own. This is a shelving superstructure, **clamped down to Panel C's already-built deck** with cam levers (Component 4) and braced against driving sway by 2 steel L-angle braces tied into Panel C's own side rails, occupying the last 14" of Panel C's own 36" length, at the tailgate end right next to the fridge/kitchen void. **3 fixed tiers + an adjustable shelf, no full-height divider, no top**: two full-depth (14") shelves — the bed shelf at 13" above the deck and the upper shelf at 18" — split the 22" height into 3 tiers. The tall bottom tier and the top tier are full-depth food storage, held by the fiddle-lip + lash-strap retention system (below). The middle tier, between the two shelves, is split by a 4.25" nook divider into an enclosed 2.75"-deep bed cubby facing the mattress (floored by the bed shelf at 9" above the mattress top, ceilinged by the upper shelf, with the half-round edging lip, Power strip 1, and the roll bubble level in it) and a 10.5"-deep food tier facing the kitchen. The 13" bottom bay carries an **adjustable shelf on pins** (one tall bay or two ~6" tiers), and every food shelf gets the **fiddle-lip + lash-strap + bins + liner** retention system. It comes off Panel C by flipping 4 base cam levers and the 4 sway-brace cam levers at the rail ends (8 total) — under a minute, no tools — so its own 22" height clears the liftgate opening on its own. Build Panel C (Component 4) first — this component's context is Panel C's own finished frame and top. See the Headboard Storage Detail render for the full dimensioned elevations.

Parts needed:

- Headboard/pantry side panels — 2, 14" x 22", 3/4" ply
- Headboard/pantry full-depth shelves — 2, 46" x 14", 3/4" ply (the carcass webs — there is no full-height divider and no top)
- Headboard/pantry base cleats — 2, 46" x 3", 3/4" ply (plain rip, screwed to the shelving underside)
- Clamp-down hardware — 4x Kipp cam levers (1/4-20 x 30mm stud) + fender washers + T-nuts (through the base cleats + Panel C's deck — flip to release, no tools)
- Sway braces — 2x slotted steel angle (L-profile), 1-1/2" x 1-1/2" x 1/8" x ~30", bolted at every end: 2x 1/4-20 + nylocs per top end, 2x 1/4-20 studs + Kipp cam-lever nuts per rail end — Sway Brace Detail render
- Headboard/pantry nook divider — 1, 46" x 4.25", 1/2" ply (middle tier — spans bed shelf to upper shelf, enclosing the cubby)

- Headboard/pantry ADJUSTABLE shelf — 1, 46" x 14", 1/2" ply (bottom bay, on pins) + 4x 5mm shelf pins (+ spares)
- Fiddle lips — ~7, 1.5" x 44.5", ripped ply/pine (one per food-shelf front edge, both faces)
- Retention — ~6 elastic lash straps (one across each tier opening) + 2-3 utensil bins + a non-slip shelf-liner roll + 1 soft-goods bungee net (one tier)
- RV bar bubble level — 1 (the ROLL half of the E409 2-pack; the PITCH one goes on the bed platform, Component 2)
- Half-round edging — 1, 3/4" half-round pine trim, 46"
- Power strip 1 + its own dedicated cord run (Component 6)
- Wood screws (1.25" ply-to-ply), wood glue


1

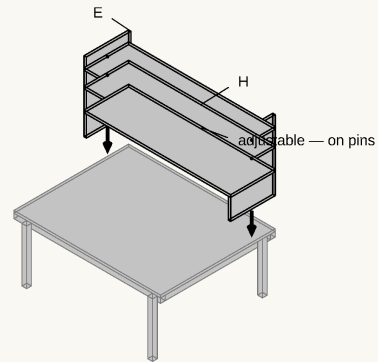

2 FIXED shelves = the structure (glued + screwed). The 3rd shelf is ADJUSTABLE on pins in the 13" bottom bay — one tall bay OR two ~6" tiers.


Build the shelving carcass as its own separate assembly, positioned over the tailgate end of Panel C's deck (shown here in context, but not yet fastened to it): 2 side panels (E) + the 2 FIXED full-depth shelves (H) glued and screwed in at 13" (the bed shelf) and 18" (the upper shelf) (2" screws, 2 per shelf end). Before assembly, drill a 5mm shelf-pin column up each side panel through the bottom bay (3"-11" on center) and cut the 3rd, ADJUSTABLE shelf — it drops onto 4 pins so the 13" bottom bay runs as one tall bay or two ~6" tiers. The two fixed shelves ARE the structure — no full-height divider, no top, both faces open.

2




clamped down: 4x 1/4-20 Kipp CAM LEVERS into T-nuts through the deck — flip to release, no tools; 2 L-angle braces to Panel C's side rails at ~45 deg.

Screw the 2 base cleats (G) flat to the shelving shell's underside, set the shell in place at the deck's tailgate end, and clamp down through the cleats and Panel C's 3/4" deck: 4x Kipp cam levers (1/4-20 studs) with fender washers into T-nuts hammered in from below — flip the levers to lock, flip to release, no tools (the bike-QR-style hardware). Then run the 2 L-angle sway braces from high on each side panel (~20" up) forward and down at ~45° to Panel C's OWN side rails, just below the deck at the B/C-seam corner — every connection BOLTED: 2x 1/4-20 + nyloc nuts at each top end (permanent), 2x 1/4-20 studs + Kipp cam-lever nuts at each rail end (Sway Brace Detail render). The bolts carry the vertical load; the braces triangulate the tall unit against fore-aft rocking under braking, and because both ends land on Panel C, Panel B lifts out without touching them. Empty the food side before ever unbolting it.



3




nook divider (F) at 2.75" from the bed face, MIDDLE tier. Then RETENTION: a fiddle lip (K) on every food shelf's front edge (both faces) + an elastic lash strap (L) across each opening + bins for utensils + non-slip liner. The lip stops the forward slide braking causes; a net stays only on the soft-goods tier.

Drop the 4.25" nook divider (F) into the middle tier, 2.75" from the mattress face — it spans from the bed shelf up to the upper shelf, screwed into both shelves and both side panels, enclosing the bed cubby. Then fit the RETENTION: glue/pin a 1.5" fiddle lip (K) along every food shelf's front edge (both faces — that lip is what stops the forward slide braking causes), run an elastic lash strap (L) across each tier opening for the taller items, lay non-slip liner under everything, and stand utensils/small items in bins so they can't slip out. Keep a bungee net on just one tier for soft goods (bread/chips/produce).

4

3/4" half-round pine trim, 44.5"
+ Power strip 1 (own cord run, Component 6)
+ 1x RV bar bubble level (from the 2-pack — its twin is on the bed platform rail)

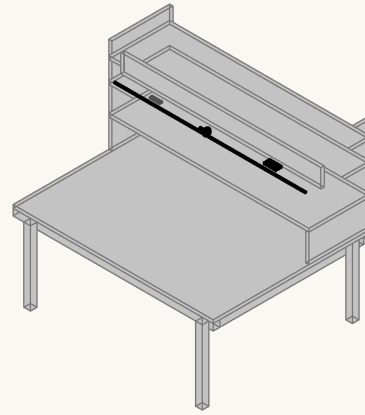

fit out the bed cubby (bed shelf, mattress side): half-round lip glued + pinned, Power strip 1, and the ROLL bubble level — read it from the bed or side door while turning the leg-foot knobs; the PITCH level lives on the platform's driver-side rail edge.

Fit out the bed cubby — the bed shelf's mattress-facing 2.75", its surface 9" above the mattress top, a comfortable reach while lying down. Glue/pin half-round edging along the shelf's front lip, mount Power strip 1 in the cubby (Component 6 for its dedicated cord run), and screw the ROLL bubble level beside it — read it from the bed or side door while turning the leg-foot knobs.

Component 2: Panel A & Bed Platform



Panel A and Panel B share the same frame construction — neither has a top of its own anymore; the one-piece slatted bed frame caps both at once (see Steps 6-7 below, and the Bed Frame Detail render). They diverge at the drawers: **Panel A's left (driver-side) bay is WAVE 3 open storage, not a drawer** — the WAVE 3 (20.4" wide) is too wide for a boxed drawer's 19" clear interior, so it rests directly on the bay floor instead, reached by hand through the driver's side door. Panel A ends up with only ONE actual drawer (right side, DELTA 3).

Parts needed:

- Long rails — 2, 29" cut, 2x2 pine
- End rails — 2, 46" cut, 2x2 pine
- Legs — 4, cut to 16", 2x2 pine (1.5" x 1.5" actual — plenty for this load); the leveling foot brings each back to an effective 17"
- Leg leveling feet — 4 (3/8-16 T-nut in the leg's bottom end grain + glide bolt + 2" star knob jam-locked on the shaft), one per leg (Leg Leveling Foot Detail render)
- Bottom rails — 2, 46" cut, 2x2 pine (END faces only — the side faces stay open for the drawer/WAVE 3)
- Center divider — 1, 26" cut, 2x2 pine
- Corner brackets — 4
- Diagonal corner braces — 2 (recovers racking rigidity lost without a top)
- Drawer box — 1 (right/DELTA 3 side only), 5 pieces: bottom 20"x25", 2 side walls 25"x14.5", 2 front/back walls 20"x14.5", all 1/2" ply
- Drawer slide — 1 pair, 20" full-extension
- Drawer catch — 1, friction catch or small turn latch

- DELTA 3 drawer hardware (right drawer) — 1x1 pine locating cleats, 2 screw-eye D-rings + cam strap, 1" cable grommet
- WAVE 3 glide strips (left bay floor) — 2, UHMW or laminate scrap, cuts friction sliding the unit in/out by hand
- Bed platform lumber — seven 1x4 x 8ft pine boards: two 58" side rails + ten 45" slats, two per board (Bed Platform Detail render)
- RV bar bubble levels — 1x 2-pack (RV Designer E409, screws included): PITCH one mounts here, ROLL one goes to the headboard nook (Component 1)



1



K: bottom rails (2x2, underside at 1") close the frame into a box — both end faces only (drawer + WAVE 3 exit the sides)



Build the frame: 2 side rails (B) + 2 end rails (A) joined with corner brackets and 2" screws, then the 4 legs (C) — CUT to 16", drilled in the bottom end grain (1/2" dia x 3/4" deep, centered) for a 3/8-16 threaded insert, so the leveling foot brings each leg back to an effective 17" (Leg Leveling Foot Detail render). Much easier to drill before assembly. Legs inset 2.5" from the deck's side edges to clear the floor-level vent intrusion. Then close the bottom: 2 END-face bottom rails (K, 46", underside 1" up at the leg bottoms — Panel A's SIDE faces stay open so the drawer and WAVE 3 can exit) plus 2 diagonal corner braces up top — the part-cube racks far less than rails + brackets alone. (Panel B's frame differs only at the bottom rails: it closes all 4 faces.)

2

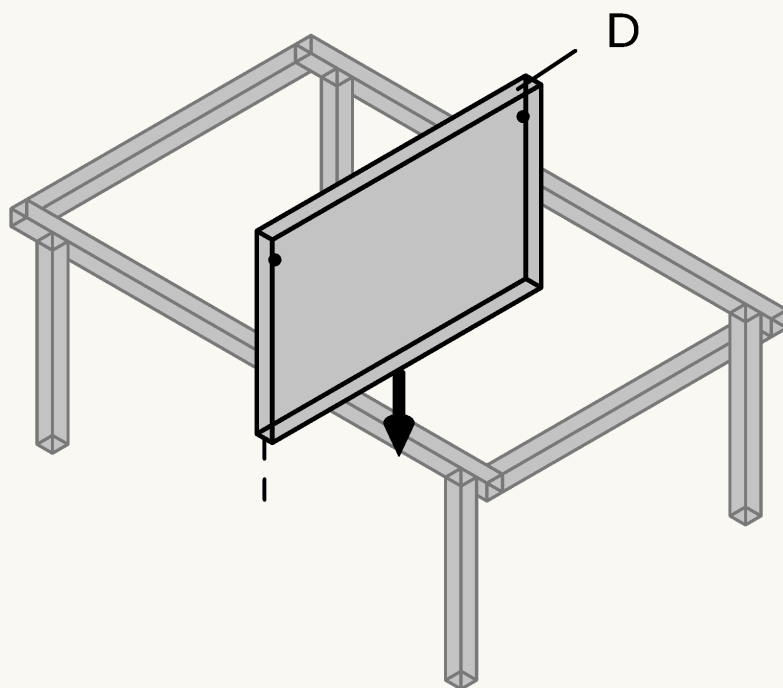

Drop the center divider (D) into the bay, centered on the panel's width — it splits the void into a left and right bay and carries one side of the right bay's drawer slide.

3

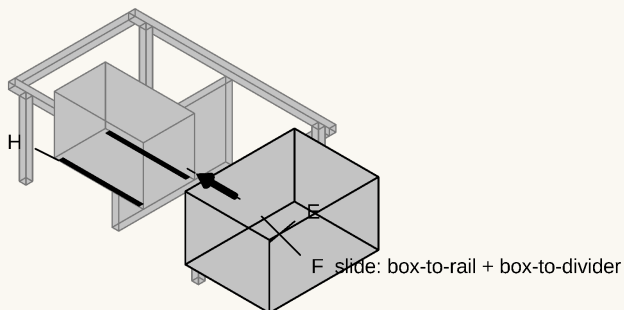


Left bay: WAVE 3 open storage (shown in place for reference) — no box, no slide

Build the right (DELTA 3) drawer box (E, 5 pieces, open top) and slide it onto its pair of 20" full-extension slides (F) — one slide side on the frame's outer rail, the other on the center divider. Add a catch (G) so it doesn't slide open in transit. On the LEFT bay, skip the drawer entirely: glue/screw down the 2 glide strips (H) along the floor instead — that's the WAVE 3's storage spot (Component 8).

DELTA 3 drawer hardware (parts list above): pine cleats, 2 D-rings + cam strap, 1" grommet

PANEL A — RIGHT DRAWER (top-down) EcoFlow DELTA 3 Plus + Extra Battery, stowed



clear interior 19" x 24"

Y: to Panel C/tailgate <-
X: divider -> outer (pull)


Combined 15.95" wide
drawer clear width 19"

Component

- 1** Position / fastener
DELTA 3 Plus (main unit)
7.95" x 15.7" x 11.16", ~28 lb
outboard (pull wall) — WAVE 3 plugs into this always
- 2** Smart Extra Battery
8" x 15.7" x 7.8", ~20 lb
inboard — grabbed less often, extra runtime only
- 3** Locating cleats (x4)
1x1 pine blocking, drawer floor
glued + screwed — #6 x 1" screws
- 4** Vent slots (x5)
1" x 0.5" slots, outer wall
lets cooling fans breathe if run while closed
- 5** Cam-strap anchors (x2)
screw-eye D-rings, divider + outer wall
#8 x 1" screws, strap over both units
- 6** Cable pass-through
1" grommet, Y=0 tailgate-facing wall
WAVE 3 cord exits here toward the tray below

PANEL A — LEFT (DRIVER-SIDE) BAY (top-down)

EcoFlow WAVE 3 — open storage, no box or slide



0.35" clear

raw bay 20.75" x 25" (no box walls to eat into it)



Y: Panel B/tailgate <-
X: divider -> outer (driver door)

Clearance is tight: 0.35in on the pull side — a boxed drawer (19in clear) would NOT fit; this raw bay does, which is why this is open storage, not a normal drawer like Panel A's right side.
Storage-only: for camp use, carry the unit to Panel C's tailgate deck (tent) or the front seat (no tent) — see the sleeping-configurations note, Section 1.
Hoses + cord stow on a hook inside the utility cabinet (between fridge + kitchen) when not in use.

Component

- 7** Position / fastener
WAVE 3 unit
20.4" x 11.7" x 13.2", 33.7 lb
rests directly on the bay floor — no box, no slide
- 8** Bay opening
20.75" x 25" raw void
reached through the driver's side door
- 9** Glide strips (x2)
UHMW or laminate scrap, full bay depth
cuts friction sliding the unit in/out by hand

FOUND STORAGE — dead headroom reclaimed (side sections)




DELTA 3 drawer: 14.5" tall, unit 11.16" -> ~3.3" of dead air on top = a cable/cooler tray
WAVE 3 bay: 17" tall, unit 13.2" -> ~3.8" of dead air above = a shelf on cleats (unit slides out under it)

In the right drawer, add the DELTA 3 fixtures: locating cleats glued/screwed to the drawer floor, D-rings + cam strap to hold the stack down in transit, and a cable grommet for the WAVE 3's charge cable. DELTA 3 Plus outboard (pull wall), Smart Extra Battery inboard — see Component 8.

5

seven 1x4 boards: 2 rails + 10 slats + pocket screws (parts list above)

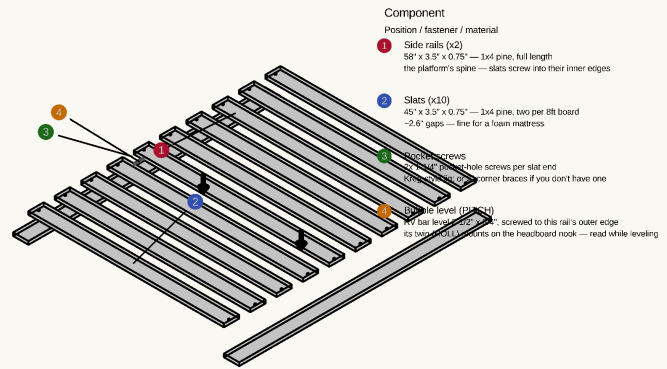


BED PLATFORM — flush ladder, exploded (Component 2, 58" x 52", 10 slats, 0.75" thick total)

One 3/4" plane: slats sit BETWEEN the two full-length side rails, pocket-screwed — no battens below, nothing above.
Rests DIRECTLY on Panel A/B's top rails and ENDS at the B/C seam, flush with Panel C's deck (the mattress's last ~20" rides that deck).

Cut two 58" side rails and ten 45" slats from seven 1x4 x 8ft pine boards (slats two per board; rails one per board). Lay the rails on edge-guides 52" apart outside-to-outside, space the slats evenly between them (~2.6" gaps), and pocket-screw each slat end into the rails' inner edges (2x 1-1/4" pocket screws per end; 2" corner braces work if you don't have a pocket-hole jig). Everything sits in one flush 3/4" plane that ENDS at the B/C seam — Panel C's own deck is at the same height, so the sleeping surface stays flush and the mattress's last ~20" rides that deck. The platform adds only 3/4" to the stack. Last, screw one RV bar bubble level to the driver-side rail's outer edge at mid-span (the 3/4" face fits it exactly) — it reads fore-aft PITCH from the slider door while you turn the leg-foot knobs; its twin reads ROLL from the headboard nook (Component 1).

6

no new parts — the assembled platform from Step 5 (leveling feet already on the legs, Step 1)

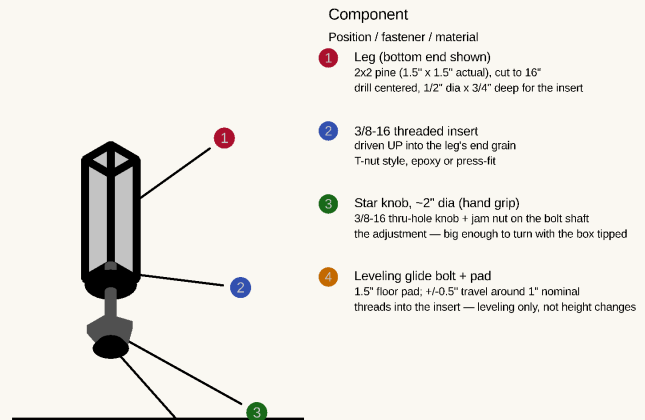

LEG LEVELING FOOT — shown 3x actual size (12 total: 4 per panel x 3 panels)

Legs are CUT to 16" — the foot makes up the last 1", keeping the effective 17" leg height.

To level: kneel at the side door, tip that corner of the box slightly, spin the star knob. Every leg is exposed at floor level — nothing boxes it in. The platform above rests DIRECTLY on the box rails (no adjusters up top anymore).

Set the finished platform down directly on Panel A + B's top rails and Panel C's mattress zone, centered so it overhangs the boxes 3" per side — nothing fastens it, it rests there and lifts straight off for drawer-bay access (it enters/exits the van tilted diagonally through the liftgate). Then LEVEL the boxes at the floor: with a level on the platform, tip each box corner slightly and spin that leg's star-knob foot until the bubble centers along both axes. Re-check after the van is parked on level ground.



Component 3: Panel B

Same frame construction as Panel A — and that's the whole build. **Panel B has no drawers, no divider, and no skirts:** the sliding-door openings sit over Panel A's footprint, not Panel B's (owner-confirmed), so nothing pulled sideways from this panel could ever clear a door. Its bay is deep storage instead — lift the platform + mattress and load it from above with the long-term/bulky things you don't touch at camp. The Panel B detail render dimensions **every hole in the panel:** the 4 leg-bottom leveling-insert holes (1/2" dia x 3/4" deep, dead center of each leg's end grain) and the alignment-pin holes on both seam faces (2x 3/8" dia x 3/8" deep, 3" in from each side edge).

Parts needed:

- Long rails — 2, 29" cut, 2x2 pine
- End rails — 2, 46" cut, 2x2 pine
- Legs — 4, 16" cut, 2x2 pine (leveling feet make up the inch)
- Bottom rails — 4: 2x 46" + 2x 26" (all four faces — the full cube)
- Corner brackets — 4
- Diagonal corner braces — 2

1

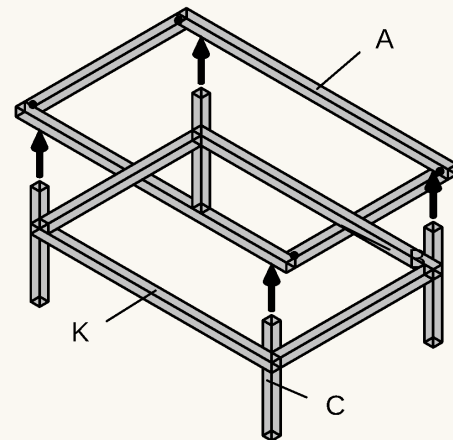

K: bottom rails (2x2, underside at 1") close the frame into a box — all 4 faces (full cube)

Build the frame — like Panel A's step 1: side rails (B), end rails (A), corner brackets, 4 legs (C) inset 2.5" from the deck edges (drilled for their leveling inserts BEFORE assembly), the 2 diagonal corner braces, and bottom rails on ALL FOUR faces (2x 46" + 2x 26", underside 1" up at the leg bottoms) — ****the full cube****: nothing exits Panel B sideways, so every face can close, and this is the stiffest frame of the three. That's the entire panel — no divider, no drawers, nothing else. Drill the alignment-pin holes when mating it to its neighbors (Component 5).



Component 4: Panel C

Build this one before Component 1 (Headboard/Pantry) — its shelving superstructure bolts down to this panel's finished deck at the tailgate end (T-nuts under the deck), with no frame or top of its own.

Parts needed:

- Panel C top — 1, 36" x 46", 3/4" ply
- Long rails — 2, 36" cut, 2x2 pine
- End rails — 2, 46" cut, 2x2 pine
- Legs — 4, 16" cut, 2x2 pine (leveling feet make up the inch; REAR pair at the true corners)
- Bottom rail — 1, 46" cut, 2x2 pine (FRONT face only)
- Corner brackets — 4
- Front wall — 1, 46" x 17", 1/2" ply, with the 120mm fan hole + two 1" grommet holes + the 7" x 2.5" low intake louver pre-cut (Panel C Front Wall render — every opening dimensioned)
- Louvered RV vents — 2 snap-in (1 low intake in the front wall, 1 low exhaust in the cabinet door)
- No divider, no drawers — the void stays fully open for Component 7 (Fridge & Kitchen Install)



1



K: bottom rails (2x2, underside at 1") close the frame into a box — front face only (appliances exit the tailgate; rear legs at the TRUE corners)

Build the frame — same construction as Panels A/B, with 36" side rails (B): end rails (A), corner brackets, 4 legs (C) — FRONT pair inset 2.5", REAR pair at the TRUE corners (the fridge/kitchen slide paths pass exactly where inset rear legs would stand; verify the vents don't reach those corners, Section 0). Add the FRONT-face bottom rail (46", underside 2" up) — the tailgate face stays open for the appliances.

2

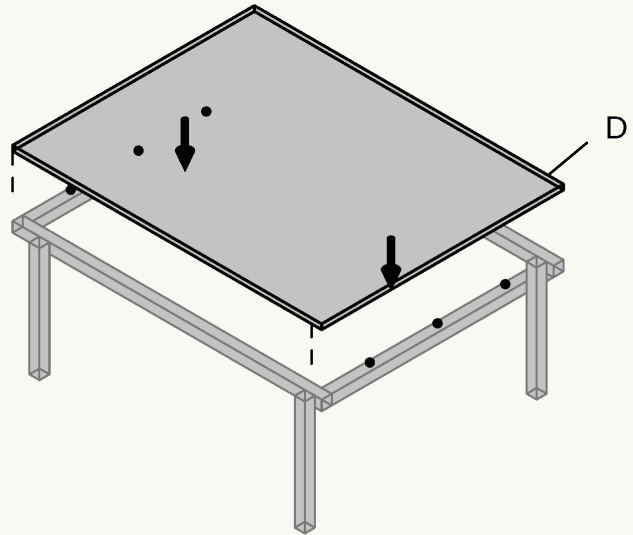


no divider — void stays open for the fridge + kitchen unit

Screw the top (D) down fixed directly to the frame rails — NO divider, since the fridge and kitchen unit need the full width of the void underneath.

3

front wall: 46" x 17" 1/2" ply, holes pre-cut per the Panel C Front Wall render

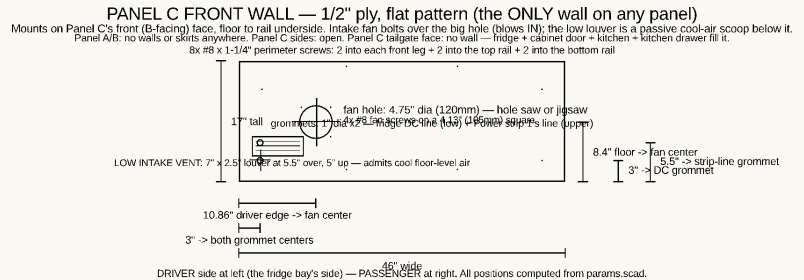


Cut the front wall and its openings to the render's dimensions — the 4.75" (120mm) fan hole centered on the fridge bay (10.86" from the driver edge, 8.4" up), two 1" grommet holes at 3" in (fridge DC line at 3" up, Power strip 1's line at 5.5" up), and the 7" x 2.5" LOW INTAKE LOUVER in the driver-side corner (5.5" over, 5" up) — a passive cool-air scoop that feeds the fridge the coolest floor-level cabin air, screened with a snap-in RV louver vent — then screw it to the front (B-facing) face: 2x #8 x 1-1/4" into each front leg + 2 into the top rail + 2 into the bottom rail (8 total). This is the ONLY wall on any panel; the intake fan bolts over the fan hole in Component 7. Panel C's sides stay open and its tailgate face is fully occupied by the fridge, cabinet door, kitchen unit, and kitchen drawer.

Component 5: Anti-Rattle Bumpers & Alignment Pins

Parts needed:

- Anti-rattle bumper strips — 2 (adhesive-backed felt or closed-cell foam weatherstrip), one per seam

- Alignment dowel pins — 4 (2 per seam), 3/8" dowel rod, ~3/4" long

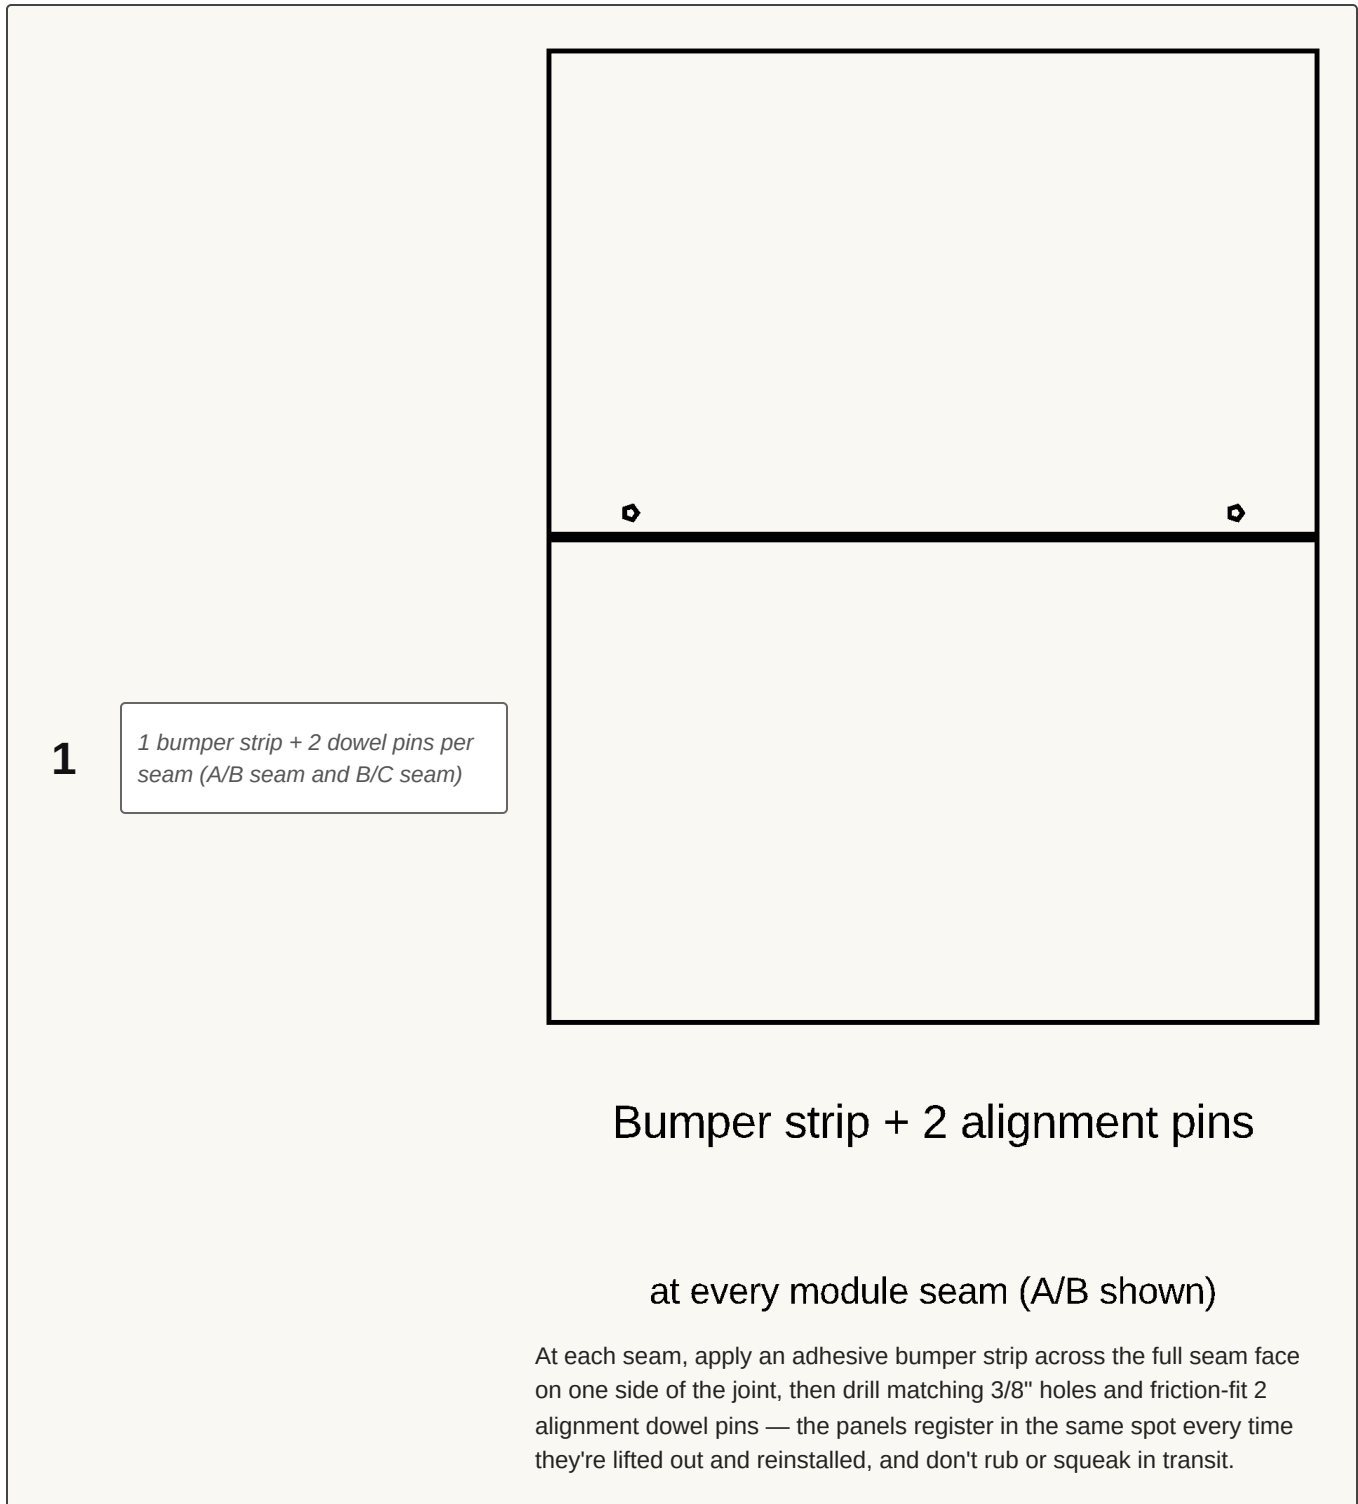

Component 6: Cord Runs — Cooktop, Power Strip 1, Fridge DC & DELTA 3 Charging


Parts needed:

- 16 AWG extension cord (household AC-rated), ~8ft (cooktop line)

- 16 AWG extension cord (household AC-rated), ~8ft (Power strip 1's own dedicated line — now one of the LONGEST lines, since the headboard/pantry it mounts on sits at the tailgate end, not the front)
- 16 AWG DC cord (automotive/solar SAE-rated), ~8ft (fridge line — DELTA 3 in Panel A back to the fridge in Panel C)
- 16 AWG cord (household AC-rated), ~3-4ft (DELTA 3 AC charging line — front console to Panel A)
- Cable grommets — 10, 1" diameter (2 cooktop line, 3 Power strip 1 line, 3 fridge DC line, 2 DELTA 3 charging line)
- Inline male/female extension-cord connector pairs — 4 (AC-rated, 2 for the cooktop line's 2 seams, 2 for Power strip 1's line's 2 seams)
- SAE quick-disconnect connectors — 2 (DC-rated, for the fridge DC line's 2 seams — only the DELTA 3 charging line crosses no seams)
- Cord clips / channel cover strip — 1
- 3-way AC outlet splitter — 1 (front console, now shared by 3 lines — see Section 5)

1

*cooktop cord + 2 grommets + 2
inline connector pairs + clips (parts
list above)*

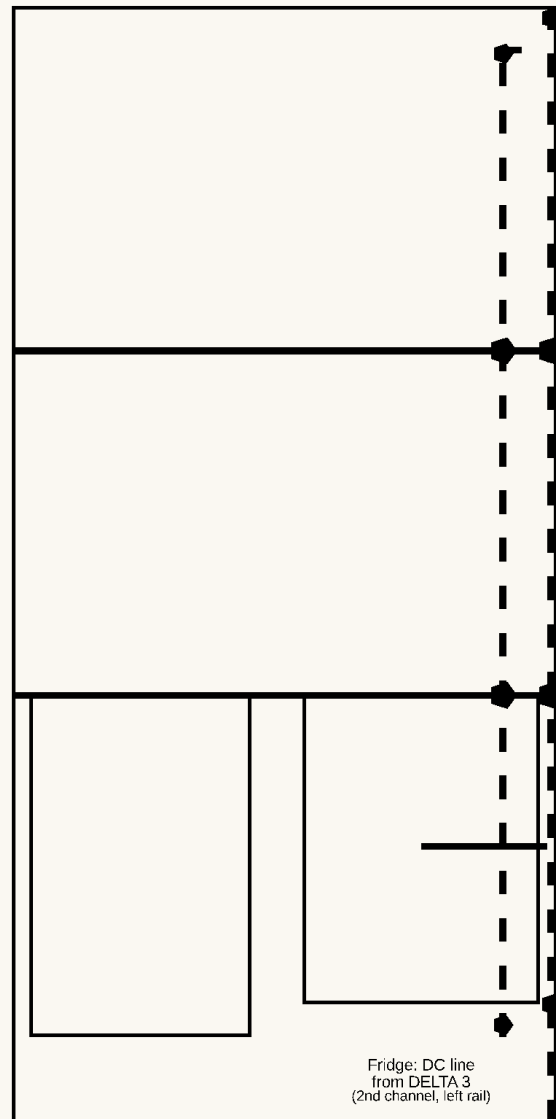

Power channels: cooktop (right rail) + fridge DC line (left rail)

cooktop: kitchen unit -> Panel C -> B -> A -> console outlet

fridge: DELTA 3 (Panel A) -> B -> C -> fridge DC input


(large circles = quick-disconnect at each panel seam)

Before final assembly, drill the grommet pass-throughs and route the cooktop's cord forward through Panel C → B → A while the frames are still accessible. Splice in an inline male/female extension-cord connector pair at each of the 2 seams the cord crosses so any panel still lifts out independently, then secure the run with clips — front console AC outlet at the Panel A end, the kitchen unit's cooktop space at the Panel C end.

2

Power strip 1's own cord + 2
grommets + 2 inline connector
pairs (parts list above)


ELECTRICAL LAYOUT — top-down (front of van at bottom, tailgate at top)

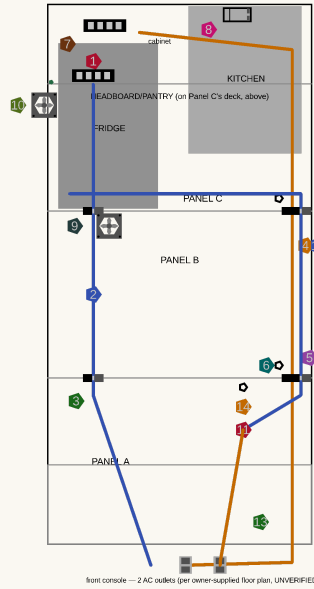

Legend

- 1 Power strip 1 — in the headboard's bed cubby (phone/light/Claymore fan)
- 2 Power strip 1's OWN dedicated cord — headboard/pantry (Panel C's tailgate end) down to the front console
- 3 Inline connector pairs — Power strip 1's line, one at each of the 2 seams it now crosses (C→B, B→A)
- 4 Cooktop cord run — 16AWG SAE cable, along the right frame rail, its own dedicated line
- 5 SAE quick-disconnects — cooktop line, one at each seam it crosses
- 6 1" grommets — cooktop line pass-throughs through the end rails
- 7 Power strip 2 — ON the slide-out kitchen unit (cooktop); cord has slack for the slide
- 8 Control enclosure — inside the cabinet, behind its door (Section 2 below)
- 9 Intake fan 120mm — on Panel C's FRONT wall, over the fridge's B-facing end
- 10 Exhaust fan 120mm — into cabinet + NTC probe (inside the bay at that wall, in the hot exhaust)
- 11 Fridge DC line — DELTA 3 (Panel A) forward to the fridge (Panel C), own dedicated run
- 12 SAE quick-disconnects — fridge DC line, one at each seam it crosses
- 13 DELTA 3 AC charging cord — front console (1500W, verified) back to Panel A's drawer
- 14 DELTA 3 drawer grommet — WAVE 3 charge cable exit (see storage detail)
- 15 DELTA 3 drawer grommet — WAVE 3 charge cable exit (see storage detail)
- 16 DELTA 3 drawer grommet — WAVE 3 charge cable exit (see storage detail)

CONTROL CLUSTER — inside the cabinet on its backer board, elevation (looking forward from tailgate)



- A LM100 enclosure — 4x #8 x 1" screws through its mounting ears into the wall
- B W1209 controller (in its case) — NTC probe wire exits the bottom grommet, runs to the fridge's microwave-facing wall (Section 3)
- C 6-way fuse block — feed from the DELTA 3's DC output (Panel A); fans + W1209 each get their own fused circuit (SA is plenty)
- D 3x Ampere switches (fridge / cooktop strip / fans) — 20mm holes in the enclosure face, switches snap in from the front


FAN MOUNTING — face-on, both fans identical hardware



Cut a 4.5" round hole (or 4.5" square) in the wall; fan mounts over it with 4x #8 x 1.5" screws through the corner holes. Gull goes on the AIR ENTRY side. Arrow on the fan's side frame shows its blow direction — point it per the labels above. Wiring: both fans in parallel off the W1209 relay (Section 5 wiring schematic).

Power strip 1 now mounts in the headboard/pantry's bed cubby (Component 1), at the tailgate end of Panel C — the opposite end from the console. Drill a grommet where the cord exits the shelving near the mattress-facing edge, route it forward on its own dedicated rail through Panel C → B → A (electrical layout diagram above), and splice in an inline male/female connector pair at each of the 2 seams it crosses, same as the cooktop line. Drill the 2nd grommet near Panel A's front edge and terminate at the console via the 3-way splitter.


ELECTRICAL LAYOUT — top-down (front of van at bottom, tailgate at top)

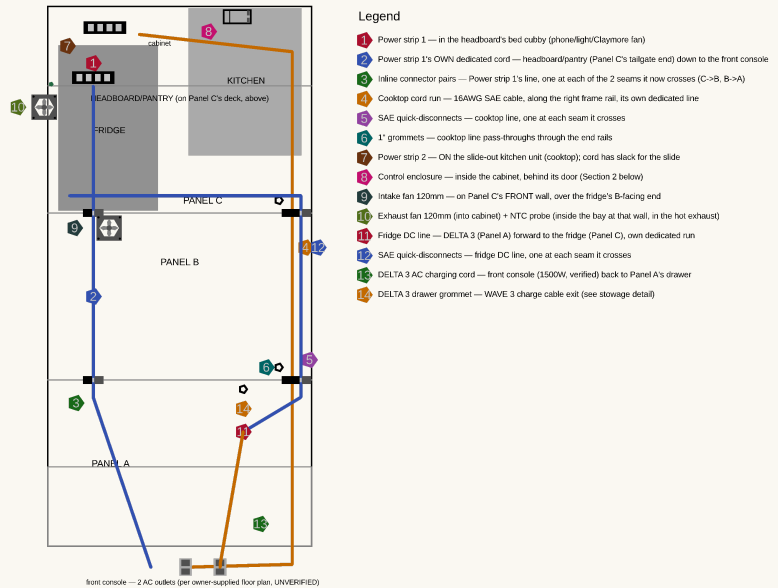


3

fridge DC cord + 3 grommets + 2
SAE disconnects (parts list above)

CONTROL CLUSTER — inside the cabinet on its backer board, elevation (looking forward from tailgate)

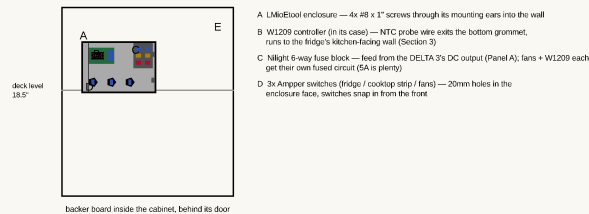

FAN MOUNTING — face-on, both fans identical hardware



Cut a 4.5" round hole (or 4.5" square) in the wall; fan mounts over it with 4x 68 x 1.5-1.6" screws through the corner holes. Gull goes on the AIR ENTRY side. Arrow on the fan's side frame shows its blow direction — point it per the labels above. Wiring: both fans in parallel off the W1209 relay (Section 5 wiring schematic).

The fridge now runs off the DELTA 3, not the van's rear outlet (Section 1) — route its DC line from the DELTA 3's output (Panel A's right drawer) back through Panel B into Panel C, with an SAE quick-disconnect at each of the 2 seams it crosses, terminating at the fridge's DC input near the control enclosure (Component 7).

4

DELTA 3 charging cord + 2
grommets (no disconnect needed)

Run the DELTA 3's own AC charging cord from Panel A's drawer forward, through the open floor gap, to the front console — zero seams, since Panel A is now the frontmost sleeping panel. Terminate all 3 forward-running AC lines (cooktop, Power strip 1, DELTA 3 charging) at the console via the 3-way splitter.

Component 7: Fridge & Kitchen Install

Parts needed:

- BougeRV Rocky 40 (41QT dual-zone) + fridge tray (1/2" ply, 17.72" x 28.74")
- Heavy-duty 24" full-extension drawer slide pair, 200lb-rated
- JAGAHABA slide-out camp kitchen + COOKTRON induction cooktop
- 120mm 12V fan + PWM temperature controller w/ NTC probe
- 12V surge protector/fused distribution block, 3 illuminated toggle switches, small electrical enclosure
- 8 Snap-Loc E-Track anchors, 16 5/16" carriage bolts/nuts/fender washers
- 4 Erickson 500lb ratchet straps
- Utility cabinet door hardware — 2 small hinges + 1 magnetic catch + 1 low louvered vent (3" x 4")
- Kitchen drawer — box (1/2" ply, 16" x 26" x 4.5") + 2 hanging cheeks (3/4" ply, 26" x 6.2") + 24" full-extension slide pair (100lb) + magnetic catch

1

no parts — inspection only


Before drilling anything, get under the van and confirm the anchor locations are clear of the fuel tank/lines, brake lines, and wiring harnesses.

2

8 E-Track anchors + 16 carriage bolts/nuts/fender washers + sealant

(4 is INSIDE the cabinet behind the door — Z in the list, CO monitor + fire extinguisher, owner-placed, not located here)

PANEL C — 46" wide x 36" deep, looking down from above




Component	Position / fastener
Intake fan (120mm) — blows IN	X=10.86 Y=26 (Panel C's FRONT wall) Z=8.4 4x M4x20 machine screws over the wall's fan hole (From Wall render)
Exhaust fan (120mm) — blows INTO the cabinet	X=19.72 Y=24.4 Z=8.4 4x M4x20 machine screws, 105mm bolt circle, into a plywood fan ring
NTC temp sensor	X=18.22 Y=22.2 Z=8.4 1x 1/2" hole in the wall of the cabinet, 4x #8x1" screws
Control panel enclosure	X=21.23.8 Y=2 Z=6.5-12.5 — INSIDE the cabinet backer board (3/4" offset) hung from the desk, 4x #8x1" screws
Cabinet door	X=20.2-24.5 Y=0-1.5 1/2" ply panel, closes the kitchen/fridge gap (not airtight — by design)
Door hinges (x2)	on the kitchen-side (high-X) edge 2x small butt hinges, 4x #6x5/8" screws each
Door catch	on the fridge-side (free) edge 1x magnetic or roller catch, 2x #6x5/8" screws
Fridge slide floor anchors (x4)	E-track, 2 per slide rail, front/back 1000lb WLL each — 2x 5/16" carriage bolts through the floor per anchor
Kitchen floor anchors (x4)	E-track, one per corner 1000lb WLL each — 2x 5/16" carriage bolts through the floor per anchor
WAVE 3 hose/cord hook	inside the cabinet, kitchen-side wall 1x heavy-duty wall hook, #8x1.5" screw — stores hoses/cord when not in use

All coordinates measured from Panel C's tailgate-facing left corner, floor level (see file header).
Floor-anchor bolts go THROUGH the van's floor pan — inspect underneath for fuel/brake lines and wiring before drilling any hole (Section 6).

Mark and drill 8 holes (2 per anchor: 4 under the fridge's slide zone, 4 under the kitchen unit's footprint), bolt the anchors through the floor pan — washers on the underside — and seal each hole with butyl or silicone before and after bolting.

Fridge Slide Mechanism — side view (one of 2 parallel slides shown)
CLOSED (solid) vs fully OPEN (dashed) — pulled out through the tailgate for top-lid access

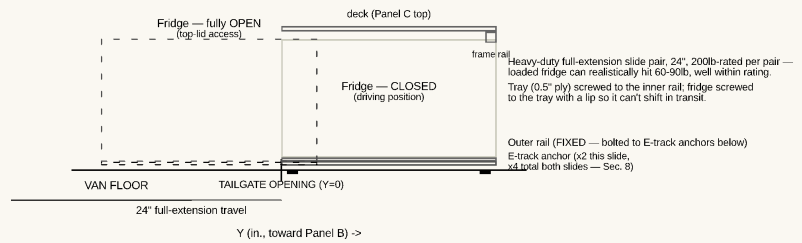

3


fridge + 1/2" ply tray + 24" 200lb
slide pair

Mount the Rocky 40 on its plywood tray on the heavy-duty slide pair; bolt the slide's outer rail to its 4 E-track anchors, against Panel C's driver-side rear corner leg (1.5" in from the edge), pulling straight out the open tailgate between the corner legs. Face the compressor/battery end toward the tailgate (B240 swaps without a full slide-out), re-hinge the reversible lid to open toward the van wall, and let the unit stand 12 hours before first power-up (manual). Connect its DC input to the fridge line routed in from the DELTA 3 (Component 6, step 3) — leave enough slack for the slide's full travel.

Fridge System Wiring — schematic, not to physical scale

4

2 fans + controller/NTC probe + control enclosure

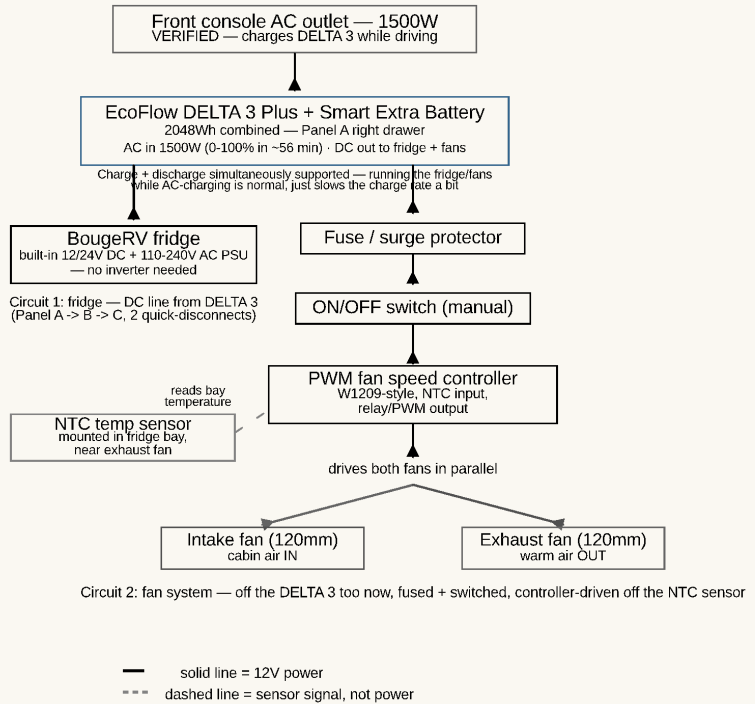

Bolt the intake fan over the front wall's fan hole (Component 4 step 3 — blowing IN) and snap the passive low intake louver into the wall's vent opening beside it (cool floor-level air in), install the exhaust fan + NTC probe (NTC just INSIDE the bay at the fridge's kitchen-facing wall, in the hot exhaust airflow, feeding the controller — it blows the warm air INTO the utility cabinet), and the control panel enclosure (switches + surge protector) INSIDE the cabinet — just behind the door, screwed to a backer board (the 3/4" sheet's offcut) hung from the deck underside, so opening the door reaches every switch. Wire everything per the schematic. The CO monitor and fire extinguisher are owner-placed — position them yourself once the build is in the van (the CO monitor stays battery-powered and unwired either way).

5

cabinet door + 2 hinges + magnetic catch

Build and hang the utility cabinet door over the gap between the kitchen unit and the fridge — 2 small hinges on the kitchen-side edge, magnetic catch on the fridge-side edge, and a 3" x 4" LOW LOUVER (5" up, centered) so the exhaust fan's warm air exits low toward the tailgate instead of only bleeding around the door edges.

6

kitchen unit + 4 ratchet straps

Slide the JAGAHABA kitchen unit into place against Panel C's passenger-side rear corner leg (1.5" in from the edge) — its shelves swing out on that side — and strap it down: 4 Erickson 500lb ratchet straps, criss-crossed over the top, hooked to its 4 E-track anchors.

7

COOKTRON cooktop


Set the cooktop into the JAGAHABA's built-in 2-burner stove space and connect its cord into Component 6's power channel.

8

kitchen drawer box + 2 hanging cheeks + 24" slide pair + magnetic catch

KITCHEN DRAWER — hung under Panel C's deck, above the kitchen unit (Component 7)

Box: 3/2" ply, glue + 1-1/4" screws, ~3.5" clear inside — utensils / cutting board / flat dry goods / griddle plate.
Face matches the utility-cabinet door look, with the same magnetic catch so nothing rattles in transit.

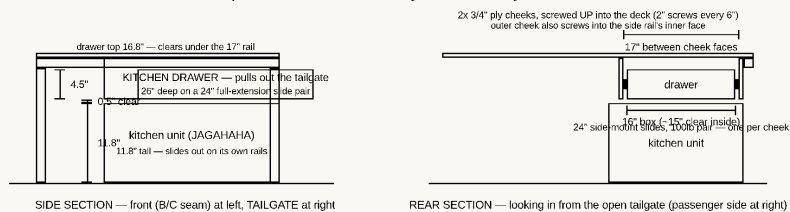

Hang the kitchen drawer in the dead air above the kitchen unit (Kitchen Drawer Detail render): screw the two 3/4" ply cheeks UP into Panel C's deck — 2" screws every 6", the outer cheek also screwed into the side rail's inner face — mount the 24" slides inside the cheeks, and hang the 16" x 26" x 4.5" box (~3.5" clear inside). It clears the kitchen's lid by 1/2", passes under the tailgate-face rail, and pulls out the open tailgate like everything else in Panel C. Give its face the same look and magnetic catch as the utility-cabinet door so nothing rattles in transit. Utensils, cutting board, flat dry goods, the cooktop's griddle plate.

Component 8: EcoFlow Stowage (DELTA 3 + WAVE 3)

Parts needed:


- EcoFlow DELTA 3 Plus + Smart Extra Battery, EcoFlow WAVE 3 (already owned, not priced)
- WAVE 3 hose/cord storage hook
- Non-slip mat (camp-use point of use — Panel C's deck or the front seat, not the storage bay)
- EcoFlow WAVE Series Car Vent Kit (no-tent sleeping configuration only)
- FOUND STORAGE: DELTA 3 drawer top tray (shallow lift-out bin) + WAVE 3 overhead shelf (1/2" ply + 1x1 cleats, from offcut) + 2 utility-cabinet bins

1

uses Panel A's right-drawer fixtures (Component 2, step 4)

PANEL A — RIGHT DRAWER (top-down)

EcoFlow DELTA 3 Plus + Extra Battery, stowed



clear interior 19" x 24"

Y: to Panel C tailgate <-
X: divider -> outer (pull)


Combined 15.95" wide
drawer clear width 19"

Component

- Position / fastener**
1 DELTA 3 Plus (main unit)
7.95" x 15.7" x 11.16", ~28 lb
outboard (pull wall) — WAVE 3 plugs into this always
- 2 Smart Extra Battery
8" x 15.7" x 7.8", ~20 lb
inboard — grabbed less often, extra runtime only
- 3 Locating cleats (x4)
1x1 pine blocking, drawer floor
glued + screwed — #6 x 1" screws
- 4 Vent slots (x5)
1" x 0.5" slots, outer wall
lets cooling fans breathe if run while closed
- 5 Cam-strap anchors (x2)
screw-eye D-rings, divider + outer wall
#8 x 1" screws, strap over both units
- 6 Cable pass-through
1" grommet, Y=0 tailgate-facing wall
WAVE 3 cord exits here toward the tray below

PANEL A — LEFT (DRIVER-SIDE) BAY (top-down)

EcoFlow WAVE 3 — open storage, no box or slide



raw bay 20.75" x 25" (no box walls to eat into it)

Y: Panel B/tailgate <-
X: divider -> outer (driver door)

Clearance is tight: 0.35in on the pull side — a boxed drawer (19in clear) would NOT fit; this raw bay does, which is why this is open storage, not a normal drawer like Panel A's right side.
Storage-only: for camp use, carry the unit to Panel C's tailgate deck (tent) or the front seat (no tent) — see the sleeping-configurations note, Section 1.
Hoses + cord stow on a hook inside the utility cabinet (between fridge + kitchen) when not in use.


Component

- Position / fastener**
7 WAVE 3 unit
20.4" x 11.7" x 13.2", 33.7 lb
rests directly on the bay floor — no box, no slide
- 8 Bay opening
20.75" x 25" raw void
reached through the driver's side door
- 9 Glide strips (x2)
UHMW or laminate scrap, full bay depth
cuts friction sliding the unit in/out by hand

FOUND STORAGE — dead headroom reclaimed (side sections)



DELTA 3 drawer: 14.5" tall, unit 11.16" -> ~3.3" of dead air on top = a cable/cooler tray



WAVE 3 bay: 17" tall, unit 13.2" -> 3.8" of dead air above = a shelf on cleats (unit slides out under it)

Stow the DELTA 3 Plus outboard (pull wall — it's what the WAVE 3 plugs into) and the Smart Extra Battery inboard, side by side over the locating cleats, cam strap over both. Connect the fridge DC line and the AC charging cord (both routed in Component 6) to the DELTA 3 Plus's DC

output and AC input ports — it now powers the fridge/fans continuously and gets charged from the front console while driving (Section 1).

2

uses Panel A's left-bay glide strips (Component 2, step 3) + storage hook

Slide the WAVE 3 into Panel A's left bay, resting on the 2 glide strips — no box, no slide hardware, just reach in through the driver's side door. Mount the hose/cord hook inside the utility cabinet (kitchen-side wall) for when the unit is carried off to run at camp. **Found storage** (DELTA 3/WAVE 3 detail render, side sections): the DELTA 3 stack is only 11.16" tall in a 14.5" drawer, so drop a shallow lift-out tray in the ~3.3" of dead air on top for cables/cords; and the WAVE 3 is 13.2" in the 17" bay, so screw a thin shelf onto 1x1 cleats at ~13.7" — flat soft goods and the WAVE 3's own hoses ride up there while the unit still slides out beneath it. Neither touches the frame or the units' function.

3

tent config: non-slip mat only · no-tent config: non-slip mat + WAVE Car Vent Kit

Tent (tailgate open): carry the WAVE 3 from Panel A's bay to Panel C's deck, just forward of the headboard/pantry (which now occupies the tailgate-most 14"), on the non-slip mat, and route its hoses past the headboard/pantry and through the open tailgate gap — no window seal needed. **No tent** (tailgate closed): carry it instead to the front passenger seat, on the same mat, and install the Car Vent Kit over a cracked front window for the hoses.

Component 9: Mattress



Primary path — BUY, no build: the HEST Dually Long (78" x 50" x 4") drops onto the platform as-is: solid foam, no inflation, washable waterproof cover included. Heads go at the headboard end. Done.

Budget fallback — DIY 2-layer build (the steps below): same 50" x 78" footprint, ~\$185–255 all-in, 5.5" thick (costs ~1.5" of the headroom the HEST keeps).

Fallback parts needed:

- Queen 4" firm high-density foam base + queen 1"-2" memory foam topper
- Spray adhesive (or large fabric strips)
- Waterproof mattress cover


1

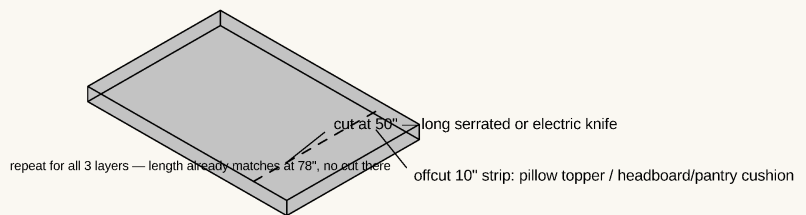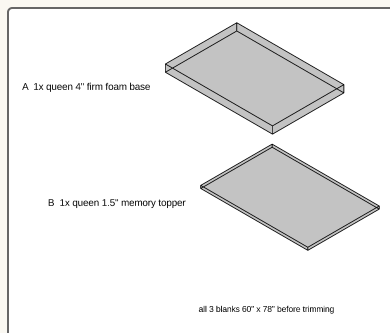

FALLBACK ONLY (skip if you bought the HEST). Buy both foam layers at queen size (60" x 80") and trim to 50" wide x 78" long with a long serrated or electric knife; the offcut strips work as a pillow topper or headboard/pantry cushion.

2

the 2 trimmed layers from step 1
+ spray adhesive (or wide fabric strips)
+ waterproof cover, fitted after gluing

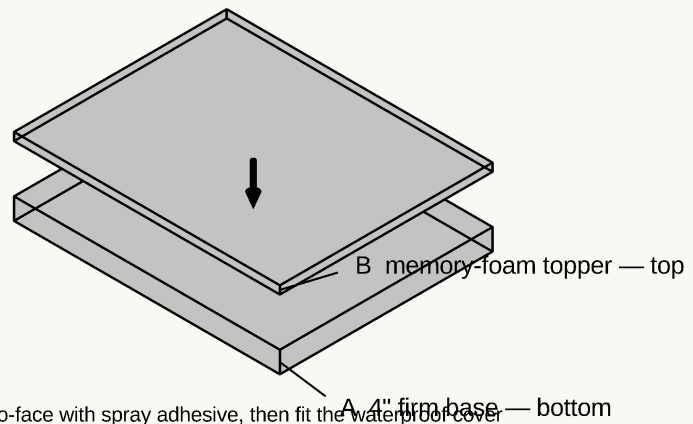

glue face-to-face with spray adhesive, then fit the waterproof cover

FALLBACK ONLY. Stack the firm base (A) with the memory-foam topper (B) on top; bond face-to-face with spray adhesive, fit the waterproof cover, and lay it on the platform.

Component 10: Final Assembly, Curtain & Test Fit

Parts needed:

- Tension rod + blackout curtain fabric
- Wood sealant/varnish, sandpaper/misc finishing supplies

Steps:

1. Sand and apply 2 coats of wood sealant/varnish to all plywood surfaces (especially edges) to prevent moisture damage.
2. Install the curtain rod (tension rod + blackout fabric) between the front seats and the platform area for privacy.
3. Test fit everything: confirm the cooktop's cord and the DELTA 3's charging cord both reach the console outlet(s), confirm the fridge's DC line reaches the DELTA 3 in Panel A with its disconnects seated at both seams, and confirm the tailgate closes with everything loaded.
4. Do a full lift-out/reinstall dry run on Panel A, Panel B, and Panel C — gripping each by its exposed top rails, each should come free and drop back in without binding, rubbing, or forcing a bumper/pin out of place. For **Panel A and Panel B specifically**, also test lifting the one-piece bed platform off the box rails first (they no longer have a top or lid of their own — the platform is the only thing capping them), then confirm each panel's drawers pull smoothly once it's clear. For **the headboard/pantry specifically**, empty the food tiers, flip the 8 cam levers (4 base + 4 brace-end — no tools), and confirm the whole shelving unit comes off Panel C cleanly — it's not one of the three lift-out panels, but it should still detach in minutes. The braces tie into Panel C's own side rails — Panel B lifts out without touching them.

No diagram — finishing and test steps, not new construction.

7. Induction Cooktop & Power Strip Design

Recommended cooktop: COOKTRON Portable Induction Cooktop 2 Burner w/ Removable Iron Cast Griddle Pan

- **Real measurements confirmed from the JAGAHAHA's own listing photos:** the stove tray is **23"L x 15.7"W, with 5.7" of clearance** when pulled out.
- The **JAGAHAHA kitchen unit is built for a 2-burner stove** (per its own listing) — a single-burner cooktop would leave half its designed stove space unused.
- An earlier draft of this plan recommended the **Duxtop 9620LS dual burner** — its manufacturer manual gives its actual footprint as **23.9"L x 14.2"W x 2.4"H**, which is **0.9" too long for the 23" tray**. Dropped in favor of the option below.
- **Confirmed exact product** (real listing photos with dimension callouts): **18.1"L x 9.1"W x 4.3"H** (briefcase-style unit with a fold-down handle) — fits the tray with real margin: ~4.9" of length, ~6.6" of width, ~1.4" of height to spare. Two 6.3"-diameter induction zones, 1800W total, plus an included removable non-stick cast-iron griddle pan that lays across both zones — a direct match for "two burner or griddle" in one unit.
- **Price: \$189.99** (confirmed current listing price).
- Requires magnetic (induction-compatible) cookware — test with a magnet before buying pots/pans if you don't already own compatible ones (the included griddle pan is already induction-ready). See the cookware recommendation below.

Power check — confirmed: the front console AC outlet is rated at **1500W (verified against the real van, Section 0)**. That's good news relative to the old "many factory outlets are limited to a few hundred watts" risk, but it's still **less than the cooktop's own 1800W total** (both induction zones at full power). In practice this means: don't run both burners at max heat simultaneously if anything else is drawing off the same console circuit (Power strip 1 included) — step one zone down, or stagger which burner is running hot, rather than assuming the full 1800W is actually available.

Cookware: Cook N Home 10-Piece Stainless Steel Set

A cheaper, tougher swap for an earlier draft's marine-grade Magma nesting set (~\$185–240) — this doesn't need to be pretty, just durable and induction-compatible, and real stainless steel beats a nonstick coating for camping abuse. 1qt + 2qt saucepans, 3qt casserole, 5qt stockpot, and a 10" fry pan (matching the cooktop's two 6.3"-diameter zones), each with its own tempered-glass lid, all in 18/10 stainless with an aluminum-encapsulated base — confirmed induction-compatible, oven-safe to 400°F, dishwasher-safe. ~\$65–90, comfortably under budget. It doesn't nest as compactly as the Magma set did, so confirm it fits the kitchen unit's storage space once both are in hand.

Kitchen unit: bought product, no slide-out tray to build

Unlike the earlier design (a plywood box with a built-in drawer slide for the cooktop), the JAGAHAHA kitchen unit is a standalone product with its **own** slide-out mechanism and stove space already built in — there's no

cooktop tray to build. Set the COOKTRON cooktop into that built-in space and run its cord through a grommet at the back of the unit, into the same frame-rail channel used to reach the front console outlet (Section 5). No plumbing, no water lines, no sink.

Multiport AC power strips (2 total)

Location	Purpose
Power strip 1 — mounted in the headboard/pantry's bed cubby (relocated from Panel A — Component 1/6)	Phone/device charging, reading light, and the Claymore V600+ tripod fan — easy reach from the sleeping area, right by where your head/torso would be
Power strip 2 — mounted ON the slide-out kitchen unit (travels to the cook position; cord has a slack loop for the slide)	Powers the induction cooktop and any other small kitchen appliance (kettle, blender)

Each strip now runs on its own dedicated cord back to the front console (Section 5) — Power strip 1 no longer taps onto the cooktop's line. They're still not unlimited: each strip is still capped by whatever its own console outlet can actually supply, so a 6-8 outlet power strip is for convenient access to that one circuit, not for adding capacity beyond it — don't run the induction cooktop and multiple other high-draw devices on Power strip 2 at the same time. The console circuit now has a 3rd tenant too — the DELTA 3's own AC charging cord (Section 1/5), which alone can draw up to the circuit's full rated 1500W — so all 3 lines (Power strip 1, Power strip 2/cooktop, DELTA 3 charging) land on the console's outlet(s) through a 3-way splitter, sharing one wattage budget rather than each having its own. (The fridge is on its own separate DC line off the DELTA 3, not either console strip, see Section 5.)

Recommended power strip: a compact 6-outlet strip with individual switches (e.g., a basic surge-protected strip, ~\$15-20 each) — the individual switches let you kill power to specific outlets without unplugging everything, useful for lights left on overnight.

All cooktop and power strip hardware costs are already folded into the master BOM in Section 4.

8. Modular Lift-Out Design & Weight

Panel A, Panel B, and Panel C each rest unbolted on the van floor — nothing is fastened down, and no module shares a frame rail with its neighbor. Pull the bumper strips free, lift any of the three out by their exposed 2x2 top rails (no tops or skirts in the way — the old routed hand-holds are gone), and the sleeping deck is gone for normal minivan use; drop them back in and the alignment pins register everything in the same spot every time. The headboard/pantry is not one of these three lift-out modules — it has no frame or floor contact of its own; it detaches separately from Panel C's deck (flip 4 base cam levers + 4 brace cam levers = 8, no tools, Component 1) — empty the food tiers before lifting it. **The fridge and kitchen unit are the one deliberate exception to "nothing is fastened down"** — see below.

Securing heavy components (fridge + kitchen unit)

The "rests unbolted, lifts out" design that works fine for the lightweight sleeping panels is not safe for the fridge (up to ~90lb loaded) or the kitchen unit (45lb). In a hard stop or collision, an unsecured item that heavy becomes a projectile — this is the one place in the whole build where "modular and non-invasive" has to give way to "actually bolted to the vehicle."

The Sienna's factory cargo hooks are not adequate for this. Toyota's own documentation is explicit that they're for hanging a cargo net, not for restraining loose cargo — confirmed by checking the owner's manual guidance, not an assumption. Do not use them to anchor the fridge or kitchen unit.

What this plan uses instead: [Snap-Loc E-Track anchors](#) — bolt-on, stainless steel, 1000lb safe working load / 3000lb break strength each, \$6.99 apiece. Eight of them, through-bolted into the van's actual floor pan (not just resting on the folded 3rd row):

- **4 anchors under the fridge's slide zone** (2 per slide rail) — the slide's outer rail bolts directly to these, independent of Panel C's own lift-out frame. Panel C's frame/legs never touch the fridge or its slide, so this doesn't compromise Panel C's own lift-out design at all — it was never structurally connected to the fridge in the first place.
- **4 anchors under the kitchen unit**, one per corner, with 4 [Erickson 500lb-rated ratchet straps](#) criss-crossed over the top.

Why this margin is enough: DOT commercial cargo securement rules (49 CFR 393, Subpart I) require tie-downs rated for 0.435g forward / 0.5g rearward / 0.25g lateral deceleration, with combined working load at least 50% of the cargo's weight. A single 1000lb-WLL E-track anchor is roughly 11x the fridge's loaded weight (90lb) and 22x the kitchen unit's (45lb) — this plan uses 4 anchors per item, not 1, for a wide margin over that commercial-vehicle baseline, even though a DIY conversion isn't held to DOT's certification process.

Before you drill anything: the E-track bolts go all the way through the van's floor pan. Get underneath the van and physically confirm each of the 8 locations (see the fridge install detail diagram, Section 2, for exact X/Y) is clear of the fuel tank, fuel lines, brake lines, and wiring harnesses before drilling — reposition an anchor if it isn't. Seal each hole with butyl or silicone sealant on both sides of the bolt to prevent water intrusion and rust.

Approximate weight per module (plywood + frame + legs only, rough estimates — excludes mattress and small hardware):

Module	Est. weight
Headboard/pantry shelving superstructure (side panels + 2 fixed shelves + adjustable shelf + nook divider + fiddle lips + base cleats, mounted on Panel C's deck)	~46 lb
Panel A (incl. divider + 1 drawer box/slide + corner braces + 2 bottom rails + glide strips + WAVE 3 overhead shelf, no top)	~43 lb
Panel B (bare cube frame — bottom rails on all 4 faces + corner braces; no top, no divider, no drawers)	~33 lb
Panel C (frame + front bottom rail + deck + front wall + fridge tray + kitchen drawer & cheeks + control enclosure — fridge/kitchen unit tracked separately below)	~49 lb
BougeRV Rocky 40 fridge (empty weight, manual spec)	40.6 lb / 18.4 kg (realistically 60-90 lb loaded — why it's on a 200lb-rated slide, not a lift-out module)
JAGAHABA kitchen unit (real product weight)	45 lb
EcoFlow DELTA 3 Plus + Smart Extra Battery (Panel A right drawer, included in that drawer's own weight above)	~48 lb
EcoFlow WAVE 3 (Panel A left bay, stored in place — unlike the old tailgate tray, it doesn't need removing for driving)	33.7 lb

All three panels are comfortable one-person lifts now. Losing the tops — and, for Panel B, all its drawers and divider — dropped every module well under the ~50 lb rule of thumb for a solo carry (weights in the table above): **Panel B is a bare cube frame at ~33 lb, Panel A is ~42 lb** (one right-side drawer + the WAVE 3 open bay), and **Panel C is ~49 lb** (frame, deck, front wall, fridge tray, kitchen drawer, and the small control enclosure). The heaviest single lift is Panel C at ~49 lb, still a solo carry. The headboard/pantry's own **~46 lb** shelving rides on top of Panel C when installed but detaches separately (flip its cam levers); it's a one-person lift too — but empty its food tiers first, since cans and boxes add real weight on top of that.

Fit and quiet-in-transit checklist:

- Each panel is lifted by gripping its exposed 2x2 top rails (no tops or skirts in the way) — the old routed hand-holds were removed; a two-hand, centered grip keeps the lift balanced.
- Bumper strips + alignment pins (hardware in Section 3, installed in Section 6, Component 5) go at the Panel A/B and Panel B/C seams — this is what stops the panels from rubbing or rattling against each other on the road, and keeps them from creeping out of position.
- Do the full lift-out/reinstall dry run in Section 6, Component 10 before you consider the build done — that's the real test of whether the modular fit is tight enough to stay quiet but loose enough to lift easily (with a second person, given the weight note above).

Test the well depth, fridge dimensions, and drawer weight against your actual van and materials before cutting — the numbers above are solid starting estimates but real-world results vary by trim year and exactly what plywood you source.

9. Seat Removal & Reinstall (Camper ↔ Passenger Mode)

The 2nd-row seats come out entirely for camper mode (Section 1) and go back in for passenger use. The Sienna's 2nd-row seats carry SRS (airbag/occupancy) wiring, so pulling them without the right procedure leaves airbag warning lights on the dash — this build uses **Ling Labs SRS emulators (0651 Round + 6134 Rectangle)** plugged into the vacated van-side floor connectors so the airbag system reads normally with the seats out.

The 30-minute battery wait is a safety step, not a convenience step — the airbag computer holds backup electrical power in capacitors that must fully drain before any SRS connector is touched. Do not skip or shorten it in either direction of the transition.

Transitioning to Camper Mode (Removing Seats)

1. **Turn off the vehicle** completely and open the rear trunk hatch.
2. Locate the 12V battery in the right rear trunk wall panel and **disconnect the negative terminal**.
3. **Wait exactly 30 minutes**. Do not skip this; the airbag computer holds backup electrical power in capacitors that must drain completely.
4. Unbolt the seats and **unplug the floor harnesses**.
5. Firmly click the **Ling Labs 0651 Round** and **6134 Rectangle** emulators into the van-side yellow floor plugs. Give them a light tug to verify they are locked.
6. Reconnect the negative 12V battery terminal and tighten it. Start the van; the dashboard lights will clear normally.

Transitioning to Passenger Mode (Reinstalling Seats)

1. Turn off the vehicle and **disconnect the negative 12V battery terminal** again.
2. **Wait 30 minutes** to de-energize the SRS system.
3. Unplug the Ling Labs dongles and store them safely in your glovebox or center console for the next trip.
4. Bolt the captain's chairs back down securely and **plug the factory seat harnesses back into the floor**.
5. Reconnect the negative 12V battery terminal.

Storage Tip

When in camper mode, the vehicle-side plugs sit flat on the floor. Use a small piece of plastic wrap or a ziplock bag secured with a rubber band around the emulators to prevent dirt, dust, or spilled camping liquids from getting into the electrical contact points.