



90% PRICING SET
09.12.2025

RCOM RITCHIE BUILDING RENOVATION

WASHINGTON STREET, RAVENSWOOD WV


LIGHTING PLANS




OMNI
ARCHITECTS

E1.01


Copyright © All rights reserved. Reproduction in whole or in part is prohibited. This drawing is the intellectual property of the firm and shall not be used in any way without written permission of the firm.
Project No. 20210108 Date: 10/1/2021

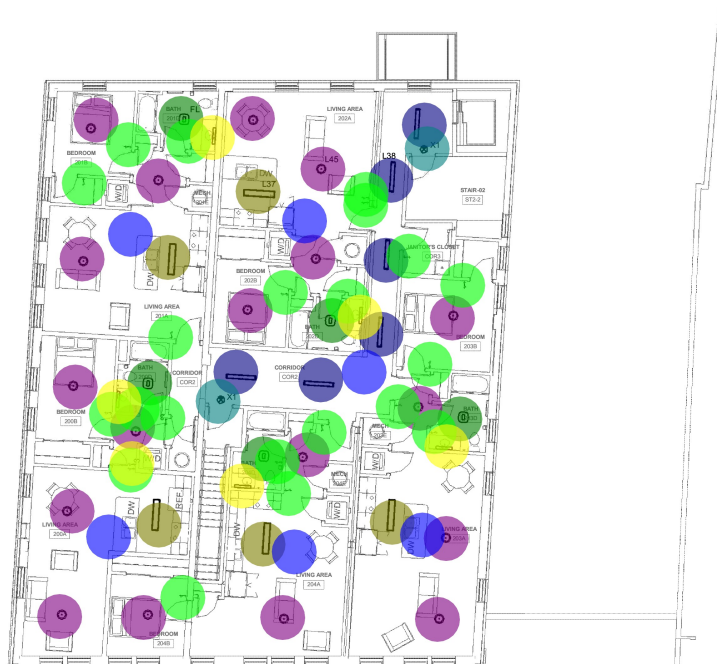

2 SECOND FLOOR LIGHTING PLAN
E1.01 1/8" = 1'-0"

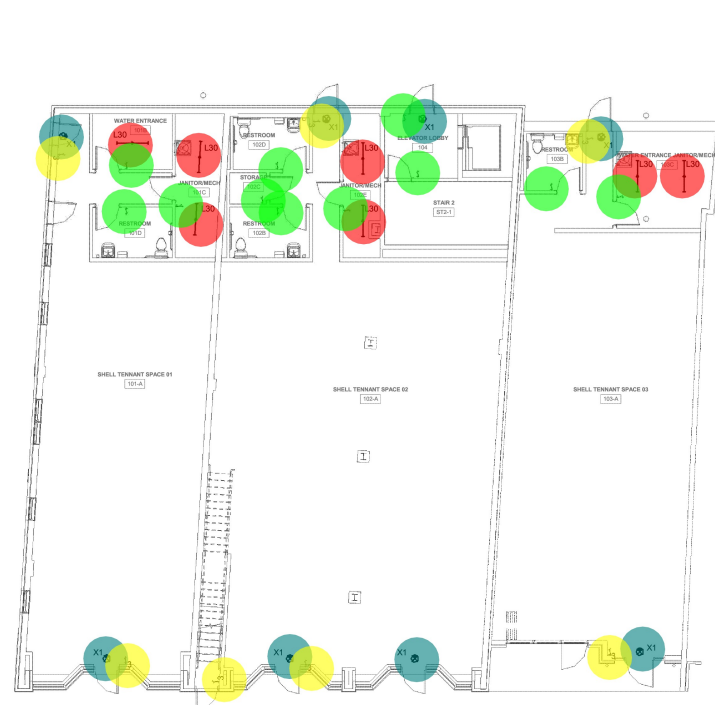

1 FIRST FLOOR LIGHTING PLAN
E1.01 1/8" = 1'-0"

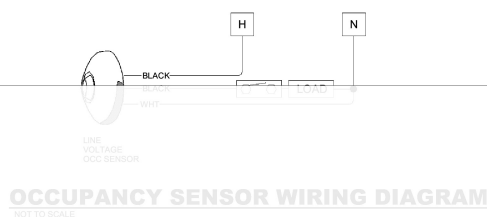


OCCUPANCY SENSOR WIRING DIAGRAM
NOT TO SCALE

LIGHTING FIXTURE SCHEDULE						
MARK	LAMP	MOUNTING	MANUFACTURER	MODEL	DESCRIPTION	NOTES
FL	LED		Cooper Lighting	605 Series LED	Luminous Wall Sconce	
L37	LED		DELTA	ELT-110LED	FANLIGHT BATHROOM EXHAUST, 96CFM, 7 SONES, 25 ESP	
L38	LED		LITHONIA	2L2NL48 3000LM	WITH CEILING RADIATION DAMPER GBR-CRD FOR FIRE RATING	
L45	LED	PENDANT	LITHONIA	2L2NL48 3000LM	4" STRIP W/ACRYLIC LENS	120V
X1	LED		COOPER	DAY-BRITE	ELECTRONIC DRIVER	
L37	LED		LITHONIA	PMI PSL	5.0	KITCHEN LIGHT
L38	LED		LITHONIA	PMI CHSL48BN	5.0	HEN
L45	LED		WITCHER	10781WHLED	6.0	BOWL
X1	LED		LITHONIA	COOPER	10.0	
			DAY-BRITE		7.0	
					32.0	
					8.0	
					5.0	
					6.0	

LIGHT FIXTURE SCHEDULE NOTES:

1. VERIFY CEILING CONSTRUCTION TYPE WITH ARCHITECTURAL DRAWINGS TO DETERMINE W/
2. RECESSED LIGHTING FIXTURES SHALL BE FLANGE OR GRID TYPE MOUNTING.
3. DIRECTIONAL INDICATOR ON EXIT SIGNS SHALL COMPLY WITH NFPA 101 SECTION 5-10.4.1.2.
4. VERIFY VOLTAGE TO OPERATE FIXTURE WITH ELECTRICAL DRAWINGS.
5. LIGHT FIXTURES SHALL COME COMPLETE WITH NECESSARY MOUNTING HARDWARE.
6. ALL RECESSED LIGHT FIXTURES SHALL BE PAINTED AFTER FABRICATION.
7. ANY REQUEST FOR SUBSTITUTION TO THE LIGHTING FIXTURE SCHEDULE SHALL BE OF EQUAL
8. QUALITY AS DETERMINED BY THE ENGINEER. ANY PERSON REQUESTING TO SUBSTITUTE A
9. IN SOUND FORM A COLLECTION OF THE MANUFACTURER'S CUT SHEETS TO BE REVIEWED BY THE ENGINEER.
10. A MINIMUM OF FORTY-EIGHT (48) DAYS PRIOR TO BID. ACCEPTED SUBSTITUTIONS SHALL BE REVIEWED BY THE ENGINEER.
11. SUPPLY HANGING BAR/ROTS WITH ALL RECESSED DOWN LIGHTS.
12. EMERGENCY BATTERY PACK FOR LIGHT FIXTURES SHALL BE RATED TO SUPPLY A MINIMUM OF 90 MINUTEL LUMENS.

- FL
- L37
- L38
- L45
- X1
- L30
- Single Pole Switch
- 3-Way Switch
- Luminous Wall Sconce - Mfg: Cooper Lighting DELTA - Model: 605 Series LED
- Occupancy Sensor



90% PRICING SET
09.12.2025

RCOM RITCHIE BUILDING RENOVATION

WASHINGTON STREET, RAVENSWOOD WV


POWER PLANS




OMNI
ARCHITECTS

E2.01


Copyright © All rights reserved. Reproduction in whole or in part is prohibited. This drawing is the intellectual property of the firm and shall not be used for any other project without written permission of the firm.
Project No. 202301008 Date: 10/1/2023

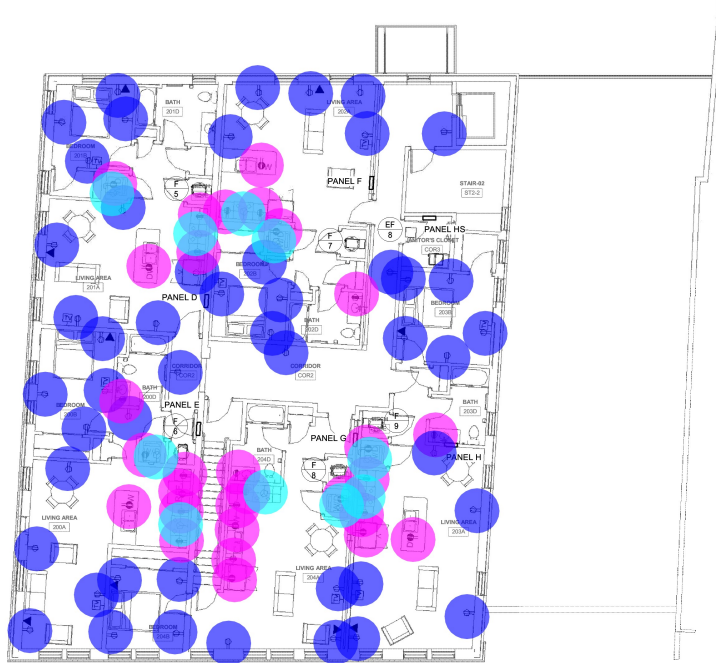

2 SECOND FLOOR POWER PLAN
E2.01 1/8" = 1'-0"

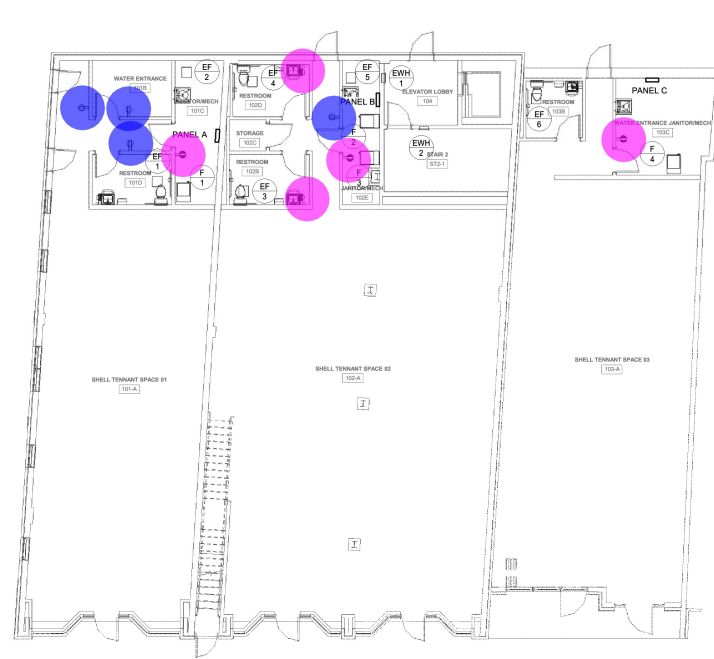

1 FIRST FLOOR POWER PLAN
E2.01 1/8" = 1'-0"

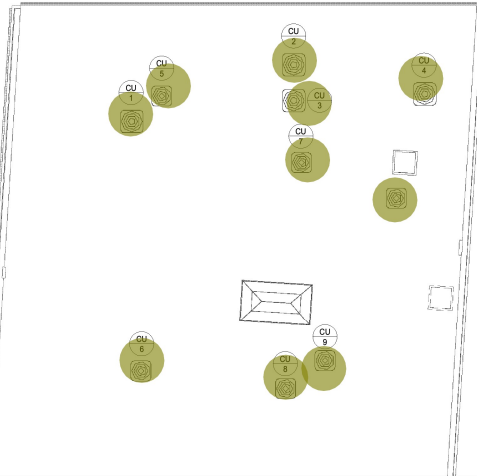

- Duplex Receptacle
- GFCI - Duplex Receptacle
- 220V Receptacle
- Disconnect Switch For Condensing Unit (TBC)

52.0
34.0
10.0
10.0



90% PRICING SET
09.12.2025

RCOM RITCHIE BUILDING RENOVATION

WASHINGTON STREET, RAVENSWOOD WV

SYSTEMS PLANS



OMNI
ARCHITECTS

E3.01

Copyright © All rights reserved. Reproduction in whole or in part is prohibited. This drawing is the intellectual property of the architect. It is to be used only for the project and site specified and may not be used for any other project without written permission of the architect.



1 SECOND FLOOR SYSTEMS PLAN
E3.01 1/8" = 1'-0"



2 FIRST FLOOR SYSTEMS PLAN
E3.01 1/8" = 1'-0"

GENERAL FIRE ALARM NOTES

1. PROVIDE ALL MATERIAL AND EQUIPMENT AND PERFORM ALL LABOR REQUIRED TO INSTALL A COMPLETE AND OPERABLE FIRE ALARM SYSTEM DEVICES AS INDICATED ON THE DRAWINGS ARE SCHEMATIC IN NATURE. CONTRACTOR SHALL PROVIDE ANY ADDITIONAL WORK AS REQUIRED BY LOCAL AND ALL ADDITIONAL CODES TO THE OWNER.
2. IT SHALL BE THE CONTRACTOR'S SOLE RESPONSIBILITY TO PROVIDE A FIRE ALARM SYSTEM IN FULL COMPLIANCE WITH THE LATEST EDITION OF NFPA 72, WV STATE FIRE CODE, AND ADA.
3. ALL DEVICES SHALL BE PARTIALLY SPRINKLED PER NFPA 72.
4. SUPPLY A 120 VOLT CONNECTION AS REQUIRED AT ALL DEVICES EQUIPMENT.
5. DEVICES SHOWN ARE APPROXIMATE LOCATIONS. FIELD VERIFY ACTUAL CONDITIONS.
6. DO NOT SUPPORT RACEWAYS FROM PIPES, DUCTS OR CEILING SUSPENSION SYSTEM.
7. EXPOSED RACEWAY AND BLANK COVERS SHALL BE PAINTED TO MATCH FINISHING SURFACES.
8. SURFACES DAMAGED BY THIS CONTRACTOR SHALL BE REPAIRED TO MATCH ADJACENT SURFACES.
9. SYSTEM SHALL INTERFACE WITH SHUNT TRIP BREAKERS OR GAS SWITCHES FOR ALL EQUIPMENT LOCATED UNDER THE KITCHEN HOOD.

FIRE ALARM SYSTEM NOTES (SPRINKLERED)


1. ALL EXTERIOR DOORS SHALL HAVE A PULL STATION MOUNTED ADJACENT TO THE DOOR. SPACING OF PULL STATIONS SHALL NOT EXCEED 200' ALONG PATH OF EGRESS.
2. FIELD VERIFY LOCATION AND QUANTITY OF AIR HANDLING UNITS GREATER THAN 2000 CFM. PROVIDE A DUCT SMOKE DETECTOR IN THE RETURN AIR OUTLET OF EACH UNIT. EACH AIR HANDLING DUCT SMOKE DETECTOR SHALL BE SEPARATELY ANNUNCIATED BY THE FIRE ALARM PANEL AND THE ANNUNCIATOR PROVIDE REMOTE LED INDICATOR AT CEILING BELOW EACH DETECTOR.
3. FIELD VERIFY LOCATION AND QUANTITY OF ELECTRICAL PANELS. PROVIDE A SMOKE DETECTOR IN EACH OF THESE ROOMS.
4. PROVIDE SMOKE DETECTORS IN CORRIDOR A MAXIMUM 10' FROM EACH END AND A MAXIMUM OF 30' ON CENTER.
5. PROVIDE SMOKE IN ALL TOILETS.
6. PROVIDE HORN/STROBES AS REQUIRED BY NFPA 72. SPACING AND SOUND LEVEL SHALL BE SUCH THAT THE AUDIBLE ALARM CAN BE EFFECTIVELY HEARD ABOVE THE AMBIENT NOISE LEVEL OBTAINED UNDER NORMAL OCCUPANCY CONDITIONS.
7. PROVIDE STROBES IN ALL PUBLIC SPACES EXCEPT COMMON AREAS AS DESIGNATED IN THE AMERICAN WITH DISABILITIES ACT. SPACING SHALL BE PER NFPA 72.

- Smoke Detector
- Manual Pull Station
- Horn/Strobe
- Strobe
- TV Outlet
- Data Outlet
- Annunciator
- Fire Alarm Control Panel
- Booster Power Supply
- 2 Cond. 18 AWG Annunciator Data Cable
- 2 Cond. 18 AWG Addressable Data Circuit
- Test Switch
- Control Relay
- Heat Detector
- 2 Cond. 14 AWG Cable

- 16.0
- 9.0
- 6.0
- 4.0
- 9.0
- 9.0
- 1.0
- 1.0
- 1.0
- 8.9 FT
- 53.8 FT
- 1.0
- 1.0
- 1.0
- 76.5 FT

FIRE ALARM SYSTEM RISER


NOTES: FIRE ALARM SYSTEM DOES NOT REFLECT ACTUAL DEVICE QUANTITIES OR LOCATIONS. PLEASE SEE THE BUILDING FIRE ALARM PLAN DRAWINGS. REUSE EXISTING ANNUNCIATOR AND FACP. SEE SYSTEM PLANS FOR NEW LOCATION.

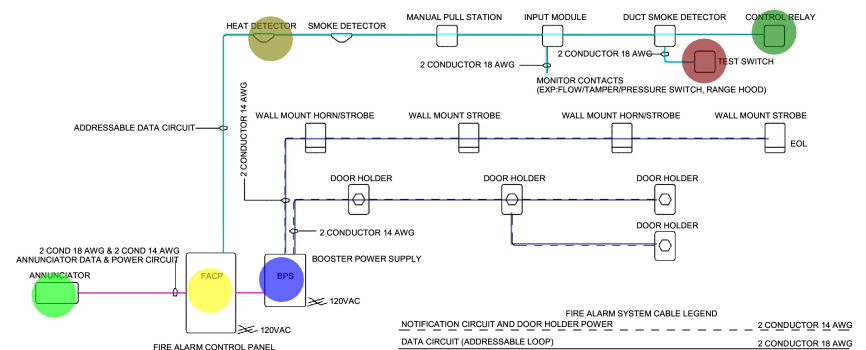

SCALE: N/A



RISER NOTES:

- (A) (4)-4" CONDUITS WITH PULL STRINGS TO POWER COMPANY TRANSFORMER.
(B) APARTMENT METER CENTER: 1200A MAIN BREAKER, 3-PHASE, 208V MAIN BREAKER, 3-PHASE IN AND 1-PHASE OUT WITH 21-150A, 208/120V, 1-PHASE, 3-WIRE METERS FOR APARTMENT PANELS (INCLUDES 1-HOUSE PANEL) WITH 20/150A CIRCUIT BREAKERS, NEMA-3R ENCLOSURE WITH COPPER BUSSES.
(C) GROUND PER N.E.C.
(D) 1 1/2" CONDUIT WITH (3)-1/0, #6 GND. CONTRACTOR TO ADJUST FOR VOLTAGE DROP IF DISTANCE EXCEEDS 125'.

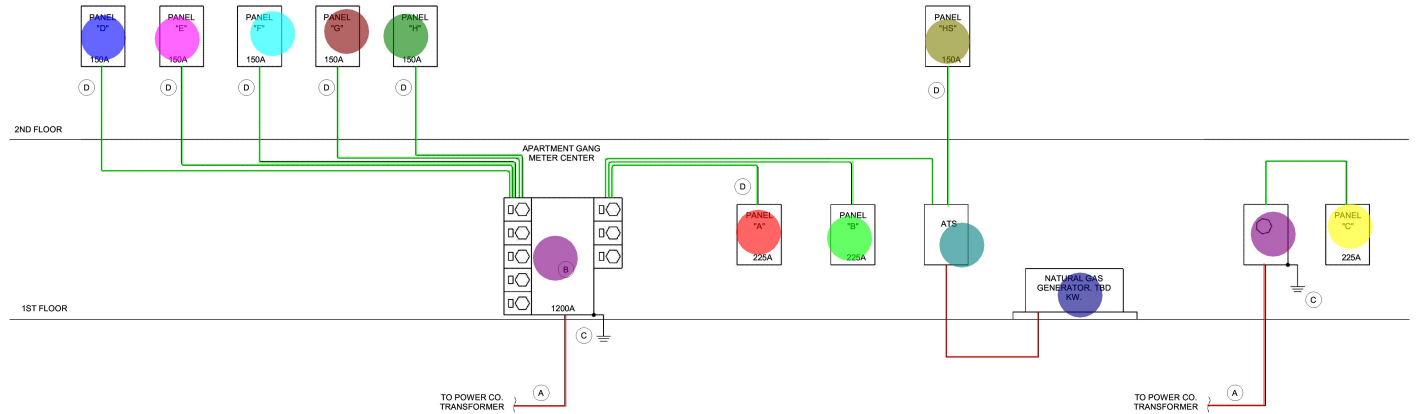

ELECTRICAL RISER


NOT TO SCALE

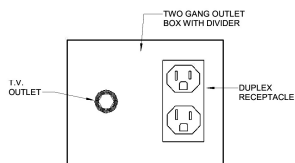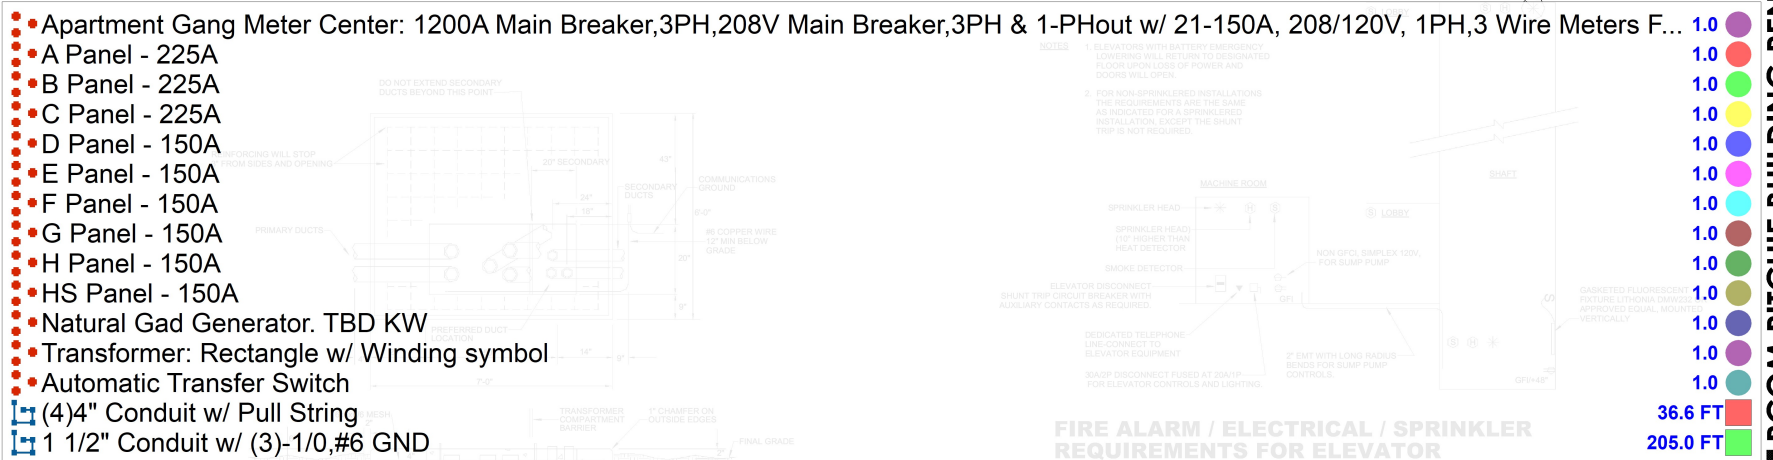

NOTE: COORDINATE EXACT LOCATION OF T.V. OUTLETS WITH WHITEBOARDS, ELECTRONIC BOARDS & TACKBOARDS. MOUNT AT 76" A.F.F.

TV OUTLET DETAIL

NOT TO SCALE

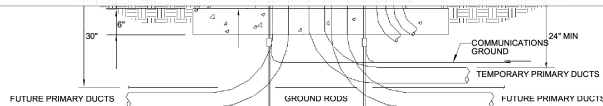

NOTES


- (1) TRANSFORMER PAD TO BE CONCRETE PAD POURED IN PLACE AT THE INSTALLATION SITE.
(2) ON POURED IN PLACE CONCRETE PADS, THE CONCRETE SHALL BE 3000 PSI.
(3) SECONDARY DUCTS SHOULD NOT EXTEND MORE THAN 2" ABOVE THE TOP OF FOUNDATION. FOR TERMINATING THE CABLES. PRIMARY DUCTS SHOULD BE CUT OFF 2" BELOW THE TOP OF THE FOUNDATION TO ALLOW
(4) EXTEND GROUND RODS 2" ABOVE THE TOP OF THE FOUNDATION TO ACCOMMODATE A GROUNDING JUMPER.
(5) HORIZONTAL SECONDARY DUCTS (CONDUITS) TO BE KEPT 24" BELOW GRADE TO TOP OF CONDUITS.

TRANSFORMER PAD DETAIL

NO SCALE

FIRE ALARM / ELECTRICAL / SPRINKLER REQUIREMENTS FOR ELEVATOR

NO SCALE

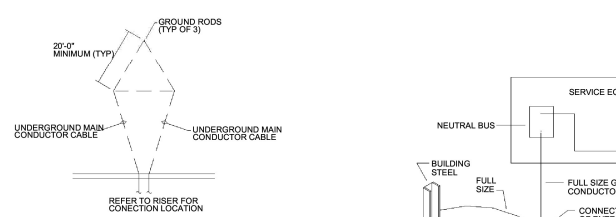


GROUNDING PROTECTION NOTES:

1. BOND GROUND SYSTEM TO BUILDING STEEL.
2. ALL CONDUCTOR CABLES SHALL BE STRANDED COPPER.
3. PROVIDE MINIMUM OF TWO PATHS TO GROUND FROM EACH GROUND ROD. MINIMUM SEPARATION IS 20'-0".
4. BONDING CONDUCTOR CABLE SHALL BE 10 MINIMUM.
5. PROVIDE GROUND GRID USING THREE 5/8" MINIMUM DIAMETER GROUND RODS. LENGTH OF RODS 10'-0" MINIMUM.
6. MINIMUM CONDUCTOR CABLE BEND IS 90 DEG. MINIMUM RADIUS OF BEND IS 8".
7. NO DEAD END CABLES ARE ALLOWED.
8. ALL WORK TO COMPLY WITH NFPA ARTICLE 780, NEC ARTICLE 250-66 AND NEC ARTICLE 250-108.


GROUNDING DETAIL

NOT TO SCALE

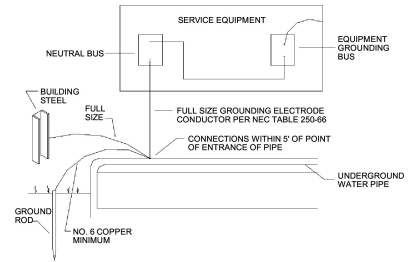

SERVICE ENTRANCE GROUNDING

SCHEMATIC



90% PRICING SET
09.12.2025

RCM RITCHIE BUILDING RENOVATION

WASHINGTON STREET, RAVENSWOOD WV

ELECTRICAL DETAILS



OMNI
ARCHITECTS

E4.03

Copyright © All rights reserved. Reproduction in whole or in part is prohibited. This drawing is the intellectual property of RCM Ritchie Building Renovation and shall not be used in any way without written permission of this firm.
Project No. 20210008 Drawn by: Author