

On the Laboratory Synthesis of Electric Eel Electrocytes

Jonathan Loud 2342270, Jacob Rodriguez 2336804,
Giovanna G. Amorim 233 4984, Samuel-José Turcotte 2339779

Dawson College

000-000-000 section 00001

Dr. Jeffery K. Eng

Submission: December 10, 2024

Abstract

This paper explores the experimental simulation of electric eel cells. By simulating the electrochemical conditions found within eel electrocytes on a macroscopic scale, this experiment was able to produce significant voltages ranging in the hundreds of millivolts. Specifically, this experiment employed the use of sodium alginate, an organic salt that releases Na⁺ ions in water, to simulate the release of sodium ions in electrocytes. By using dialysis tubing with a specific pore size, it was possible to trap the alginate while allowing the diffusion of Na⁺, thereby creating a charge differential across the tubing and inducing a measurable voltage. **Keywords:** [keywords]

Contents

1 Introduction	2
2 Material and Methods	3
3 Results and Discussion	4
References	6

1 Introduction

Native to the freshwater rivers of South America, the *Electrophorus electricus*, or more commonly referred to as the electric eel, is known for its ability to generate high voltage shocks, formally known as electric organ discharges (EOD); these EODs can be classified into low-voltage EODs and high-voltage EODs. Low-voltage EODs are expressed at lower frequencies of about 10Hz to 20Hz [4], reaching about 10 V [5]. Therefore, they are more practical for communication and determining the presence of organisms in their environment through a process called electrolocation: monitoring changes in a particular electric field [1]. On the other hand, high-voltage EODs are used as an attack or defence mechanism, the largest recorded voltage discharge being 500V [5]. However, whether the emitted EODs are expressed as low or high voltages, they are produced from a specific cell that makes up 80% of the eel's body: electrocytes [3]. These electrocyte cells are arranged in series and in parallel and are located in the electric eel's three most prominent organs: Sach's organ, the Main organ, and Hunter's organ [5]. [cite this figure (Figure 1.)] This arrangement allows for the entire eel to be viewed as a battery, with the positive and negative poles at the head and tail respectively, allowing for the variety of EOD voltages mentioned above. Although electric eels have the potential to release high-voltage EODs, the current produced remains nonetheless quite minimal (1 A) [5]. This is a result of the high resistance of the freshwater where these eels are found, or more precisely, the lack of ions to maintain the electric current [2]. Consequently, to optimize the battery potential of the electric eels EOD, research was conducted by Lina Guezi [6], a colleague of ours, to produce a synthetic replication of the electric eel's electrocyte cells in ionized water. Our experiment aims to test their research findings by making our own battery prototype based off of their work with a few modifications in order to explore the potential uses of this biological battery. To do so we used a dialysis membrane to isolate positive sodium ions (Na^+), similarly to how the electric eels do in their electrocyte cells, which creates a potential gradient across our synthetic electrocyte cell. This process generates a voltage difference which then produces an electric discharge, similarly to a battery. The synthetic batteries created in this lab function through the principles of diffusion and dissociation. Firstly, the salt used in this experiment is sodium alginate. Like all salts, sodium alginate is composed of a positively-charged cation (in this case, sodium), and a negatively-charged anion (here, alginic acid). These two components are fused together in solid form by an ionic bond. However, when placed in an aqueous environment, the ionic bond is broken and the two components are allowed to separate. This phenomenon occurs in most salts, and is known as dissociation. Next, this experiment uses diffusion and a semi-permeable membrane to separate the charged ions. The sodium alginate is held in a capsule made of dialysis tubing, a specialized membrane with microscopic pores. These pores are of a very particular size, as to allow certain smaller molecules to pass freely across the membrane, while blocking larger molecules from crossing. This is known as a semi-permeable membrane. The membrane used in this experiment has a molecular cut-off weight between 6,000 and 8,000 Daltons. This means that 90% of molecules with a molecular weight greater than 8,000 Daltons will be trapped by the membrane [7]. In the case of alginic acid, which possesses a molecular weight between 10,000 and 600,000 Daltons [8], the membrane is non-permeable. This means that the alginic acid ions placed within the tubing will remain. However, the sodium ions released are quite small, with a mass of around 23 Daltons. Therefore, they are free to diffuse across the membrane into the surrounding water. Taking into account the fact that sodium ions possess a charge of 1+, and the alginic acid, therefore, possesses a charge of 1-, as sodium ions begin to diffuse across the membrane, the water outside the tubing acquires a positive charge. Likewise, the solution within the tubing starts to contain more alginic acid than sodium and therefore goes from a neutral solution to becoming negatively charged. This charge imbalance is then measurable by using a voltmeter.

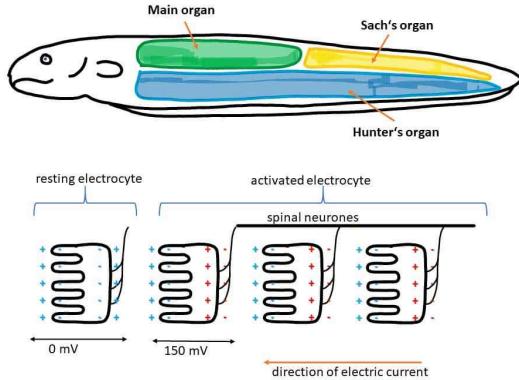


Figure 1: Electric eel's organ composition (Hunter's organ, the Main organ, and Sach's organ make up 80% of the eel's organs) with electrocyte cell alignment and polarization.

2 Material and Methods

Materials

- Drinking glasses or other receptacles capable of holding water
- Dialysis tubing with a MWCO of 6-8kDa
- Sodium alginate powder
- Voltmeter
- Alligator wires

Method

1. Drinking glasses were rinsed and filled with hot tap water. Roughly 10cm pieces of dialysis tubing were cut, and one piece of tubing was soaked in each glass for 30 minutes.
2. Dialysis tubing pieces were removed from the water, opened up, and a knot was tied at the bottom of each piece, sealing it. 1.25mL of sodium alginate powder was inserted into each section of tubing, and the tubes were filled around 3/4 of the way with water to dissolve the powder. Stirring rods were used to aid soaking and dissolution of the powder.
3. The filled dialysis membranes were placed back into their glasses, open side up, ensuring that the top of each piece protruded past the water level in the glasses.
4. The setup was left for 12 hours to maximize ionic diffusion.
5. The voltage of each sample was measured by placing two alligator-clip wires in each glass: one wire was placed inside the dialysis tubing, and one was placed in the glass but outside the tubing. The positive probe of the voltmeter was then attached to the wire outside the tubing, and the negative probe was connected to the wire inside the tubing. A reading was then made using the voltmeter and the data was recorded. This was repeated for each replicate.



Figure 2: Experiment with aluminium foil attached to electrode

3 Results and Discussion

The results obtained by the lab indicate that the voltages produced by the experimental replicates ($M=81.82\text{mV}$, $SD=20$) are significantly greater than those generated by the control group $t(4) = -2.6$, $p = .048$. This confirms the hypothesis that if sodium alginate is dissociated inside a dialysis membrane, by diffusion, a potential difference will be created between the inside and outside of the membrane.

Our experiment created a voltage using a reaction similar to an electrolyte in an electric eel. By releasing sodium alginate, an ionic molecule that dissociates into two oppositely charged particles of different sizes, we were able to separate the sodium cations from the alginate anions, thus creating a difference in charge inside and outside the membrane. This created a difference of potential and voltage. The initial voltage measured was significantly higher than the control (38mV, 600mV, and 40.9mV). After 12 hours, the voltage was also higher than the control (101.26, 141.39mV, 46mV, and 26.4 mV). The p-value after 12 hours was 0.048 which means our results are significant because it is less than 0.1, which is the standard for battery making[9]. Additionally, our data suggests that the voltage after 12 hours is lower than that measured immediately after the dissolution of the sodium alginate. This voltage drop may be due to the dialysis membrane pore size. If the pores are too large, it may be possible for small quantities of alginic acid to slowly diffuse across the membrane. We also observed that adding aluminum foil to the end of the electrode of the voltmeter seems to significantly increase the voltage. Unfortunately, as we were limited by the quantity of materials, we did not do replicates of this. Having 2.5mL of sodium alginate also does not seem to affect the voltage measured, though this result is not conclusive.

We noticed that the current is very low and decreases rapidly. When measured, the voltage would drop significantly during the time it was being measured. This is similar to the voltage produced by electric eels which can produce high voltages but for a very short time. Even when the voltage was semi-stable, it fluctuated greatly. Our results are around 5-10 mV away from the true voltage because it varied so much. tried to read a voltage in the middle.

To further explore the potential of these batteries, it would be useful to make more replicates. Due to our lack of membrane, we were limited to seven attempts. By experimenting with different procedures, we refined our protocol to give the best results. If we were to redo this experiment, we would put only 1.25 mL of powder in as 2.5 mL does not fit easily, is hard to mix, and overflowed. We would also put aluminum foil on the electrodes to increase the surface area to which ions can attach to generate a higher voltage. We would also use a membrane of the appropriate pore size to restrict the flow of alginate and only let sodium pass through the membrane. We would also measure the voltage more frequently to find the time at which the most sodium diffused but with the least amount of alginic acid diffused. If we make a graph showing the progression of voltage over time, we will be able to maximize the voltage. It would also be interesting to put multiple cells in series to generate an even higher voltage. This would be harder because all electrodes would have to be put in simultaneously as the current decreases so rapidly.

Our battery functions similarly to a capacitor which can output high voltages in a short period of time.



Figure 3: Membranes being left to diffuse

Its uses would be similar to that of capacitors as well.

References

- [1] M. V. L. Bennett. “Comparative Physiology: Electric Organs”. In: *Annual Review of Physiology* 32. Volume 32, 1970 (Mar. 1970), pp. 471–528. ISSN: 0066-4278, 1545-1585. DOI: 10.1146/annurev.ph.32.030170.002351. (Visited on 12/10/2024).
- [2] Anja Boisselet. *Biomimetic potential of electric eels*. Sept. 2017. (Visited on 12/10/2024).
- [3] Bruce A. Carlson. “Animal Behavior: Electric Eels Amp Up for an Easy Meal”. In: *Current Biology* 25.22 (Nov. 2015), R1070–R1072. ISSN: 09609822. DOI: 10.1016/j.cub.2015.09.051. (Visited on 12/09/2024).
- [4] Kenneth C. Catania. “The Astonishing Behavior of Electric Eels”. In: *Frontiers in Integrative Neuroscience* 13 (July 2019), p. 23. ISSN: 1662-5145. DOI: 10.3389/fnint.2019.00023. (Visited on 12/10/2024).
- [5] “Electric Circuits 6: Electric Eels”. In: 2nd ed. The University of Western Australia, Dec. 2015. URL: <https://www.uwa.edu.au/study/-/media/faculties/science/docs/electric-eels.pdf> (visited on 12/09/2024).
- [6] Lina Guezi et al. “Theoretical Examination of the Conception of a Biological Battery Containing Synthetic”. In: (Dec. 2017), p. 12.
- [7] *Molecular Weight Cut Off*. Synder Filtration. July 22, 2014. URL: <https://synderfiltration.com/learning-center/articles/membranes/molecular-weight-cut-off/> (visited on 12/06/2024).
- [8] *Molecular Weight Determination for Alginates — USP-NF*. USP-NF. URL: <https://www.uspnf.com/notices/312-gc-prospectus-20211029> (visited on 12/08/2024).
- [9] Mona Faraji Niri et al. “Quantifying Key Factors for Optimised Manufacturing of Li-ion Battery Anode and Cathode via Artificial Intelligence”. In: *Energy and AI* 7 (Jan. 1, 2022), p. 100129. ISSN: 2666-5468. DOI: 10.1016/j.egyai.2021.100129. URL: <https://www.sciencedirect.com/science/article/pii/S2666546821000768> (visited on 12/10/2024).