
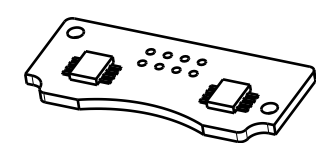


All parts which supply to LG Innotek must not contain prohibited substances including RoHS Hazardous substances and for more details refer to LG Innotek's "Manual for management of hazardous substances in Product"

Copyright © 2015 by LG Innotek, Co., Ltd. All rights reserved. No part of this document may be reproduced, stored in a storage device or retrieval system, or transmitted in any form or by any means, whether electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of LG Innotek, Co., Ltd.

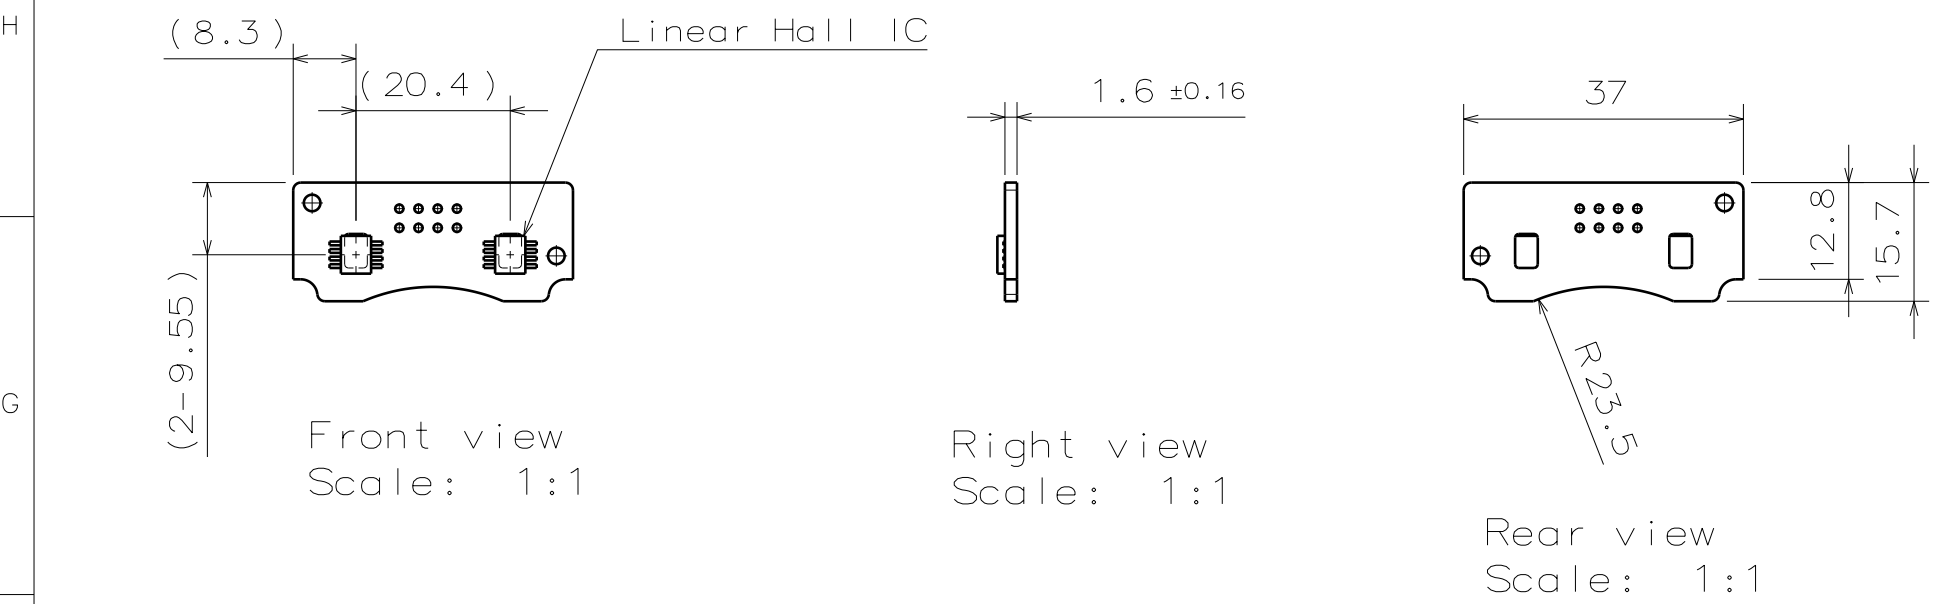

Isometric view
Scale: 1:1


- NOTE
1. This is a PCB Ass'y drawing.
 2. The detail for circuit and pattern, follow the artwork
 - PCB Revision No. : A0
 3. All dimensions and tolerances of PCB follow the single pcb drawing (3PCR03625A)
 4. No swap error, omission and misalignment of the chip component.
 5. No PCB degradation, burn out, flux and alien substance after SMT
 6. No deformation and damage at PCB.
 7. Coating liquid must not spill out on the side of the PCB
 8. Apperance criteria after coating follow the PQR Rev.3
 9. No assembly problem with Lower Case Assy
 10. All Components must be automotive qualified (AEC qualified)
 11. Solder Paste : TAMURA TLF-204-HSP
 12. Conformal coating materials : DOW CORNING 3-1953 or Chemtros PAS7900(A), (Type A-1(MS941-04))
 13. Conformal coating area
 - Follow the left conformal coating area.
 - The surface mount of the circuit components
 14. No conformal coating area
 - Follow the left conformal coating area.
 - Exception area : 8pin terminal holes, Screw holes, Hall IC hole area, Assembly area with case
 15. Conformal coating thickness : 30 ~ 150µm
 16. Check coating area whether coating is applied on essential coating area or not.
 17. All operators must wear a ESD protection bracelet and must be equipped with ionizer in the main process(material warehouse, IC)
 18. PCB Ass'y bending quantity : Max. 500µm/m (No crack all parts)
 19. ICT inspection items and specs should be selected after consultation with the LGIT quality manager
 20. All PCB Ass'y must be inspected as the following 'Test items'
 21. Barcode position and type must be discussed with R&D
 22. Cleanliness Specification
 - 22-1. Part Cleanliness - Metal : 400µm↓, Non Metal : 600µm↓
 - 22-2. Box Cleanliness - Metal : 400µm↓, Non Metal : 600µm↓
 23. This part must meet the following regulation.
 - 1) ES90000-01 Rev. 10
 - 2) ES90000-02 Rev. 7
 - 3) ES90000-03 Rev. 6
 - 4) ES90000-04 Rev. 9
 - 5) MS201-02 Rev. 47
 - 6) MS915-01 Rev. 4 Type A
 - 7) MS941-01 Rev. 8 Type B
 - 8) MS941-04 Rev. 11 Type A-1
 - 9) MS184-01 Rev. 6 Type B
 - 10) PQR Rev.3
 24. Packaging container which reflects elctro-static discharge measures should be used.
 25. Each products should be free from interference.
 26. Contamincants inflow and shock during movement should not be caused.
 27. Following the below QR code rule
 - Model [6:7] : A2

BYTE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
ITEM	Bare PCB	LOT (YYWW)	Baking	Model	Supplier code	Line No.	YY	M	D	Serial No.	Rev.									

PCB Assy Test List

	Test Item	Test Method	Acceptance Criteria
1	TOS output	Measure Unit time of SENT (T1,T2,T3,T4) after applying 5V at VCCM, VCCS	3µs±20%
2	TOS consumption current	Measure current consumption after applying 5V at VDDM, VDDS	Power A : 6 ~ 16mA Power B : 6 ~ 16mA

- Power A : TSM(T1), TSS(T2) Power Line Pin No.4(VCC_A), No.3(GND_A)
- Power B : TSM_R(T3), TSS_R(T4) Power Line Pin No.5(VCC_B), No.6(GND_B)

0.0004kg	7	5CHT00014A	Coating agent			-		
0.0016kg	6	5SOC00024A	Solder cream			-		
6	5	2FTC00096A	Murata, Ferrite bead BLM18AG471SH1			BLM1,2,3,4,5,6		
4	4	2CAC01814A	SAMSUNG, Open type MLC CL10B102KB8WPMC, 1nF, 50V, 1608			C2, C4 C6, C8		
4	3	2CAC01803A	SAMSUNG, Open type MLC CL10B473KB8WPMC, 47nF, 50V, 1608			C1, C3 C5, C7		
2	2	2ICZ00257A	Infineon, Linear Hall IC TLE4998S80			U1, U2		
1	1	3PCR03625A	PCB FR-4, 2Layer, Middle-Tg, ENIG			-		
Q'TY	NO	PART NO		DESCRIPTION	MATERIAL	COLOR FINISH	NOTE	
RELATED P/N			SCALE	UNIT	DESIGN	2025.02.21	TITLE	PCB Assy
					S.W.BYUN		PART NO	
			1:1	mm	CHECKED	2025.02.21	MODEL	
					C.H.LEE	ASTMFT0007		
					APPROVED	2025.02.21	DWG NO	8PCA00020A
					J.Y.KIM			



DIMENSIONAL TOLERANCE		CHANGES	REV NO.	DATE (YY MM DD)	SIGNATURE	CHANGE CONTENTS
LENGTH	±0.1					
ANGULAR	±0.5°					
UNLESS OTHERWISE SPECIFIED						