


16 Mar, 2026 -- 1:37pm
C:\dfile\22103.25-ES101.dwg



ELECTRICAL SITE PLAN

SCALE: 1"=20'

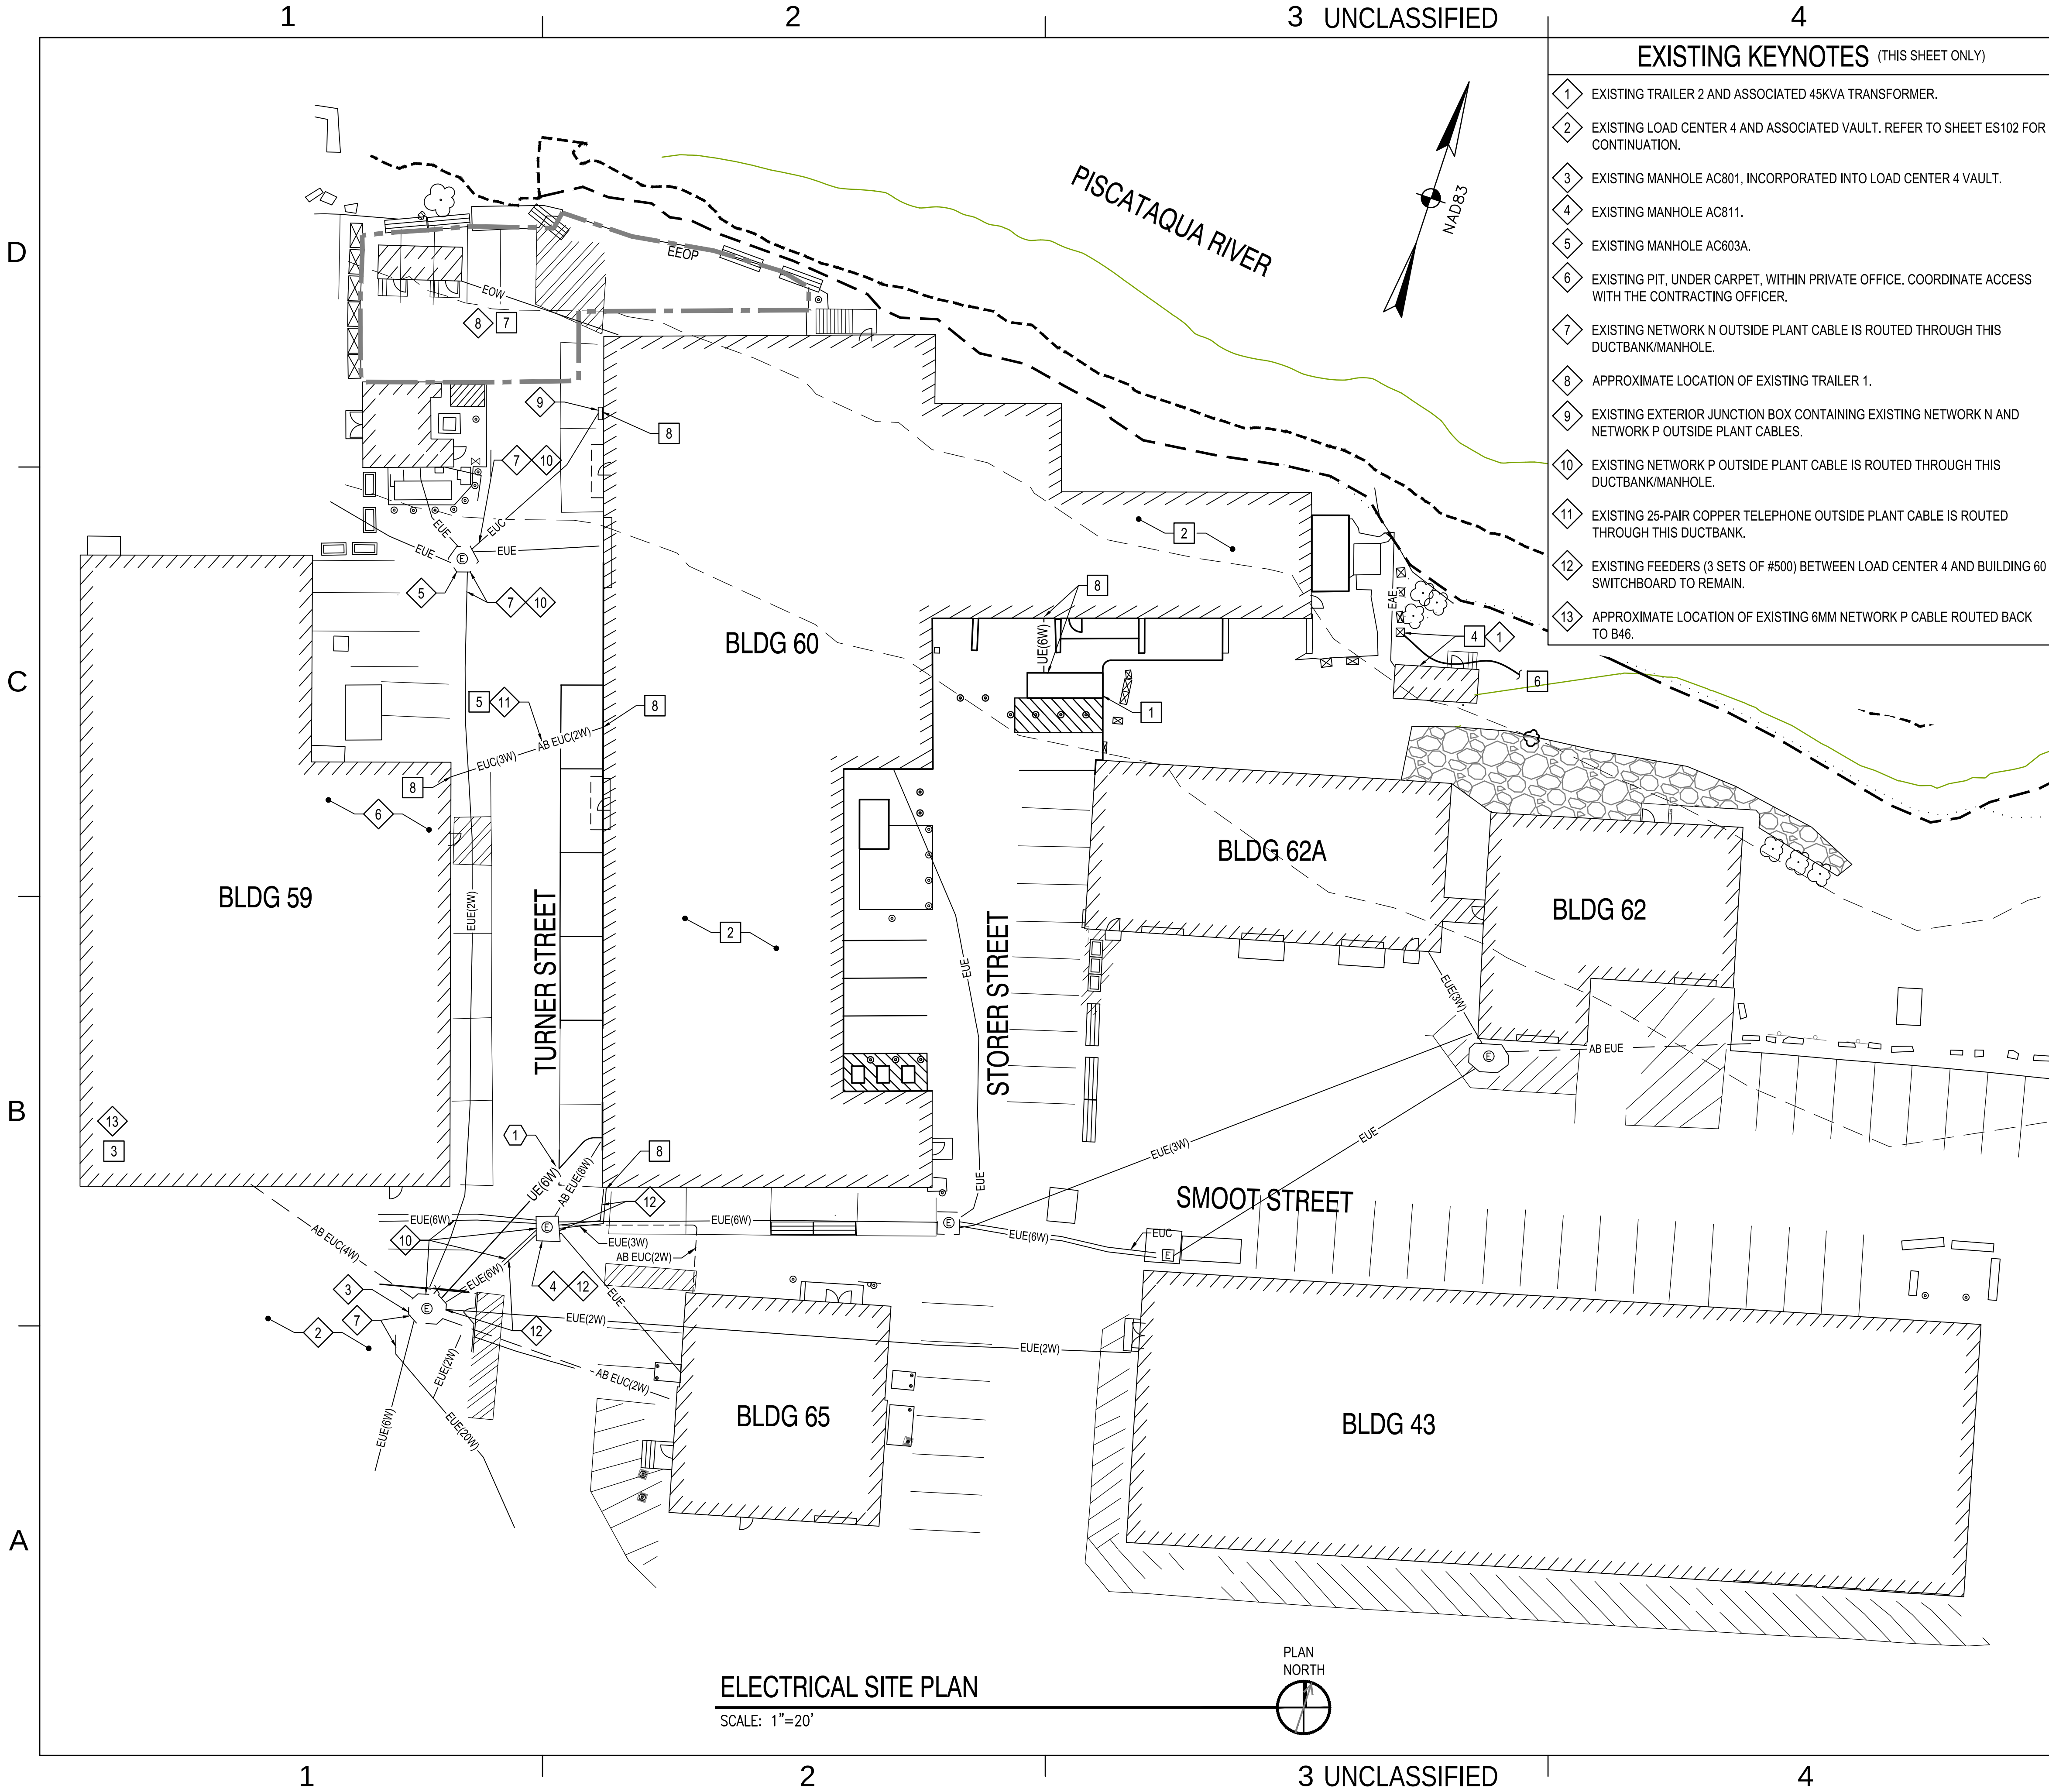

EXISTING KEYNOTES (THIS SHEET ONLY)

- EXISTING TRAILER 2 AND ASSOCIATED 45KVA TRANSFORMER.
- EXISTING LOAD CENTER 4 AND ASSOCIATED VAULT. REFER TO SHEET ES102 FOR CONTINUATION.
- EXISTING MANHOLE AC801, INCORPORATED INTO LOAD CENTER 4 VAULT.
- EXISTING MANHOLE AC811.
- EXISTING MANHOLE AC803A.
- EXISTING PIT, UNDER CARPET, WITHIN PRIVATE OFFICE. COORDINATE ACCESS WITH THE CONTRACTING OFFICER.
- EXISTING NETWORK N OUTSIDE PLANT CABLE IS ROUTED THROUGH THIS DUCTBANK/MANHOLE.
- APPROXIMATE LOCATION OF EXISTING TRAILER 1.
- EXISTING EXTERIOR JUNCTION BOX CONTAINING EXISTING NETWORK N AND NETWORK P OUTSIDE PLANT CABLES.
- EXISTING NETWORK P OUTSIDE PLANT CABLE IS ROUTED THROUGH THIS DUCTBANK/MANHOLE.
- EXISTING 25-PAIR COPPER TELEPHONE OUTSIDE PLANT CABLE IS ROUTED THROUGH THIS DUCTBANK.
- EXISTING FEEDERS (3 SETS OF #500) BETWEEN LOAD CENTER 4 AND BUILDING 60 SWITCHBOARD TO REMAIN.
- APPROXIMATE LOCATION OF EXISTING 6MM NETWORK P CABLE ROUTED BACK TO B46.

GENERAL NOTES (THIS SHEET ONLY)

- REFER TO SHEET CS101 FOR LIMITS OF WORK REQUIRING A NRPA PERMIT BY RULE.
- REFER TO SHEET ET501 FOR TELECOMMUNICATIONS RISER DIAGRAMS.
- REFER TO SHEET EP501 FOR ONE-LINE DIAGRAM.
- REFER TO SHEET ES102 FOR TELECOMMUNICATIONS SITE PLAN SCOPE.

REMOVALS KEYNOTES (THIS SHEET ONLY)

- FIELD VERIFY AND REMOVE CABLES WITHIN EXISTING DUCTBANK LOCATED BETWEEN LOAD CENTER 4 VAULT AND BUILDING 60. FOR BIDDING PURPOSES, ASSUME REMOVAL OF 1,000 LINEAR FEET OF COPPER CABLE. ASSUME THREE OF THE DUCTS CONTAIN A #2/0 BARE, CUT OFF, COPPER GROUND WIRE. ASSUME ONE OF THE DUCTS CONTAINS 3-1/C#2 CUT OFF, WIRES. ASSUME THE REMAINING CABLES ARE A 60A DC FEEDER. THE CABLES ARE NOT ANTICIPATED TO BE LEAD COVERED, COORDINATE WITH THE CIVIL TRADE. (OPTION 9); THE DUCTBANK IS BEING REMOVED IN PREPARATION FOR A NEW DUCTBANK TO BE INSTALLED.

KEYNOTES (THIS SHEET ONLY)

- PROVIDE DIESEL GENERATOR WITH SUB BASE FUEL TANK. REFER TO SHEET EP501.
- PROVIDE LIGHTNING PROTECTION SYSTEM. REFER TO LIGHTNING PROTECTION SYSTEM NOTES, THIS SHEET.
- [BASE BID]; PROVIDE FUSION SPlice TO EXISTING 6MM NETWORK P CABLE IN BUILDING 59. COORDINATE EXACT ROUTING THROUGH B59 WITH THE CONTRACTING OFFICER. REFER TO SHEET ET106.
- [CLIN 004]; PROVIDE TEMPORARY POWER TO EXISTING TRAILER 2 DURING CONSTRUCTION. REESTABLISH POWER, FROM BUILDING 60, TO THE EXISTING TRAILER. REFER TO SHEET EP501 ONE-LINE DIAGRAM.
- [BASE BID]; ROUTE 6 STRAND MULTIMODE FIBER OPTIC NETWORK P CABLE BETWEEN B59 AND B60. REFER TO SHEETS ET106 AND ET501. (OPTION 11); ROUTE 36 STRAND SINGLE MODE FIBER OPTIC NETWORK N AND NETWORK P CABLES BETWEEN B59 AND B60. REFER TO SHEETS ES102, ET106, AND ET501.
- UTILIZE ONE SET OF EXISTING CONDUCTORS FEEDING B60 TO MAINTAIN POWER TO EXISTING TRANSFORMER SERVING EXISTING TRAILER 2. PROVIDE TEMPORARY POWER TO BUILDING 60 CONSTRUCTION TRAILER VIA EXISTING TRANSFORMER. TEMPORARILY ADJUST TRIP SETTINGS ON THE EXISTING LOAD CENTER BREAKER FOR CONSTRUCTION PERIOD. REFER TO SHEET EP501 AND ADJUST TRIP SETTINGS AT THE COMPLETION OF CONSTRUCTION. REFER TO SHEET G-008 FOR OUTAGE SCHEDULE. COORDINATE WITH THE CONTRACTING OFFICER.
- [CLIN 004]; MAINTAIN TEMPORARY POWER TO EXISTING TRAILER 1. RELOCATE EXISTING TEMPORARY EQUIPMENT SERVING THE TRAILER, AS REQUIRED, TO ACCOMMODATE B60 RENOVATION. REFER TO SHEETS ED102 AND EP102.
- SEAL CONDUIT INTERIORS.

LIGHTNING PROTECTION SYSTEM NOTES

- DELEGATED DESIGN: PROVIDE LIGHTNING PROTECTION SYSTEM DESIGNED BY A CERTIFIED LIGHTNING PROTECTION SYSTEM MASTER DESIGNER IN ACCORDANCE WITH NFPA 780 AND UFC 5-575-01. PROVIDE UL LIGHTNING PROTECTION INSPECTION CERTIFICATE FOR THE BUILDING, CERTIFIED TO NFPA 780. INSTALL LIGHTNING PROTECTION SYSTEM IN ACCORDANCE WITH APPROVED SHOP DRAWINGS.
- SEE ARCHITECTURAL SHEETS FOR ROOF PLAN, BUILDING SECTIONS, AND EXTERIOR BUILDING ELEVATIONS. SEE CIVIL SHEETS FOR UNDERGROUND UTILITIES AND PERMIT INFORMATION.
- PROVIDE LIGHTNING PROTECTION SYSTEM SHOP DRAWINGS, INCLUDING ROOF PLAN, AND BUILDING EXTERIOR ELEVATIONS, AND CLEARLY INDICATE DOWN CONDUCTOR LOCATIONS FOR GOVERNMENT REVIEW AND APPROVAL. DOWN CONDUCTORS MUST BE ROUTED ALONG BUILDING CONTOURS AND MUST NOT CROSS IN FRONT OF WINDOWS, SILLS, OR LINTELS. EXTERIOR ELEVATIONS INDICATE POTENTIAL DOWN CONDUCTOR LOCATIONS. FINAL LOCATIONS MUST BE DETERMINED BY THE DELEGATED DESIGNER AND APPROVED BY THE GOVERNMENT.
- REFER TO SHEETS CR101 AND CS101 FOR LOCATIONS WHERE PAVEMENT IS BEING REPAIRED. SUCH AREAS ARE SUGGESTED LOCATIONS FOR PLACING GROUND RODS/PLATES. IN AREAS WHERE PAVEMENT IS NOT IDENTIFIED FOR PAVEMENT REPAIR, REPAIR THE PAVEMENT AFTER GROUND ROD/PLATE INSTALLATION IN ACCORDANCE WITH DETAIL C1/C502. THE WORK REQUIRED TO INSTALL GROUND RODS/PLATES IS NOT PERMITTED BELOW THE TOP OF THE SLOPE/RIVER BANK. REFER TO SHEET CX101.
- REFER TO GENERAL CONSTRUCTION NOTES ON SHEET G-004A FOR WORK RELATED TO HISTORIC BUILDINGS.
- FASTEN LIGHTNING PROTECTION DOWN CONDUCTORS TO CENTER OF BRICK, NOT WITHIN MORTAR JOINTS, PER REQUIREMENTS OF NFPA 780 AND UL. PROVIDE BRICK DRILLING AT EXISTING BRICK.

GRAPHIC SCALE



CHECK GRAPHIC SCALE BEFORE USING



FOR COMMANDER NAVFAC
ACTIVITY
SATISFACTORY TO DATE
DESIGNER HRM
DRAWN BY BPD
CHECKED BY DCL
DESIGN MANAGER T. CARLETON
PROJECT MANAGER L. LYONS
FEADIPMAE
FIRE PROTECTION S. RUCINSKI

DEPARTMENT OF THE NAVY	NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND
NAVAL FACILITIES ENGINEERING SYSTEMS COMMAND - MID-ATLANTIC	PORTSMOUTH NAVAL SHIPYARD - KITTERY, ME
PORTSMOUTH NAVAL SHIPYARD	B60 REPAIRS
ELECTRICAL SITE PLAN	

PROJECT NO. 1740579
NAVFAC DRAWING NO.
SHEET 246 OF 282
ES101

DRAWFORM REVISION: 14 SEP 2023