


Shaun Lim
Aldrich Go
Amienz Arago
Joshua Sorrilla

Lab - Basic Switch and End Device Configuration

Topology

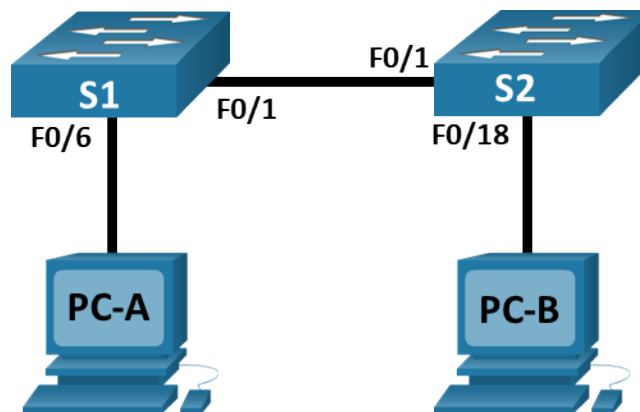

Addressing Table

Device	Interface	IP Address	Subnet Mask
S1	VLAN 1	192.168.1.1	255.255.255.0
S2	VLAN 1	192.168.1.2	255.255.255.0
PC-A	NIC	192.168.1.10	255.255.255.0
PC-B	NIC	192.168.1.11	255.255.255.0

Objectives

- Set Up the Network Topology
- Configure PC Hosts
- Configure and Verify Basic Switch Settings

Background / Scenario

In this lab, you will build a simple network with two hosts and two switches. You will also configure basic settings including hostname, local passwords, and login banner. Use **show** commands to display the running configuration, IOS version, and interface status. Use the **copy** command to save device configurations.

You will apply IP addressing for this lab to the PCs and switches to enable communication between the devices. Use the **ping** utility to verify connectivity.

Note: The switches used are Cisco Catalyst 2960s with Cisco IOS Release 15.0(2) (lanbasek9 image). Other switches and Cisco IOS versions can be used. Depending on the model and Cisco IOS version, the commands available and output produced might vary from what is shown in the labs.

Note: Make sure that the switches have been erased and have no startup configurations. Refer to Appendix A for the procedure to initialize and reload a switch.

Required Resources

- 2 Switches (Cisco 2960 with Cisco IOS Release 15.0(2) lanbasek9 image or comparable)
- 2 PCs (Windows with terminal emulation program, such as Tera Term)
- Console cables to configure the Cisco IOS devices via the console ports
- Ethernet cables as shown in the topology

Instructions

Step 1: Set Up the Network Topology

In this step, you will cable the devices together according to the network topology.

- a. Power on the devices.
- b. Connect the two switches.
- c. Connect the PCs to their respective switches.
- d. Visually inspect network connections.

Step 2: Configure PC Hosts

- a. Configure static IP address information on the PCs according to the Addressing Table.

Pinged ip address of 192.168.1.69 because previous class set the switch ip to 192.168.1.10 and did not reset it.

PC-B:

Lab - Basic Switch and End Device Configuration

```
Administrator: Command Prompt
C:\Users\NETLABUSER.CNISLAB>ipconfig /all

Windows IP Configuration

   Host Name . . . . . : WSTN-A06
   Primary Dns Suffix . . . . . : cnislab.dlsu.edu.ph
   Node Type . . . . . : Hybrid
   IP Routing Enabled. . . . . : No
   WINS Proxy Enabled. . . . . : No
   DNS Suffix Search List. . . . . : cnislab.dlsu.edu.ph

Ethernet adapter Ethernet 1:

   Media State . . . . . : Media disconnected
   Connection-specific DNS Suffix . :
   Description . . . . . : TP-Link Gigabit PCI Express Adapter
   Physical Address. . . . . : 50-3E-AA-08-47-83
   DHCP Enabled. . . . . : Yes
   Autoconfiguration Enabled . . . . : Yes

Ethernet adapter Ethernet 2:

   Connection-specific DNS Suffix . :
   Description . . . . . : Realtek PCIe GbE Family Controller
   Physical Address. . . . . : 98-EE-CB-A0-33-CB
   DHCP Enabled. . . . . : No
   Autoconfiguration Enabled . . . . : Yes
   Link-local IPv6 Address . . . . . : fe80::3cc1:fa1e:b916:30b%15(Preferred)
   IPv4 Address. . . . . : 192.168.1.11(Preferred)
   Subnet Mask . . . . . : 255.255.255.0
   Default Gateway . . . . . :
   DHCPv6 IAID . . . . . : 110685899
   DHCPv6 Client DUID. . . . . : 00-01-00-01-24-FF-C4-6D-98-EE-CB-A0-33-CB
   DNS Servers . . . . . : fec0:0:0:ffff::1%1
                           fec0:0:0:ffff::2%1
                           fec0:0:0:ffff::3%1
   NetBIOS over Tcpip. . . . . : Enabled

Ethernet adapter VMware Network Adapter VMnet1:

   Connection-specific DNS Suffix . :
   Description . . . . . : VMware Virtual Ethernet Adapter for VMnet1
   Physical Address. . . . . : 00-50-56-C0-00-01
   DHCP Enabled. . . . . : Yes
   Autoconfiguration Enabled . . . . : Yes
   Link-local IPv6 Address . . . . . : fe80::954a:ca2:562f:5f87%12(Preferred)
```

```
Administrator: Command Prompt

   Connection-specific DNS Suffix . :
   Description . . . . . : VMware Virtual Ethernet Adapter for VMnet8
   Physical Address. . . . . : 00-50-56-C0-00-08
   DHCP Enabled. . . . . : Yes
   Autoconfiguration Enabled . . . . : Yes
   Link-local IPv6 Address . . . . . : fe80::6eb8:5b25:95f9:42de%5(Preferred)
   IPv4 Address. . . . . : 192.168.195.1(Preferred)
   Subnet Mask . . . . . : 255.255.255.0
   Lease Obtained. . . . . : Thursday, 25 May 2023 2:30:30 pm
   Lease Expires . . . . . : Thursday, 25 May 2023 5:30:30 pm
   Default Gateway . . . . . :
   DHCP Server . . . . . : 192.168.195.254
   DHCPv6 IAID . . . . . : 486559830
   DHCPv6 Client DUID. . . . . : 00-01-00-01-24-FF-C4-6D-98-EE-CB-A0-33-CB
   DNS Servers . . . . . : fec0:0:0:ffff::1%1
                           fec0:0:0:ffff::2%1
                           fec0:0:0:ffff::3%1
   Primary WINS Server . . . . . : 192.168.195.2
   NetBIOS over Tcpip. . . . . : Enabled

C:\Users\NETLABUSER.CNISLAB>ping 192.168.1.69

Pinging 192.168.1.69 with 32 bytes of data:
Reply from 192.168.1.69: bytes=32 time=1ms TTL=128
Reply from 192.168.1.69: bytes=32 time=1ms TTL=128
Reply from 192.168.1.69: bytes=32 time=1ms TTL=128
Reply from 192.168.1.69: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.69:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Users\NETLABUSER.CNISLAB>
```

PC-A:

```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.19045.2965]
(c) Microsoft Corporation. All rights reserved.

C:\Users\NETLABUSER.CNISLAB>ipconfig /all

Windows IP Configuration

Host Name . . . . . : WSTN-A05
Primary Dns Suffix . . . . . : cnislab.dlsu.edu.ph
Node Type . . . . . : Hybrid
IP Routing Enabled. . . . . : No
WINS Proxy Enabled. . . . . : No
DNS Suffix Search List. . . . . : cnislab.dlsu.edu.ph

Ethernet adapter Ethernet:

Media State . . . . . : Media disconnected
Connection-specific DNS Suffix . :
Description . . . . . : Realtek PCIe GbE Family Controller
Physical Address. . . . . : 98-EE-CB-A0-34-33
Dhcp Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes

Ethernet adapter Ethernet 2:

Connection-specific DNS Suffix . :
Description . . . . . : TP-Link Gigabit PCI Express Adapter
Physical Address. . . . . : 50-3E-AA-0A-72-9A
Dhcp Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes
IPv6 Address. . . . . : 2001:db8:acad:1::3(Preferred)
Link-local IPv6 Address . . . . . : fe80::241fc07d:88b0:f67%3(Preferred)
Autoconfiguration IPv4 Address. . : 169.254.149.15(Preferred)
Subnet Mask . . . . . : 255.255.0.0
Default Gateway . . . . . : fe80::1%3
Dhcpv6 IAID . . . . . : 500575402
Dhcpv6 Client DUID. . . . . : 00-01-00-01-24-FF-D4-57-98-EE-CB-A0-34-33
DNS Servers . . . . . : fec0:00:0000::1%1
                        fec0:00:0000::2%1
                        fec0:00:0000::3%1
NetBIOS over Tcpip. . . . . : Enabled

C:\Users\NETLABUSER.CNISLAB>enable
'enable' is not recognized as an internal or external command,
operable program or batch file.

C:\Users\NETLABUSER.CNISLAB>
```

- b. Verify PC settings and connectivity.

Step 3: Configure and Verify Basic Switch Settings

- a. Console into the switch. Enter the global configuration mode.
- b. Give the switch a name according to the Addressing Table.
- c. Prevent unwanted DNS lookups.
- d. Enter local passwords. Use **class** as the privileged EXEC password and **cisco** as the password for console access.
- e. Configure and enable the SVI according to the Addressing Table.
- f. Enter a login MOTD banner to warn about unauthorized access.
- g. Save the configuration.
- h. Display the current configuration.
- i. Display the IOS version and other useful switch information.
- j. Display the status of the connected interfaces on the switch.
- k. Configure switch S2.
- l. Record the interface status for the following interfaces.

Interface	S1 Status	S1 Protocol	S2 Status	S2 Protocol
F0/1				
F0/6				
F0/18				
VLAN 1				

- m. From a PC, ping S1 and S2. The pings should be successful.
- n. From a switch, ping PC-A and PC-B. The pings should be successful.

Reflection Question

Why some FastEthernet ports on the switches are up and others are down?

What could prevent a ping from being sent between the PCs?