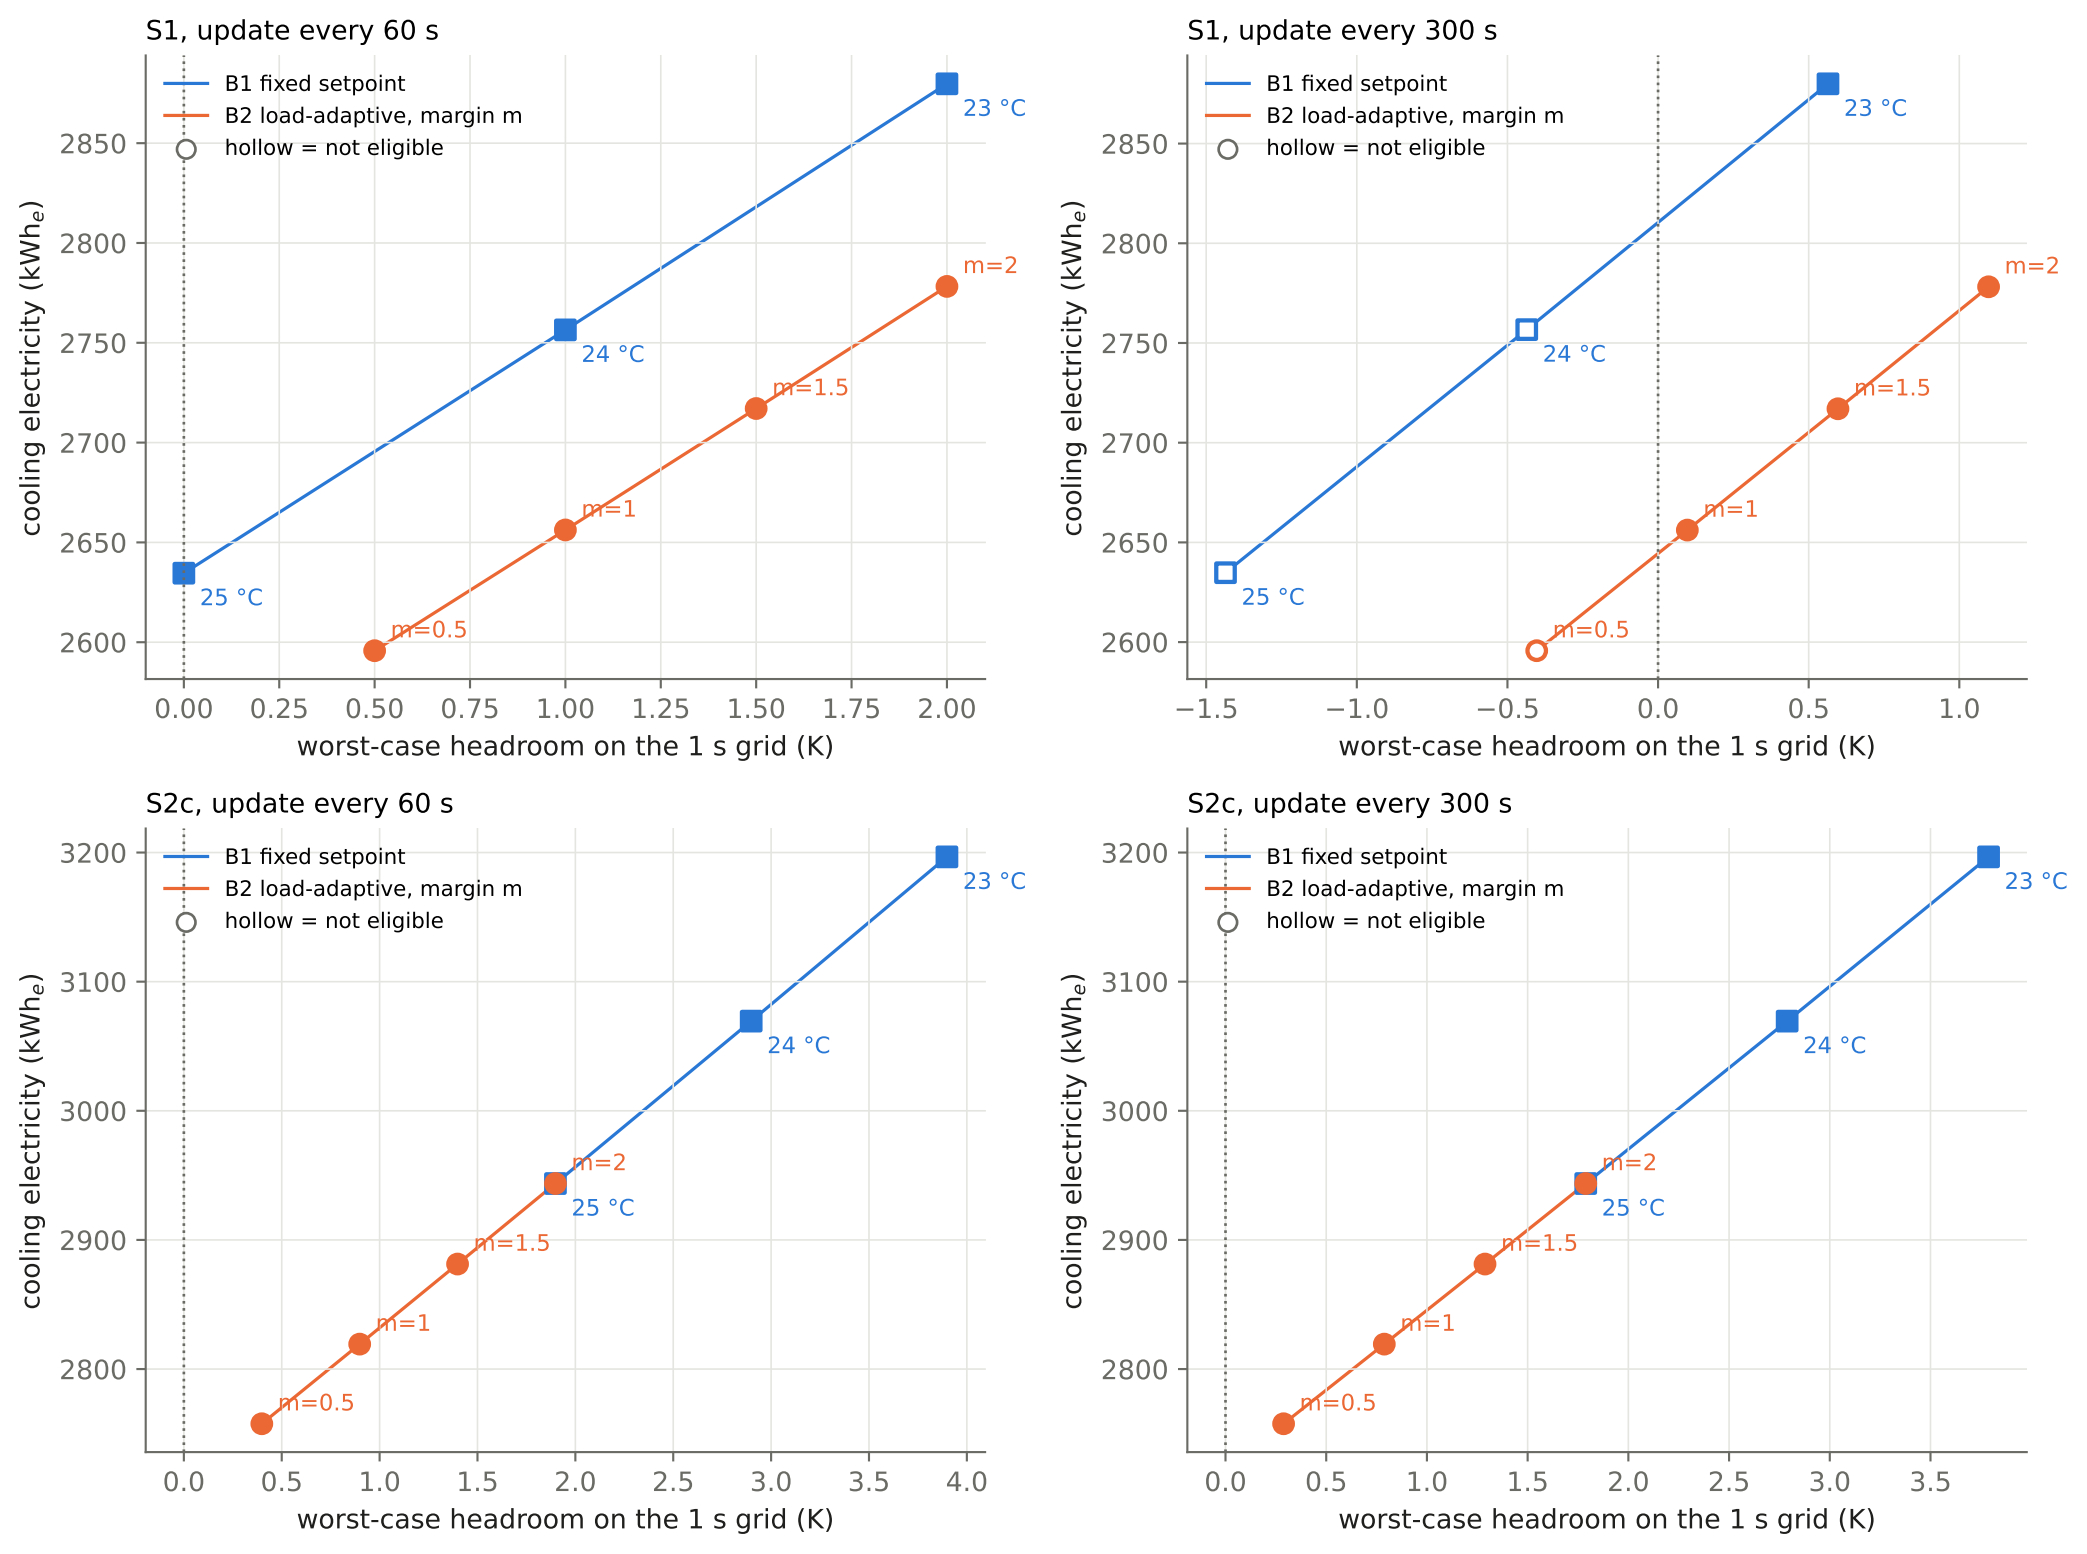
S1, update every 60 s
B1 fixed setpoint
B2 load-adaptive, margin m
hollow = not eligible
23 °C
24 °C
25 °C
m=2
m=1.5
m=1
m=0.5
cooling electricity (kWh$_e$)
worst-case headroom on the 1 s grid (K)
S1, update every 300 s
B1 fixed setpoint
B2 load-adaptive, margin m
hollow = not eligible
23 °C
24 °C
25 °C
m=2
m=1.5
m=1
m=0.5
cooling electricity (kWh$_e$)
worst-case headroom on the 1 s grid (K)
S2c, update every 60 s
B1 fixed setpoint
B2 load-adaptive, margin m
hollow = not eligible
23 °C
24 °C
25 °C
m=2
m=1.5
m=1
m=0.5
cooling electricity (kWh$_e$)
worst-case headroom on the 1 s grid (K)
S2c, update every 300 s
B1 fixed setpoint
B2 load-adaptive, margin m
hollow = not eligible
23 °C
24 °C
25 °C
m=2
m=1.5
m=1
m=0.5
cooling electricity (kWh$_e$)
worst-case headroom on the 1 s grid (K)