


Read burst 1:1 (gear=00)

p0 only; rd_cmd +tphy_rdlat=5 -> rddata_en (MC window); PHY drives rddata_valid+rddata; accum -> 512b write

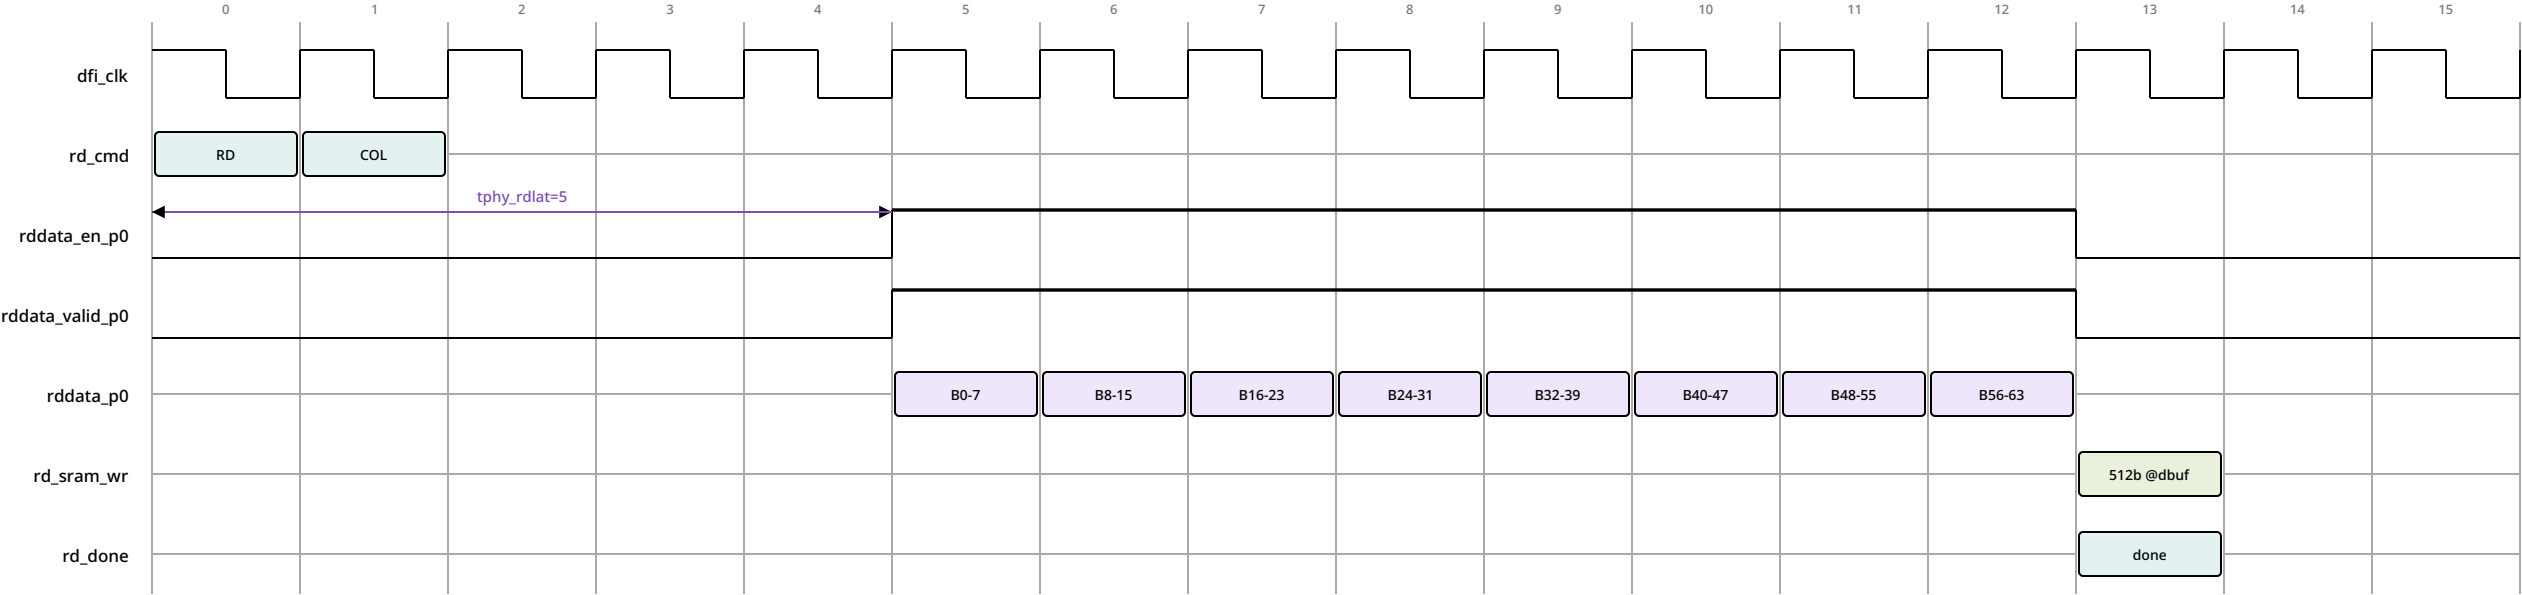


disabled this gear (no toggle):

rddata_en/valid/rddata_p1/p2/p3

Read burst 1:2 (gear=01)

p0,p1; window 4 mc_clk; PHY returns 2 phases/cyc

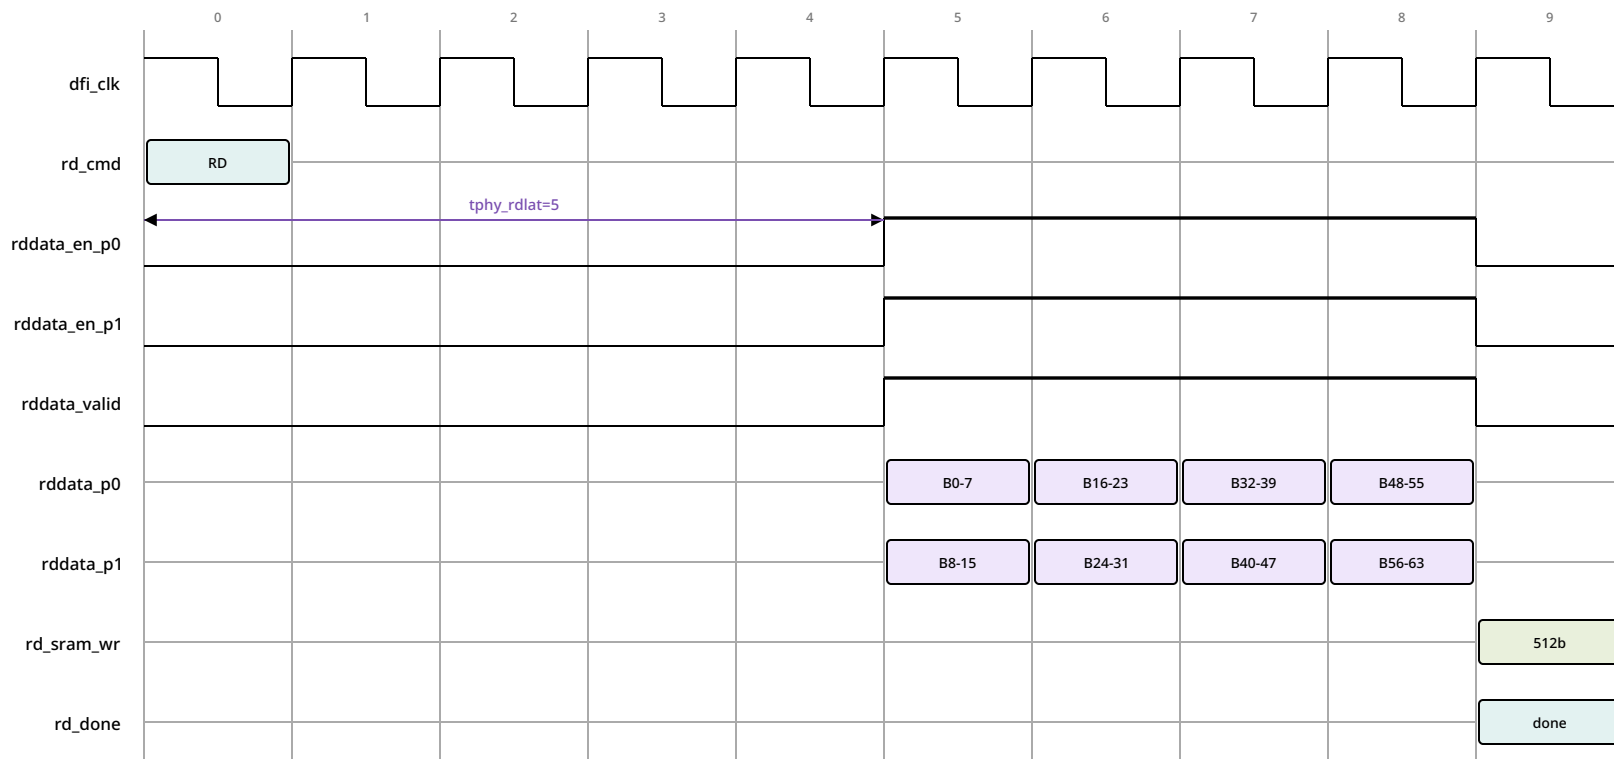

disabled this gear (no toggle):

rddata_p2/p3

Read burst 1:4 (gear=11)

p0..p3; window 2 mc_clk; PHY returns 4 phases/cyc (all active)

