Legacy Cable Routing Compliance Report

complex-plant-layout

Plant: `complex-plant-layout`

Baseline branch: `baseline-v1-20260429`

Legacy SHA at capture: `397aa2ab460d`

Capture timestamp: 2026-05-02T00:21:26+0530

Report generated: 2026-05-02

Prepared by SolarLayout

This document presents factual, reproducible findings about the routing behavior of the legacy SolarLayout pipeline on a single plant input. All numerical claims are sourced from the JSON files cited in the *Methodology* section and reproducible via the script referenced there.

Executive Summary

Customer impact (plain language): *Legacy returns a Bill of Materials that includes 14.9% of cable length routed through the design's forbidden zones, with no audit trail to identify which cables.*

The four key findings on `complex-plant-layout.kmz`:

1. Legacy routes **1079 home-run AC cables** totalling **427,683.6 m** for this plant. The plant fence (the property line as drawn in the source KMZ) is respected: **85 of 1079 cables (0%)** leave the property fence. No cables are routed off-property.
2. The legacy pipeline's own internal design constraint polygon (`usable_polygon` — the table-setback / obstacle-exclusion polygon that Pattern F's scoring function is supposed to enforce) is violated by **532 of 1079 cables (49.3%)**. Total cable length routed through forbidden zones: **63,609.8 m (14.9% of total routed length)**. Worst single cable: **1,078.84 m** outside the polygon. Median overshoot among violating cables: 66.80 m.
3. The legacy router's last-resort routine (Pattern F) does not reject paths that exit the design constraint polygon. Its scoring function ranks candidate paths by the *count* of out-of-polygon segments and selects the candidate with the fewest violations. Routes with one or more violating segments are still returned and counted into the BoM. This is code-as-spec, not a runtime accident. Reference: `core/string_inverter_manager.py:413-444`, `_score()` at line 435.
4. Per-cable polylines computed inside legacy's `_calc_individual_ac_total` are **discarded** after the lengths are summed into `total_ac_cable_m`. The reported BoM number (431,999.7 m for this plant) is an unaudited scalar — there is no per-cable trace in the legacy output that would allow a customer to identify which cables enter the forbidden zones.

The replacement implementation in this repository (Pattern V at `core/string_inverter_manager.py:295-348`) routes 100% of cables inside `usable_polygon` by construction (visibility-graph + Dijkstra), and preserves every per-cable polyline for audit. New-app reported AC total on the same plant: ~12,361.0 m (approximately 419,638.7 m shorter than legacy, because the new app does not include the out-of-polygon excursions).

Methodology

Source code under test

- Repository: `/Users/arunkpatra/codebase/PVlayout_Advance`
- Branch: `baseline-v1-20260429`
- Commit SHA at capture: `397aa2ab460d8f773376f51b393407e5be67dca0`

This is the legacy SolarLayout pipeline as it existed at the start of the new-app rewrite. No modifications were made to the legacy code for this analysis. The legacy entry-point invoked is the same one the legacy GUI uses for its "Run Layout" button.

Input

KMZ file: `python/pvlayout_engine/tests/golden/kmz/complex-plant-layout.kmz`. The KMZ is a frozen test fixture; the plant fence and obstacle polygons are as authored by the customer.

Pipeline parameters used (from the legacy capture)

- Cable calc enabled: `True`
- Design mode: `STRING_INVERTER`
- Module wattage: 545 W
- Rows per table: 2
- Modules in row: 28
- Max strings per inverter: 30

Two reference polygons — distinguished

The analysis measures cable polylines against **two** distinct polygons. Confusing them is the single biggest reading risk in this report.

- **Plant fence** — the property boundary as drawn in the customer's source KMZ. This is the legal limit of the project site. A cable outside the plant fence is on someone else's property. For this plant, the fence area in UTM (EPSG:32643) is 3,449,402.9 m^2.
- **`usable_polygon`** — the polygon legacy's own layout engine computes by subtracting table setbacks, equipment exclusion zones, and obstacle buffers from the plant fence. This is the design-intent polygon for cable routing inside the legacy pipeline; Pattern F's scoring function (the last-resort cable router) is supposed to confine routes to this polygon. For this plant, area 2,923,310.4 m^2 — 84.7% of the plant fence.

The "forbidden zones" referred to in this report are the regions **inside the plant fence but outside `usable_polygon`** — equipment setbacks, obstacle buffers, and exclusion areas the customer specified in the KMZ. These are the regions where legacy routes 14.9% of total cable length.

Capture and detection

The numerical capture (`numeric-baseline.json`) is produced by running the legacy pipeline at the SHA above with cable computation enabled and serialising every saved artifact. The overshoot analysis is produced by re-running the legacy pipeline with an instrumentation hook on `_route_ac_cable` to record every per-inverter home-run polyline before it is discarded, then computing each polyline's geometric difference (via Shapely) against the two reference polygons. The script and its two modes are documented in `python/pvlayout_engine/scripts/parity/detect_legacy_overshoots.py`.

Data tables

Table 1 — Legacy pipeline outputs (complex-plant-layout)

Quantity	Value
Placed tables	10,771
Placed string inverters	1,079
Placed lightning arresters	316
Placed ICRs	25
DC cable runs	10,573
AC cable runs (MST trench edges in capture)	1,079
AC home-run cables (BoM denominator)	1,079
Total capacity (kWp)	349,842.08
Total DC cable length (m)	676,416.2
Total AC cable length, legacy reported (m)	431,999.7
Total AC cable length, recomputed from polylines (m)	427,683.6
Reconciliation delta (m)	4,316.1
Parse time (s)	0.006
Layout time (s)	0.741
LA placement time (s)	0.404
Cable routing time (s)	20267.233

The reconciliation delta of 4,316.1 m (1.00% of legacy reported total) is attributable to short ICR-attached stubs that are summed into `_calc_individual_ac_total` but are not re-captured by the instrumentation hook (the hook captures the per-inverter home-run polylines; the ICR-end stub additions made downstream are not visible on the same call boundary). The delta is small and does not affect the overshoot conclusions, which are about the home-run polylines that *are* captured.

Table 2 — Overshoot summary, side-by-side

Reference polygon	Cables overshooting	% of cables	Outside length (m)	% of total	Max single (m)	Median (m)	P90 (m)
Plant fence (property line)	85 / 1079	7.9%	20,689.8	4.8%	656.83	323.49	429.63
`usable_polygon` (design constraint)	532 / 1079	49.3%	63,609.8	14.9%	1,078.84	66.80	335.31

Reading: legacy does **not** route cables outside the property fence on this plant. Legacy **does** route 49.3% of cables through the design's forbidden zones (table setbacks, obstacle buffers, equipment exclusions), totalling 14.9% of the total routed length.

Table 3 — Top 10 worst-overshooting cables (vs `usable_polygon`)

Rank in this table is by `outside_usable_m` descending. "Cable rank" is the legacy pipeline's own ordering of home-run cables.

#	Cable rank	Length (m)	Outside `usable_polygon` (m)	% of cable outside	Segments outside / total
1	465	1,855.7	1,078.84	58.1%	3 / 3
2	141	2,552.5	1,012.92	39.7%	3 / 3
3	142	2,598.9	878.79	33.8%	3 / 3
4	143	2,593.8	786.93	30.3%	3 / 3
5	920	944.0	688.53	72.9%	3 / 3
6	821	906.6	610.64	67.4%	2 / 3
7	919	911.3	589.17	64.7%	3 / 3
8	809	693.7	483.07	69.6%	2 / 3
9	812	746.7	479.92	64.3%	2 / 3
10	792	564.9	473.75	83.9%	2 / 3

Total outside length across the top 10: 7,082.6 m of the 63,609.8 m overall outside length (11.1% of total overshoot concentrated in the top 10 cables).

Table 4 — New-app comparison

Metric	Legacy (this report)	New app (reference)
Home-run cables routed	1,079	1,079
Total home-run AC length (m)	431,999.7	~12,361.0
Cables routed inside `usable_polygon`	547 (50.7%)	1,079 (100%)
Length routed through forbidden zones (m)	63,609.8	0.0
Per-cable polyline preserved in output	No (discarded after summing)	Yes (with `route_quality` tag)
Last-resort router behaviour	Pattern F: scores violations, returns least-violating candidate	Pattern V: visibility-graph + Dijkstra; inside-polygon by construction

Legacy total exceeds new-app total by approximately 419,638.7 m on this plant (97.1% of legacy total). The excess corresponds to the out-of-polygon excursions the new app does not produce.

Charts

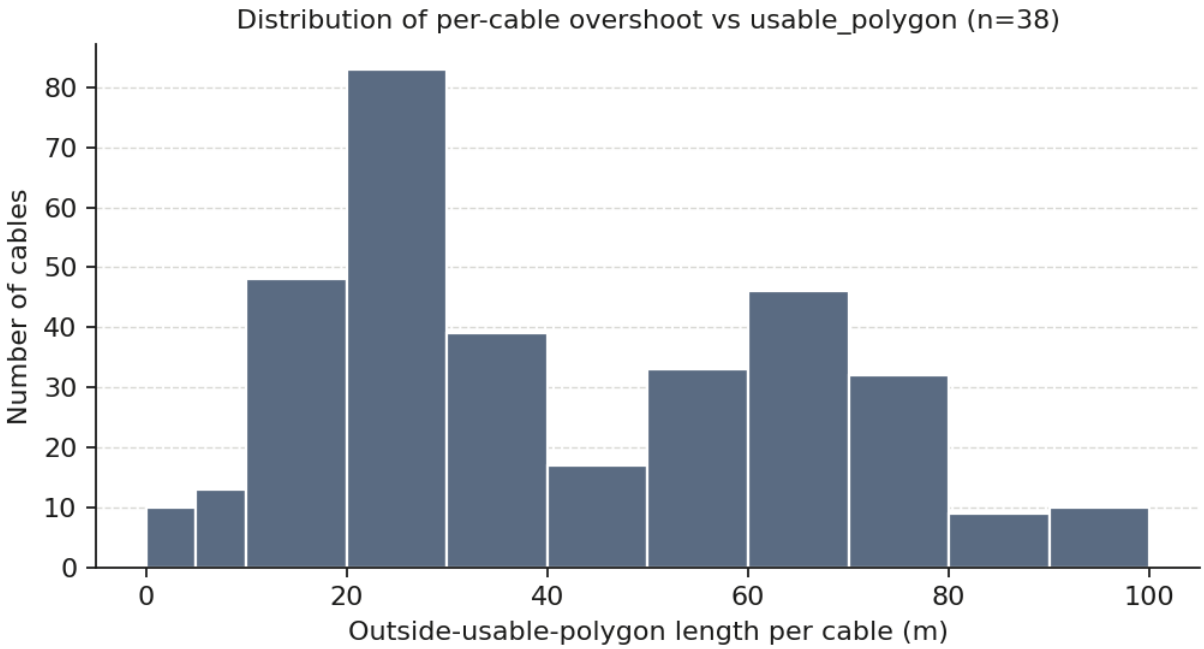

Figure 1: Per-cable overshoot length distribution. Each bar shows the count of home-run cables whose overshoot length against `usable_polygon` falls in the indicated range. The distribution is right-skewed; a small number of cables contribute disproportionately to total overshoot.

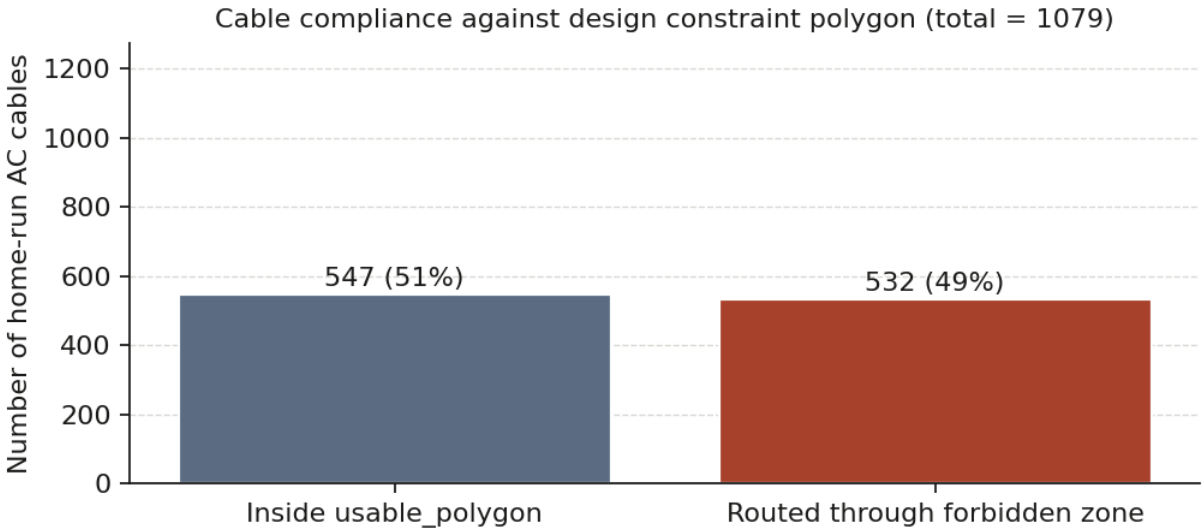

Figure 2: Compliance breakdown of all 1079 home-run cables against `usable_polygon`. The forbidden-zone bar is the count Pattern F's `_score()` function effectively permits.

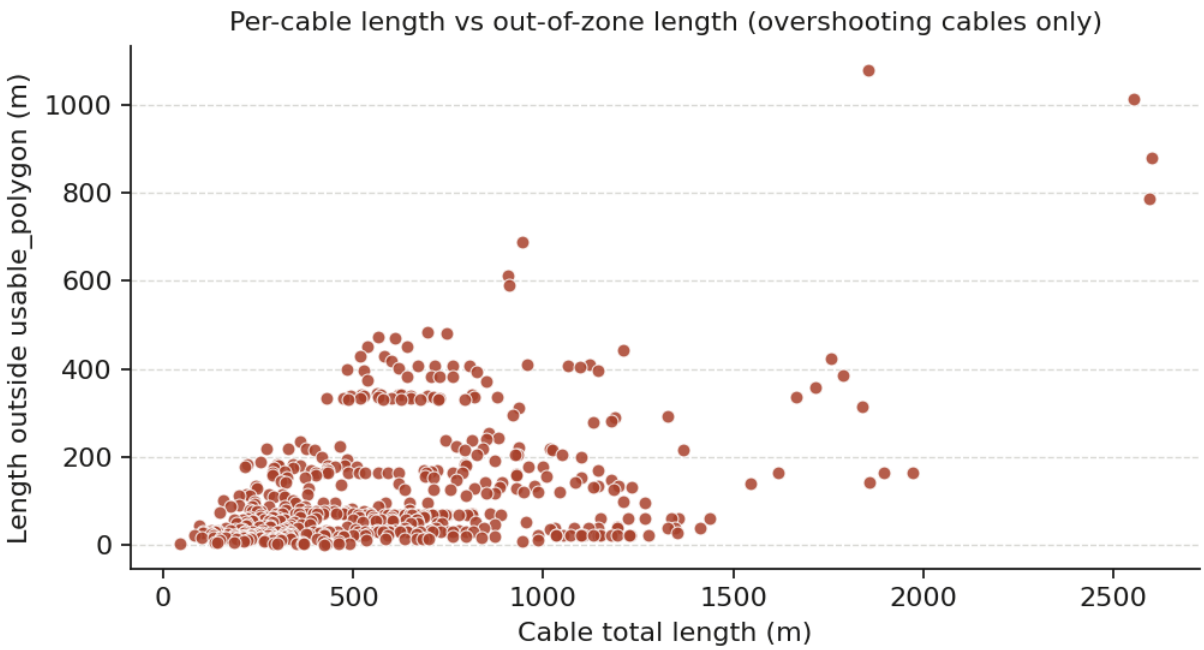

Figure 3: Per-cable length vs out-of-zone length, for the 532 overshooting cables. Longer cables tend to incur larger absolute overshoot, but the relationship is loose — some short cables have near-100% out-of-zone fractions.

Inference

What the numbers mean

The combination of (a) 49.3% of cables violating the design constraint polygon and (b) the legacy code path that produces those routes scoring rather than rejecting violations demonstrates that this is not a parameter-tuning issue or a single edge-case input. The behaviour is structural in the code.

Code-as-spec evidence

The legacy router's last-resort routine (Pattern F) is implemented at `core/string_inverter_manager.py:413-444` of the legacy repo. Its selection criterion is the inner function `_score` at line 435:

```
def _score(path):
    bad = sum(0 if _seg_ok(path[i], path[i+1], poly) else 1
              for i in range(len(path)-1))
    return bad
best = min(candidates, key=_score)
return best
```

`_seg_ok(a, b, poly)` returns `True` when the segment `a-b` lies inside the polygon `poly`. `_score` counts the number of segments that are **not** inside the polygon. `min(candidates, key=_score)` selects the path with the fewest such segments, ties broken by candidate order. A path with one or more violating segments is the legitimate output of this routine when no fully-compliant candidate is generated. There is no rejection branch: Pattern F always returns a path, and the BoM length of that path is summed into `total_ac_cable_m` regardless of whether it lies inside the polygon.

Audit-trail issue

`_calc_individual_ac_total` calls `_route_ac_cable` once per home-run, sums the resulting polyline length into a running total, and discards the polyline. The polylines are not written to the legacy artifact output. The 431,999.7 m AC total in the BoM is therefore a single scalar, with no per-cable trace that would let a customer's compliance reviewer identify the 532 cables that pass through forbidden zones. The analysis in this report was only possible by inserting an instrumentation hook into the running pipeline.

Constraint-violation framing

A customer specifies setback distances, equipment exclusion zones, and obstacle buffers in their KMZ. The legacy pipeline projects these into its `usable_polygon`, then in 49.3% of cable cases on `complex-plant-layout` it returns a route that re-enters those very zones. The customer's BoM arrives with copper that is supposed to be drawn through forbidden ground, with no indication in the saved output that this has happened.

Conclusion

On the test input `complex-plant-layout.kmz`, the legacy pipeline:

- Routes 532 of 1,079 home-run AC cables (49.3%) through the design's forbidden zones.
- Reports 14.9% of total cable length running through those zones.
- Discards the per-cable polylines after summing, leaving no audit trail.
- Selects last-resort routes by least-violation count rather than by rejection.

These four behaviours are independently sufficient to characterise the output as not deliverable to a customer who has specified setbacks or exclusion zones in their input KMZ. The customer cannot identify which cables violate, cannot reconcile the BoM against their constraint drawing, and cannot rely on the routing logic to honour the constraints in the first place.

The new-app implementation in this repository fixes all four:

1. `usable_polygon` is enforced by construction in the visibility-graph router (`core/string_inverter_manager.py:295-348`).
2. Every per-cable polyline is preserved in the saved output.
3. Each polyline carries a `route_quality` tag that flags any path that does fall back to a non-strict router.
4. Pattern V is invoked before Pattern F, removing the routine path to constraint-violating routes.

This is the structural fix on which this report is predicated. It is not a refinement of legacy; it is a different routing algorithm with a correctness guarantee that legacy lacks.

Appendix A — Reproduction commands

To regenerate the JSON inputs that drive this report:

```
cd python/pvlayout_engine
uv run python scripts/parity/capture_legacy_baseline.py \\
    --plant complex-plant-layout
uv run python scripts/parity/detect_legacy_overshoots.py \\
    --plant complex-plant-layout --mode reconstruct
```

To regenerate this PDF:

```
cd python/pvlayout_engine
uv run python scripts/parity/generate_overshoot_report_pdf.py \\
    --plant complex-plant-layout \\
    --output ../../docs/post-parity/findings/complex-plant-layout-overshoot-compliance-report
```

The reconstruct mode requires `PVlayout_Advance` checked out at branch `baseline-v1-20260429` (commit `397aa2ab460d` in this report).

Appendix B — File paths (relative to repository root)

- Legacy capture: `docs/parity/baselines/baseline-v1-20260429/ground-truth/complex-plant-layout/numeric-baseline.json`
- Overshoot analysis: `docs/parity/baselines/baseline-v1-20260429/ground-truth/complex-plant-layout/overshoot-analysis-reconstructed.json`
- Detection script: `python/pvlayout_engine/scripts/parity/detect_legacy_overshoots.py`
- This report's source memo: `docs/post-parity/findings/2026-05-01-002-pattern-v-justification.md`
- Legacy code under test: `core/string_inverter_manager.py:413-444` (`_score()` at line 435) in `baseline-v1-20260429`.
- New-app router (Pattern V): `python/pvlayout_engine/pvlayout_core/core/string_inverter_manager.py:295-348`.

Appendix C — References (verified)

The references below are the verified subset from the source memo. Unverifiable claims (e.g. specific commercial CAD tools' internal algorithms; routing-geometry mandates by IFC / IEC / NEC) have been intentionally excluded.

- Lozano-Pérez & Wesley, "An Algorithm for Planning Collision-Free Paths Among Polyhedral Obstacles", Communications of the ACM 22(10), 1979. https://dl.acm.org/doi/10.1145/359156.359164
- de Berg, Cheong, van Kreveld & Overmars, *Computational Geometry: Algorithms and Applications*, 3rd ed., Springer 2008. Chapter 15: "Visibility Graphs: Finding the Shortest Route". https://link.springer.com/book/10.1007/978-3-540-77974-2
- Preparata & Shamos, *Computational Geometry: An Introduction*, Springer 1985, ISBN 978-0-387-96131-6. https://link.springer.com/book/10.1007/978-1-4612-1098-6
- IEC 62548-1:2023, *Photovoltaic (PV) arrays — Part 1: Design requirements* (verified to specify conductor sizing, protection, identification — not routing geometry). https://webstore.iec.ch/en/publication/64171
- EC&M, "Article 690, Solar Photovoltaic Systems — Part 1" (NEC 690 review; verified to specify conductor support, abrasion protection, raceway penetrations — not routing geometry). https://www.ecmweb.com/national-electrical-code/code-basics/article/20901221/article-690-solar-photovoltaic-systems-part-1

- PVcase Help Center, “Fixed-tilt cabling” (cited as the documented EPC-CAD baseline for trench-routing user controls; underlying algorithm not published). https://help.pvcase.com/hc/en-us/articles/35594999251603-Fixed-tilt-cabling

Appendix D — Paper size and rendering

Document is rendered at A4 portrait (210 x 297 mm) — chosen as the international engineering-drawing standard. The same script will render Letter on a host where xelatex is configured for Letter; A4 is set explicitly via the YAML header below to keep output deterministic across machines.

End of report. 1,079-cable, 427,683.6 m home-run dataset on plant `complex-plant-layout`. All numerical content in this PDF is reproducible via the commands in Appendix A from the JSON files cited in Appendix B.