


ROOM 1402: MAIN ELECTRICAL SWITCHGEAR PENTHOUSE VAULT

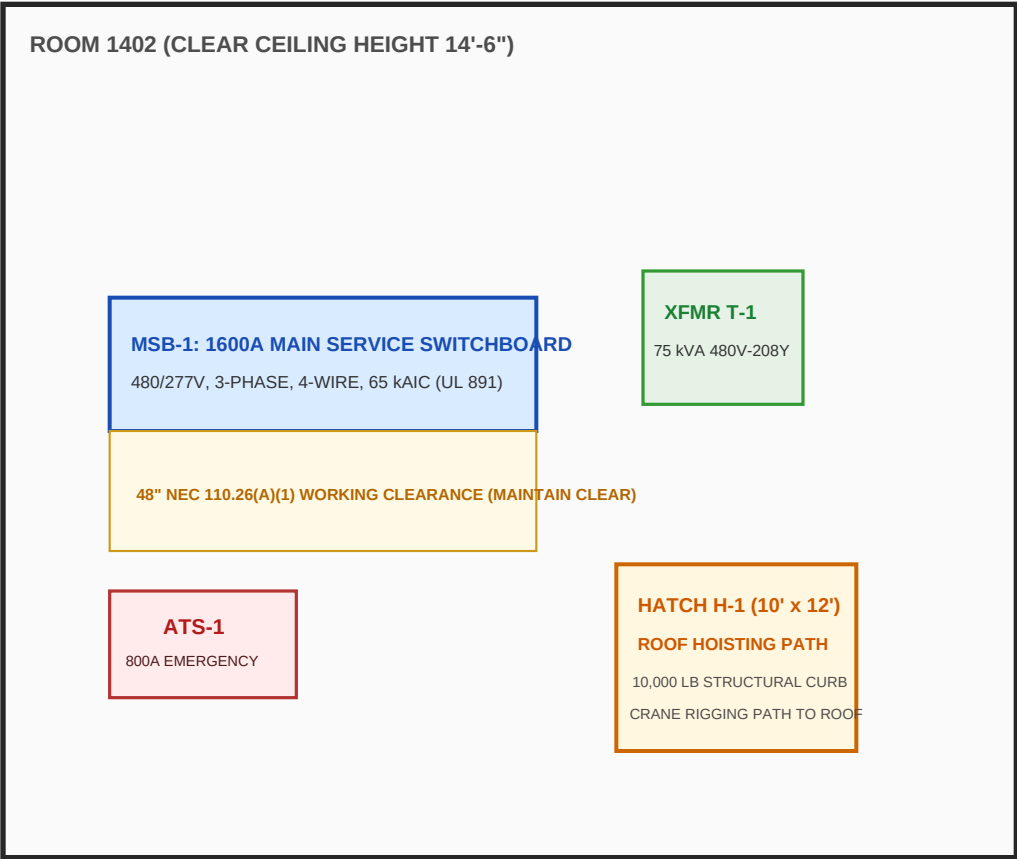

GENERAL ELECTRICAL NOTES & SPECIFICATIONS:

- GOVERNING CODES: NFPA 70 (NEC 2023), City of Austin Electrical Code, IBC 2024.
- CRANE RIGGING SCOPE: Electrical contractor is strictly responsible for crane mobilization and hoisting MSB-1 up to 14th-floor penthouse plant room.
- FIRESTOPPING: All penetrations through floors/walls must be sealed with UL 1479 compliant intumescent firestop assemblies (Spec Section 01 00 00 Article 3.01).
- SEISMIC ANCHORAGE: Furnish PE-stamped engineered seismic bracing (IBC 1613).  
Anchors: Hilti HSL-4 M16 heavy-duty wedge anchors with min 6" embedment.
- EQUIPMENT WEIGHTS: MSB-1 weighs 7,200 lbs; exceed 3,500 lb freight elevator limit.
- TEMPORARY POWER: Electrical contractor must furnish temporary 400A power boards.
- COORDINATION: Subcontractor shall field verify all slab core locations prior to drilling.

EQUIPMENT SCHEDULE:

| TAG   | DESCRIPTION               | VOLTAGE           | RATING      |
|-------|---------------------------|-------------------|-------------|
| MSB-1 | Main Service Switchboard  | 480/277V, 3P, 4W  | 1600A 65k   |
| ATS-1 | Automatic Transfer Switch | 480/277V, 3P, 4W  | 800A 4-Pole |
| T-1   | Step-Down Dry Transformer | 480V to 208Y/120V | 75 kVA NEMA |
| DP-1  | Distribution Panelboard   | 480/277V, 3P, 4W  | 400A MLO    |

STATE OF TEXAS  
PROFESSIONAL  
ENGINEER

No. 89214

Austin Energy Sys

CERTIFIED PE

THE DOMAIN TOWER B

11400 Domain Dr, Austin, TX 78758

DRAWING TITLE:

1600A SWITCHGEAR & PENTHOUSE PLAN

DESIGNED: Austin Commercial MEP Arch.

CHECKED: Lead Electrical PE #89214

DATE: 2026-09-08 SCALE: 1/4" = 1'-0"

SHEET NO: E-101 REV 2