


Front Linkage

Parameters
 $a = 18 \text{ mm}$, $b = 90 \text{ mm}$, $c = 44 \text{ mm}$, $d = 89.44 \text{ mm}$
 $\rho = 74 \text{ mm}$, $\delta = 36^\circ$, $\theta_2 = 60^\circ$

Measurements
 $\theta_3 = 19^\circ$, $\theta_4 = 84^\circ$, $\phi_3 = 66^\circ$, $\phi_4 = 96^\circ$, $\phi_2 = 139^\circ$

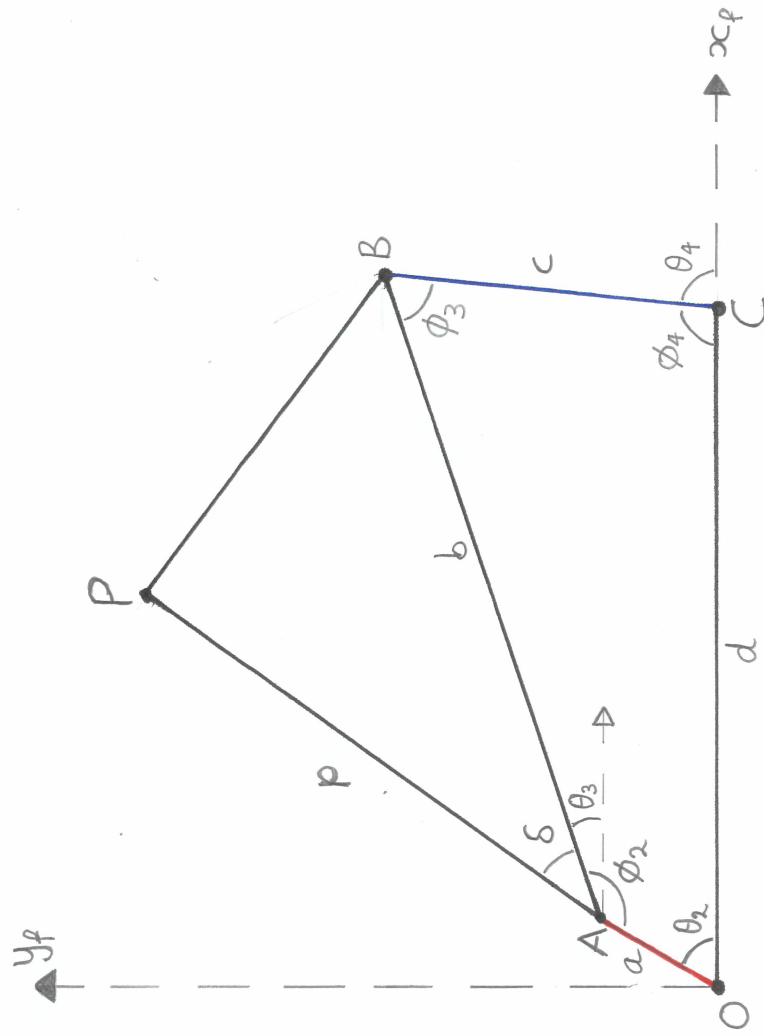


Rear Linkage

Parameters

$a = 15 \text{ mm}$, $b_1 = 47 \text{ mm}$, $c = 28 \text{ mm}$, $d = 53.1 \text{ mm}$
 $p = 54 \text{ mm}$, $\delta = -76^\circ$, $\beta_2 = 314.6^\circ$

Measurements

$\beta_3 = -22^\circ$, $\beta_4 = -88^\circ$, $\phi_1 = 46^\circ$, $\phi_2 = 157^\circ$, $\phi_3 = 66^\circ$, $\phi_4 = 92^\circ$

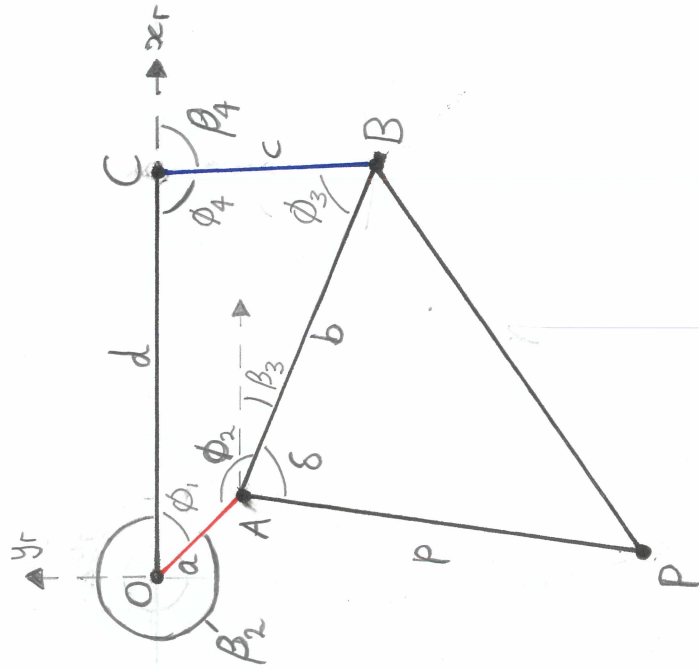

Global and Local Coordinate Systems.

$$\gamma_g = 153^\circ$$

$$\gamma_r = 49^\circ$$

$$\theta_2 = 60^\circ, \lambda = 150^\circ$$

$$\beta_2 = 315^\circ$$

