




Resolve Clock Issues

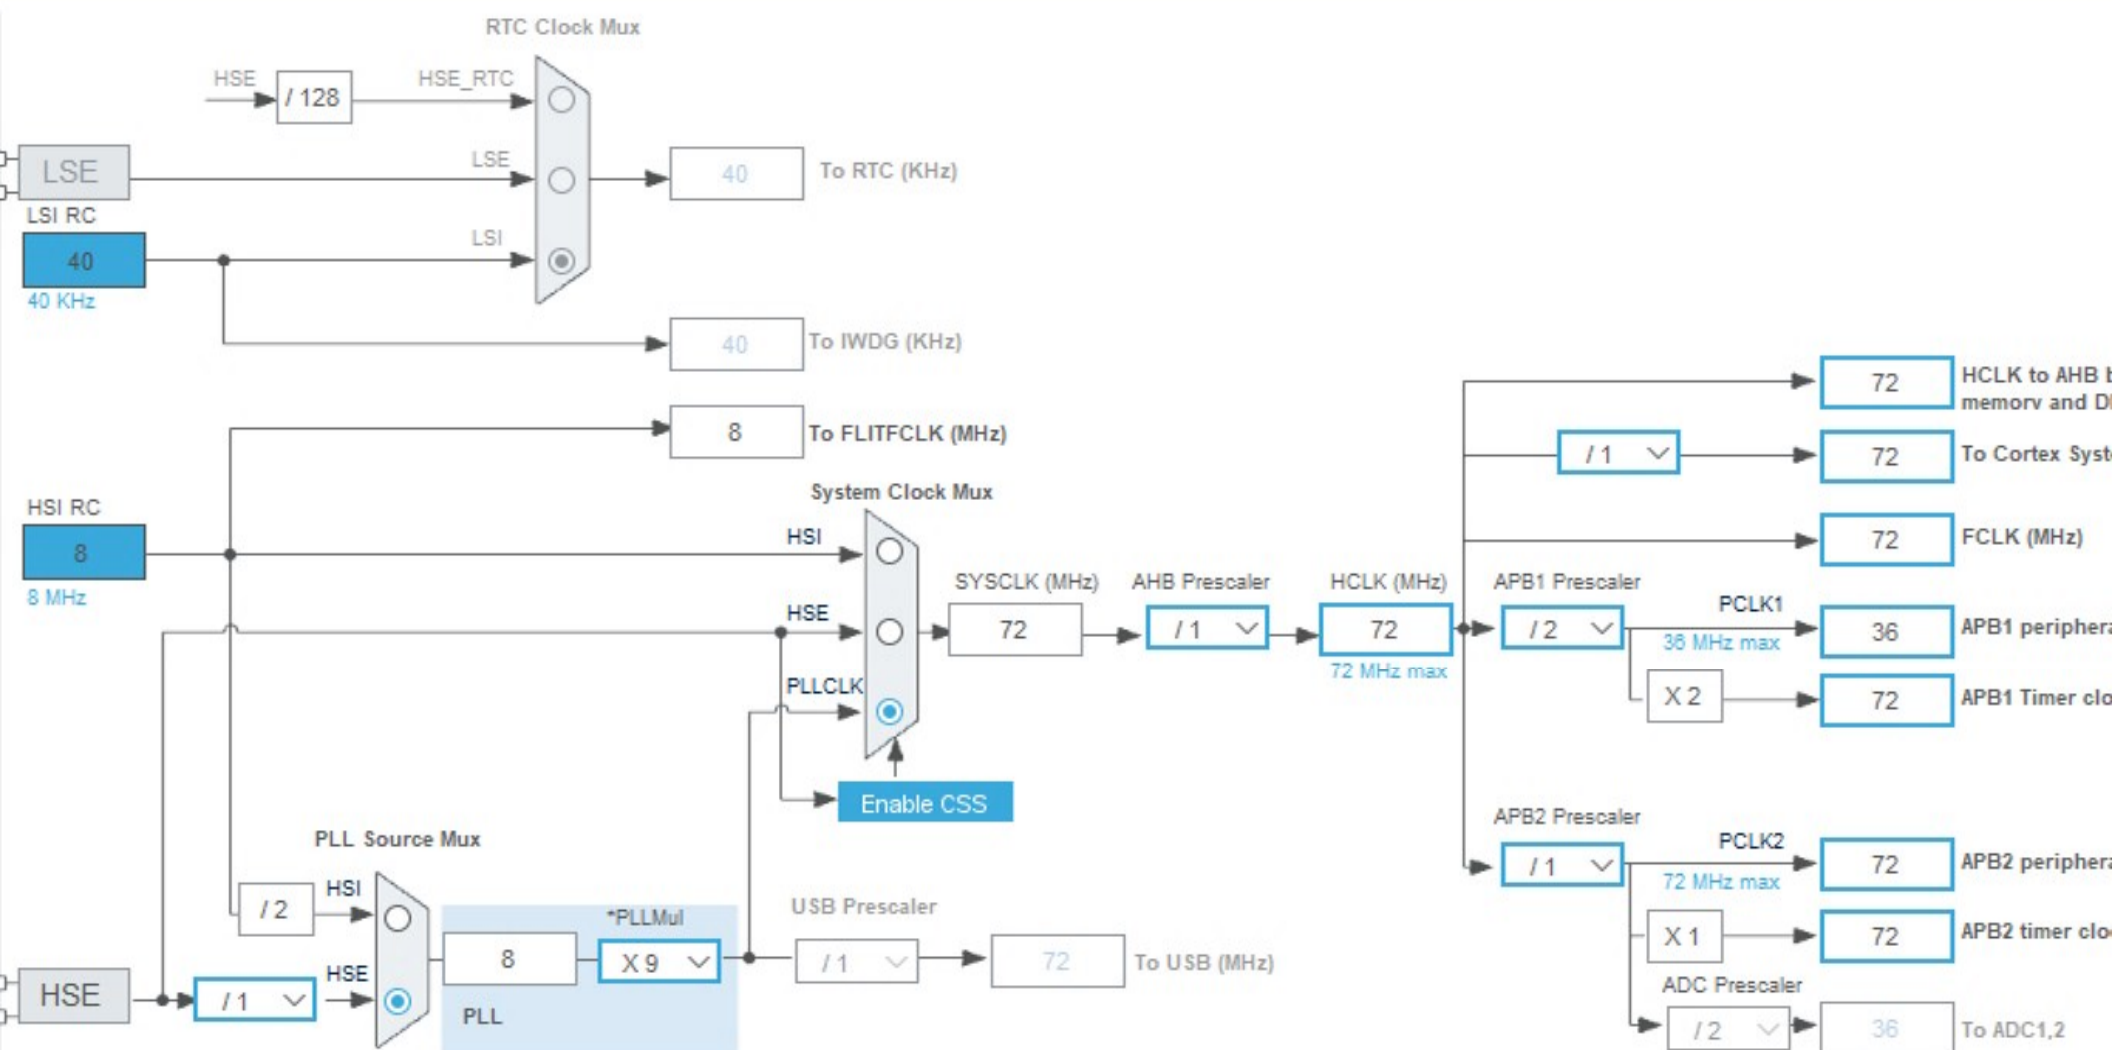

Pinout & Configuration

Clock Configuration

Project

Software Packs

Pinout

Categories

A->Z

System Core

Analog

Timers

RTC

TIM1

TIM2

☒ TIM3☐ TIM4

Connectivity

Computing

Middleware and Software Packs

TIM3 Mode and Configuration

Mode

Configuration

Reset Configuration

☒ User Constants☒ NVIC Settings☒ DMA Settings☒ Parameter Settings

Configure the below parameters :

 Search (Ctrl+F)

Counter Settings

Prescaler (PSC - 16 bits value) 7199

Counter Mode Up

Counter Period (AutoReload ...) 4999

Internal Clock Division (CKD) No Division

auto-reload preload Disable

Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit) Disable (Trigger input effect not delayed)

Trigger Event Selection Reset (UG bit from TIMx_EGR)

Pinout & Configuration

Clock Configuration

Project

▼ Software Packs

▼ Pinout



Categories

A->Z

System Core >

Analog >

Timers ▾

RTC

TIM1

TIM2

☒ TIM3☐ TIM4

Connectivity >

Computing >

Middleware and Software Packs >

TIM3 Mode and Configuration

Mode

Configuration

Reset Configuration

☒ User Constants☒ NVIC Settings☒ DMA Settings☒ Parameter Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0



Pinout view



System view

