

ERNIE 3D printing instructions.

Requirements.

If you are going to use a [Bambu Lab 3D printer](#) as we did, purchase it here.

Install the [Bambu Studio software](#) to open the .stl files.

Steps


Step 1: Download the [ERNIE parts](#) from the GitHub page.

Step 2: If not yet installed, install [the Bambu Studio software](#) to open .stl files. We currently use the [Bambu Lab 3D printer](#), but any 3D printer that is PLA compatible works just fine.

Step 3: Remove the SD card from the 3D printer and insert it in the PC. This is where the files will be stored for 3D printing.

Step 4: Double-click the .stl file to open it with Bambu Studio.

This is how it should look:

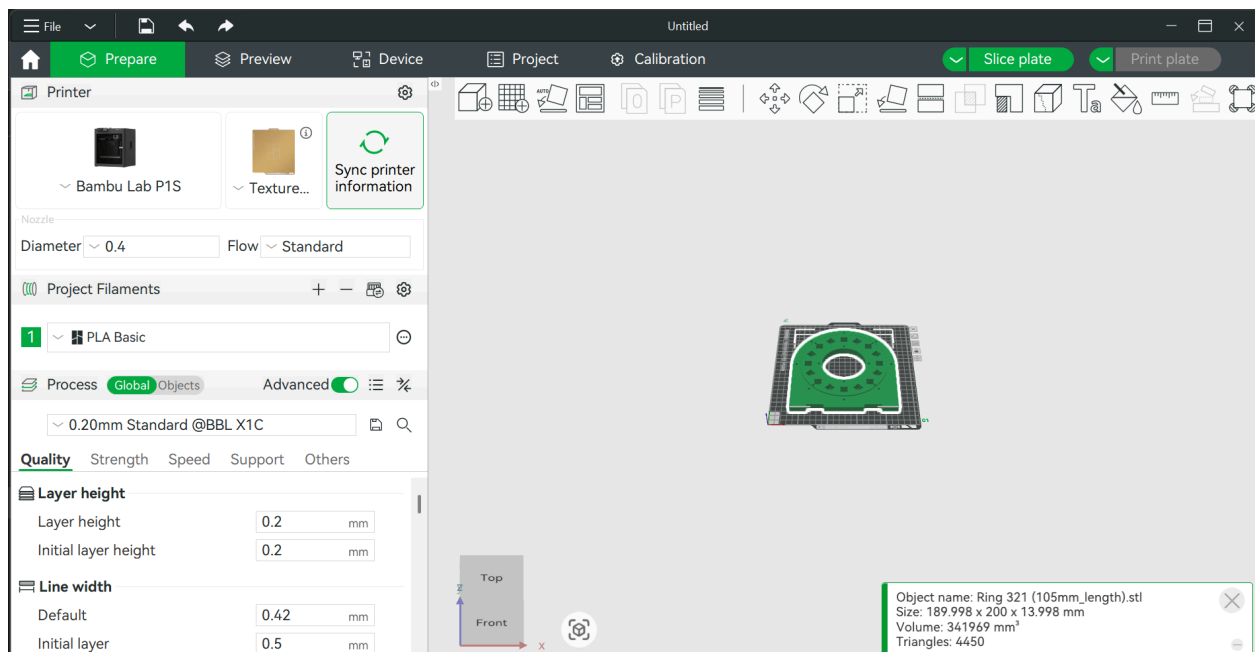


Step 5: Select printer and material. Locate the global settings panel on the left side of the screen. Select the exact printer model from the drop-down menu. Set the filament drop-down to Bambu PLA Basic.


Choose the process preset (0.20mm Standard is ideal for general PLA printing).

Step 6: Navigate to the quality tab and verify your layer height. Switch to the strength tab to set infill density (15%- 20%) is standard for PLA. Choose an infill pattern (Grid) for the structural strength. Rings do not really require support so there is no need to enable support from the support section.

Step 7: Click the Slice Plate button in the top right corner. Wait for the software to calculate the toolpaths and layer data. Use the vertical slider on the right side of the screen to preview the print layer-by-layer. Check the preview Legend to confirm the calculated print to and filament usage.

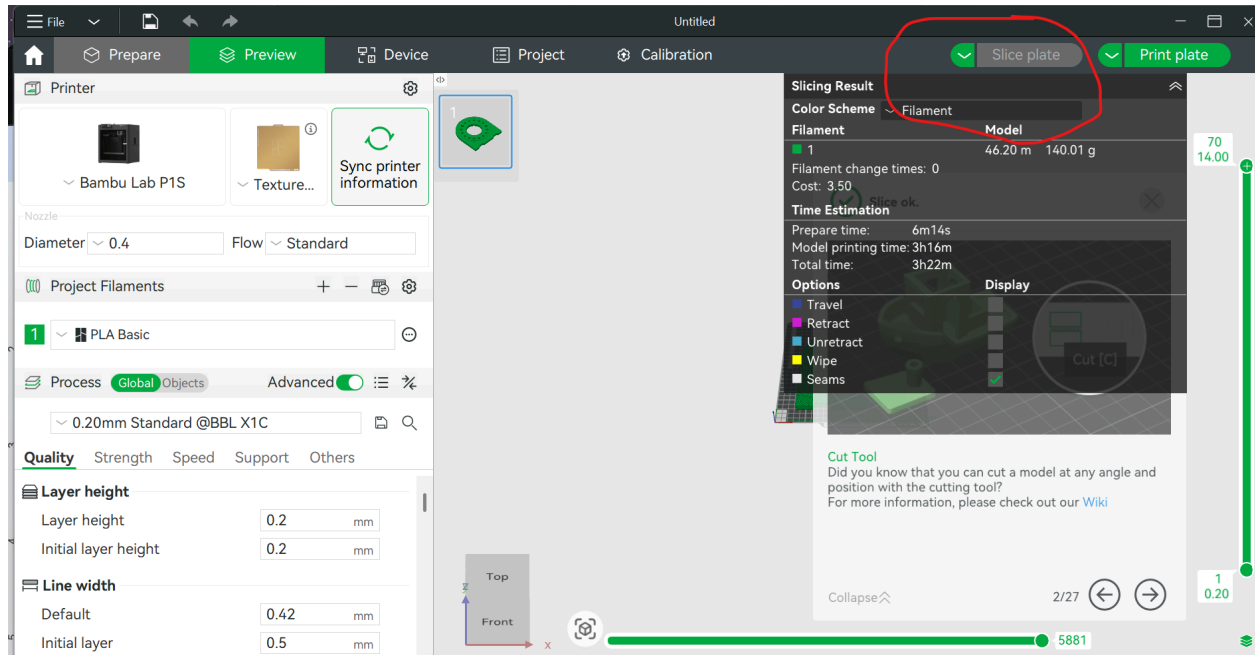

Step 8 : Click the File bar at the top left side of the page. Select Export > Export G-code and save the file on the SD-Card.

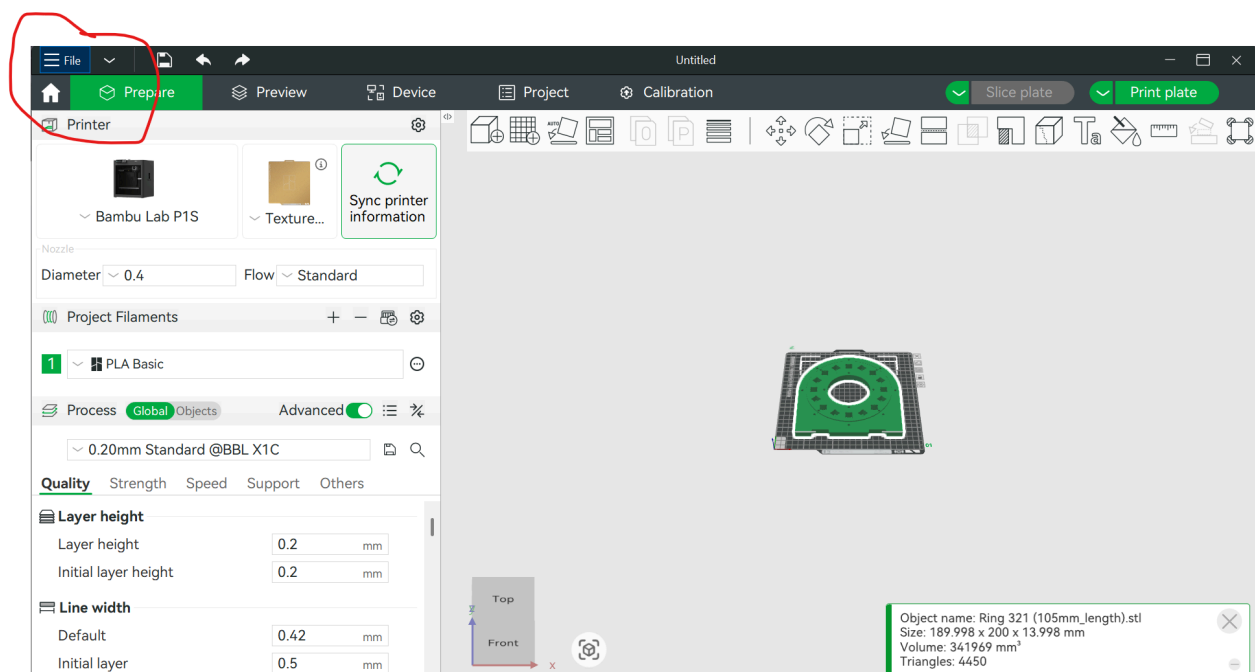

Step 9: Load the 3D printer with PLA. Turn on the 3D printer and insert the SD Card. Select the part to be printed and press “ok”. This kickstarts the printing process.

Step 10: After printing, wait for the printer to cool down (5 minutes) and then remove the part that has been printed. Repeat this for all other parts.