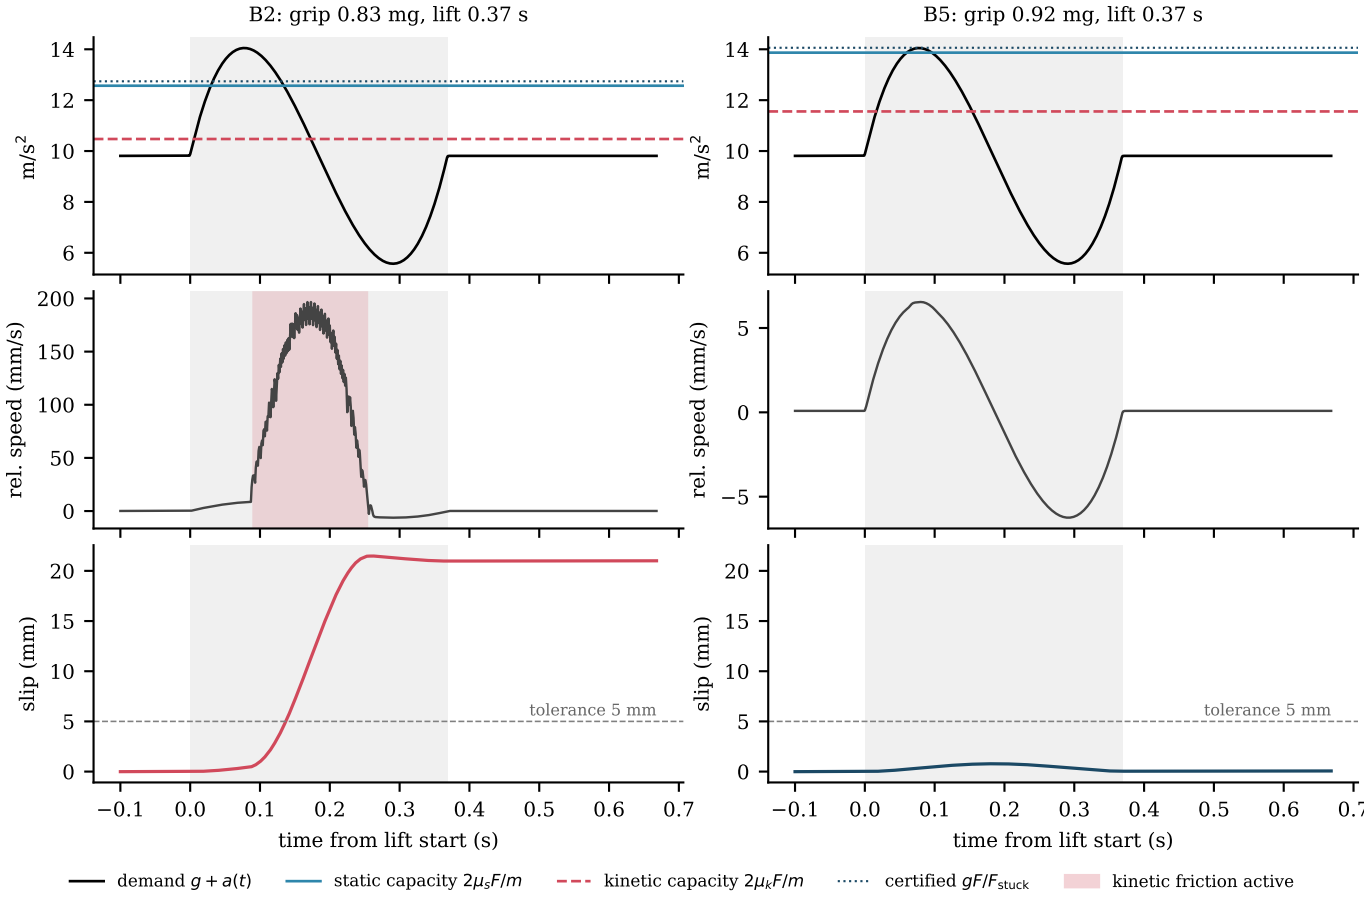
B2: grip 0.83 mg, lift 0.37 s
B5: grip 0.92 mg, lift 0.37 s
m/s²
rel. speed (mm/s)
slip (mm)
tolerance 5 mm
time from lift start (s)
demand g + a(t)
static capacity 2μsF/m
kinetic capacity 2μkF/m
certified gF/Fstuck
kinetic friction active