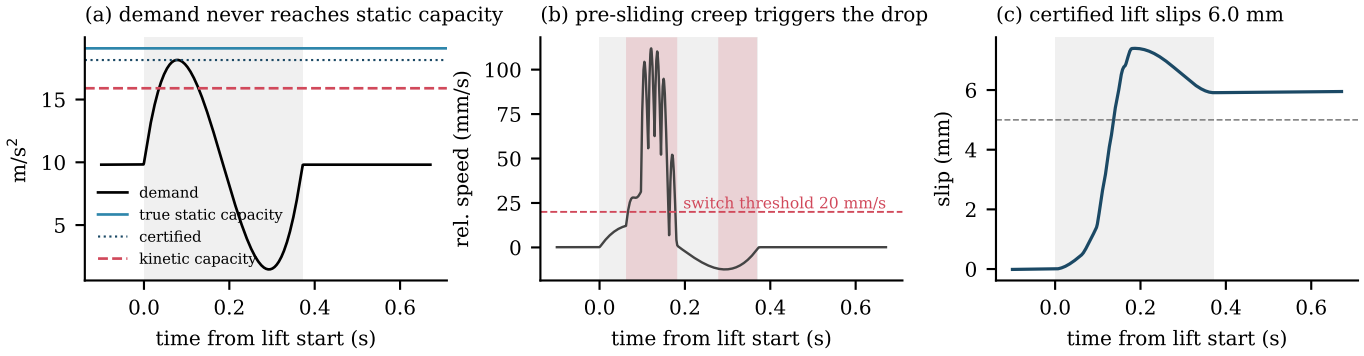
(a) demand never reaches static capacity
m/s²
15
10
5
demand
true static capacity
certified
kinetic capacity
0.0
0.2
0.4
0.6
time from lift start (s)
(b) pre-sliding creep triggers the drop
rel. speed (mm/s)
100
75
50
25
0
switch threshold 20 mm/s
0.0
0.2
0.4
0.6
time from lift start (s)
(c) certified lift slips 6.0 mm
slip (mm)
6
4
2
0
0.0
0.2
0.4
0.6
time from lift start (s)