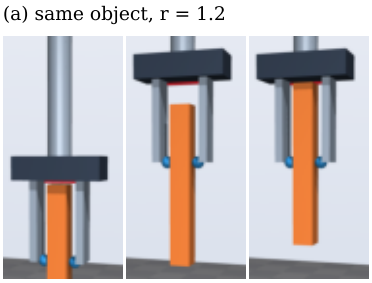
(a) same object, r = 1.2
before lift
B2 (no shield)
slip 21 mm
B5 (shield)
slip 0.1 mm
(b) safety
model B0
residual B2
shielded B5
beyond
r_{max}
lifts slipping > 5 mm (%)
static/kinetic ratio r
(c) speed vs grip
B5
B4g
B2
B4t
B0
grip / weight
lift time (s)
(d) value of allowing slip
slip allowed
3.5 mm
10 mm
30 mm
grip saved (%)
assumed r_{max}