

J40 RHD Centre 9-inch LCD / HVAC Fascia - Rev D

Units mm | Quote + 1:1 prototype | Production geometry HOLD



FLAT-FACE CUTTING SCOPE

- Remove the complete protruding ashtray: door, body, lip, seam and recess.
- Remove/cover the adjacent radio openings and their separate surround.
- Make one continuous flat body-colour face across the combined zone.
- No ashtray outline, knob, door, recess or separate blank remains.
- Preserve the glovebox/instruction panel and speedometer pressing unchanged.
- Nominal fascia envelope: 275 x 225 x 1.5 CR4 steel; template controls.

EXACT SELECTOR POSITIONS

- RIGHT OF SPEEDOMETER, viewed from cabin:
 - upper-left WIPERS | upper-right LIGHTS
 - lower-left SPOTS | lower-right AUX
- UNDER LCD, left to right:
 - BLOWER | A/C REQUEST | FUEL STOP / CONTROL (provisional)
- Separate red HAZARD; indicators stay on the OEM stalk.

HVAC / RELEASE


- Two directional eyeball outlets mount below the dash, not in this face.
- Target 63.5 / 2.5-inch hose neck; actual vent and duct trial controls.
- All orange/dashed and HOLD_* geometry is reference, not a cut path.
- Complete and sign M1-M8 before any final panel or vehicle cutting.

QUOTE / TEMPLATE READY. DO NOT PRODUCTION-CUT THE PANEL OR VEHICLE UNTIL THE ACTUAL LCD, SELECTORS, VENTS AND 1:1 VEHICLE TEMPLATE ARE SIGNED.

Actual-dashboard basis and locked control layout

Photographs establish intent only - do not scale

BEFORE - OWNER'S RHD DASHBOARD

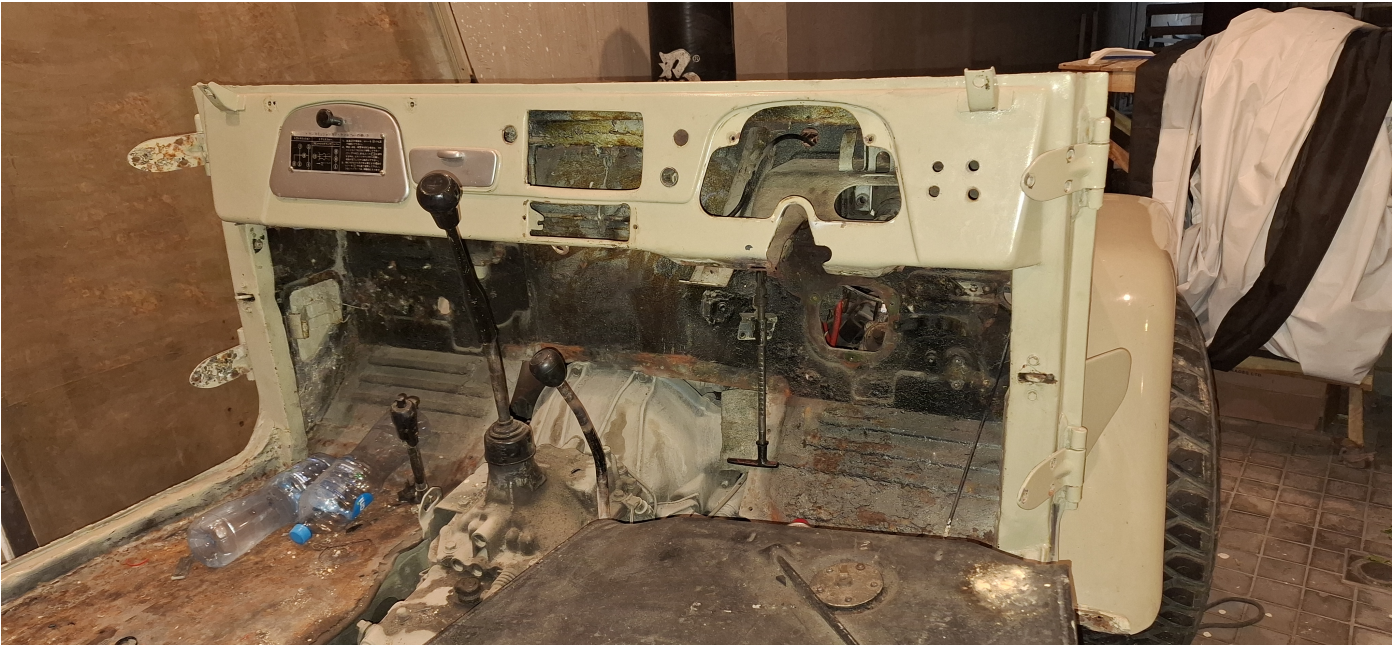


Preserve: glovebox, instruction plate, speedometer/instrument pressing and main dash character lines.

REV D OVERLAY - ASHTRAY DELETED / FACE FLATTENED



Replace: the whole protruding ashtray/radio zone with one flat cream face carrying the 9-inch LCD.


UNDER THE SCREEN - LEFT TO RIGHT

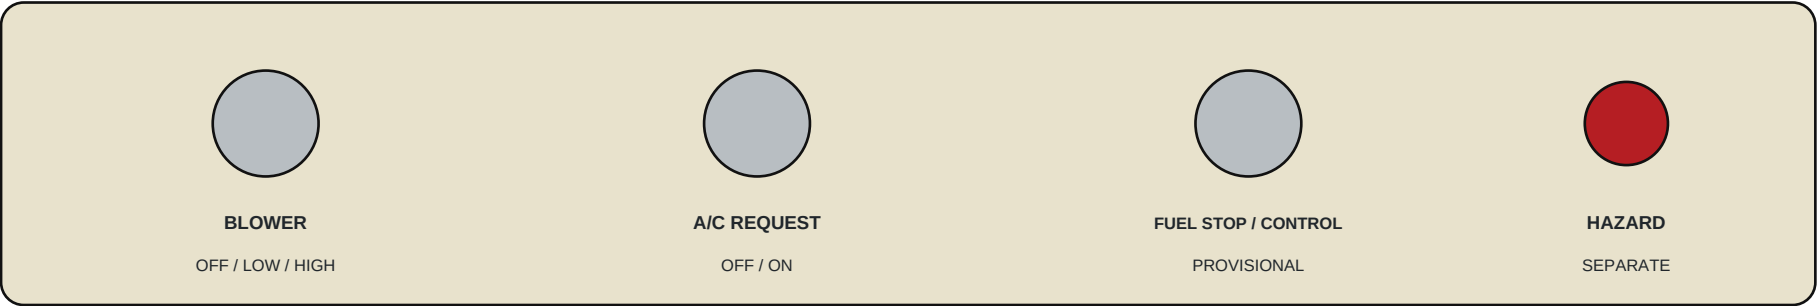

Two hose-fed A/C eyeball vents mount on separate reversible under-dash brackets, one each side of the centre insert.

The overlay uses the bought industrial selector style. Final 22.3 mm holes and anti-rotation details come from caliper measurement of all seven actual selectors.

RIGHT OF SPEEDOMETER - VIEWED FROM CABIN

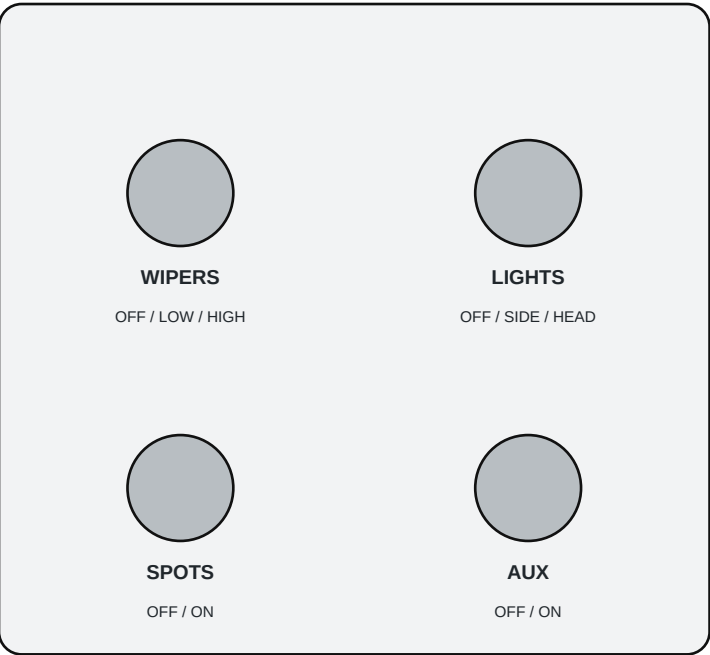

Selector schedule, electrical constraints and production release

Function assignment locked except fuel-stop/control; all hole centres measured before cut

ID	LOCATION	TYPE	FUNCTION	STATES	CONTROL / RELAY	RELEASE NOTE
R-UL	right upper-left	3-pos	WIPERS	OFF/LOW/HIGH	existing wiper control	Function locked; actual hole/stack HOLD
R-UR	right upper-right	3-pos	LIGHTS	OFF/SIDE/HEAD	T1 low + T2 high beam controls	Function locked; prove headlamp logic
R-LL	right lower-left	2-pos	SPOTS	OFF/ON	T5 spot-lamp relay trigger	Function and hole-3 allocation locked
R-LR	right lower-right	2-pos	AUX	OFF/ON	B2 auxiliary control	Function locked; final accessory/load HOLD
C-L	under LCD left	3-pos	BLOWER	OFF/LOW/HIGH	dedicated HVAC control/relay	Load, resistor and relay sizing HOLD
C-C	under LCD centre	2-pos	A/C REQUEST	OFF/ON	B1 through safety chain	Pressure/trinary interlock mandatory
C-R	under LCD right	2-pos	FUEL STOP / CONTROL	prove states	ignition-linked stop control	PROVISIONAL; retain manual cable

ELECTRICAL RULES

Selectors command fused relay/control circuits only; do not switch blower, lamps, clutch or other high-current loads directly.

Frozen relay baseline: T1 LOW BEAM, T2 HIGH BEAM, T3 HORN, T4 CONDENSER FAN, T5 SPOTS, B1 A/C CLUTCH, B2 AUX.

A/C REQUEST may energise B1 only through the thermostat / trinary / pressure-protection chain; T4 fan behaviour is proved with the selected HVAC hardware.

BLOWER uses its dedicated measured HVAC control/relay/resistor circuit. T1 and T2 are lighting relays and must not be reassigned.

FUEL STOP / CONTROL remains provisional until device identity, terminal behaviour and engine RUN-to-OFF shutdown are live-tested; retain the manual stop cable.

Hazard is a separate red control. Left/right indicators remain on the original stalk.

M1-M8 PRODUCTION HOLD GATES

M1 vehicle contour/flat lands + ashtray/radio removal boundary | M2 actual LCD active/aperture/bezel drawing | M3 LCD rear body, mount, connector and depth

M4 all seven selector bushes, anti-rotation and rear stacks | M5 transfer actual four right-cluster centres | M6 actual vent face, neck, hose and rear depth

M7 signed 1:1 prototype: glovebox, instruments, steering, gear lever, sight line, wiring and duct sweeps | M8 labels, continuity, relay map and live function tests

RELEASE: quotation, card/acrylic template and cheap-sheet prototype only. Production metal and vehicle cutting remain HOLD until M1-M8 are signed.

Electrical basis: electrical_master.csv; electrical_diagram_reconciliation_20260518.csv; engine_electrical_inputs_reconciliation_20260517.csv; expenses.csv.