




SEZ. A-A

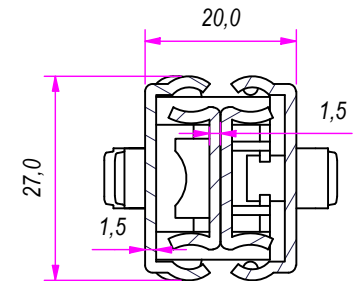


B (1:1)





C (1:1)




Part outer surface should be clean and free from foreign materials					
Treatment test method: minimum 54 hours neutral salt spray before zinc corrosion (ISO9227)					
DESIGNED BY	CHECKED AND APPROVED BY	GENERAL TOLLERENCE	DATE	CODE	
F.Dino	L. Paleari	SS-ISO-2768-1M	31/07/2020	SHE27190	
			PACKAGING	UNIT	SHEET
				mm	1 of 2
			DESCRIPTION		MATERIAL
High and low temp grease		Cold rolled steel			
DEVICE			SLIDING FORCE	PAIR WEIGHT	
			2N ~ 5N		
Property of RAM Industrie.					
Without its written authorization the present drawing shall neither be used for construction anyway, communicated to third parties, nor reproduced.					

Guide per cassetti; guide telescopiche	Coulisses à billes; coulisse télescopique	REVISION HISTORY			
Drawer slide; telescopic ball bearing slide	Guías para cajones; guía teleópica	REV	DESCRIPTION	DATE	
Kugelführung; Teleskopschienen		1a		31/07/2020	

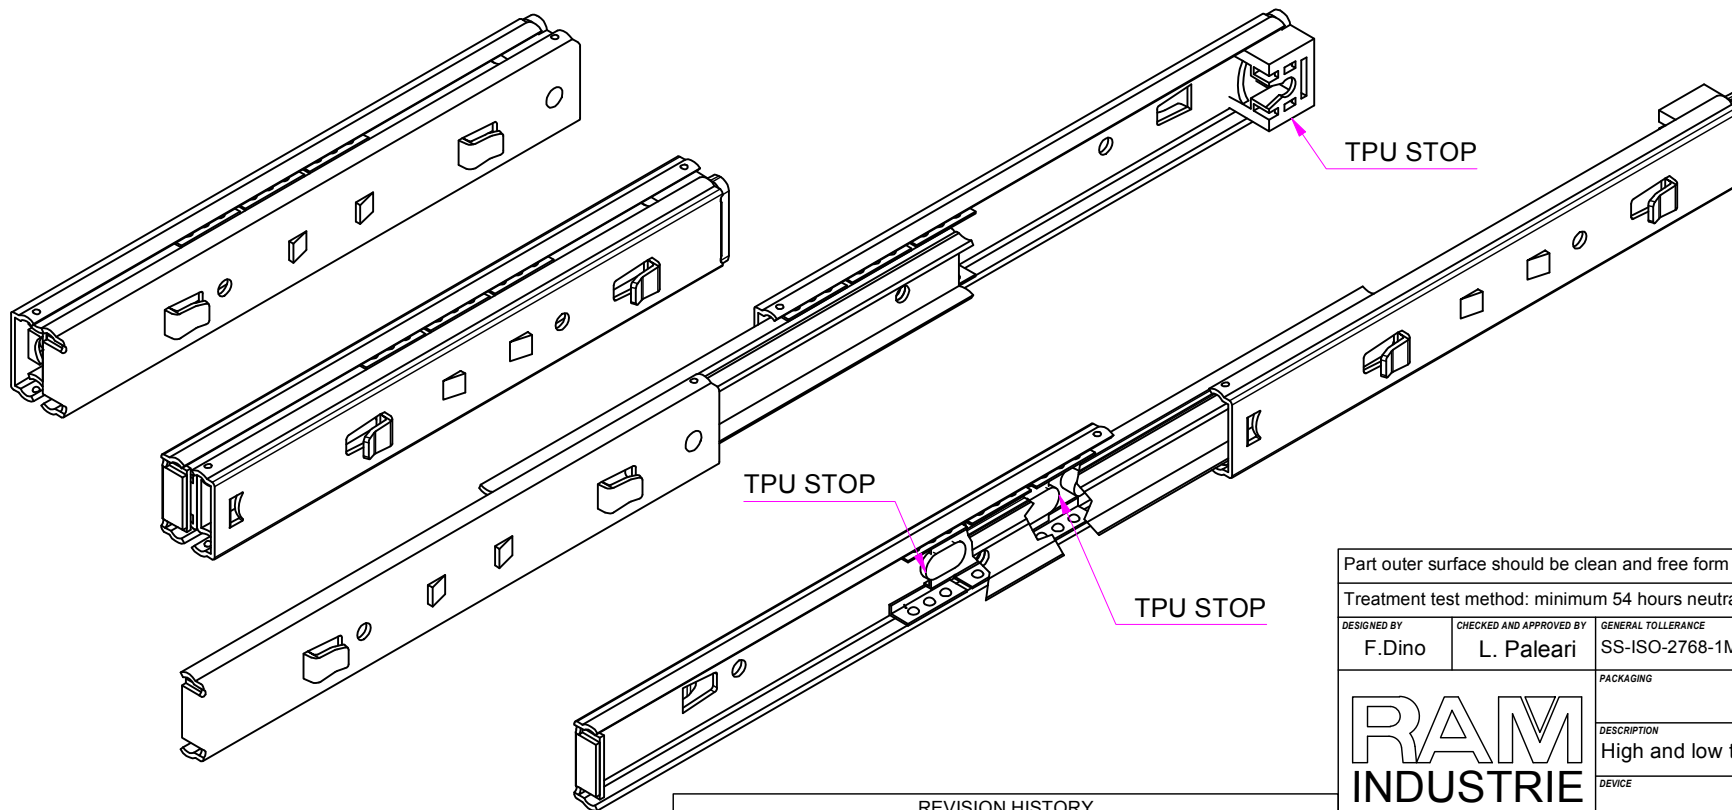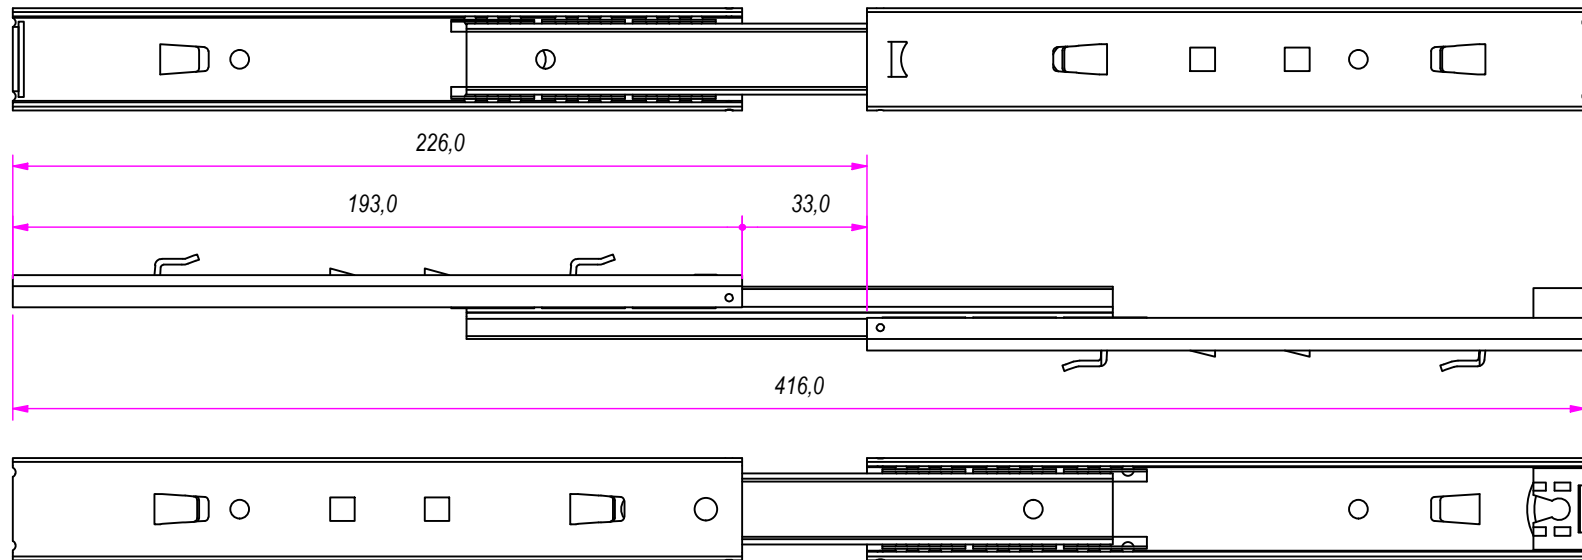

REVISION HISTORY		
REV	DESCRIPTION	DATE
1a		31/07/2020

Part outer surface should be clean and free from foreign materials						
Treatment test method: minimum 54 hours neutral salt spray before zinc corrosion (ISO9227)						
DESIGNED BY F.Dino	CHECKED AND APPROVED BY L. Paleari	GENERAL TOLLERENCE SS-ISO-2768-1M	DATE 31/07/2020	CODE SHE27190		
			PACKAGING		UNIT mm	SHEET 2 of 2
			DESCRIPTION High and low temp grease		MATERIAL Cold rolled steel	
			DEVICE		SLIDING FORCE 2N ~ 5N	PAIR WEIGHT
Property of RAM Industrie. Without its written authorization the present drawing shall neither be used for construction anyway, communicated to third parties, nor reproduced						