


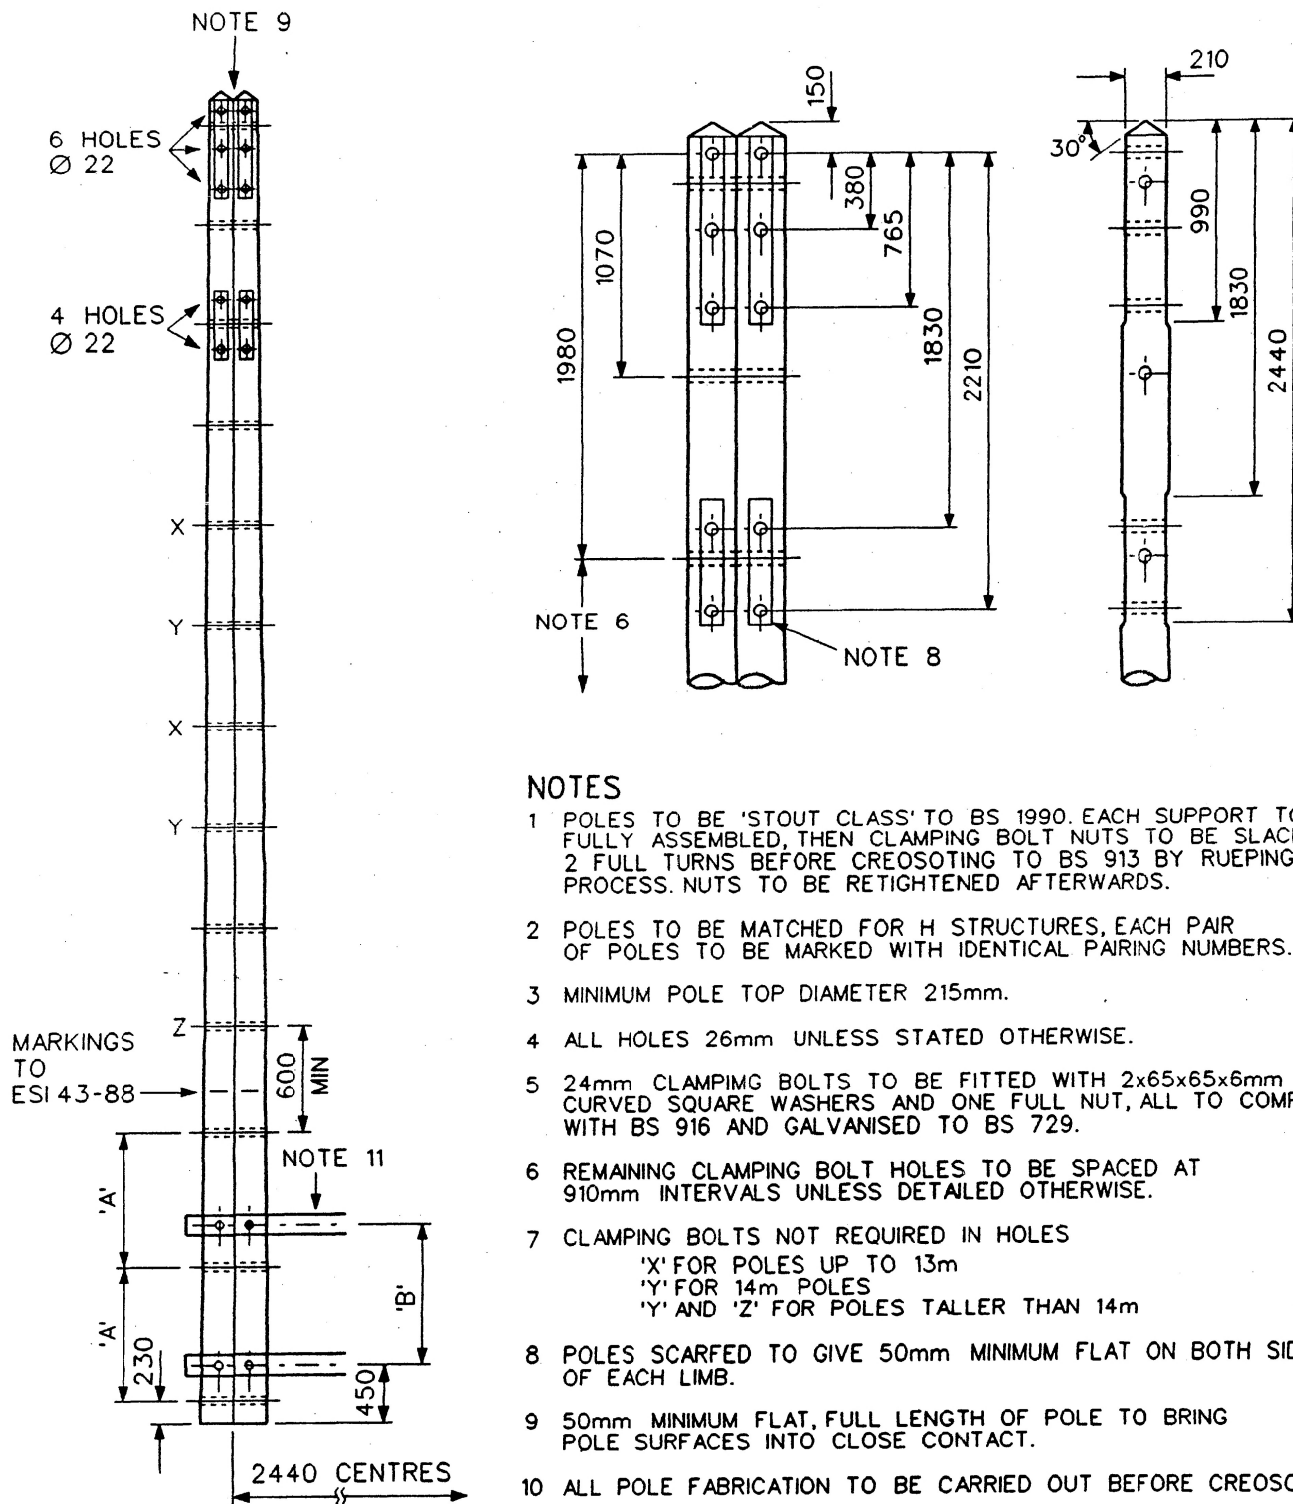

POLE LENGTH (M)	DIM 'A' (mm)	DIM 'B' (mm)
11.5	900	1400
12.0	1200	1400
13.0 & 14.0	1100	1400
15.0 - 17.0	1200	1500
18.0	1100	1500

NOTES

- POLES TO BE 'STOUT CLASS' TO BS 1990. EACH SUPPORT TO BE FULLY ASSEMBLED, THEN CLAMPING BOLT NUTS TO BE SLACKENED 2 FULL TURNS BEFORE CREOSOTING TO BS 913 BY RUEPING PROCESS. NUTS TO BE RETIGHTENED AFTERWARDS.
- POLES TO BE MATCHED FOR H STRUCTURES, EACH PAIR OF POLES TO BE MARKED WITH IDENTICAL PAIRING NUMBERS.
- MINIMUM POLE TOP DIAMETER 215mm.
- ALL HOLES 26mm UNLESS STATED OTHERWISE.
- 24mm CLAMPING BOLTS TO BE FITTED WITH 2x65x65x6mm CURVED SQUARE WASHERS AND ONE FULL NUT, ALL TO COMPLY WITH BS 916 AND GALVANISED TO BS 729.
- REMAINING CLAMPING BOLT HOLES TO BE SPACED AT 910mm INTERVALS UNLESS DETAILED OTHERWISE.
- CLAMPING BOLTS NOT REQUIRED IN HOLES
'X' FOR POLES UP TO 13m
'Y' FOR 14m POLES
'Y' AND 'Z' FOR POLES TALLER THAN 14m
- POLES SCARFED TO GIVE 50mm MINIMUM FLAT ON BOTH SIDES OF EACH LIMB.
- 50mm MINIMUM FLAT, FULL LENGTH OF POLE TO BRING POLE SURFACES INTO CLOSE CONTACT.
- ALL POLE FABRICATION TO BE CARRIED OUT BEFORE CREOSOTING.
- 3350x200x100 CREOSOTED, IMPORTED FIR FOUNDATION BALKS, DRILLED TO MATCH POLE HOLES ON POLE REFERENCE FACE. BALKS TO BE NUMBERED TO MATCH POLES. TO BE SUPPLIED COMPLETE WITH FIXING BOLTS, FLAT & CURVED SQUARE WASHERS AND ONE FULL NUT.

DIMENSIONS IN MILLIMETRES

drawn	BT	POLE FABRICATION ANGLE SUPPORT CE/OM/DC 1(M)		 Yorkshire Electricity	
traced	DB				
checked	JMP				
approved					
revision	date	5-9-90	original scale	Y205L0603	CAD