
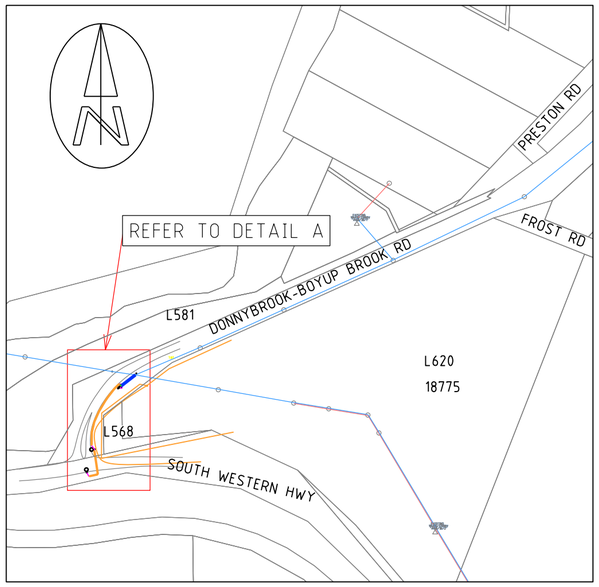


LOCATION PLAN

100 50 0 100 200 300 400

1:5000

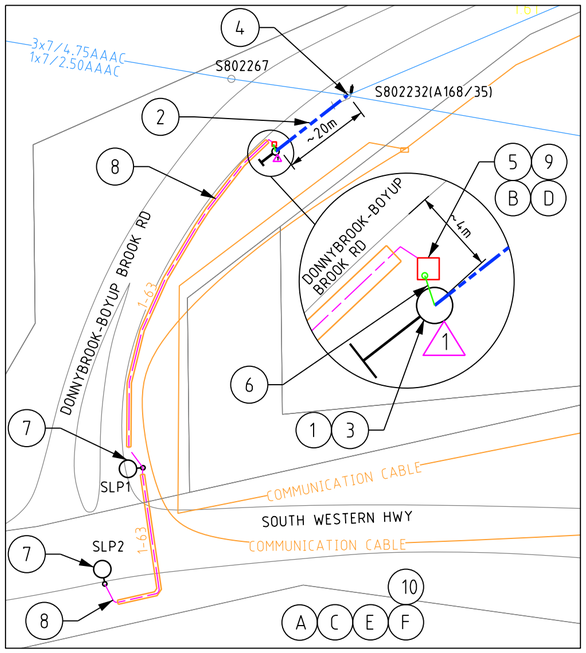

20 10 0 20 40 60 80

1:1000

DETAIL A

CUSTOMER SCOPE OF WORK

(A) THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE WESTERN AUSTRALIAN SERVICE AND INSTALLATION REQUIREMENTS.

(B) PILLAR EXCLUSION ZONE TO BE PREPARED AS PER THE WESTERN AUSTRALIAN SERVICE AND INSTALLATION REQUIREMENTS CLAUSE 12.5.3. THIS INCLUDES, BUT IS NOT LIMITED TO THE FOLLOWING:

1. PEGGING THE PILLAR LOCATION AND ADJACENT BOUNDARY LOCATION PRIOR TO CONSTRUCTION.

2. ONLY EASILY REMOVABLE SURFACE TREATMENT IS TO BE INSTALLED IN THIS AREA, SUCH AS BRICK PAVING.

3. CLEAR OF ALL SERVICES INCLUDING CONTAMINATED SOIL, ASBESTOS ETC.

4. LOCATED 300mm ABOVE 100 YEAR FLOOD LEVEL AND NOT IN A PRECARIOUS POSITION.

5. CUSTOMER TO ENSURE PILLAR EXCLUSION ZONE CLEAR OF VEGETATION TO THE SATISFACTION OF THE WP SCOPER/PNO.

(C) CUSTOMER MUST COMPLY WITH POWER QUALITY LIMITS AS PER AS/TS IEC 61000.3.5 AND WESTERN POWER TECHNICAL REQUIREMENTS.

(D) CUSTOMER TO PEG THE LOCATION OF ALL NEW STREETLIGHTS IN ACCORDANCE WITH THE CUSTOMERS STREETLIGHTING DESIGN AS1158. WESTERN POWERS 'UNDERGROUND DISTRIBUTION SCHEMES' MANUAL AND ANY SPECIFIC REQUIREMENTS FROM LGA AND/OR ROAD AUTHORITY AT NO COST TO WESTERN POWER. IT IS THE CUSTOMERS RESPONSIBILITY TO ADHERE TO THE FOLLOWING:
- THE LOCATION OF ALL STREETLIGHTS IS CLEAR OF ANY 3RD PARTY ASSETS
- ALL STREETLIGHTS MAINTAIN A MINIMUM SET BACK FROM THE ROAD IN ACCORDANCE WITH AS1158.1.2 AND WESTERN POWERS UDS MANUAL
- ANY PROPOSED STREETLIGHT LOCATIONS OUTSIDE OF THE WESTERN POWER STANDARD 2.4 - 3.0m POLE ALIGNMENT HAVE THE APPROVAL OF 3RD PARTY UTILITIES IN ACCORDANCE WITH THE UTILITY PROVIDERS CODE OF PRACTICE.
- STREET LIGHTS ARE NOT PERMITTED TO BE INSTALLED WITHIN THE WESTERN POWER STANDARD 0-500mm CABLE ALIGNMENT.

(E) CUSTOMER TO ENSURE UNMETERED SUPPLY ACCOUNT IS CREATED / UPDATED TO REFLECT ADDITIONAL STREET LIGHTING. CUSTOMER TO COMPLY WITH THE UNMETERED SUPPLY STANDARD AVAILABLE THE WESTERN POWER WEBSITE.

(F) THE CUSTOMER IS RESPONSIBLE FOR CONSULTING WITH THE RELEVANT LGA CONFIRMING AND SATISFYING ANY DEVELOPMENT APPROVAL REQUIREMENTS THAT APPLY.

NOTE TO SPIDA FOR POLE S802232

PLEASE INCLUDE FEATURE TEXT, DETAIL AND COMMENT IN SPIDA, ASSET MANAGEMENT PORTAL DX STATING 'NON-STANDARD POLE CONSTRUCTION-VOLT REFER TO DQM PROJECT SP053196.

WESTERN POWER SCOPE OF WORK

(1) INSTALL NEW 12.5m/6kN WOOD POLE AS PER POLE SCHEDULE.
CU: P08_Rx1
DCSH: R12-2, R13-3

(2) STRING NEW 1x7/4.75 AAAC HV CONDUCTOR AND 1x7/4.75 AAAC RE CONDUCTOR BETWEEN NEW POLE AND POLE# S802232.
CU: CN52_7/475x70m

(3) AT NEW POLE.
- INSTALL NEW HV TERMINATION.
- INSTALL 25kVA/12.7kV PTTx
- TAP PTTx TO HV BARE AERIALS.
- INSTALL NEW RE TERMINATION.
- INSTALL GROUND STAY.
CU: HV30_Nx1, TX5_25/12.7x1, ST1_19/200Wx1, CN9_7/475AAx2, HV34_PTx1, HV34_PT12x1, HV34_PTSx1, RE3_7/475AAx1
DCSH: H47-1, R12-1

(4) AT POLE S802232.
- RE-ATTACH EXISTING 3 PHASE TERMINATION AS PER MODIFIED H13-1
- INSTALL NEW SINGLE PHASE TEE-OFF AND TAP ON HV BARE VIA 3A FAULT TAMER.
- INSTALL NEW RE TERMINATION AT TAP ON TO EXISTING RE.
CU: HV30_Nx1, HV52_3FTx1, RE3_7/475AAx1, CN9_7/475AAx4
DCSH: MODIFIED H13-1

(5) INSTALL NEW MINI-PILLAR WITHIN 1m OF THE BASE OF POLE#S802267 WHERE PEGGED ON SITE BY CUSTOMER AS PER ZONE EXCLUSION DETAIL (WASIR CL. 12.5.3)
CU: LU10x1
NON CU: CR0324x1
DCSH: U08-4, U19-3

(6) INSTALL NEW 25LV CABLE FROM NEW MINI-PILLAR TO NEW POLE AND TERMINATE TO PTTx LV BUSHINGS VIA 100A FLOWLINE FUSES.
CU: CN42x20m, CN73_LV25x3, CN54x1,LU61_25_240Ox1
LU61_25_240Ux1
NON CU: GF1947x1

(7) INSTALL 2x NEW 12.5m STEEL STANDARD STREETLIGHT WITH 170W 4000K LED STREETLIGHTS AS PER STREETLIGHT SCHEDULE.
CU: SL11_6Lx2
NON CU: FE0112x2
DCSH: S11

(8) INSTALL NEW 16SL CABLE FROM NEW MINI-PILLAR TO NEW STREETLIGHTS SL2 LOOPING IN AND OUT FROM SL1 AT APPROX. 1.5m SETBACK FROM BITUMEN EDGE VIA 63mm POLY PIPE.
CU: CN41x145m, CN73_LV10/16x5, CN54x3
DCSH: R26, R27

(9) AT NEW MINI-PILLAR.
- TERMINATE NEW 25LV CABLE.
- TERMINATE NEW 16SL CABLE VIA RED SPOT FUSE.
CU: UM3_Rx1
DCSH: U08-04, U23-2

(10) ENVIRONMENTAL FILTER CHECKED.
NO ENVIRONMENTAL ISSUES IDENTIFIED GIVEN THE NATURE OF THE PROPOSED WORKS. THE FOLLOWING POTENTIAL ENVIRONMENTAL RISK LAYERS ARE PRESENT WITHIN THE AREA OF WORKS:
NATIVE VEGETATION REMAINING
NATIVE VEGETATION EXTENT (DPIRD-005)
PRE-EUROPEAN VEGETATION (DPIRD-006)
CARNABYS COCKATOO UNCONFIRMED FEEDING HABITAT (DBCA-056)
LOCAL PLANNING SCHEME - ZONES AND RESERVES (DPLH-071)
INDIGENOUS LAND USE AGREEMENTS (ILUAS)
NATIVE TITLE BOUNDARIES
RIWI ACT, SURFACE WATER AREAS AND IRRIGATION DISTRICTS (DWER-037)
BUSH FIRE PRONE AREAS - CURRENT (OBRM-001)
REFER TO environment@westernpower.com.au

LEGEND

LV-SL CABLES
- CN45 - 240mm2 (1x3c)
- CN44 - 185mm2 (1x3c)
- CN43 - 120mm2 (1x3c)
- CN42 - 25mm2 (1x3c)
- CN41 - 16mm2 SL (1c)
- 40 C PILOT
- EXISTING LV CABLES (SIZE AND TYPE INDICATED)


STREET LIGHTS — EXISTING
- POLE BRACKET / SINGLE OUTREACH
- POLE BRACKET / SINGLE OUTREACH

- ALPHA CHARACTER DENOTES STREET LIGHT TYPE. REFER STREET LIGHT SCHEDULE FOR POLE & LUMINAIRE DETAILS.

PILLARS / PITS / ETC
- MINI (WORKING END)
- UNIVERSAL
- MINI
- LINK
- CABLE MARKER U/G
- Serviced Uncleared De-energised Lot
- UMS PIT
- UTILITIES PIT
- BGSP PIT
- 100/200AMP CUTOUT
- CONDUIT / POLY PIPE

AERIAL CONDUCTORS AND POLES
- NEW POLE (ANY TYPE AS INDICATED)
- EXISTING POLE (ANY TYPE AS INDICATED)
- HV LV EXISTING AERIAL CONDUCTORS (SIZE AND TYPE INDICATED)

OH EQUIPMENT
- INTERMEDIATE
- INLINE STRAIN
- DOF
- PTT

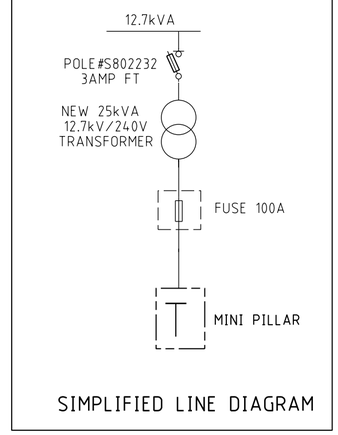

SIMPLIFIED LINE DIAGRAM

POLE SCHEDULE

POLE ID	POLE DETAILS	POLE LOCATION		STRUCTURE MATERIALS / CU'S	DCSH REFERENCE	AS CON CHECK
		EASTING	NORTHING			
SLP1	12.5m STANDARD STEEL STREETLIGHT	392464.504	6283859.527	SL11_6L	S11	-
SLP2	12.5m STANDARD STEEL STREETLIGHT	392473.305	6283886.921	SL11_6L	S11	-
NEW POLE	12.5m/6kN WOOD POLE	392503.883	6283959.281	REFER TO WP SOW 1,3		


CONDUCTOR SCHEDULE - REFER TO DM#9692320 OD DCSH SECTION 10 FOR STRINGING TABLES

SECTION	TYPE	LOCATION		No COND	CONDUCTOR TYPE	RULING SPAN (m)	DISTANCE (m)	STRINGING TENSION % CBL @ EDT (15×C)	DCSH STRINGING TBL	CU	AS CON CHECK
		FROM POLE	TO POLE								
1	HV	S802232	NEW POLE	2	7/4.75 AAAC	20	20	0.5kN (SLACK)		CN52_7/475	-

CRITICAL RISK MANAGEMENT

☒	☒	☒	☒	☒	☒	☐	☒	☐

COMMUNICATION CABLES IN VICINITY OF WORKS



TO BE CONSTRUCTED DE-ENERGISED UNLESS RISK ASSESSED

NO NATIVE VEGETATION MAY BE DISTURBED WITHOUT A PERMIT OR OUTSIDE OF THE PERMIT AREA. IF IN DOUBT, PLEASE CONTACT THE RELEVANT MANAGER WHO WILL CONTACT WESTERN POWER ENVIRONMENTAL TEAM.

PLEASE NOTE: HEAVY PENALTIES MAY APPLY TO INDIVIDUALS AND BUSINESSES FOR DAMAGE TO NATIVE VEGETATION WITHOUT A PERMIT.

CUSTOMER CONTACT DETAILS

COMPANY NAME: MAIN ROADS WA
CONTACT: DAMIAN LOW TEL: 0401901625

Rev.	REVISIONS	DRN	DATE	FILE REFERENCE DETAILS
				SHE ASSESSMENT REPORT
A	ISSUED FOR CONSTRUCTION	I.P.	09/26	HAZARD MANAGEMENT REGISTER

STREETLIGHT INSTALLATION

INTERSECTION OF BOYUP BROOK RD AND SOUTH WESTERN HWY

DONNYBROOK WA 6239

NETWORK VOLTAGE: 22kV / 240V

DESIGNER: ISHAN PALIKHE
DESIGN TEAM: CCS COMM SVM - RASP
EMAIL: ccs.design.commercial.svm@westernpower.com.au
TEL: 13 10 87
DATE: 09/26 SCALE: AS NOTED @ A2
GEO REF: Lat. - 33°34'42.4"S Long. - 115°50'29.6"E

westernpower

DRAWING NUMBER

SP053196

SHEET 01 OF 01

REV: A ORIGINAL SIZE - A2