
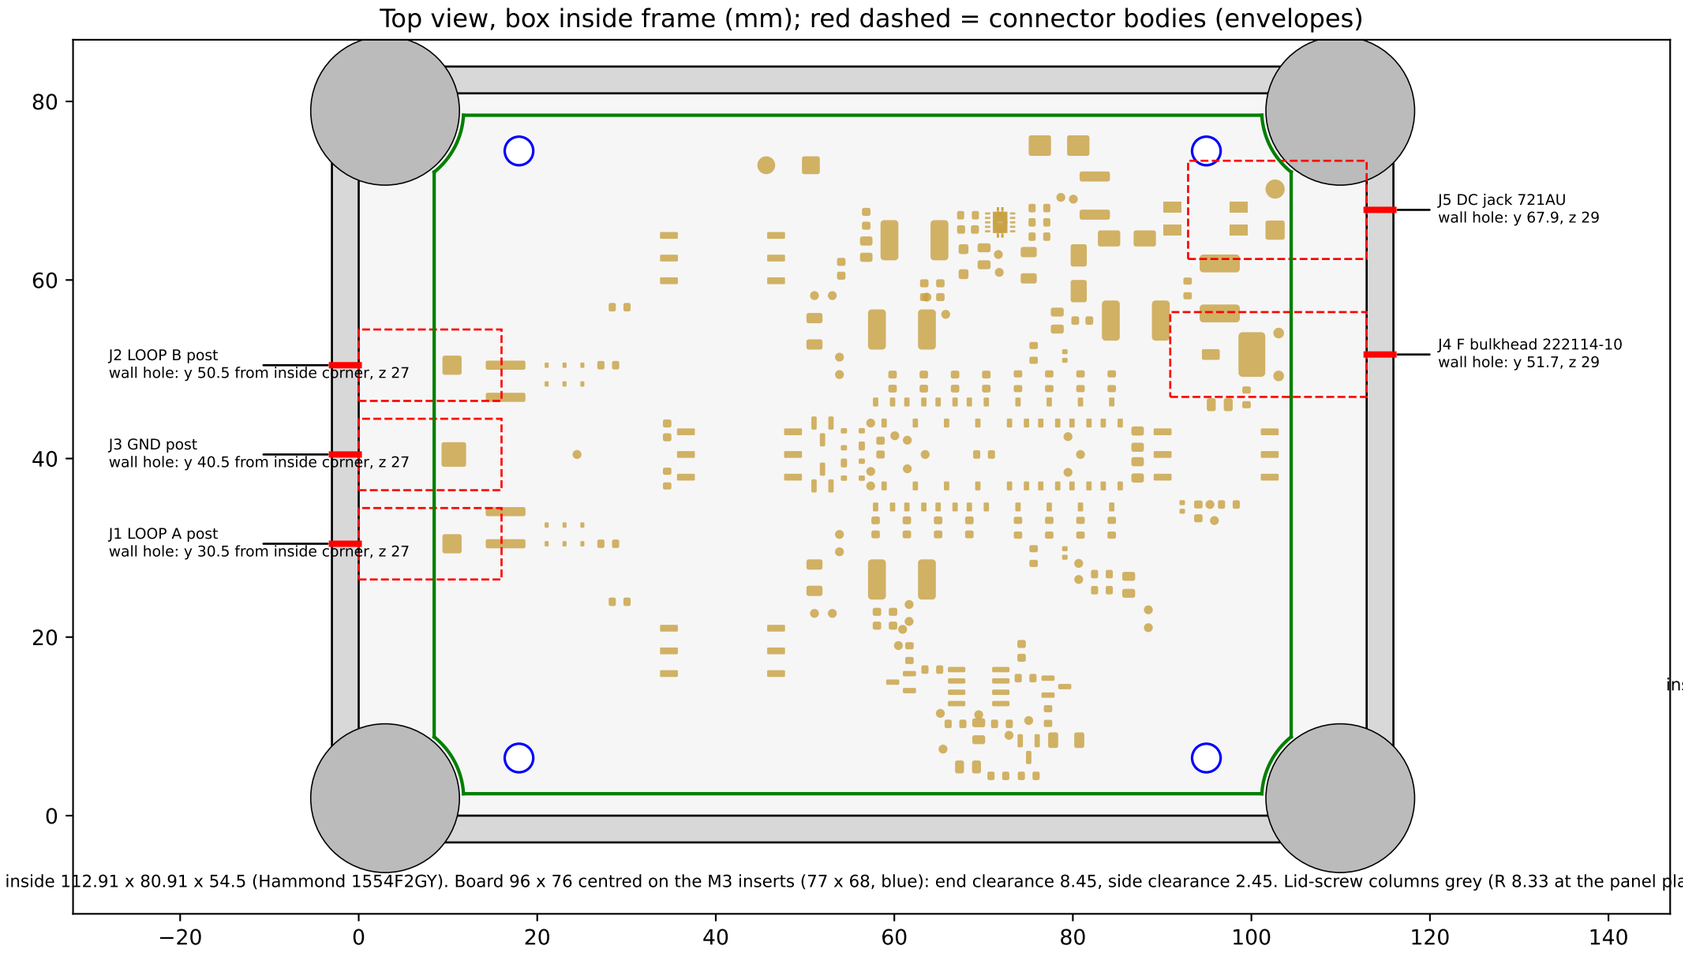


inside 112.91 x 80.91 x 54.5 (Hammond 1554F2GY). Board 96 x 76 centred on the M3 inserts (77 x 68, blue): end clearance 8.45, side clearance 2.45. Lid-screw columns grey (R 8.33 at the panel plane).

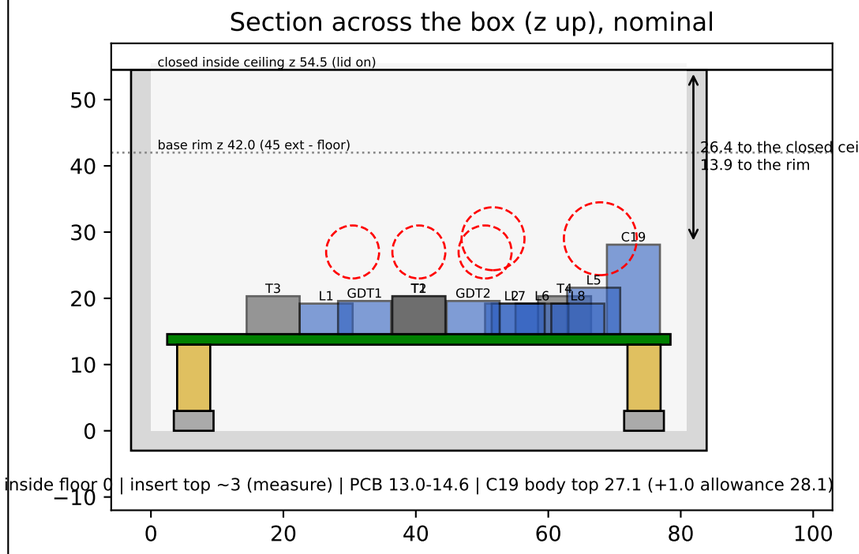

inside floor 0 | insert top ~3 (measure) | PCB 13.0-14.6 | C19 body top 27.1 (+1.0 allowance 28.1)

MECHANICAL HANDOFF, WB-2 board sha 877c82ec, drawing rev B after review-07 (nominal; NOT a drilling template until the datums are measured)

1. Hammond 1554F2GY (IP66). Datums: inside floor z0; insert top ~3 (Hammond 6.00 is from the bottom datum, floor ~3 assumed: MEASURE); base rim ~42; closed inside ceiling 54.5.

2. PCB 96 x 76 x 1.6, corner bites R 8.8 on the lid-screw columns. Board edges sit 8.45 mm from the end walls and 2.45 mm from the side walls (nominal, before draft).

3. Left wall: posts J1/J3/J2 on board y 28/38/48 (box y 30.455/40.455/50.455), hole centres 12.4 mm above the PCB top; post tails over the protection region x 0-19.

   Wires: J1/J2 0.5 mm2, J3 1.0 mm2 straight to its pad at (2.2, 38); keep all three short and away from the transformer region.

4. Right wall: J4 F bulkhead 222114-10 at board y 49.2 (box 51.655), J5 jack 721AU at board y 65.4 (box 67.855; check nut vs lid column), centres 14.4 mm above PCB top. RG-179 <= 50 mm,

   laced at the two J4 holes; it must not cross the input rows. J5 twisted pair stays inside the L5 / J5 entry region; the sleeve (CBL_GND) is never bonded to the box or board ground elsewhere.

5. C19 EEU-FC1V221B 10 x 12.5 is the tallest part: body top z 27.1, envelope with +1.0 mm allowance z 28.1; 26.4 mm to the closed ceiling, 13.9 mm to the base rim.

6. All four M3 screws stay accessible from above; nothing is mounted over H1-H4.