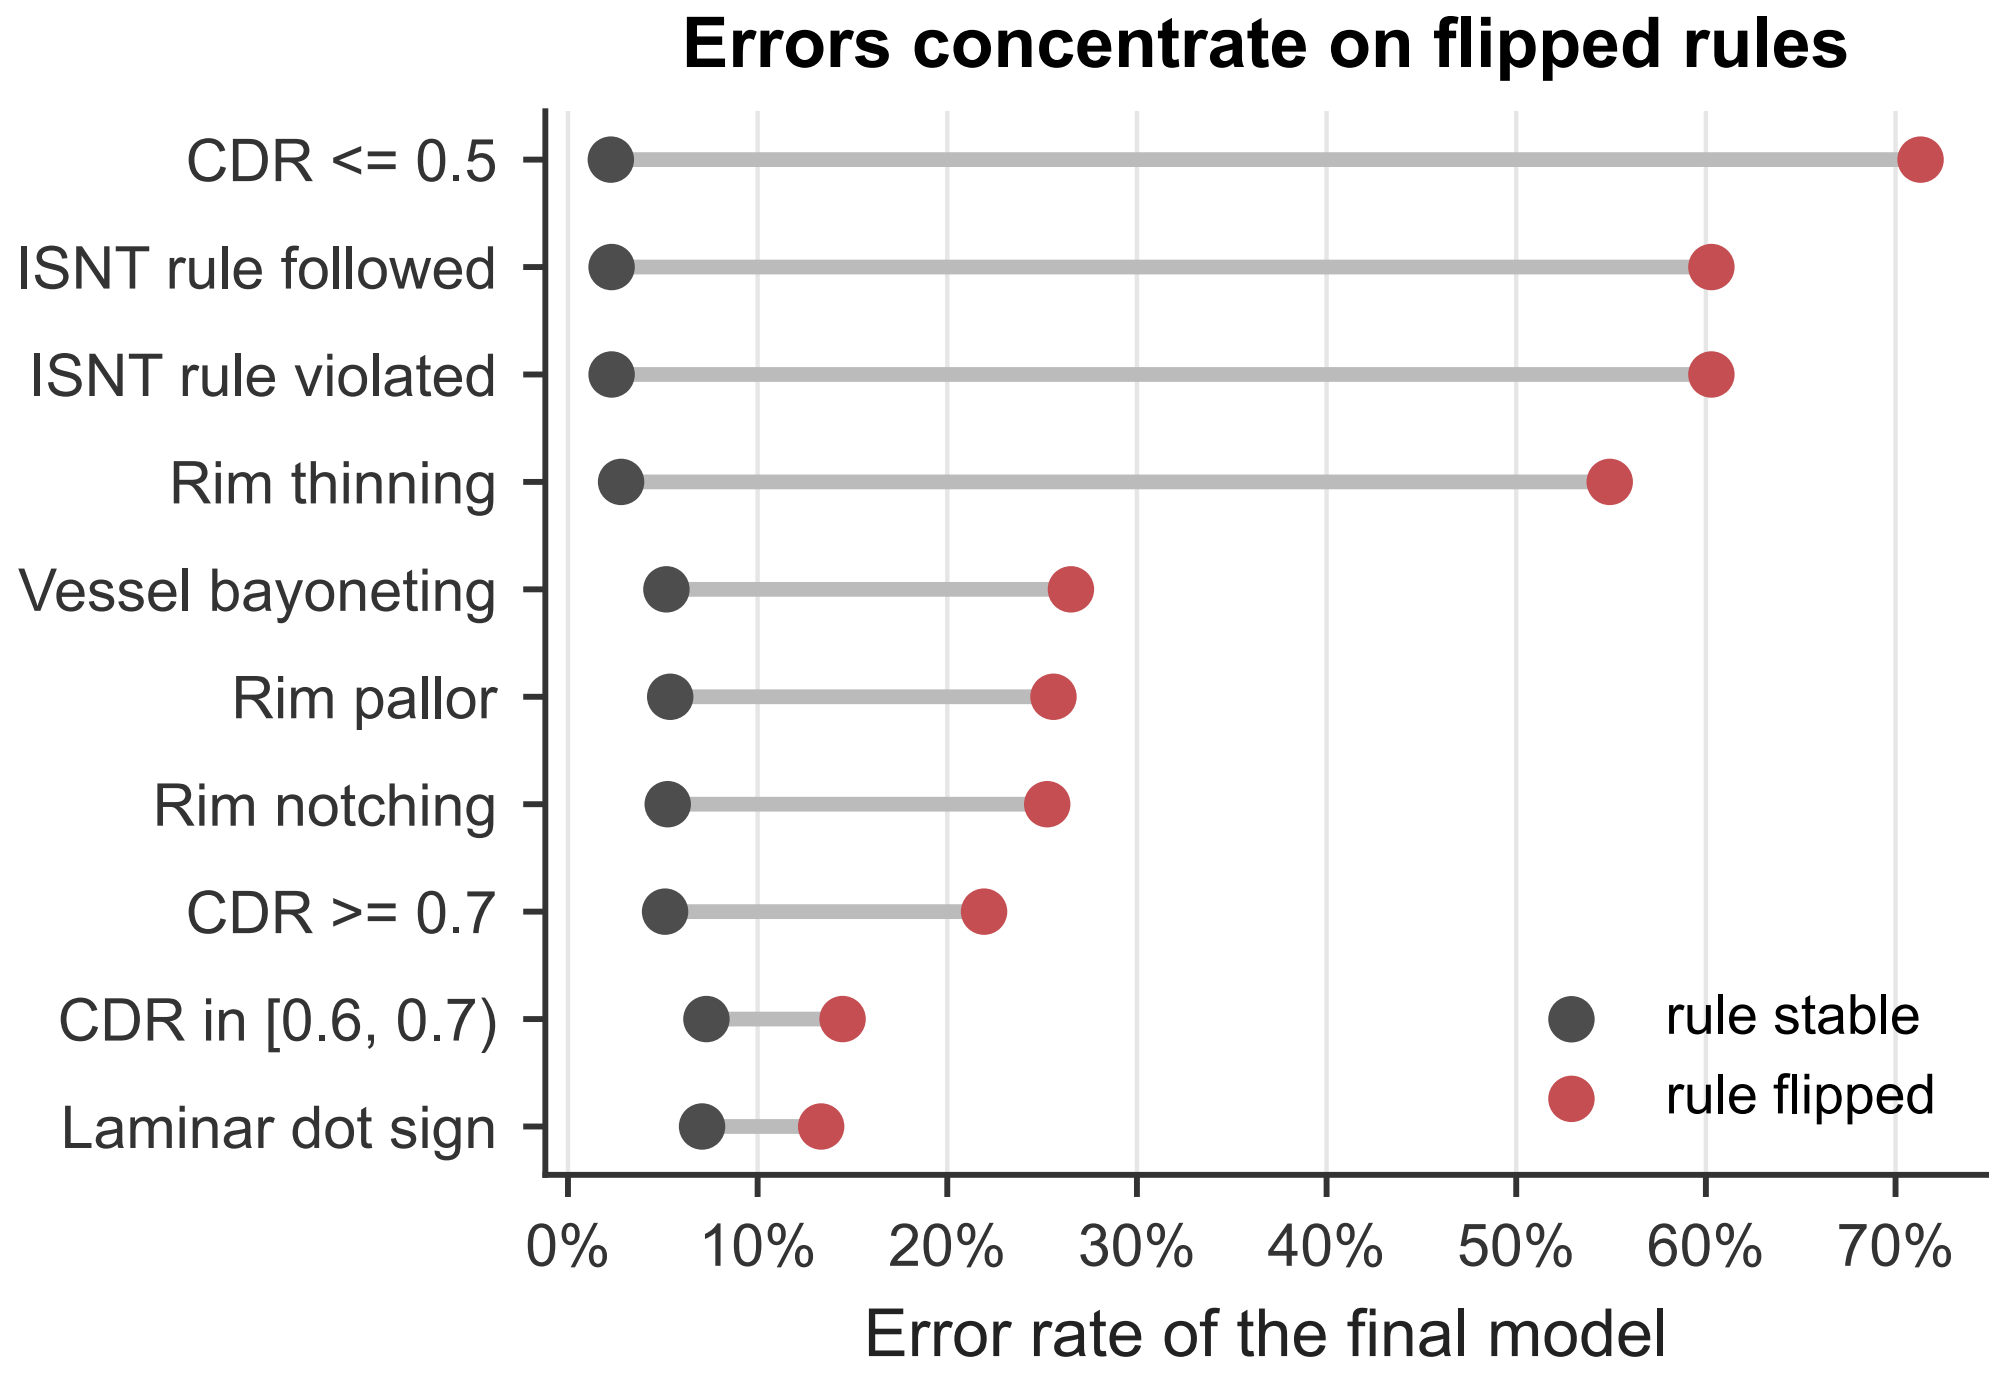
Errors concentrate on flipped rules
CDR <= 0.5
ISNT rule followed
ISNT rule violated
Rim thinning
Vessel bayoneting
Rim pallor
Rim notching
CDR >= 0.7
CDR in [0.6, 0.7)
Laminar dot sign
rule stable
rule flipped
0%
10%
20%
30%
40%
50%
60%
70%
Error rate of the final model