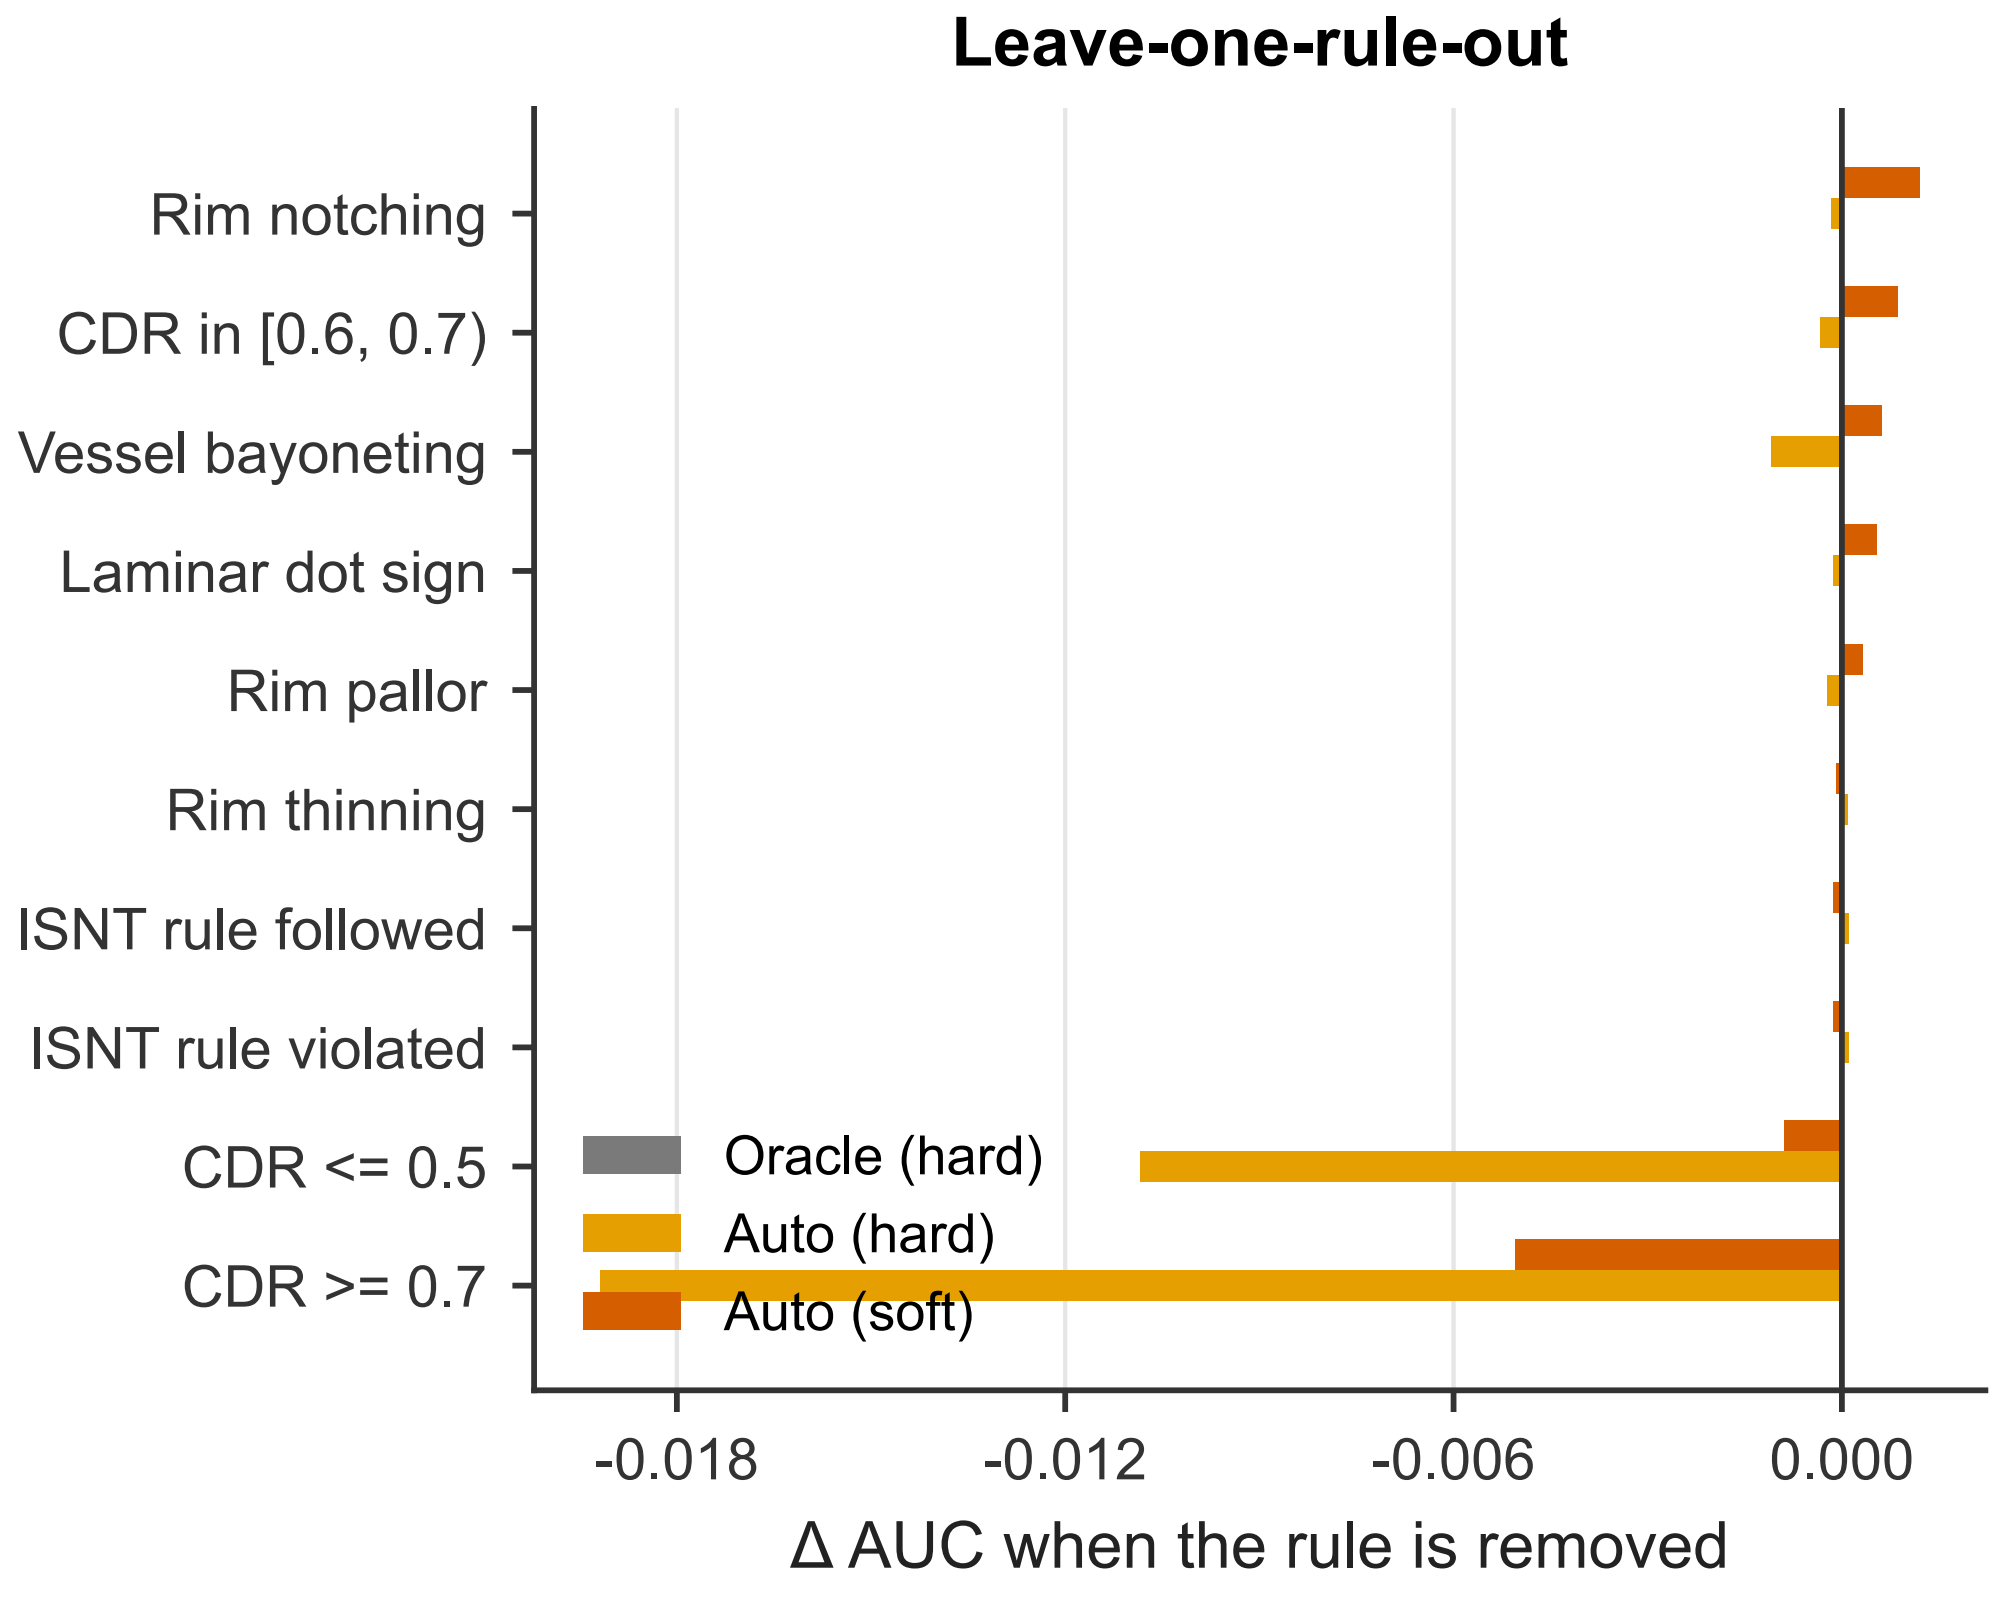
Leave-one-rule-out
Rim notching
CDR in [0.6, 0.7)
Vessel bayoneting
Laminar dot sign
Rim pallor
Rim thinning
ISNT rule followed
ISNT rule violated
CDR <= 0.5
CDR >= 0.7
Oracle (hard)
Auto (hard)
Auto (soft)
-0.018
-0.012
-0.006
0.000
Δ AUC when the rule is removed