


KBUR/BUR
BOB HOPE

JEPPESEN **BURBANK, CALIF**
4 AUG 23 **10-2** **Eff 10 Aug** **STAR**


D-ATIS Arrival via FIM/PMD only		Apt Elev See Graphic
134.5	135.12	
Alt set: INCHES Trans level: FL180 DME required.		
FERNANDO 7 ARRIVAL (FIM.FERN7)		
ROUTING		
From FIM VOR via FIM R136 to TOAKS, then via IBUR localizer. EXPECT ILS Rwy 8.		

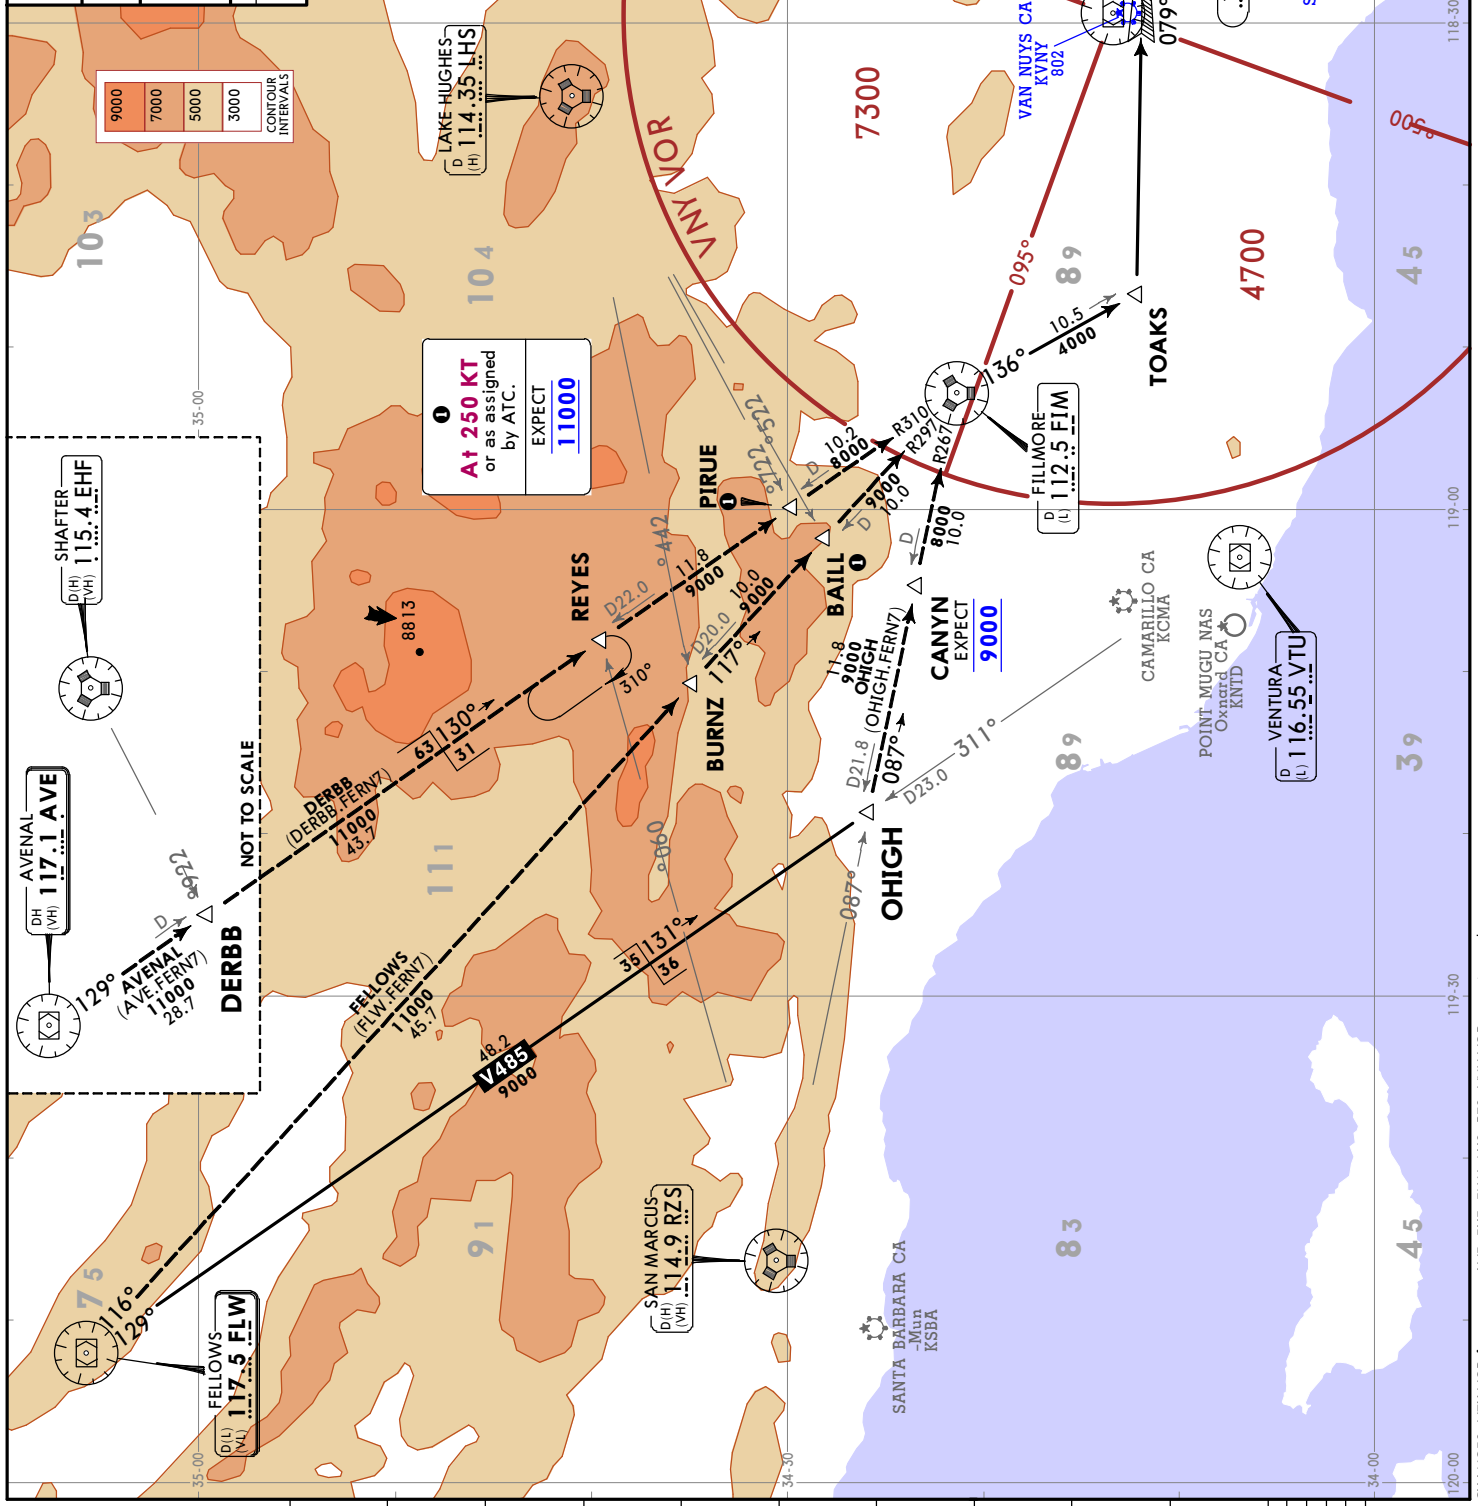

KBUR/BUR
BOB HOPE

JEPPESEN BURBANK, CALIF
4 AUG 23 (10-2B) Eff 10 Aug
RNAV STAR

D-ATS		Alt Set: INCHES	Trans level: FL180
Arrival via FIM/PMD only		1. RADAR required.	
134.5		2. DME/DME/IRU or GPS required.	
135.125		3. RNAV 1.	
Apt Elev See Graphic		4. EXPECT runway 8 unless otherwise assigned by ATC.	
		5. KREME Transition restricted to KLAS departures only.	
		6. WNCNL Transition ATC assigned only.	
JANNY 5 RNAV ARRIVAL (JANNY.JANNY5) (RWY 8)			
ROUTING			
From JANNY on track 243° to PUCCK, then on track 201° to ELMRR, then on track 201° to WABBT, then on track 201° EXPECT RNAV (RNP) Y Rwy 8 or RADAR vectors to final approach course.			


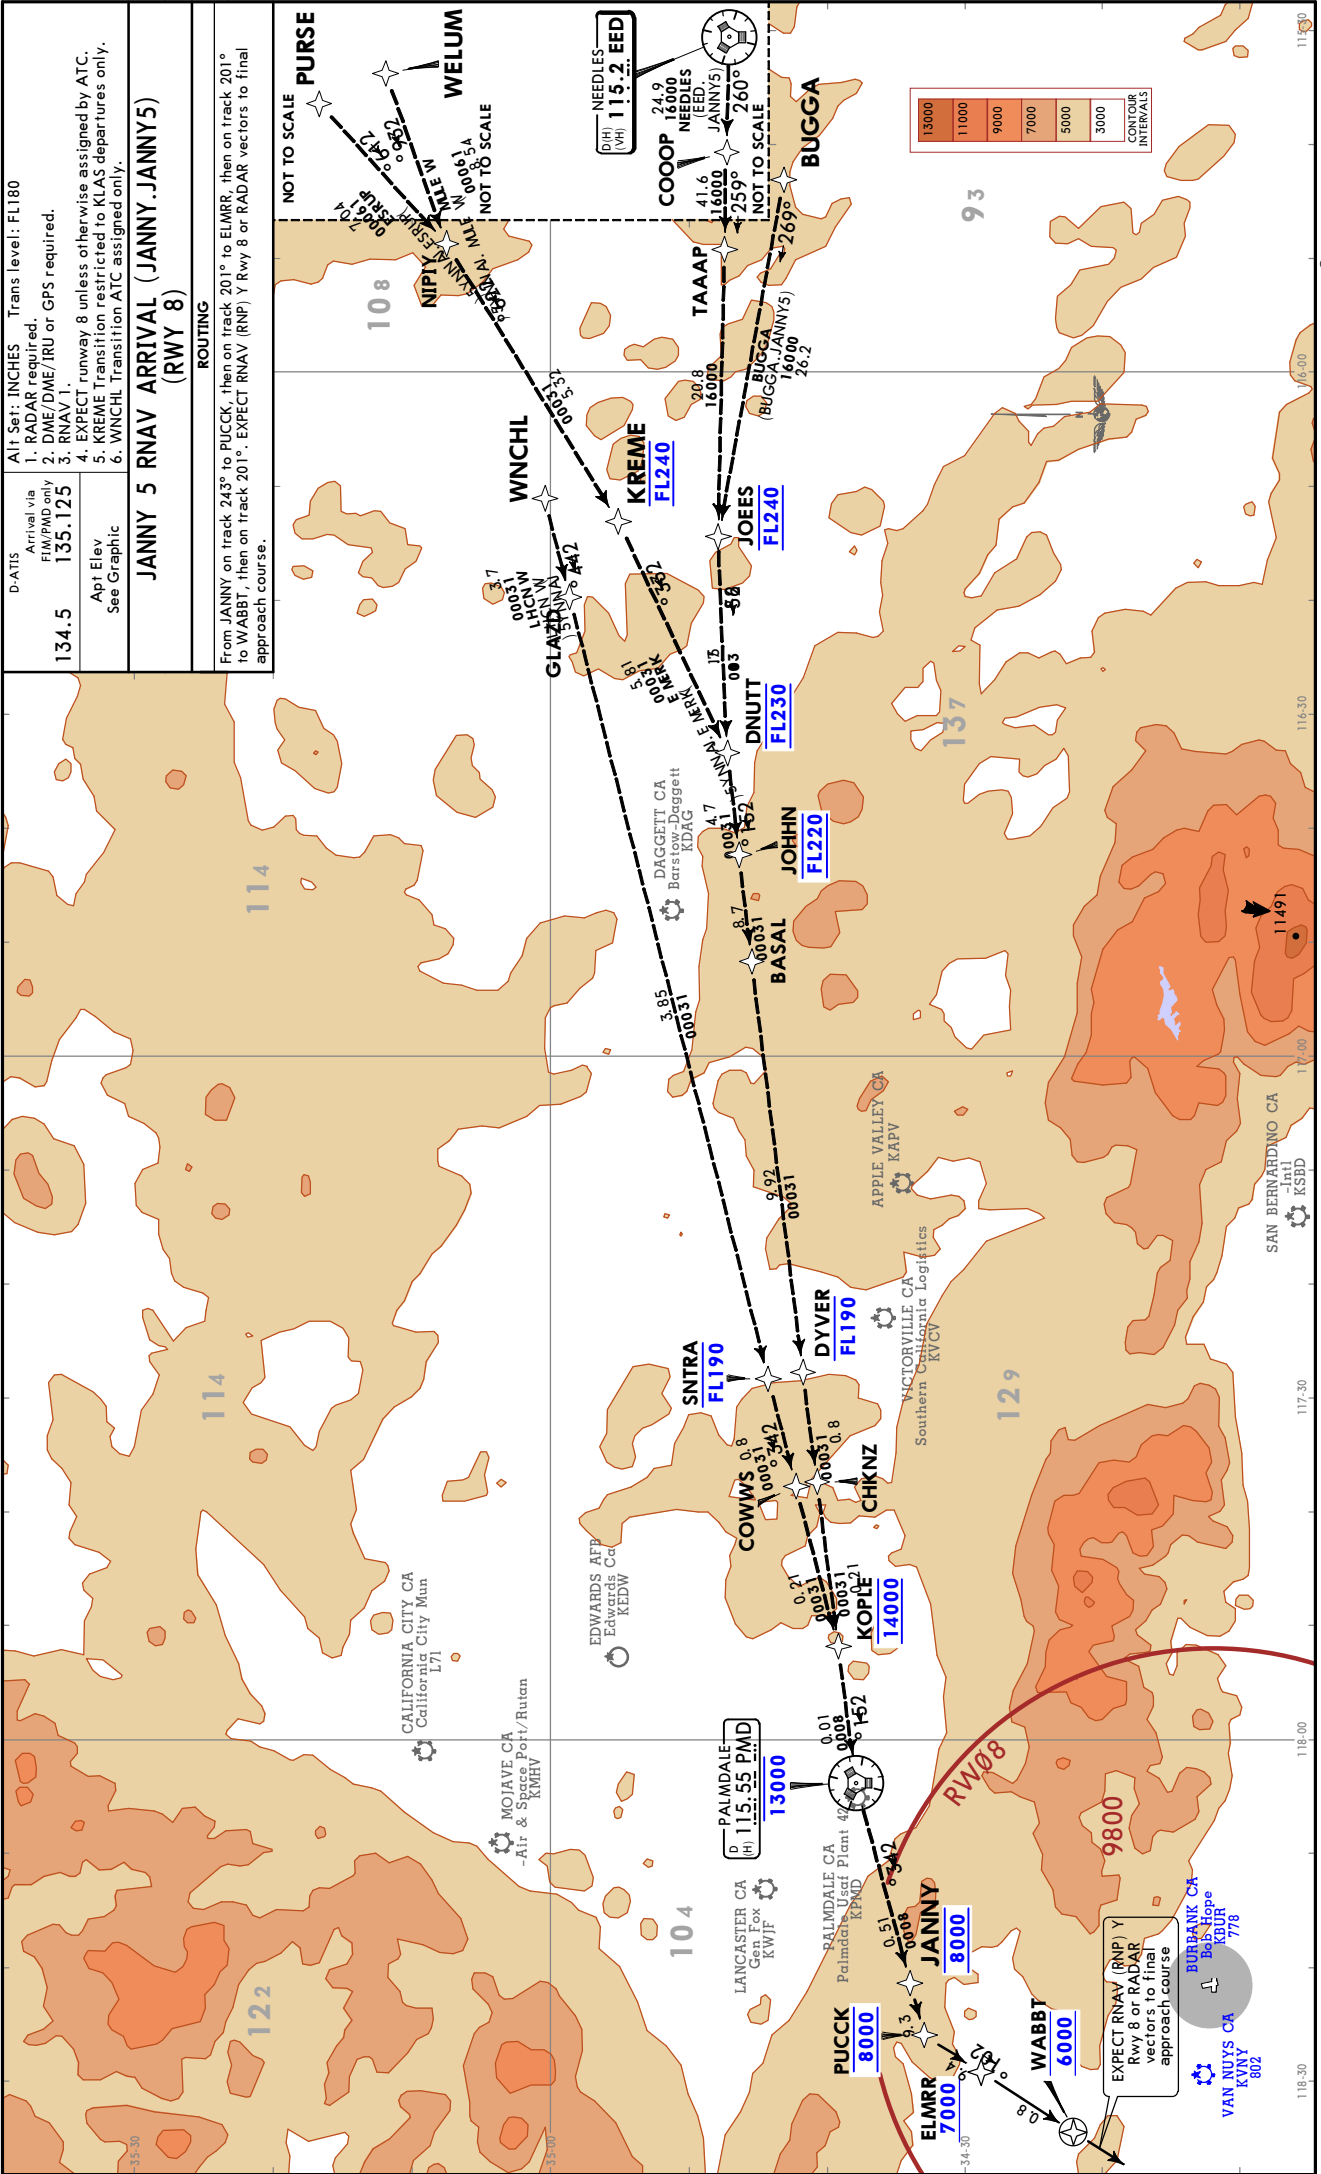


KBUR/BUR
BOB HOPE

JEPPesen
4 AUG 23 (10-2C) Eff 10 Aug

BURBANK, CALIF
STAR

D-ATIS	Alt Set: INCHES DME required for DAGGETT, HECTOR and PALMDALE transitions.
Arrival via FIM/PMD only	Trans level: FL180
134.5	See Graphic
135.125	transitions.
LYNXX 8 ARRIVAL (LYNXX.LYNXX8)	
ROUTING	
From over LYNXX via VNY R329 to VNY VOR. EXPECT RADAR vectors to final approach course after VNY VOR.	

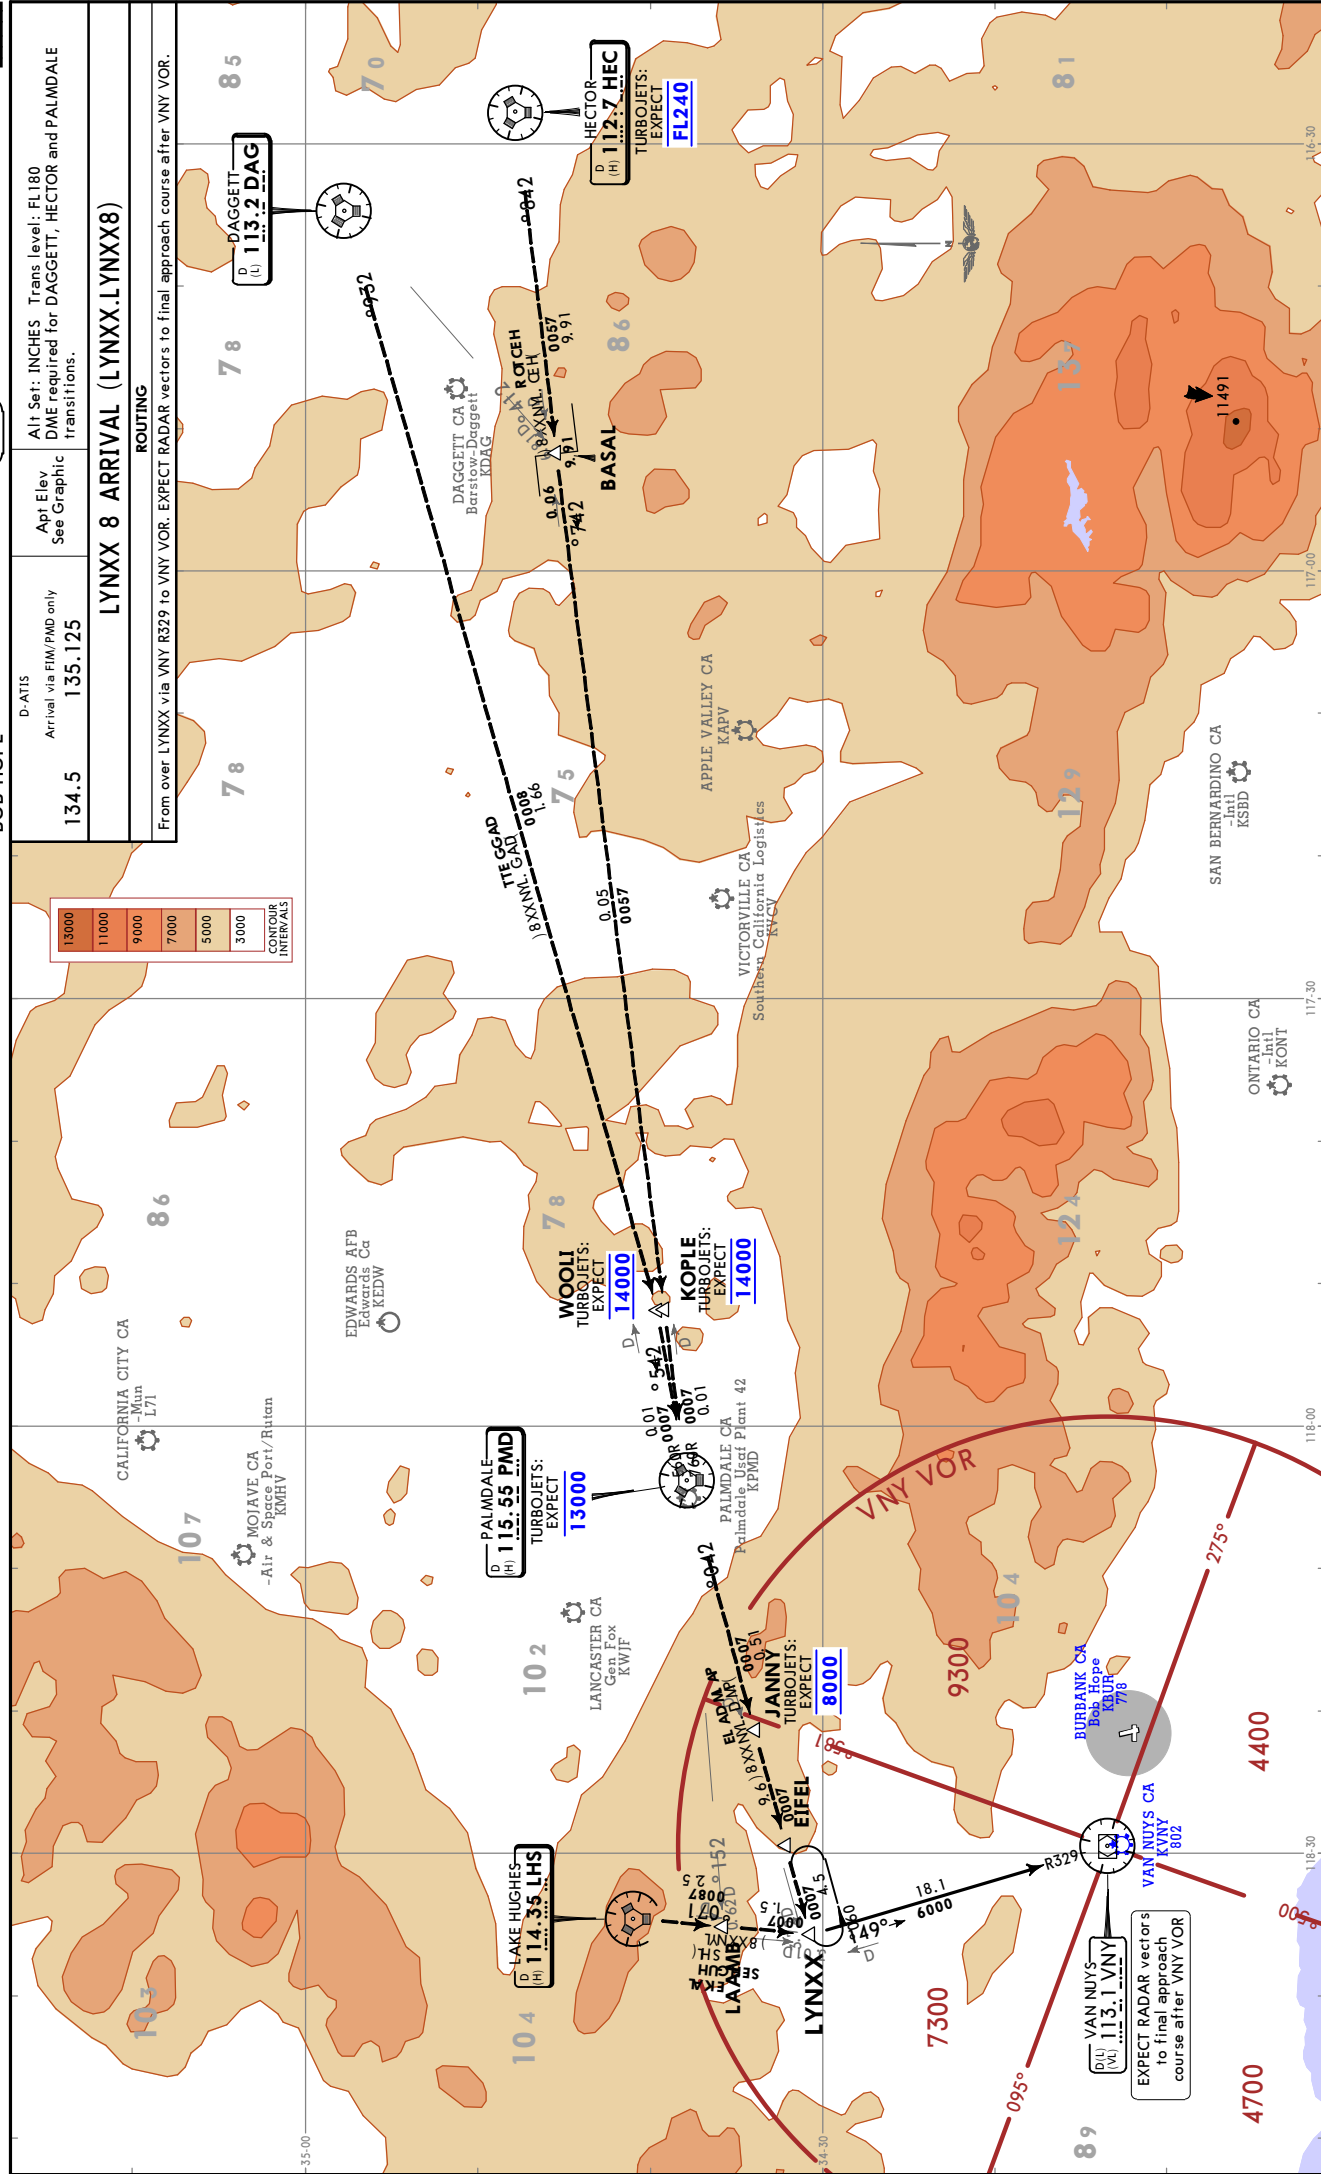


CHANGES: MOCAs, IGGYY waypoint added, HEVVY, ROKKR, ZEPPE waypoints moved, bearings, speed restriction at HONKZ, procedure renumbered.

© JEPPESEN, 2019, 2025. ALL RIGHTS RESERVED.

KBUR/BUR
BOB HOPE


JEPPESEN BURBANK, CALIF
14 FEB 25 (10-2D) EFF 20 Feb
RNAV STAR

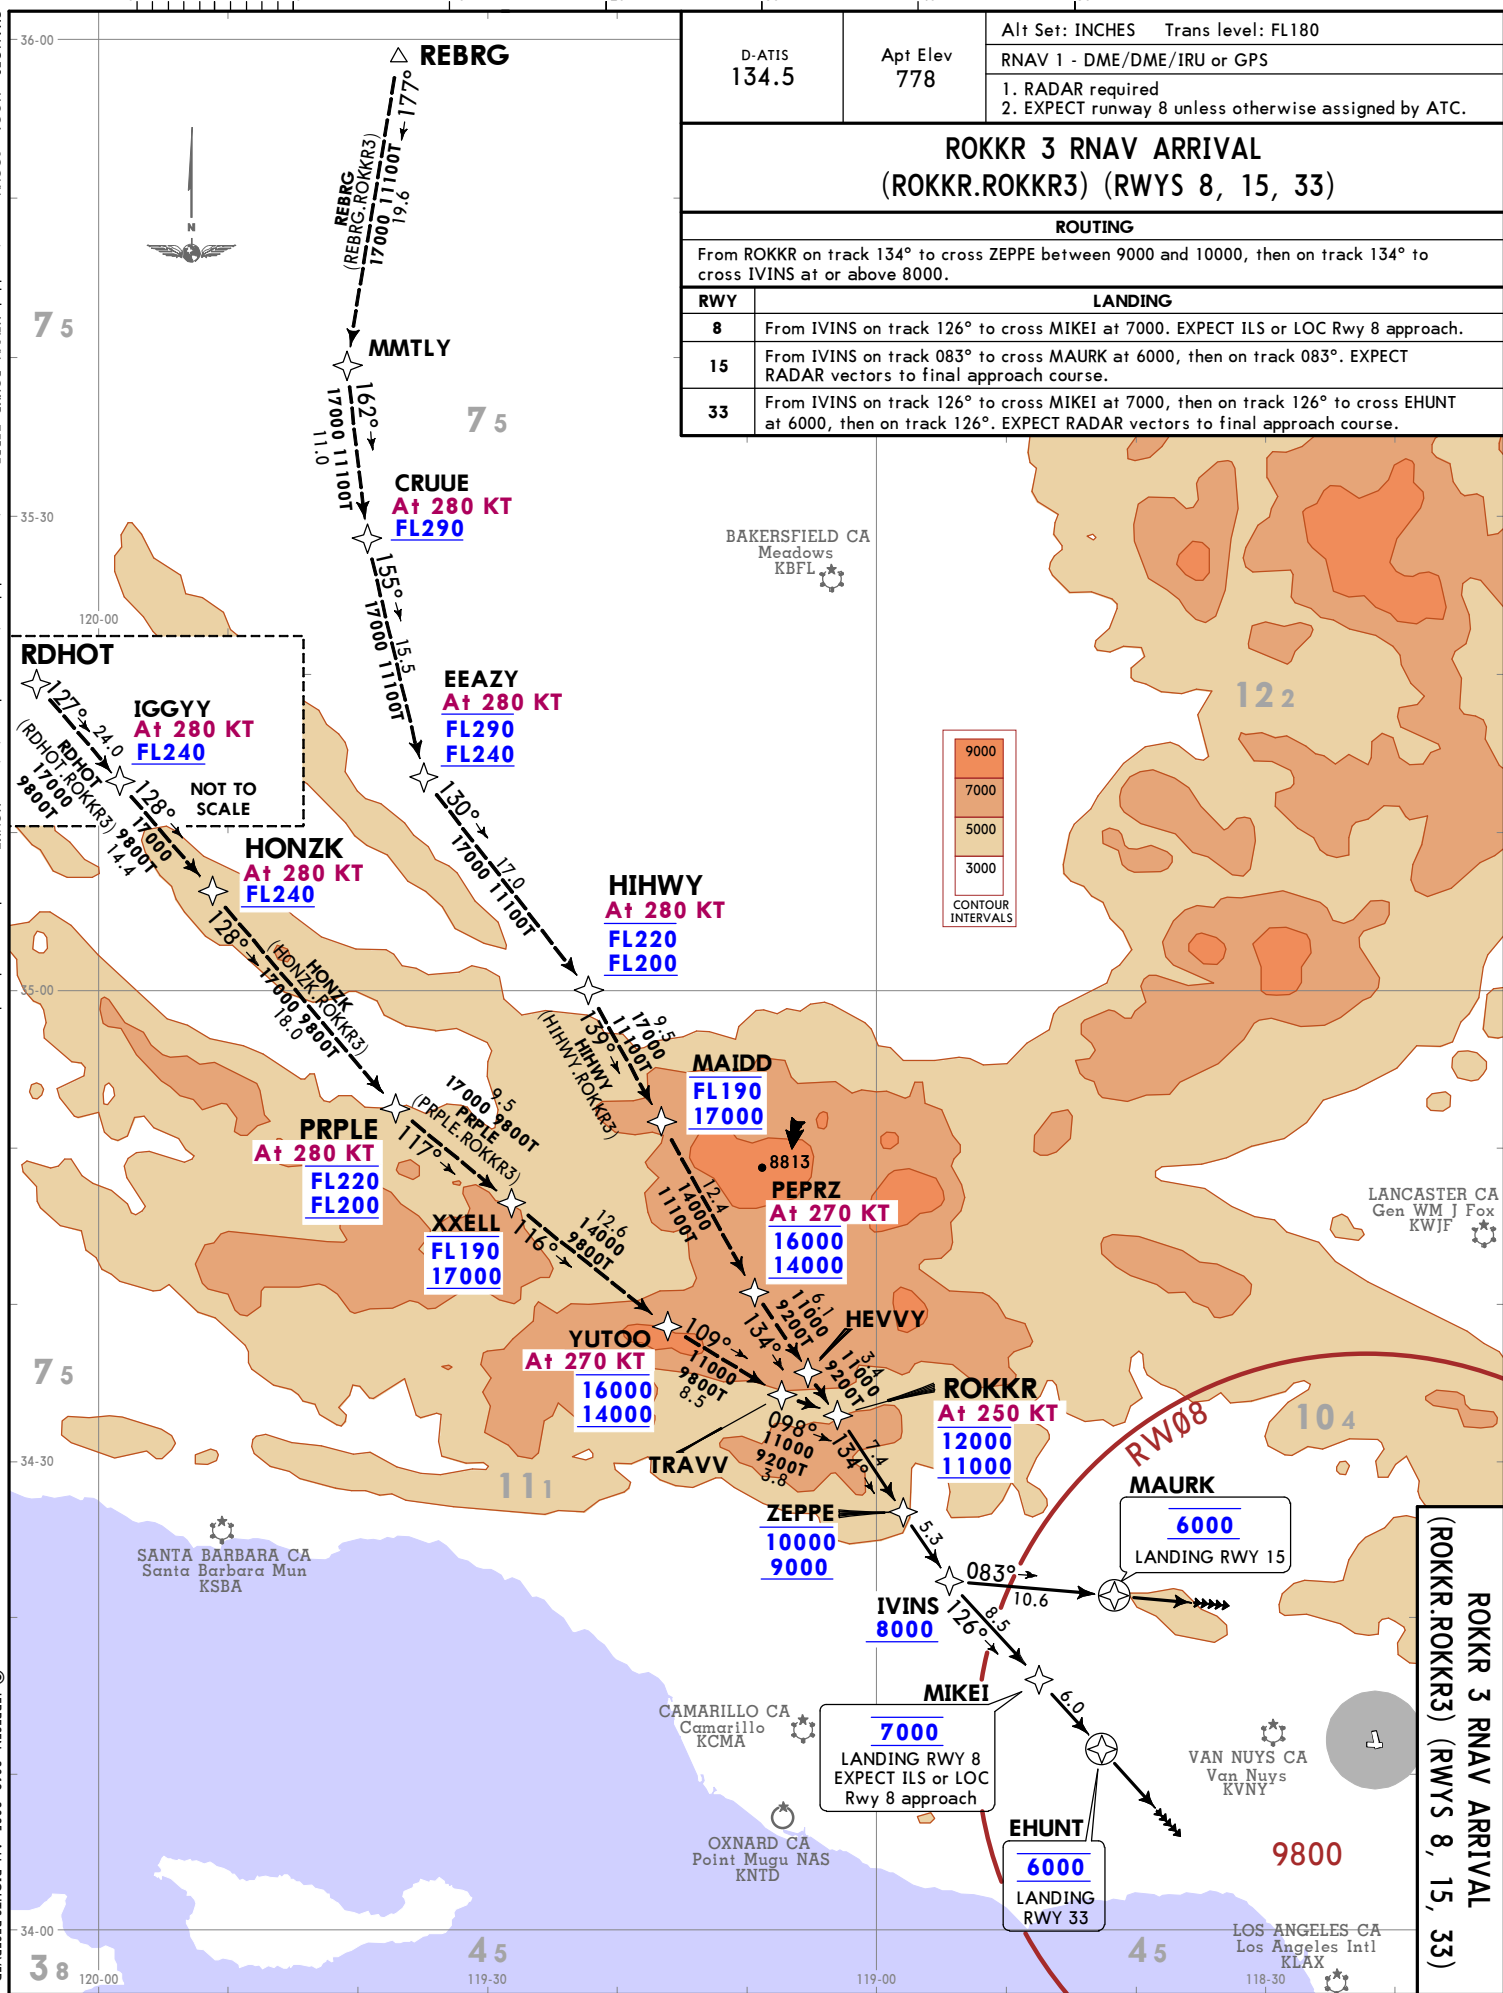

KBUR/BUR
BOB HOPE

JEPPESEN BURBANK, CALIF
14 FEB 25 (10-2E) EFF 20 Feb
RNAV STAR

D-ATIS 134.5	Apt Elev See Graphic
Alt set: INCHES Trans level: FL180	
RNAV 1 - DME/DME/IRU or GPS required	
1. RADAR required. 2. Jet and turboprop aircraft only. 3. EXPECT local area altimeter setting reaching FL200.	
THRNE 4 RNAV ARRIVAL (THRNE.THRNE4)	
ROUTING From THRNE on track 275° to cross CRCS at 10000, then on track 269° to cross EDARD at 10000 and at 250 KT, then on track 268° to cross NNEDD at 8000, then on track 253°. EXPECT RADAR vectors to final approach course.	

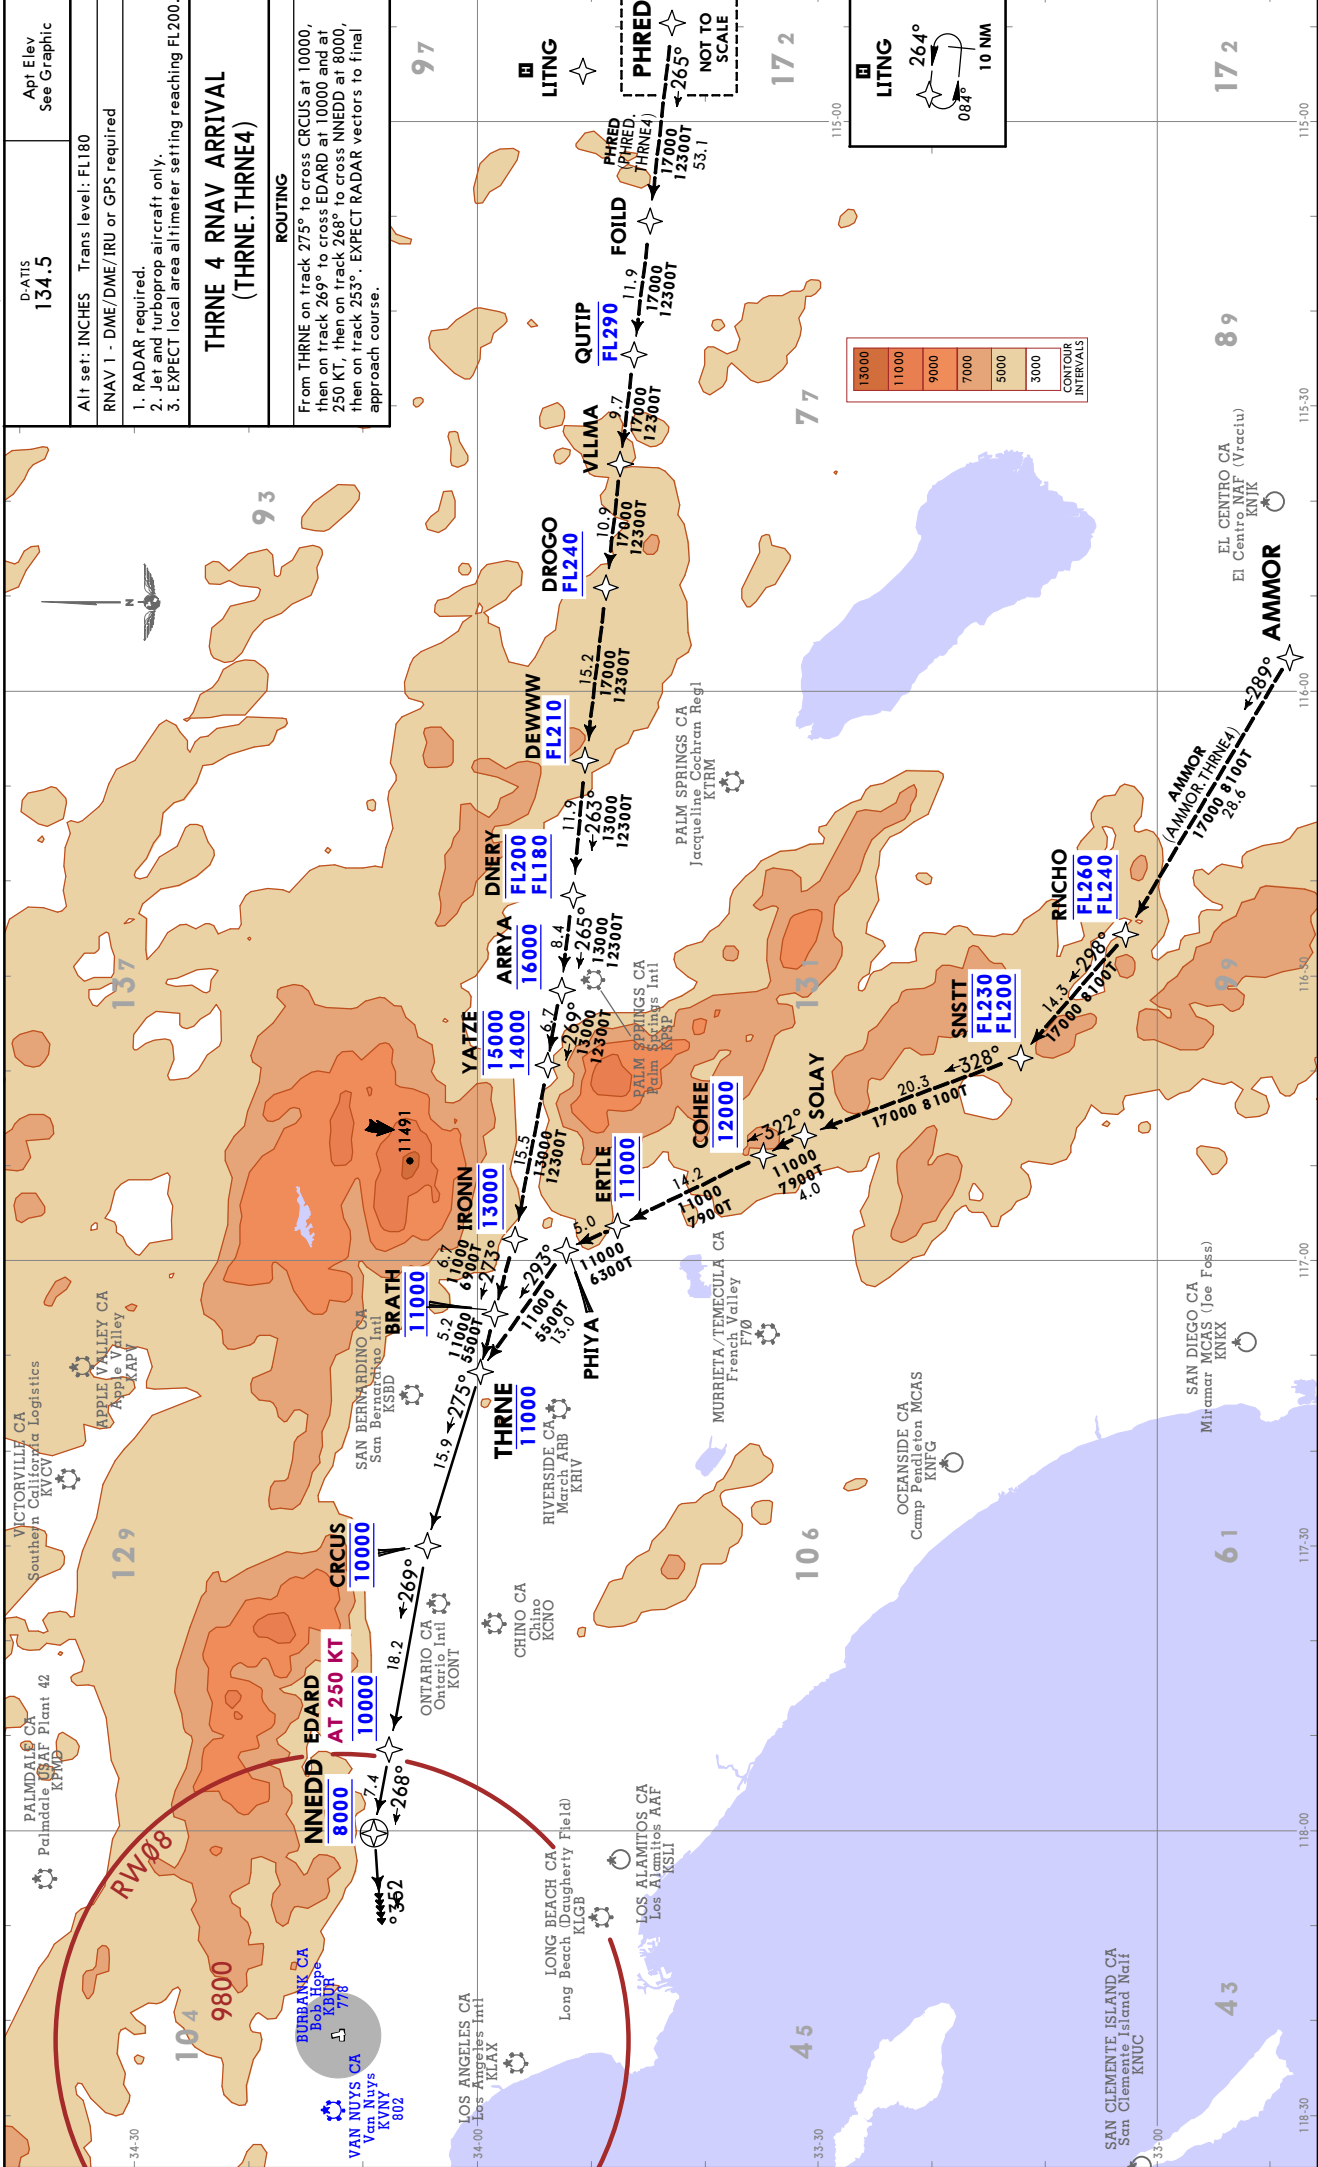

KBUR/BUR
HOPE

JEPPESSEN
25 JAN 19 10-2F


BURBANK, CALIF
RNAV STAR

D-ATIS
Arrival via
FIM/PMD only
134.5 135.125

Apt Elev
See
Graphic

Alt Set: INCHES Trans level: FL180
1. **RADAR required.** 2. **DME/DME/IRU or GPS required.** 3. **RNAV 1.**
4. **EXPECT runway 8 unless otherwise assigned by ATC.**
5. **This procedure not authorized for turbojet aircraft.**

WEESL 1 RNAV ARRIVAL (WEESL.WEESL1)

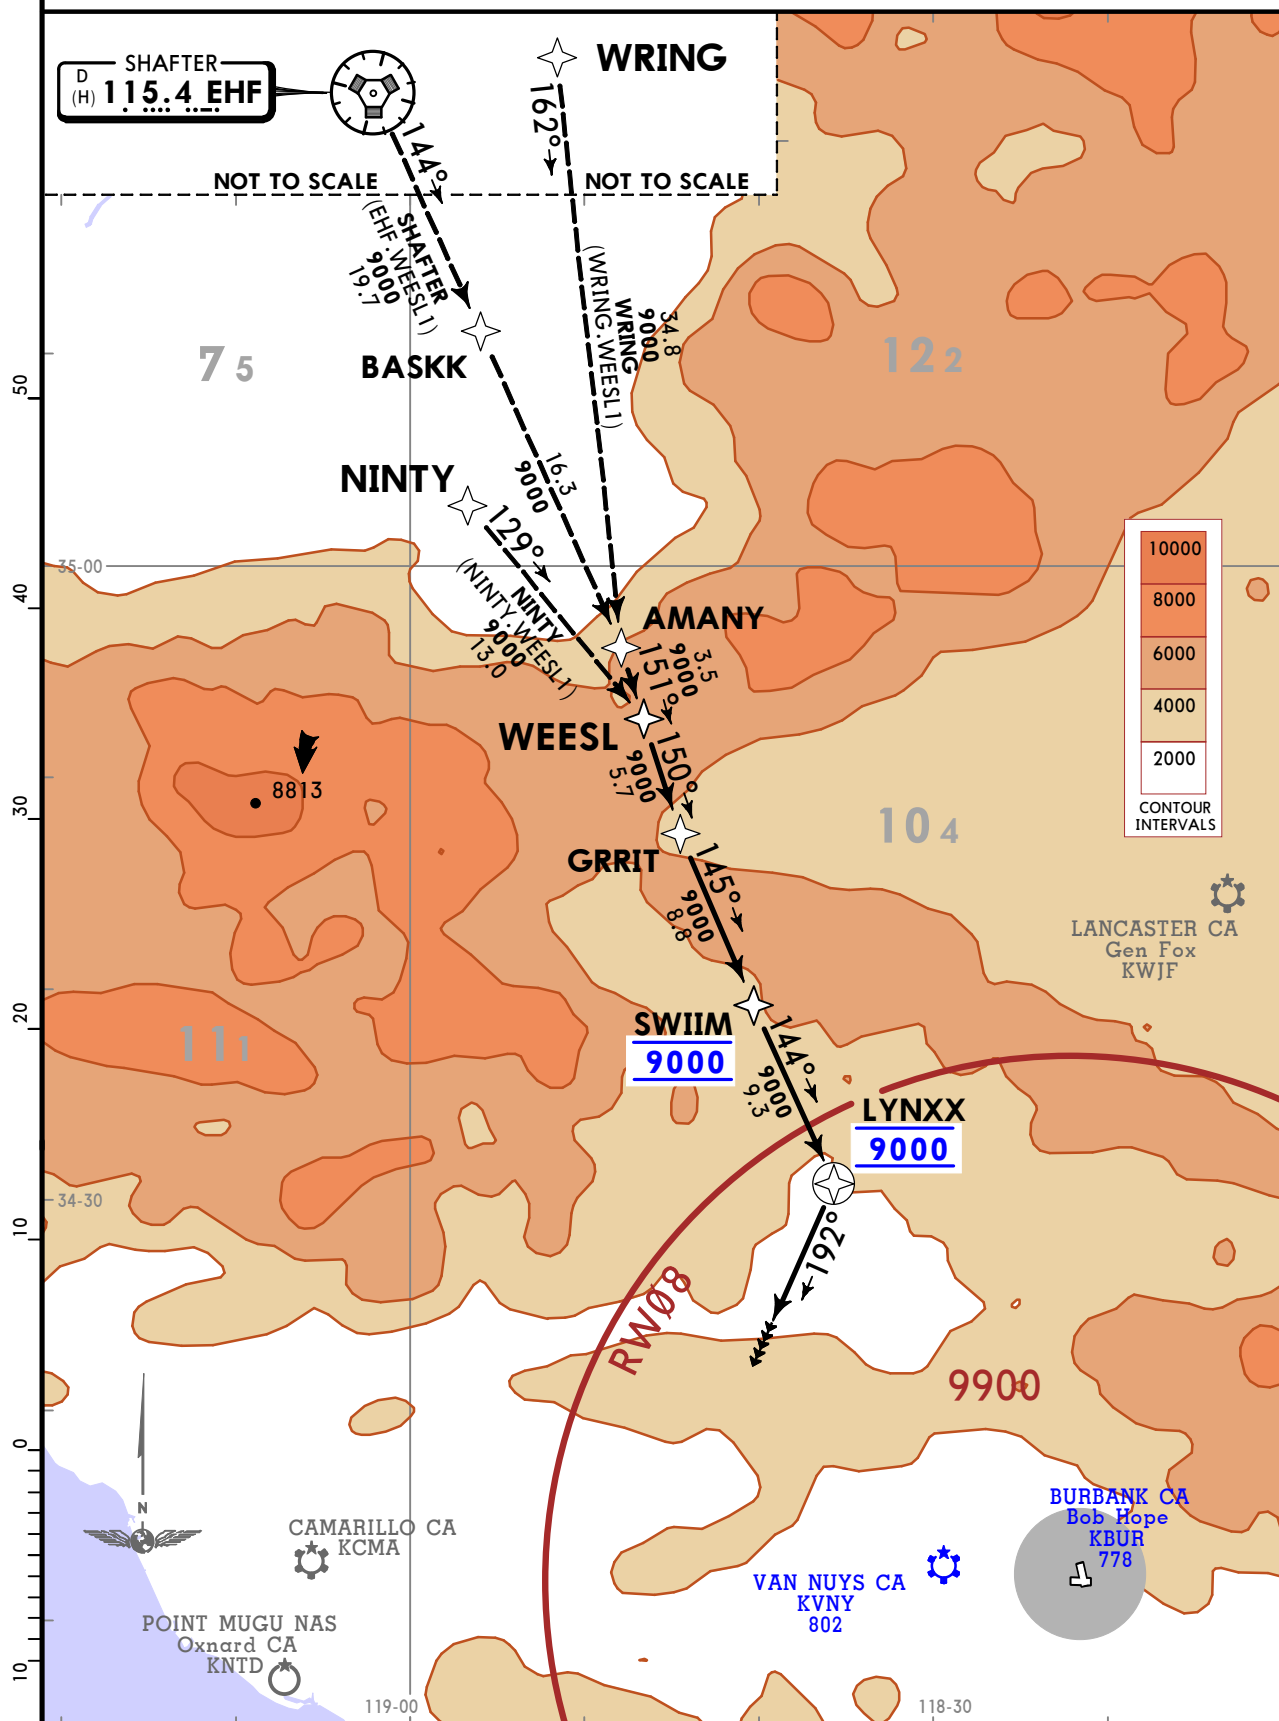

ROUTING
From WEESL on track 150° to GRRIT, then on track 145° to SWIIM, then on track 144° to LYNXX, then on track 192°. EXPECT RADAR vectors to final approach course.

CHANGES: New format.

© JEPPESSEN, 2019. ALL RIGHTS RESERVED.

VNY R280
- Apt 050°
120.4

SOCAL Departure (R)

Apt 050°
- Apt 150°
VNY R160
- VNY R280
124.6

VNY R160
- VNY R280
134.2

Apt Elev
778

Trans alt: 18000

ELMOO 9 DEPARTURE
(ELMO09.ELMOO)

8000
6000
4000
2000
CONTOUR
INTERVALS

N

TAKEOFF OBSTACLE NOTES
See TAKEOFF OBSTACLE NOTES page (10-30B1).

This SID requires takeoff minimums
(for standard minimums, refer to airport chart):
Rwy 8: Standard (or lower than standard,
if authorized) with minimum climb of 380 per NM
to 2500.
Rwy 15: Standard (or lower than standard,
if authorized) with minimum climb of 450 per NM
to 3000.
Rwy 26: Standard (or lower than standard,
if authorized) with minimum climb of 305 per NM
to 2600.
Rwy 33: 600-2 1/4 with minimum climb of 210 per NM
to 4000 or standard (or lower than standard, if
authorized) with minimum climb of 450 per NM to
2600.

Gnd speed-KT	75	100	150	200	250	300
210 per NM	263	350	525	700	875	1050
305 per NM	381	508	763	1017	1271	1525
380 per NM	475	633	950	1267	1583	1900
450 per NM	563	750	1125	1500	1875	2250

RWY

INITIAL CLIMB

TOP ALTITUDE

8

Climbing RIGHT turn heading 123°,
intercept VNY R095 to ELMOO.

Assigned
by ATC

15, 26

Climbing LEFT turn heading 113°,
intercept VNY R095 to ELMOO.

33

Climbing LEFT turn heading 123°,
intercept VNY R095 to ELMOO.

ROUTING



From ELMOO via assigned route. MAINTAIN ATC
assigned altitude.

The chart displays the ELMOO 9 DEPARTURE (ELMO09.ELMOO) procedure. It begins at the Van Nuys VOR (VNY) station (113.1 VNY) and follows a path that includes a climb to 4000 feet. Key features include:

- Obstacles:** A large obstacle at 9300 feet is shown near the start of the climb. Other obstacles are marked at 7300, 4700, and 4400 feet.
- Altitudes:** The procedure includes a climb to 4000 feet, followed by a climb to 6000 feet (V188 6000).
- Headings:** The path includes headings of 095°, 123°, 113°, and 341°.
- Distances:** Key distances are marked, including 1.020 NM and 18.9 NM.
- Navigation Aids:** The chart shows the VNY VOR, LOS ANGELES VOR (113.6 LAX), and LOS ANGELES VOR (113.7 SLI).
- Obstacles:** A large obstacle at 9300 feet is shown near the start of the climb. Other obstacles are marked at 7300, 4700, and 4400 feet.

CHANGES: None.

© JEPPESEN, 2019. ALL RIGHTS RESERVED.

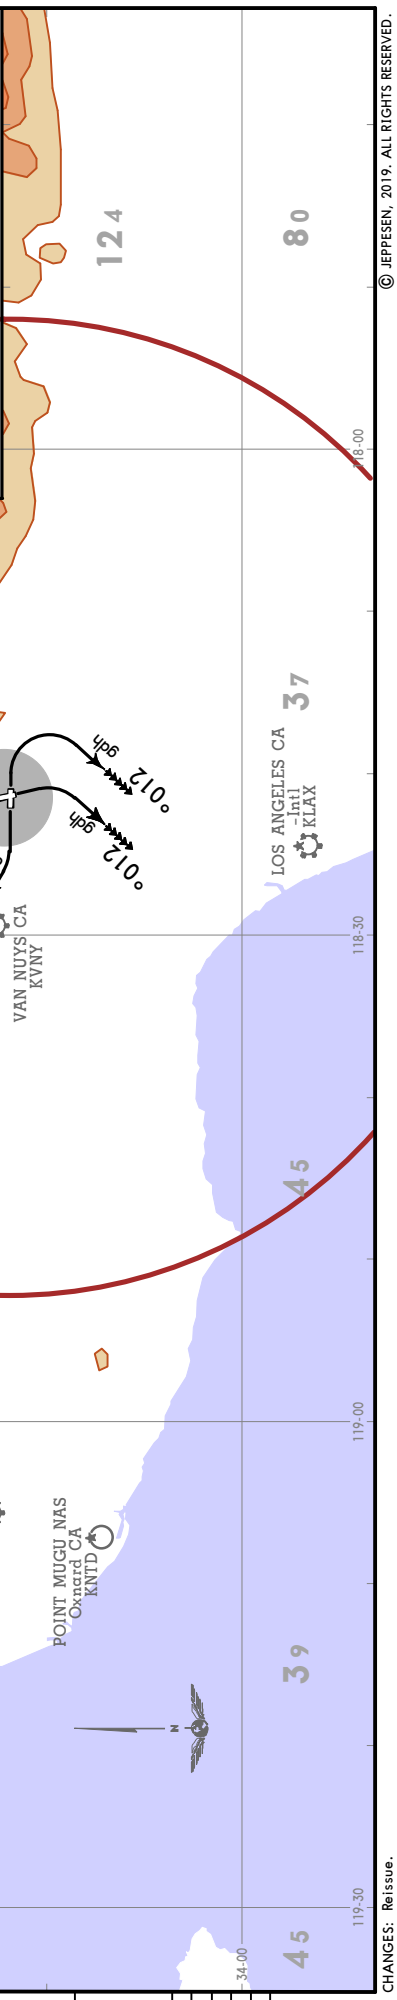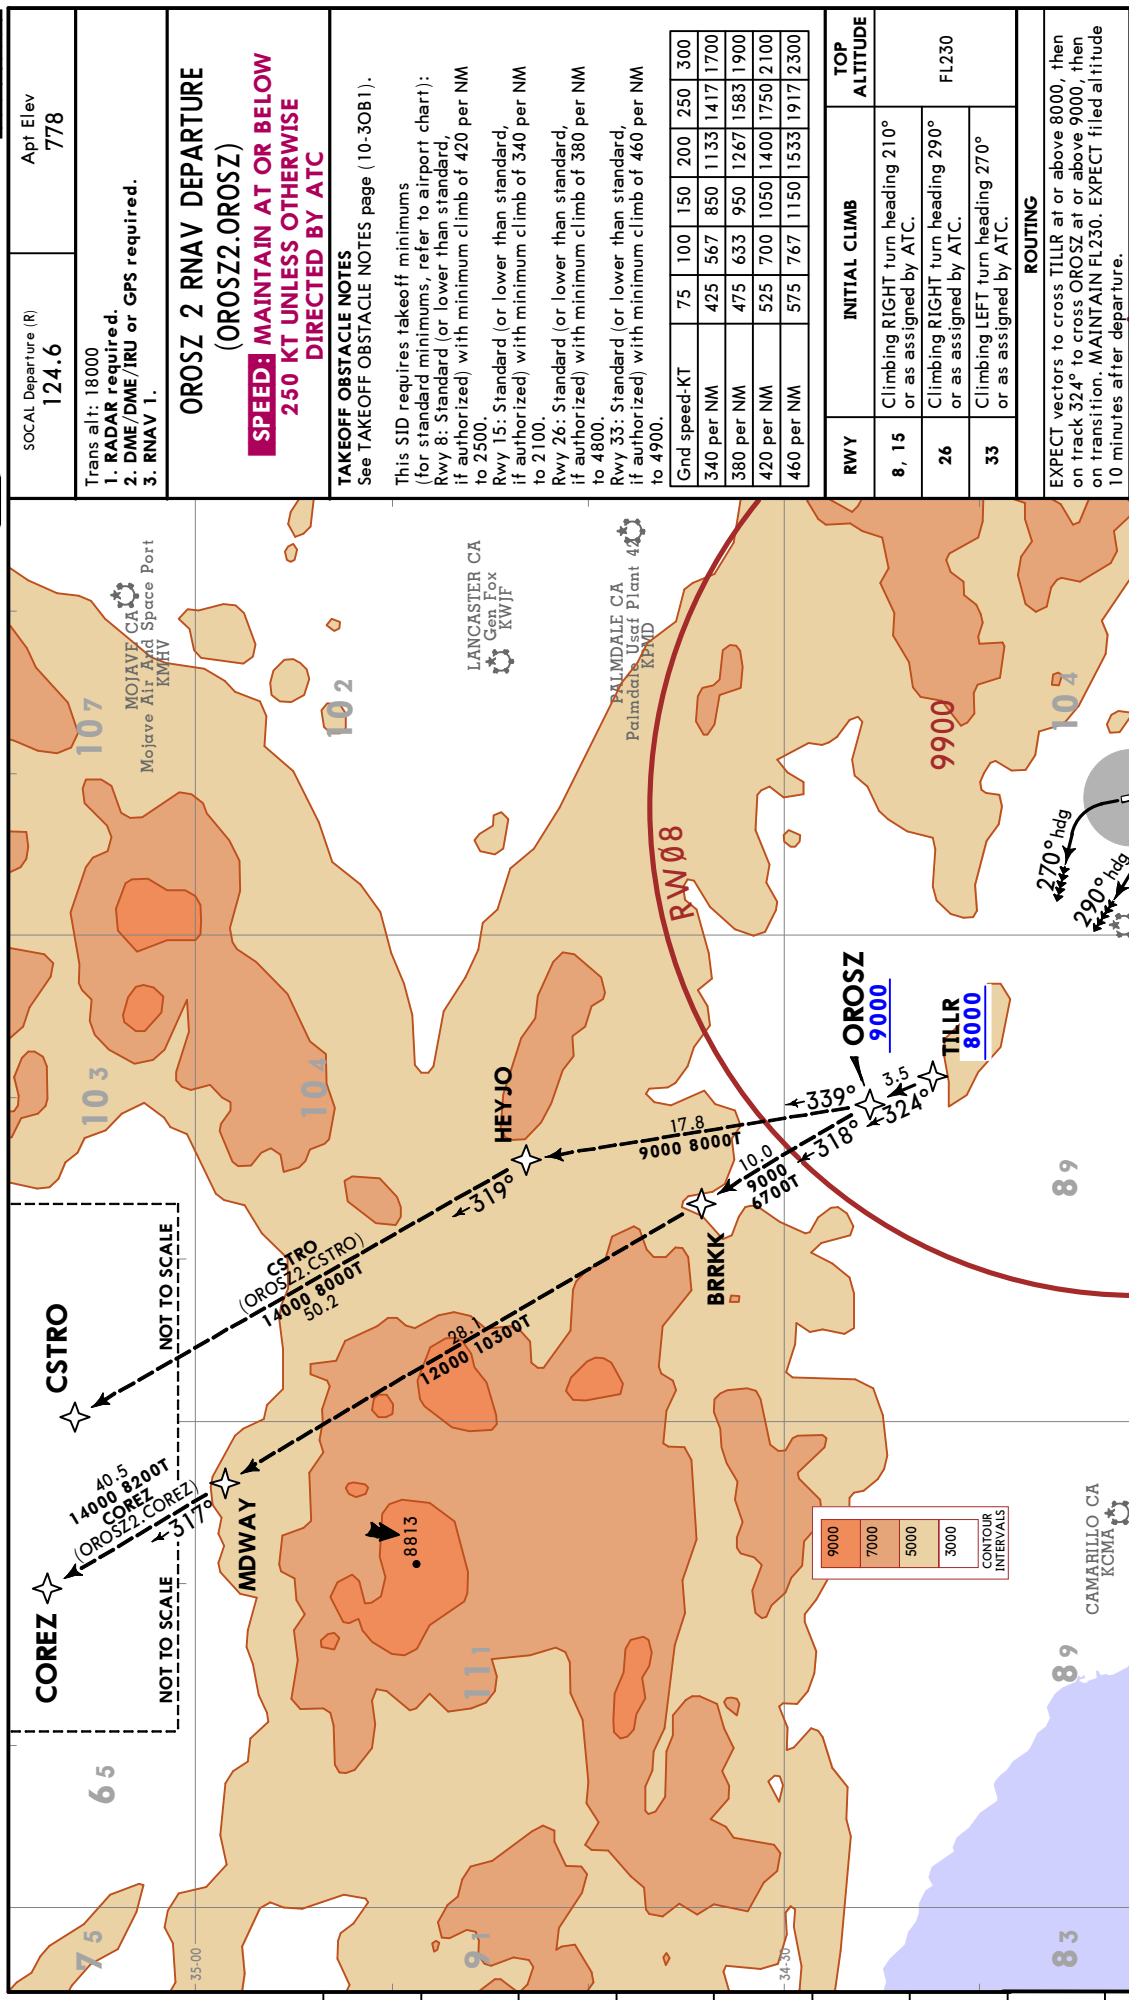

KBUR/BUR
BOB HOPE

JEPPESEN
BURBANK, CALIF

RNAV SID

19 JAN 24 (10-3B) Eff 25 Jan

SOCAL Departure (R)	Apt Elev	Trans alt:
124.6	778	18000
RNAV 1	DME/DME/IRU or GPS required	

1. RADAR required. 2. Turbojet only. 3. HAILO Transition ATC assigned only.
4. MISEN Transition restricted to aircraft landing LAS terminal area.

SLAPP 2 RNAV DEPARTURE (SLAPP2.SLAPP)
(ALL RWYS)

RWY	INITIAL CLIMB	TOP ALTITUDE
8	Climbing RIGHT turn to heading 210°.	FL230
15	Climbing RIGHT turn to heading 210°.	
15	or as assigned by ATC.	
26	Climbing RIGHT turn to heading 290°.	
33	Climbing LEFT turn to heading 270°.	

ROUTING

EXPECT vectors to RAYVE, then on track 009° to cross SLAPP at or above 15000, then on transition MAINTAIN FL230. EXPECT filed altitude 10 minutes after departure.

TAKE-OFF OBSTACLE NOTES
See TAKE-OFF OBSTACLE NOTES page (10-30B1).

TAKE-OFF MINIMUMS:


Rwy 8: Standard with minimum climb of 420 FT/NM to 2500.

Rwy 15: Standard with minimum climb of 340 FT/NM to 2100.

Rwy 26: Standard with minimum climb of 380 FT/NM to 4800.

Rwy 33: Standard with minimum climb of 460 FT/NM to 4900.

Gnd speed-KT	75	100	150	200	250	300
340 FT/NM	425	567	850	1133	1417	1700
380 FT/NM	475	633	950	1267	1583	1900
420 FT/NM	525	700	1050	1400	1750	2100
460 FT/NM	575	767	1150	1533	1917	2300

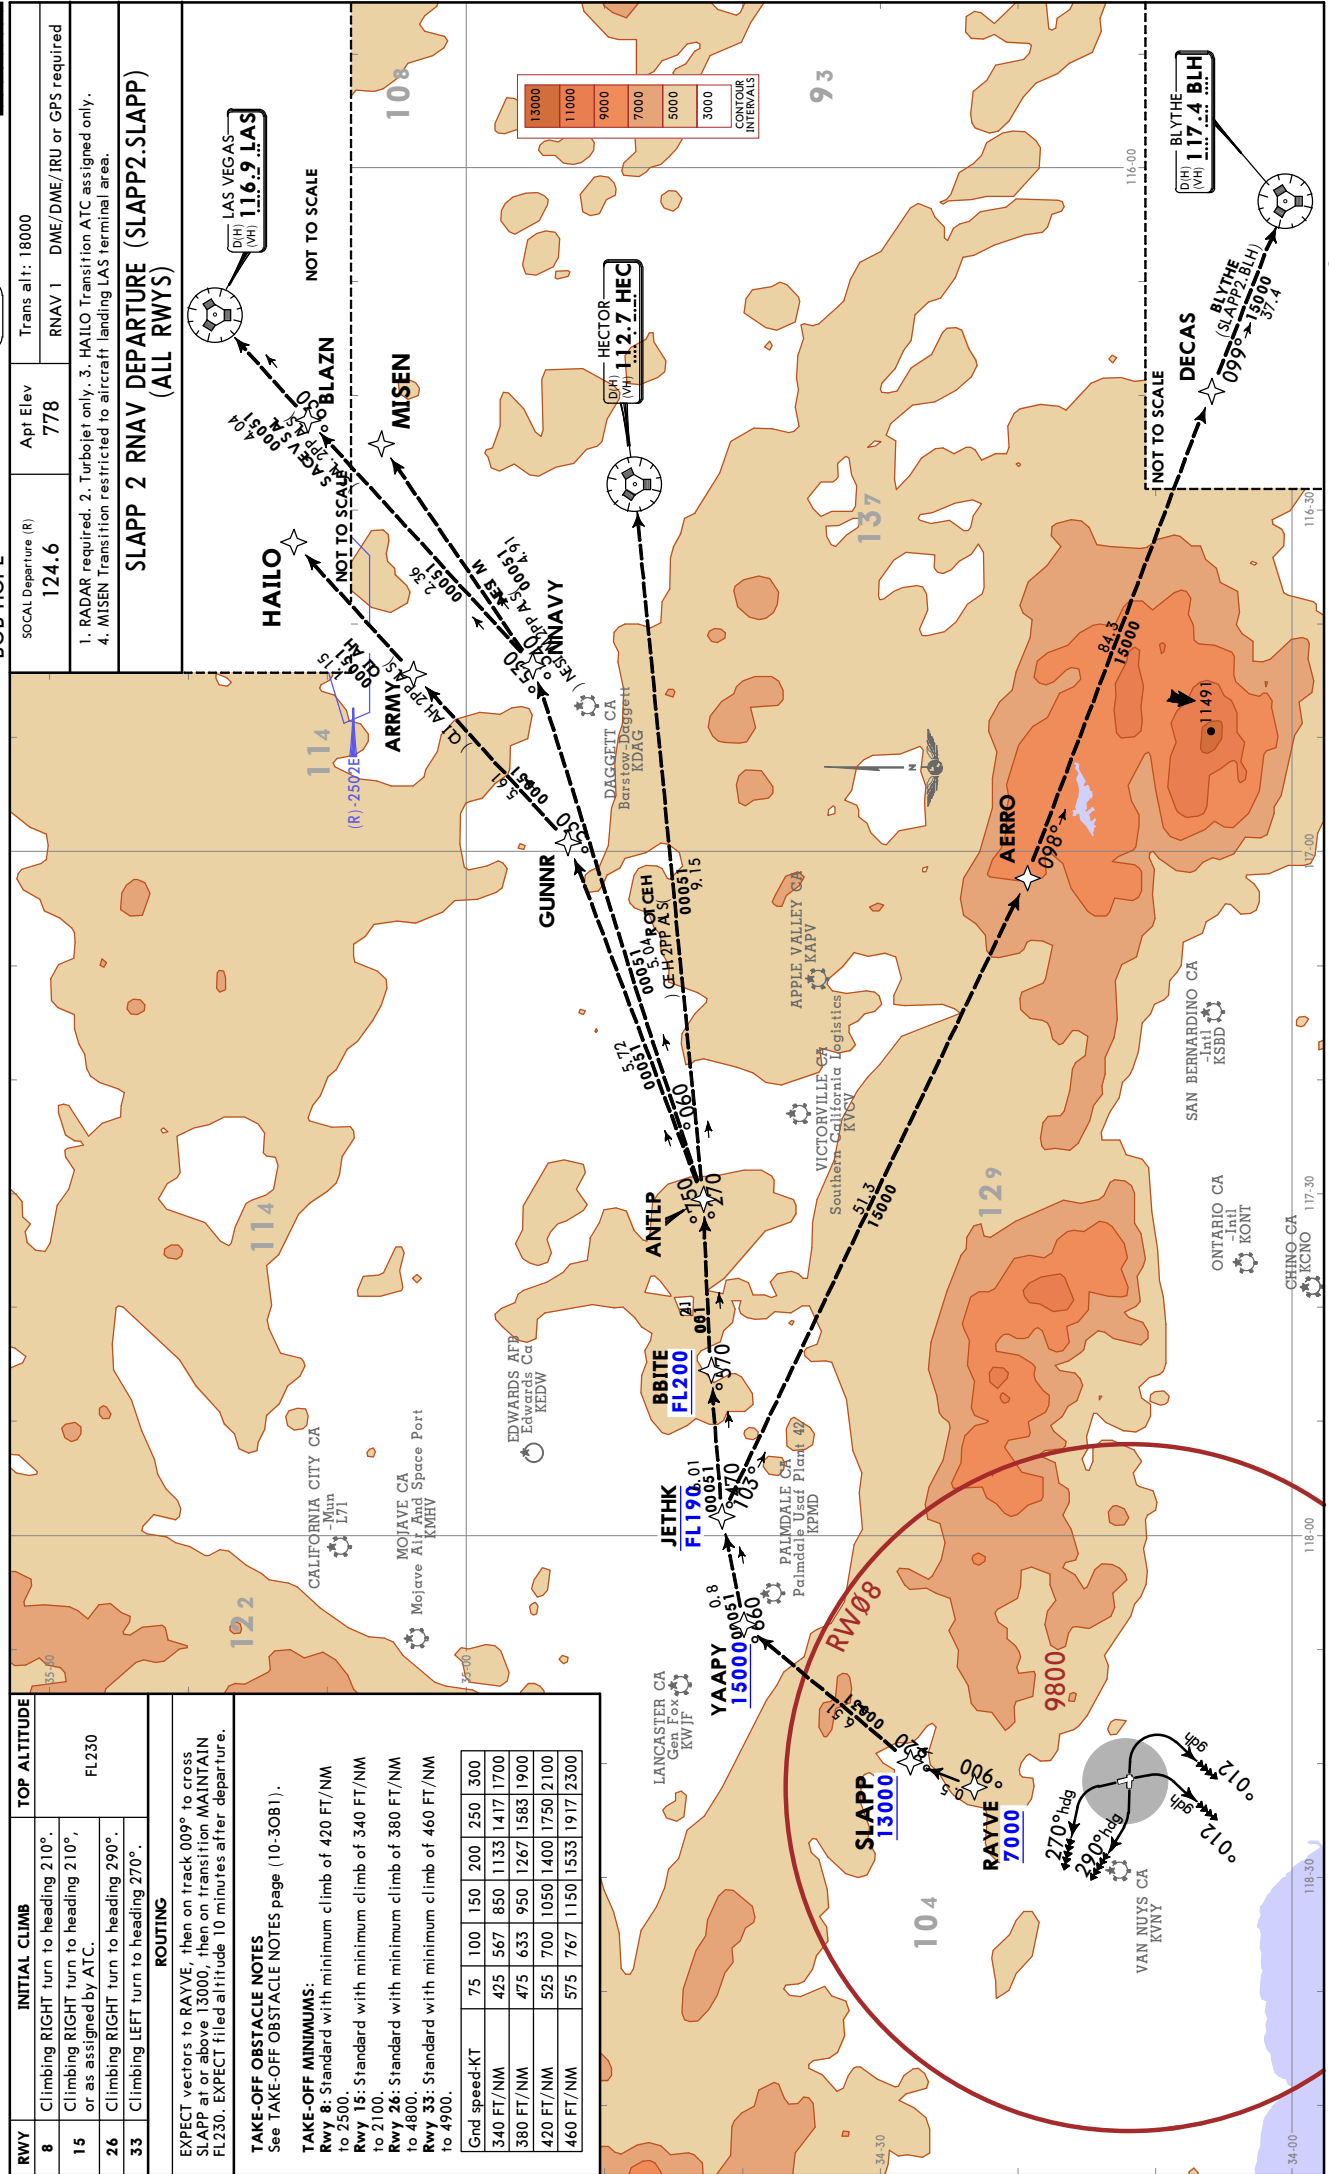

KBUR/BUR
BOB HOPE

BURBANK, CALIF
SID



JEPPESEN
19 JAN 24 (10-3C) Eff 25 Jan

SOCAL Departure (R)
124.6

Trans alt: 18000
RADAR required.

Api Elev
778

VAN NUYS 3 DEPARTURE (VNY3.VNY)
(ALL RWYS)

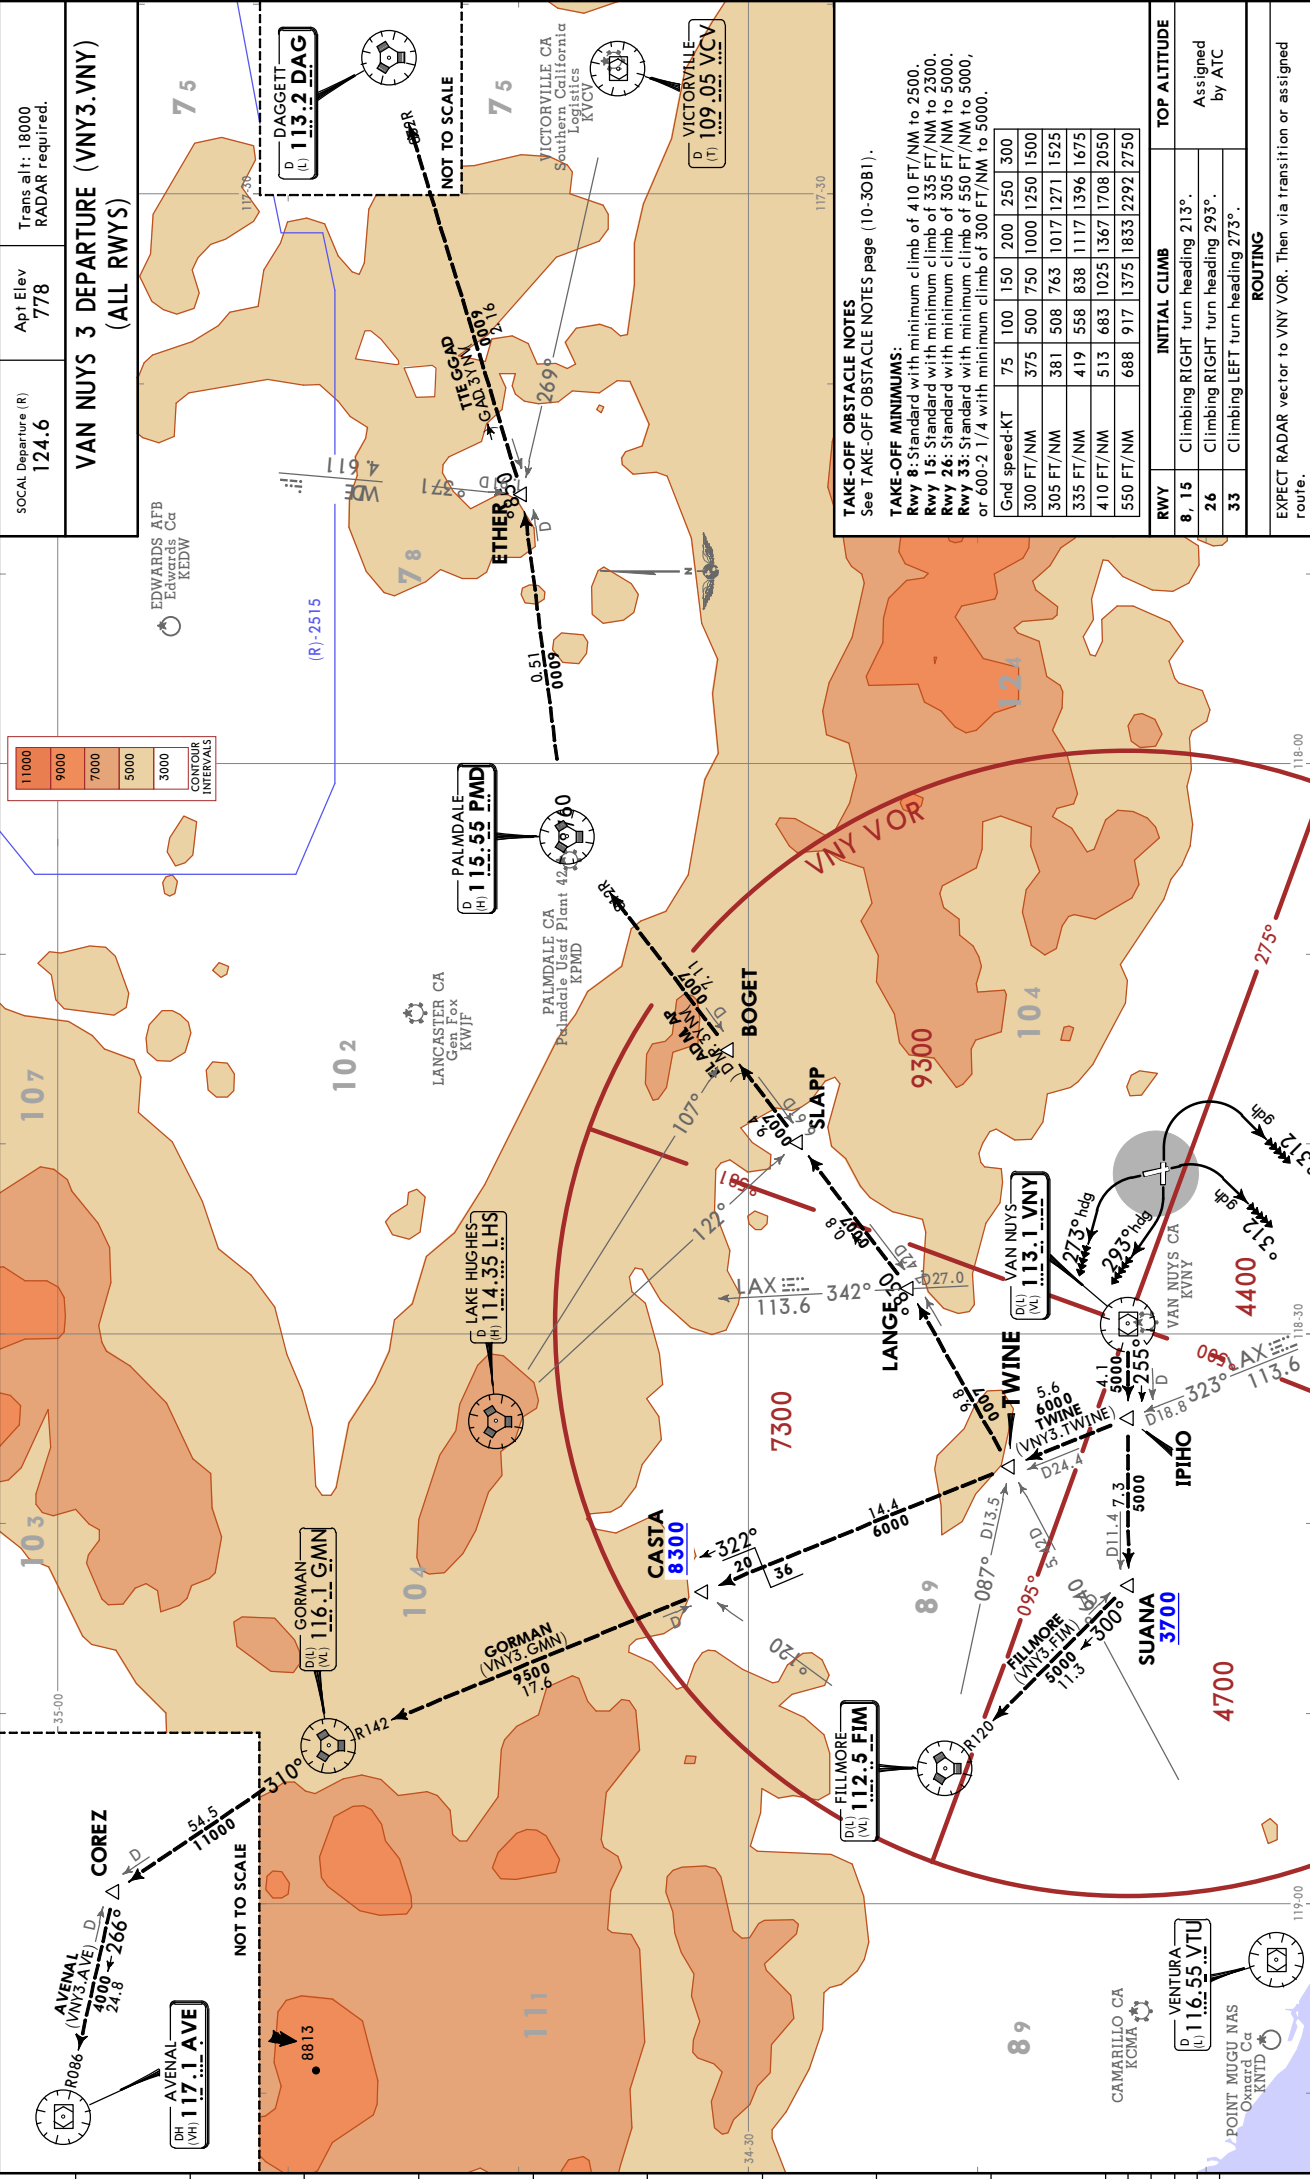


TAKE-OFF OBSTACLE NOTES
See TAKE-OFF OBSTACLE NOTES page (10-30B1).

TAKE-OFF MINIMUMS:
Rwy 8: Standard with minimum climb of 410 FT/NM to 2500.
Rwy 15: Standard with minimum climb of 335 FT/NM to 2300.
Rwy 26: Standard with minimum climb of 305 FT/NM to 5000.
Rwy 33: Standard with minimum climb of 550 FT/NM to 5000, or 600-2 1/4 with minimum climb of 300 FT/NM to 5000.

Grnd speed-KT	75	100	150	200	250	300
300 FT/NM	375	500	750	1000	1250	1500
305 FT/NM	381	508	763	1017	1271	1525
335 FT/NM	419	558	838	1117	1396	1675
410 FT/NM	513	683	1025	1367	1708	2050
550 FT/NM	688	917	1375	1833	2292	2750

RWY	INITIAL CLIMB		TOP ALTITUDE
	8, 15	Climbing RIGHT turn heading 213°.	Assigned by ATC
26		Climbing RIGHT turn heading 293°.	
33		Climbing LEFT turn heading 273°.	

ROUTING
EXPECT RADAR vector to VNY VOR. Then via transition or assigned route.

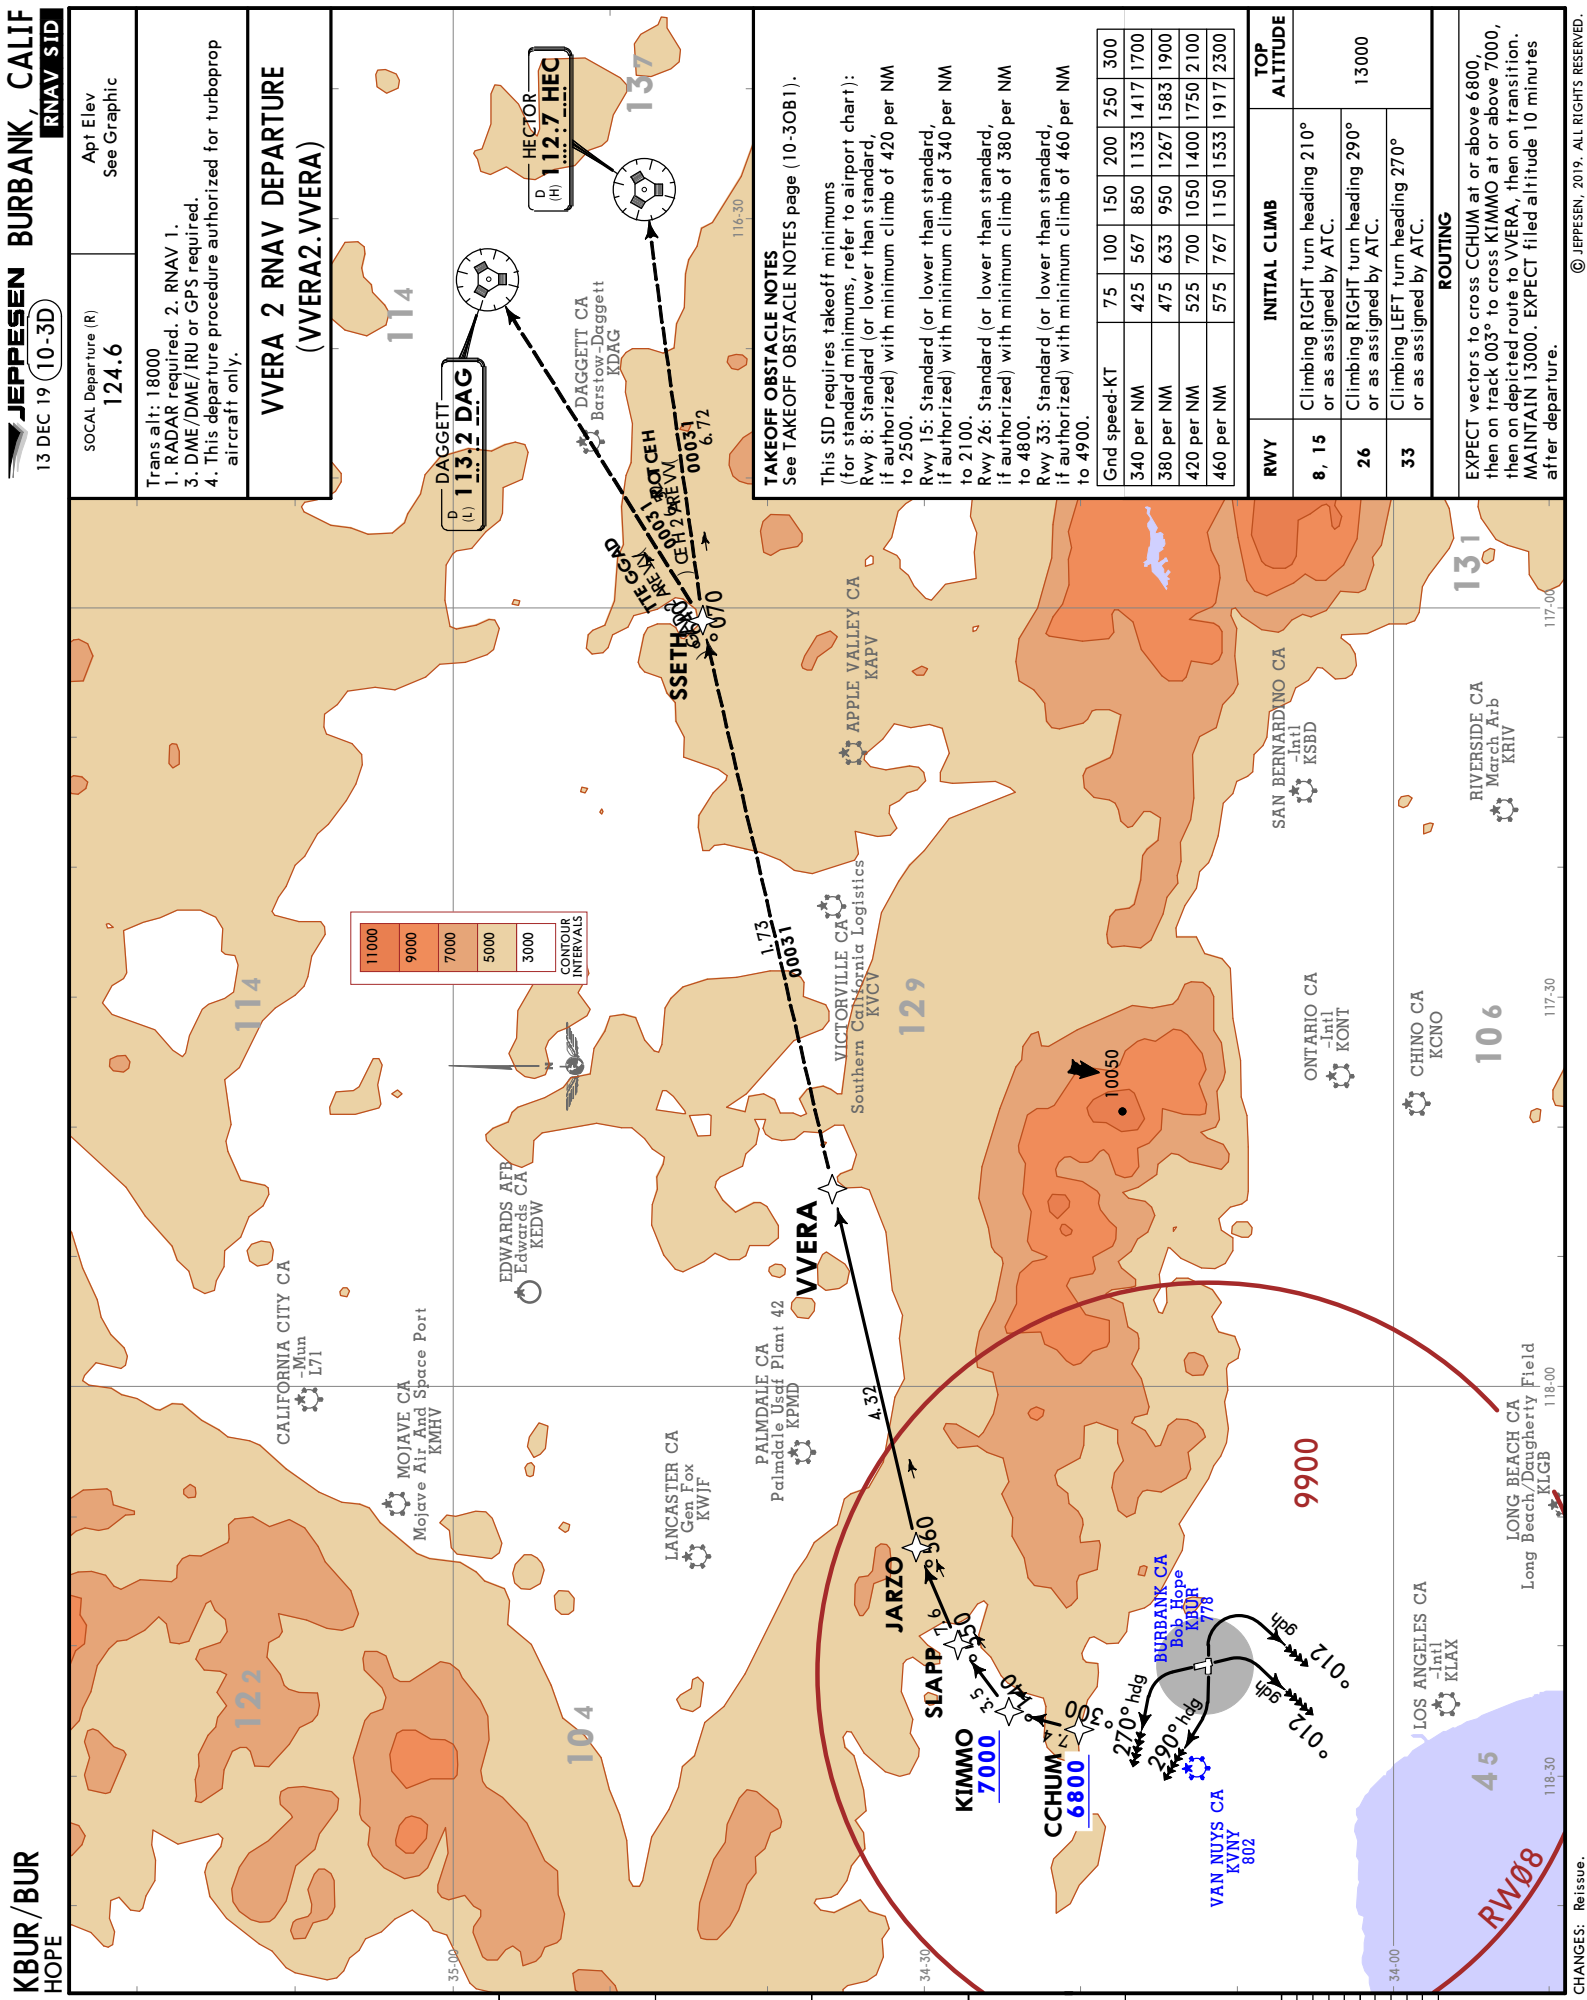

KBUR/BUR

 **JEPPesen**
24 FEB 17 **10-30B1** **Eff 2 Mar**

BURBANK, CALIF

HOPE

TAKEOFF OBSTACLE NOTES

◦ RWY 8:

MULTIPLE TREES, POLES, BUILDINGS BEGINNING 124' FROM DER, 42' RIGHT OF CENTERLINE, UP TO 65' AGL/745' MSL. MULTIPLE TREES, BUILDINGS AND POLES BEGINNING 278' FROM DER, 73' LEFT OF CENTERLINE, UP TO 56' AGL/746' MSL.

◦ RWY 15:

MULTIPLE TREES, BUILDINGS, POLES AND BLAST FENCE BEGINNING 50' FROM DER, 2' RIGHT OF CENTERLINE, UP TO 65' AGL/762' MSL. MULTIPLE TREES, BUILDINGS, POLES, BLAST FENCE BEGINNING 185' FROM DER, 53' LEFT OF CENTERLINE, UP TO 108' AGL/777' MSL.

◦ RWY 26:

MULTIPLE TREES, POLES, TRANSMISSION TOWERS, BUILDINGS, ROADS AND TERRAIN BEGINNING 26' FROM DER, 4' RIGHT OF CENTERLINE, UP TO 145' AGL/731' MSL. MULTIPLE TREES, POLES, TRANSMISSION TOWERS, RAILROAD AND BUILDINGS BEGINNING 302' FROM DER, 437' LEFT OF CENTERLINE, UP TO 117' AGL/846' MSL.

◦ RWY 33:

MULTIPLE TREES, POLES, TERRAIN, BUILDINGS, ROAD BEGINNING 33' FROM DER, 30' RIGHT OF CENTERLINE, UP TO 100' AGL/1333' MSL. MULTIPLE TREES, POLES, BUILDINGS, ANTENNA, RAILROAD AND BLAST FENCE BEGINNING 97' FROM DER, 11' LEFT OF CENTERLINE, UP TO 50' AGL/878' MSL.

KBUR/BUR

JEPPesen
26 SEP 25 (10-8)

BURBANK, CALIF
BOB HOPE

BOB HOPE CONSTRUCTION

All Dates are Approximate, Implementation Should be Verified Through NOTAMs. See Current NOTAMs for Additional Information.

(See 10-8A for Construction Notes)



LEGEND



Construction Phase 2C



Taxi Route




Jet Blast for 737-900 MAX
35mph while turning from A2 to A.

RUNWAY INCURSION HOT SPOTS

HS



See 10-9 for description of Hot Spots

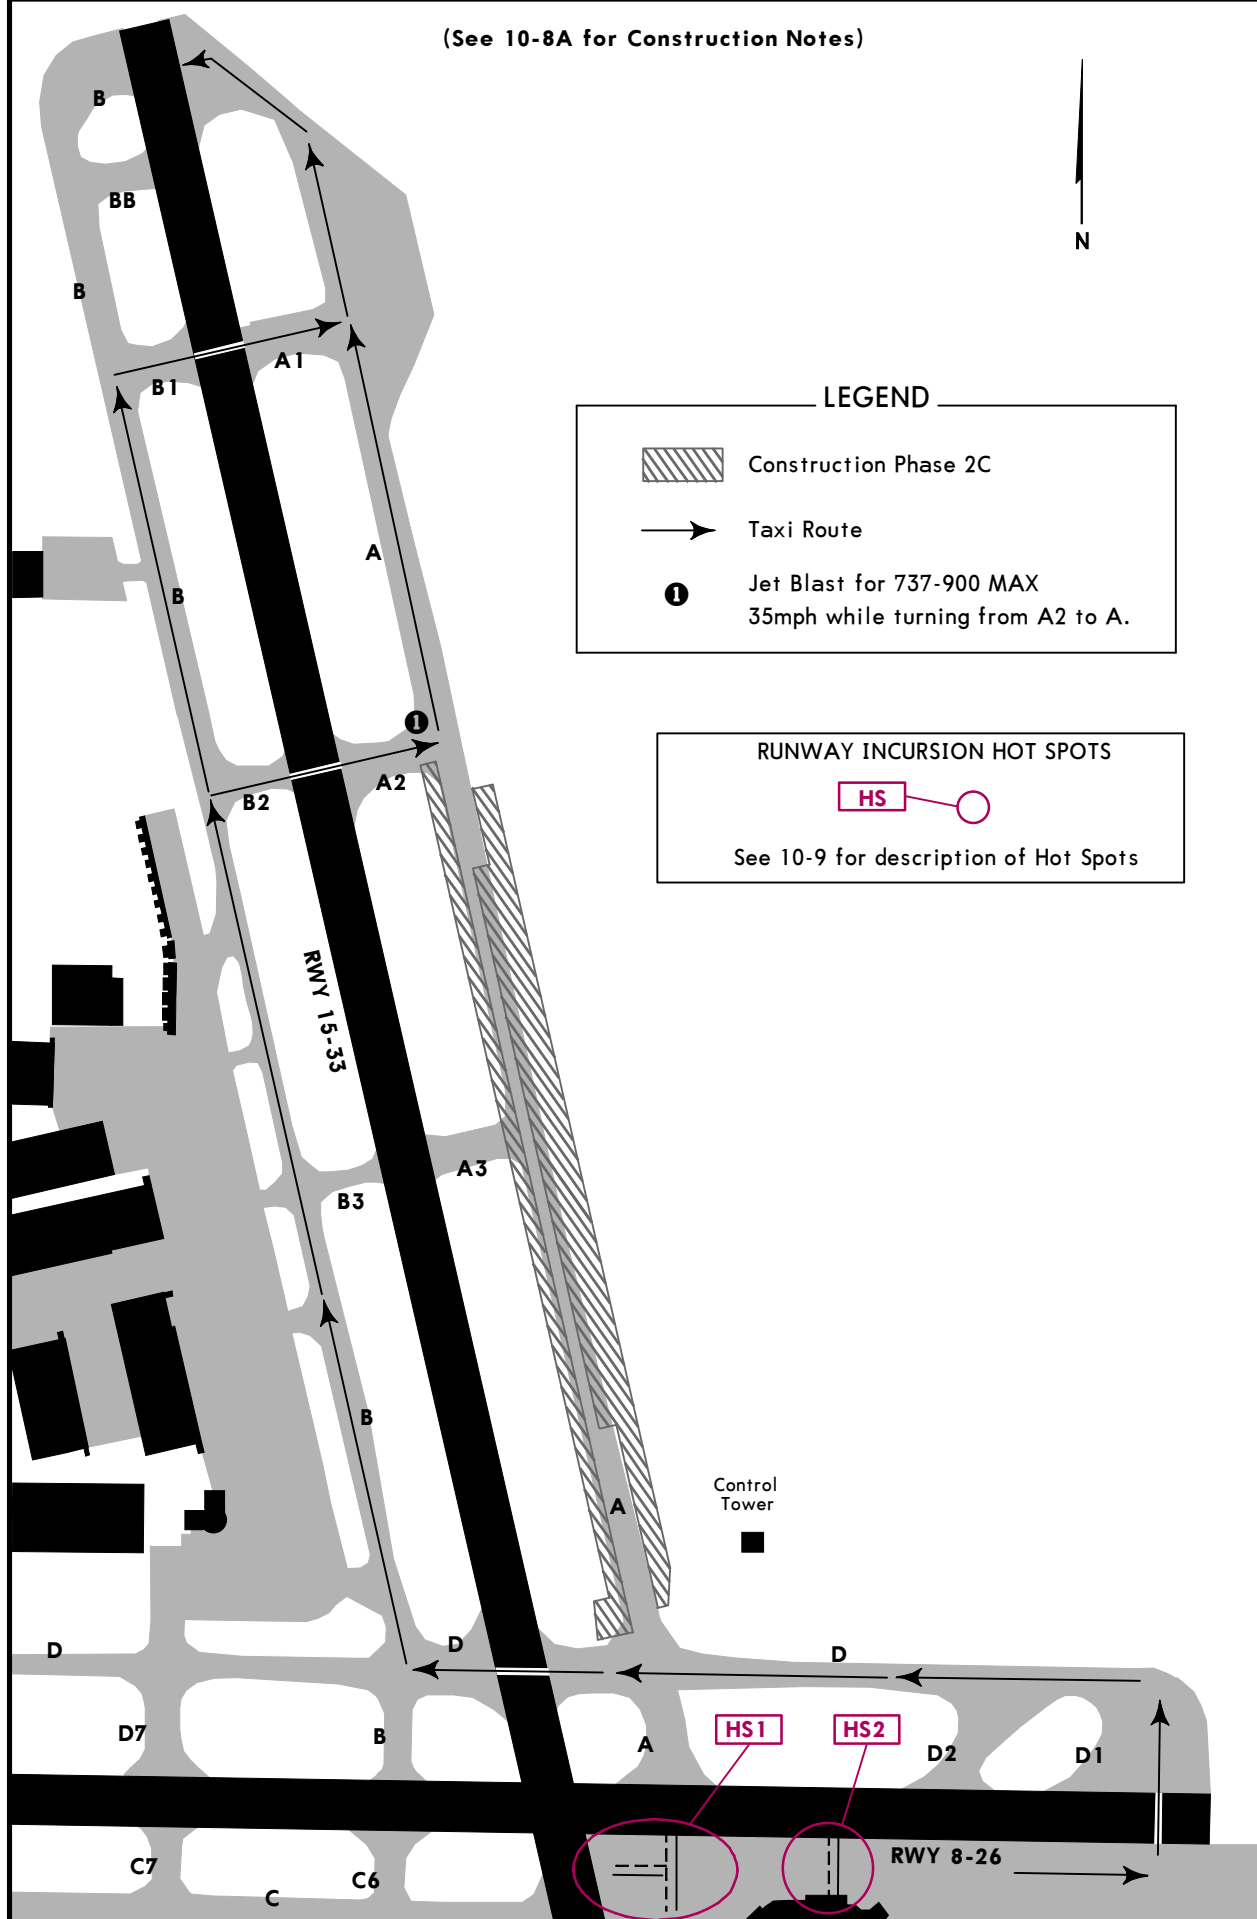

CHANGES: Taxi routes revised, notes.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.

KBUR/BUR

29 AUG 25  **JEPPESSEN**
10-8A

BURBANK, CALIF
BOB HOPE

BOB HOPE CONSTRUCTION (CONTD)

**All Dates are Approximate, Implementation Should be Verified
Through NOTAMs. See Current NOTAMs for Additional Information.**

Construction Phase 2C
(29 AUG 2025 to 11 OCT 2025)
(See 10-8 for Construction Graphic)

ADG IV aircraft with wingspan 118' up to but not including 171' movements along Taxiway A will be prohibited during this phase and must back taxi on Runway to access Taxiway D.

Runway 8-26 open with unrestricted access.

Runway 15-33 open with unrestricted access.


Taxiway D open. No access north to Taxiway A.

Taxiway A closed between Taxiway A2 and Taxiway D.

Taxiway A2 open. No access south to Taxiway A.

Taxiway A3 closed east of Runway 15-33.


Taxiway B open with restricted access to ADG II aircraft with wingspan 49' up to but not including 79' between Runway 15 threshold and Taxiway B1, and restricted access to ADG III aircraft with wingspan 79' up to but not including 118' between Taxiway B1 and Taxiway D.

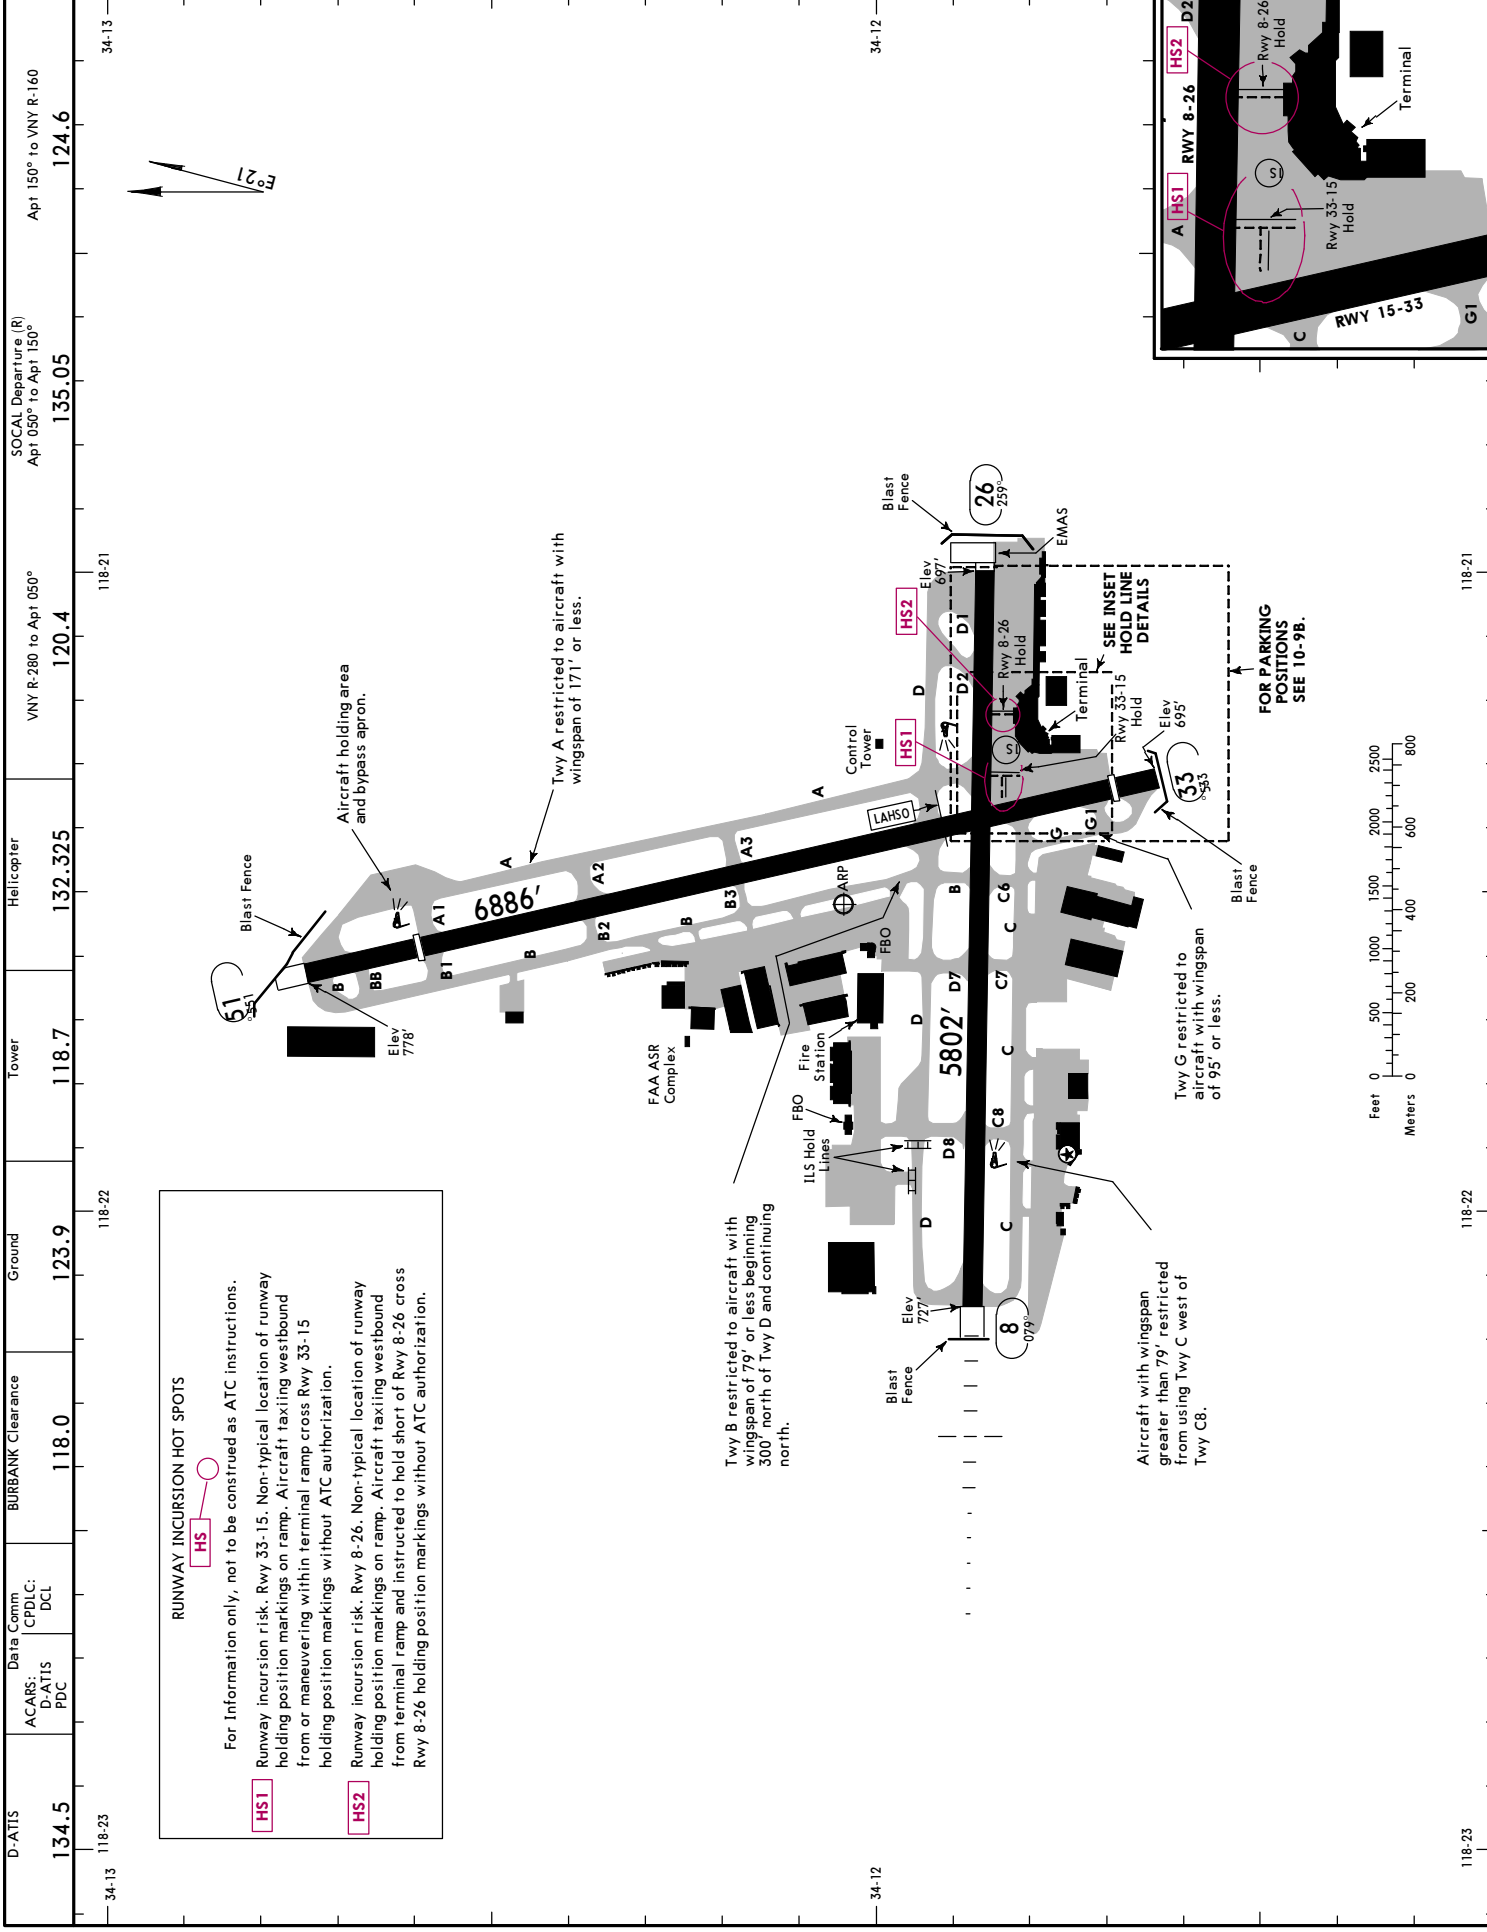

KBUR/BUR

 **JEPPESEN**
1 AUG 25 (10-9B) Eff 7 Aug

BURBANK, CALIF
BOB HOPE

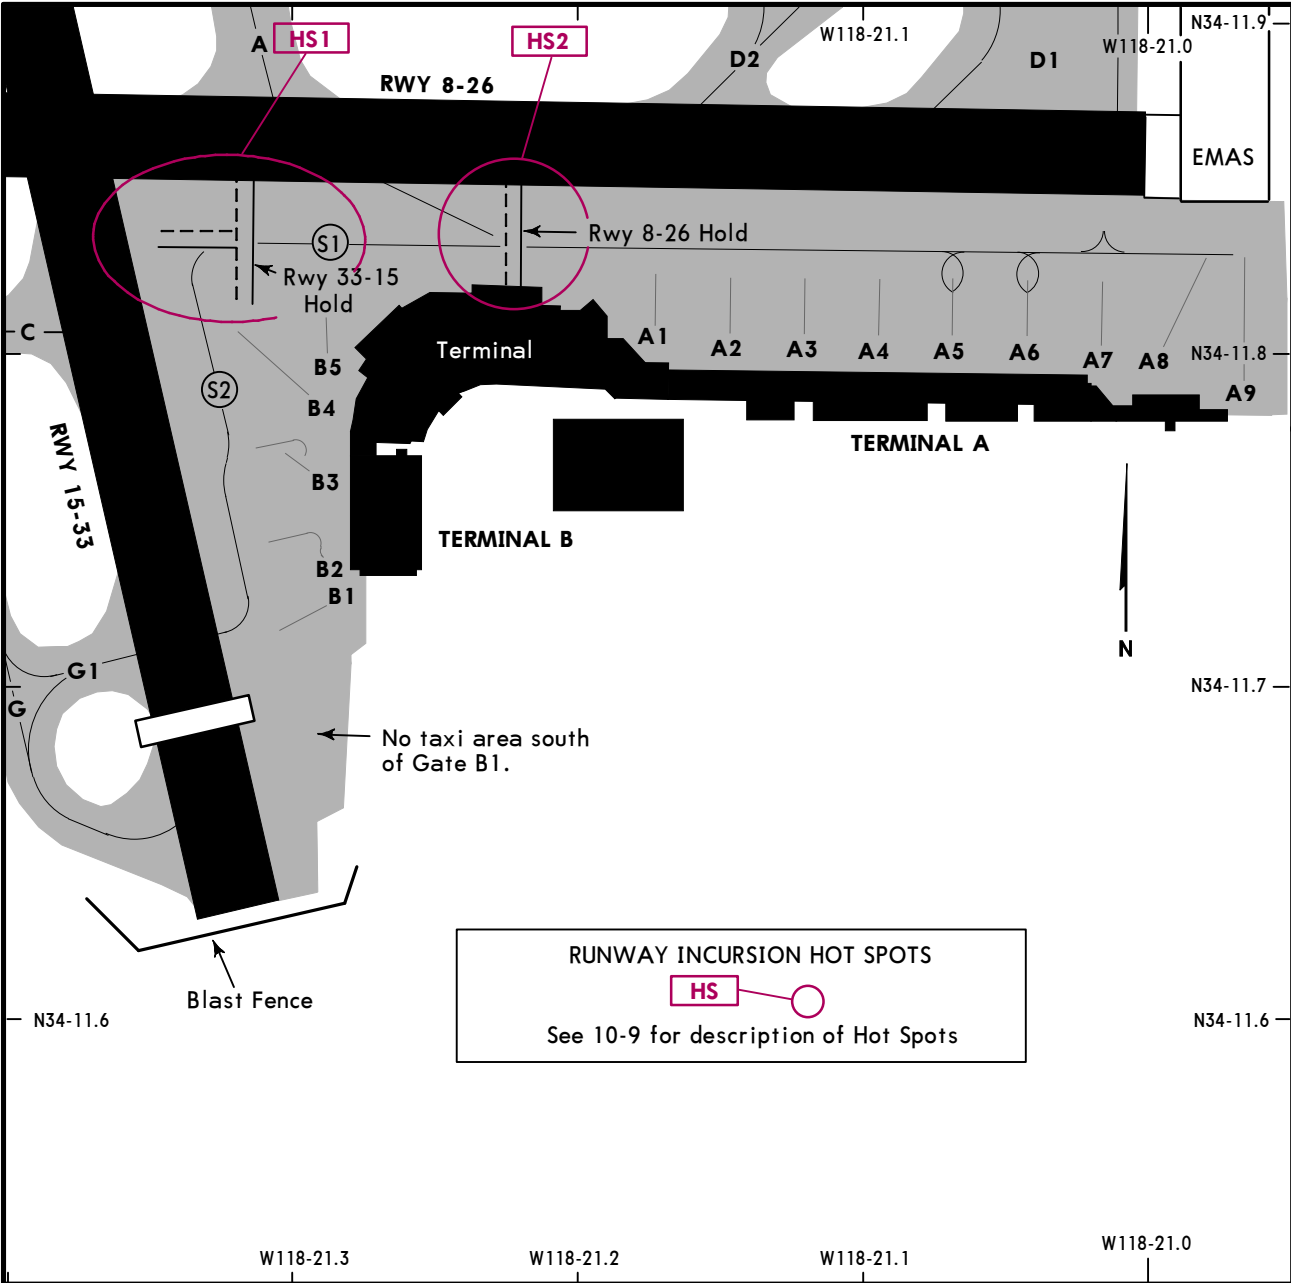

PARKING GATE COORDINATES

GATE No.	COORDINATES	GATE No.	COORDINATES
Terminal A		Terminal B	
A1	N34 11.8 W118 21.2	B1,B2	N34 11.7 W118 21.3
A2 thru A5	N34 11.8 W118 21.1	B3 thru B5	N34 11.8 W118 21.3
A6 thru A9	N34 11.8 W118 21.0		

KBUR/BUR

BOB HOPE

JEPPESSEN

5 JUL 24

(11-1)

BURBANK, CALIF

ILS Z or LOC Z Rwy 8

D-ATIS

Arrival via FIM/PMD VOR only

SOCAL Approach (R)

BURBANK Tower

Ground

Helicopter

134.5

135.125

134.2

118.7

123.9

132.325

LOC
IBUR

109.5

Final
Apch Crs

079°

BUDDE

2753' (2026')

ILS
DA(H)

1075' (348')

Apt Elev 778'

TDZE 727'

7300

185°

9300

275°

4400

005°

4700

095°

MSA VNY VOR

MISSED APCH: Climb to 1300' then climbing RIGHT turn to 4600' on heading 210° and inbound on VTU VOR R-086 to VTU VOR and hold.

Missed approach requires a minimum climb gradient of 340'/NM to 2520'; if unable to meet climb gradient, see ILS Y or LOC Y Rwy 8 (11-2).

Alt Set: INCHES

Trans level: FL 180



Trans alt: 18000'

From MIKEI: RNAV 1-GPS required for RNAV transitions.

1. Circling Rwy 26 not authorized at night. 2. Circling Rwy 33 not authorized at night for cat D.

3. Straight-in Rwy 8 at night, circling to Rwy 33 at night, operational VGSI required. Remain on or above VGSI glidepath until threshold. 4. LOC unusable within 0.9 NM to threshold. 5. Rwy 8 helicopter visibility reduction below RVR 50 not authorized.

DEPARTING STRIP

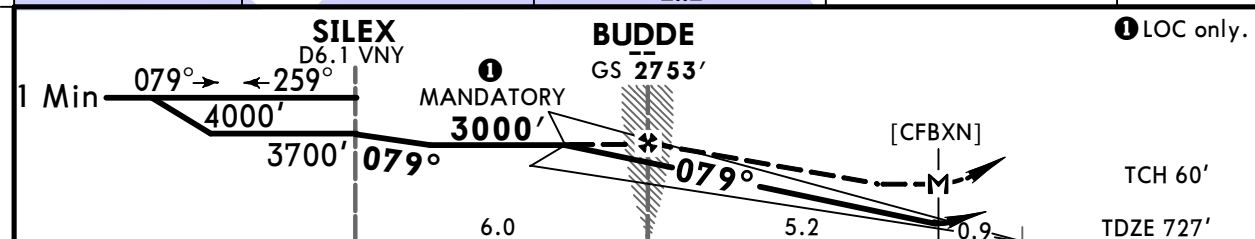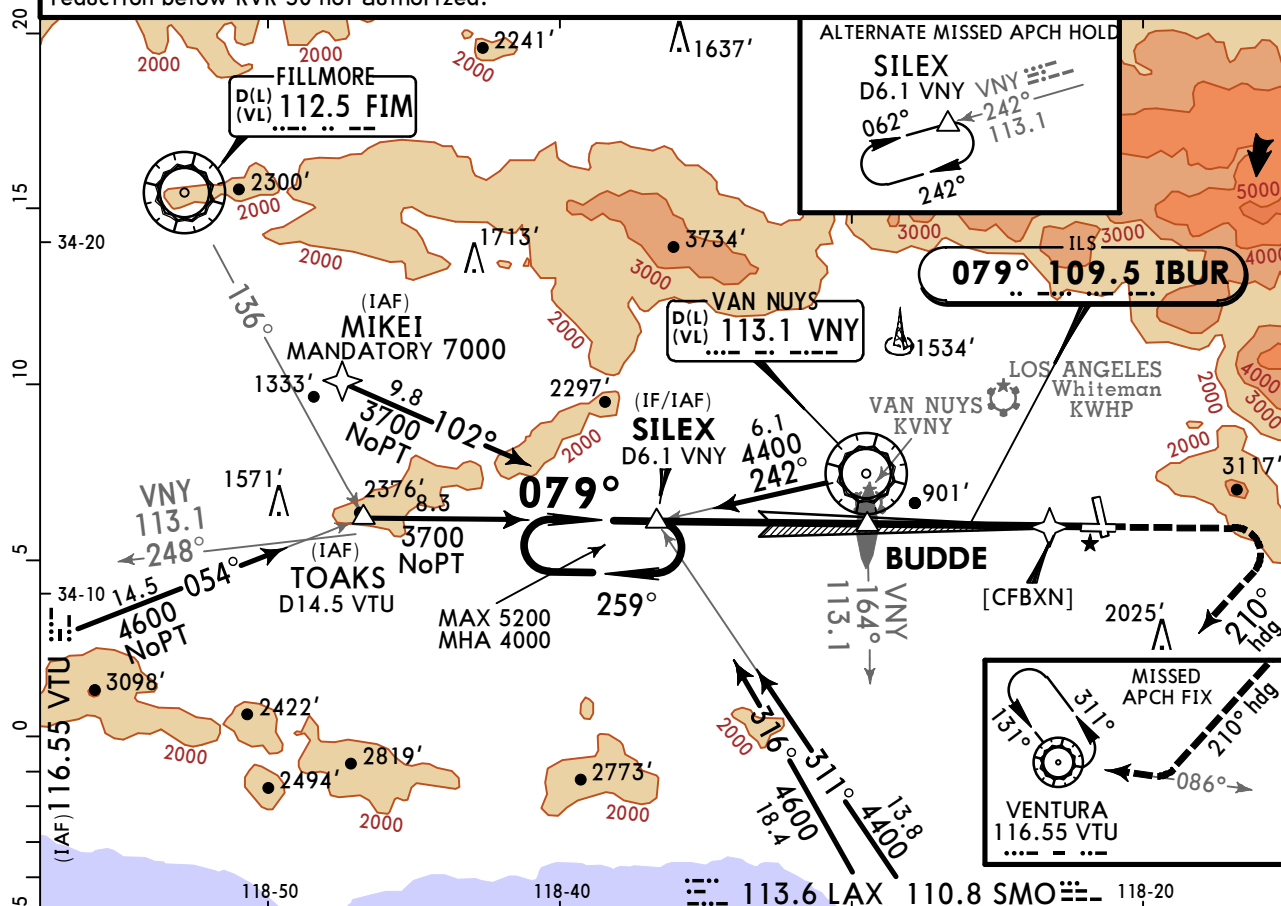

Gnd speed-Kts	70	90	100	120	140	160	MALSR		1300'	4600'	210°	VTU
GS	3.00°	372	478	531	637	743	PAPI		↑	RT	on	116.55
BUDE to MAP	5.2	4:27	3:28	3:07	2:36	2:14	1:57				hdg	R-086

TERPS				STRAIGHT-IN LANDING RWY 8				CIRCLE-TO-LAND			
ILS				LOC (GS out)				C			
DA(H) 1075' (348')				MDA(H) 1160' (433')				Max Kts			
RAIL/ALS out				RAIL/ALS out				MDA(H)			
A								90	11280' (502') - 1 1/8		
B								120	11640' (862') - 1 1/4		
C	RVR 50 or 1			RVR 50 or 1				140	12240' (1462') - 3		
D				1 1/4				165	22320' (1542') - 3		

1 Not authorized northeast of Rwy 15 and 26. 2 Not authorized east of Rwy 15-33.

CHANGES: Note removed.

© JEPPESSEN, 2003, 2024. ALL RIGHTS RESERVED.

KBUR/BUR

BOB HOPE

JEPPesen

5 JUL 24


(11-2)

BURBANK, CALIF

ILS Y or LOC Y Rwy 8



BRIEFING STRIP™

D-ATIS Arrival via FIM/PMD VOR only		SOCAL Approach (R)		BURBANK Tower	Ground	Helicopter
134.5		135.125		134.2	118.7	123.9
LOC IBUR	Final Apch Crs	BUDE		ILS DA(H)	Apt Elev 778'	
109.5	079°	2753' (2026')		1555' (828')	TDZE 727'	
MISSED APCH: Climb to 1800' then climbing RIGHT turn to 4600' on heading 210° and inbound on VTU VOR R-086 to VTU VOR and hold.						
Alt Set: INCHES		Trans level: FL 180		Trans alt: 18000'		
From MIKEI : RNAV 1-GPS required for RNAV transitions.						



MSA VNY VOR

1. Circling Rwy 26 not authorized at night.
2. Circling Rwy 33 not authorized at night for cat D.
3. Straight-in Rwy 8 at night, circling to Rwy 33 at night, operational VGSI required. Remain on or above VGSI glidepath until threshold.
4. LOC unusable within 0.9 NM to threshold.
5. Rwy 8 helicopter visibility reduction below RVR 50 not authorized.

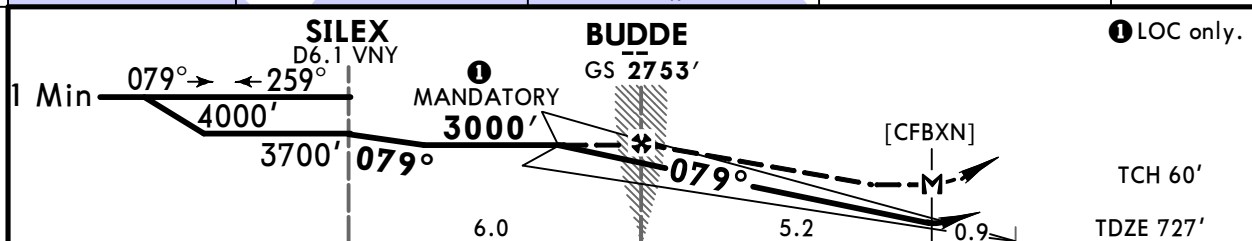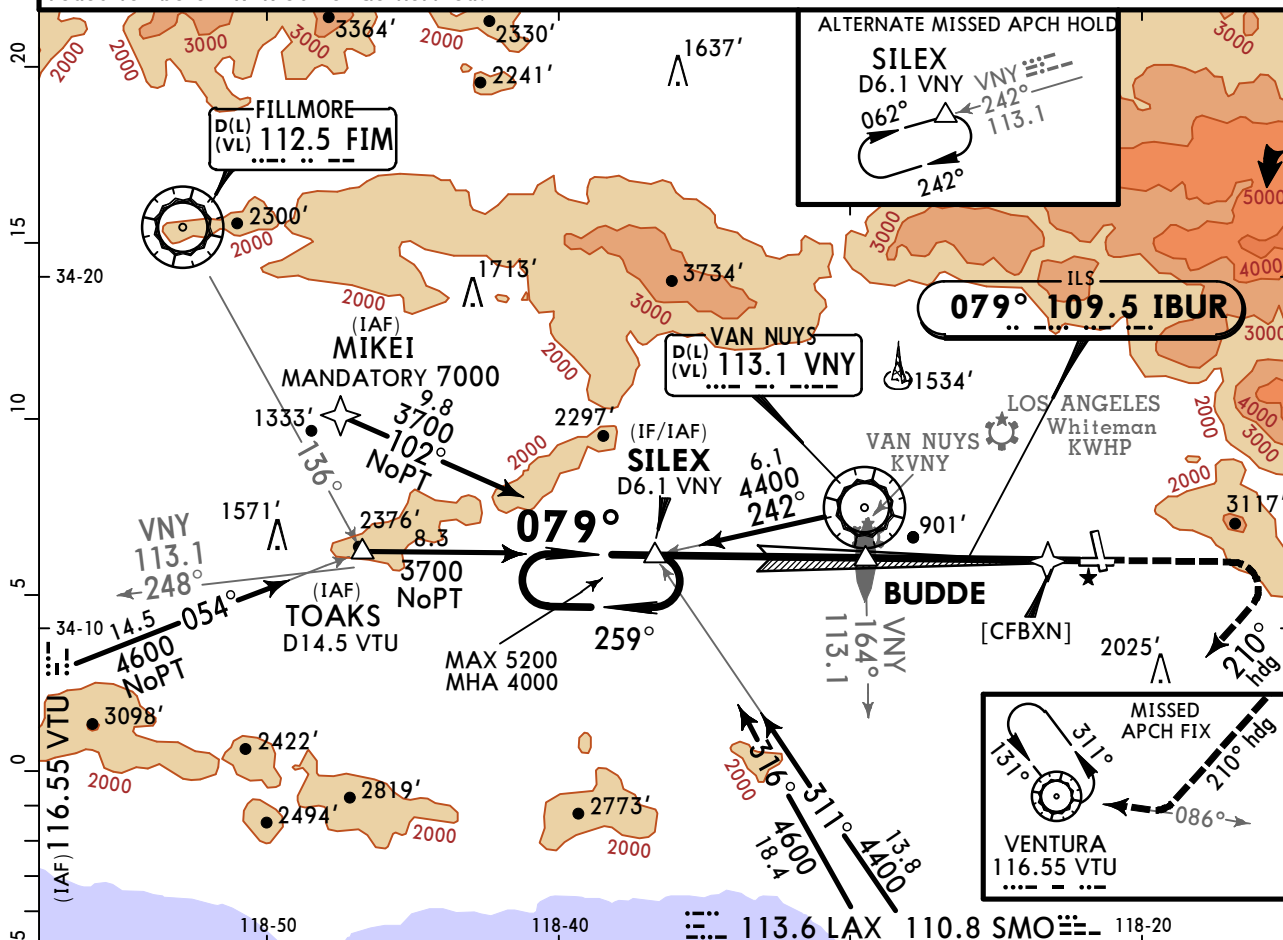

Gnd speed-Kts	70	90	100	120	140	160	MALSR		1800'	4600'	210°	VTU
GS	3.00°	372	478	531	637	743	PAPI		↑	RT	hdg	116.55
BUDE to MAP	5.2	4:27	3:28	3:07	2:36	2:14						R-086

TERPS

STRAIGHT-IN LANDING RWY 8

ILS

LOC (GS out)

DA(H) 1555' (828')

MDA(H) 1620' (893')

RAIL/ALS out

RAIL/ALS out

C

Max Kts

MDA(H)

1620' (842') - 1 1/4

1640' (862') - 1 1/4

2240' (1462') - 3

2320' (1542') - 3

A

B

C

D

2 1/2

RVR 50 or 1

2

RVR 60 or 1 1/4

2 1/2

TERPS

STRAIGHT-IN LANDING RWY 8

ILS

LOC (GS out)

DA(H) 1555' (828')

MDA(H) 1620' (893')

RAIL/ALS out

RAIL/ALS out

C

Max Kts

MDA(H)

1620' (842') - 1 1/4

1640' (862') - 1 1/4

2240' (1462') - 3

2320' (1542') - 3

A

B

C

D

2 1/2

RVR 50 or 1

2

RVR 60 or 1 1/4

2 1/2

1 Not authorized northeast of Rwy 15 and 26. 2 Not authorized east of Rwy 15-33.

CHANGES: Note removed.

© JEPPesen, 2003, 2024. ALL RIGHTS RESERVED.

KBUR/BUR
BOB HOPE



JEPPESEN
5 JUL 24 12-1

BURBANK, CALIF
RNAV (GPS) Z Rwy 8

20

BRIEFING STRIP™

D-ATIS Arrival via FIM/PMD VOR only		SOCAL Approach (R)		BURBANK Tower		Ground		Helicopter	
134.5		135.125		134.2		118.7		123.9	
WAAS Ch 53638 W08A		Final Apch Crs 079°		BUBNE 3000' (2273')		LP MDA(H) 1540' (813')		Apt Elev 778' TDZE 727'	
MISSED APCH: Climbing RIGHT turn to 4600' direct COTSI and on track 263° to VTU VOR and hold.									9500 MSA HIMEN
RNP Apch		Alt Set: INCHES		Trans level: FL 180		Trans alt: 18000'			
1. Circling Rwy 26 not authorized at night. 2. Circling Rwy 33 not authorized at night for cat D. 3. Straight-in Rwy 8 at night, circling Rwy 33 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. 4. Rwy 8 helicopter visibility reduction below RVR 50 not authorized.									

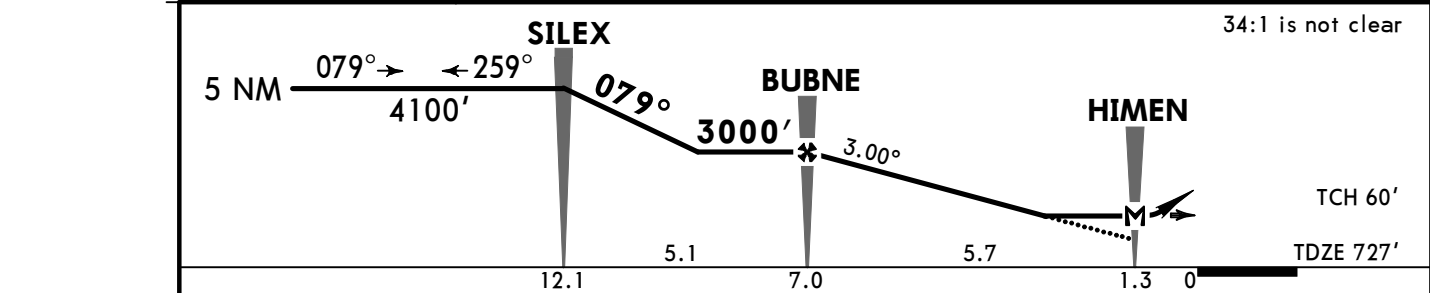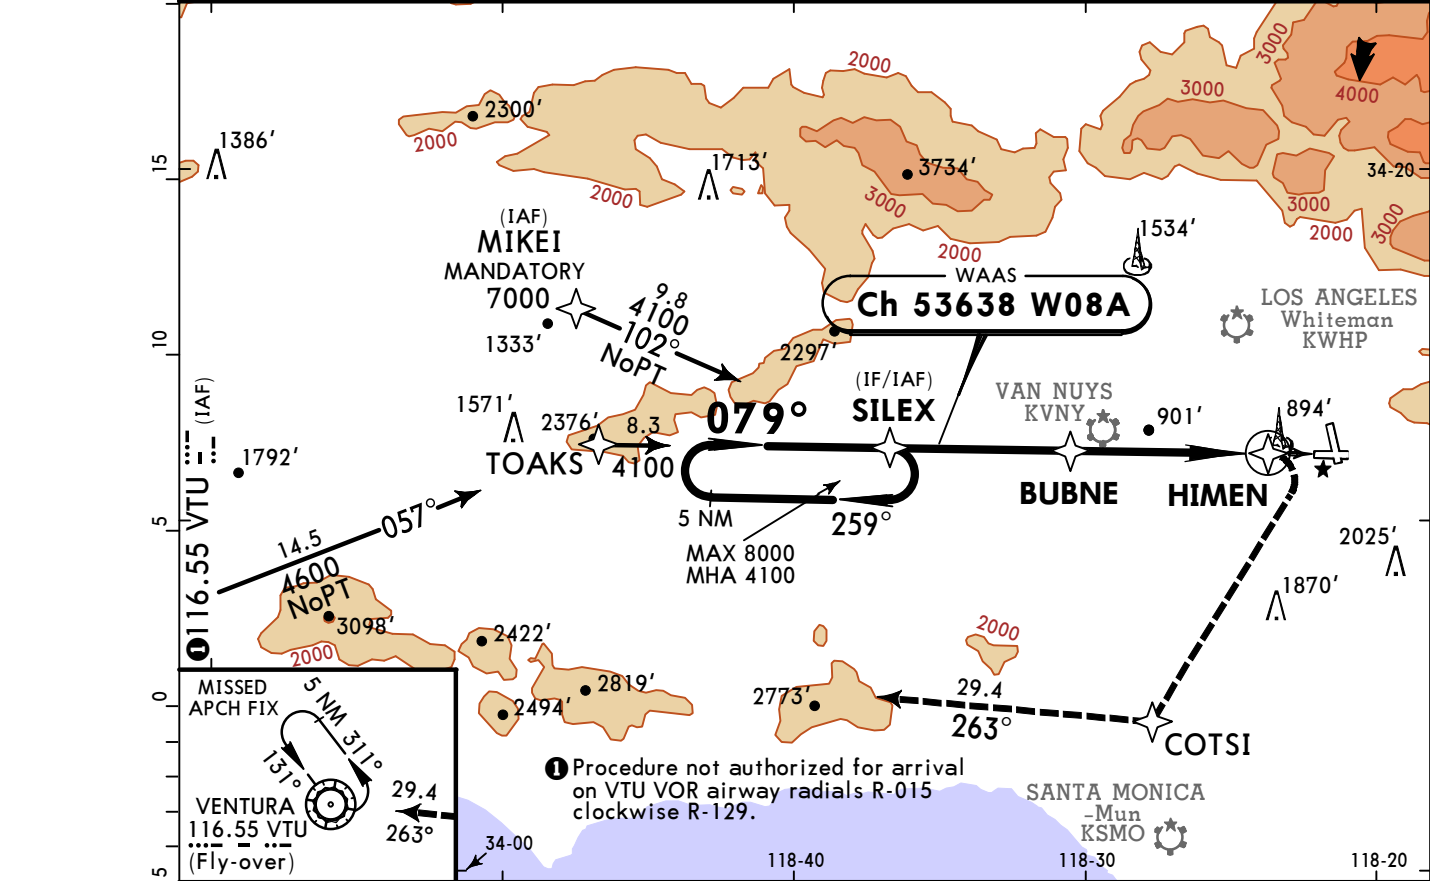

Gnd speed-Kts	70	90	100	120	140	160	MALSR PAPI	4600'	RT	COTSI
Descent Angle 3.00°	372	478	531	637	743	849				

TERPS		STRAIGHT-IN LANDING RWY 8				CIRCLE-TO-LAND	
		LP	LNAV				
		MDA(H) 1540' (813')	MDA(H) 1660' (933')				
		RAIL/ALS out	RAIL/ALS out				
A					Max Kts		
B	RVR 60 or 1¼	1½	RVR 60 or 1¼	1½	90	1	1660' (882') - 1½
C					120	1	2240' (1462') - 3
D	1⅞	2½	2	2½	140	1	2320' (1542') - 3
					165	2	2320' (1542') - 3



1 Not authorized northeast of Rwy 15 and 26. 2 Not authorized east of Rwy 15-33.

KBUR/BUR
BOB HOPE

JEPPESSEN
5 JUL 24 12-20

BURBANK, CALIF
RNAV (RNP) Y Rwy 8

D-ATIS Arrival via FIM/PMD VOR only		SOCAL Approach (R)		BURBANK Tower	Ground	Helicopter
134.5		135.125		134.2	118.7	123.9
132.325						
RNAV	Final Apch Crs 079°	WESKI 2700' (1973')	RNP 0.20 DA(H) 1068' (341')	Apt Elev 778' TDZE 727'	9800 MSA RW08	
MISSED APCH: Climb to 1200' then climbing RIGHT turn to 4600' direct COTSI and on track 263° to YOLYY and hold.						
Alt Set: INCHES		Trans level: FL 180		Trans alt: 18000'		
RNP AR Apch						
1. Authorization required. 2. Straight-in Rwy 8 at night, operational VGSI required. Remain on or above VGSI glidepath until threshold. 3. For uncompensated Baro-VNAV systems, procedure not authorized below 1°C or above 54°C.						

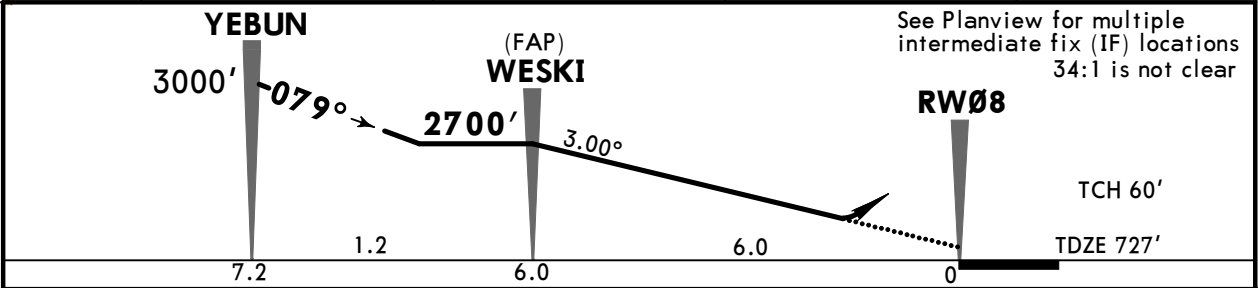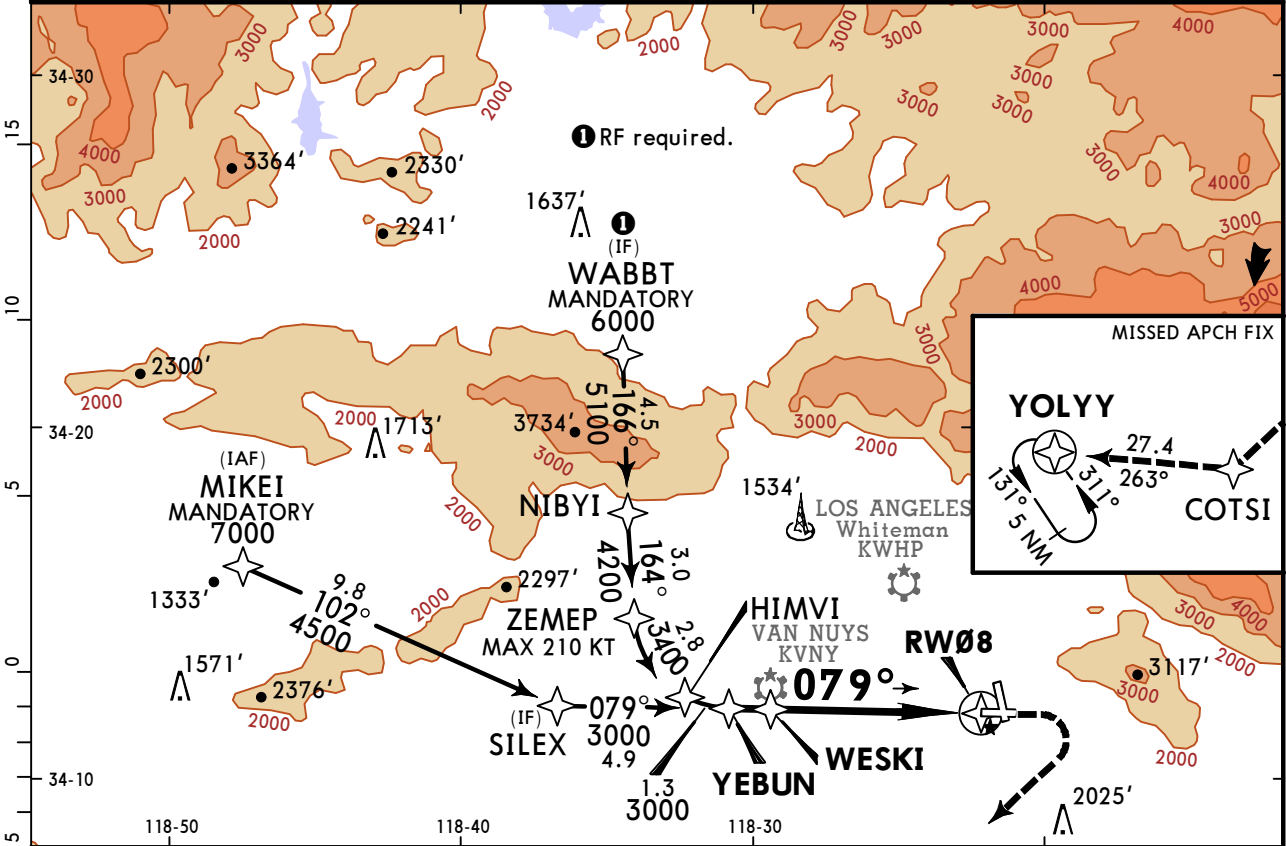

Gnd speed-Kts	70	90	100	120	140	160	MALSR	1200'	4600'	→	COTSI
Glide Path Angle	3.00°	372	478	531	637	743	849	PAPI	↑	RT	

TERPS		STRAIGHT-IN LANDING RWY 8				
1 RNP 0.20		2 RNP 0.30		RNP 0.30		
DA(H) 1068' (341')		DA(H) 1151' (424')		DA(H) 1485' (758')		
RAIL/ALS out		RAIL/ALS out		RAIL/ALS out		
A	RVR 50 or 1		RVR 50 or 1		1 1/4	
B						
C						
D						
		2 1/2				


1 Missed approach requires minimum climb of 340'/NM to 2400'.
2 Missed approach requires minimum climb of 317'/NM to 2400'.

KBUR/BUR
BOB HOPE

JEPPESSEN

26 APR 24 13-1

BURBANK, CALIF
VOR Rwy 8

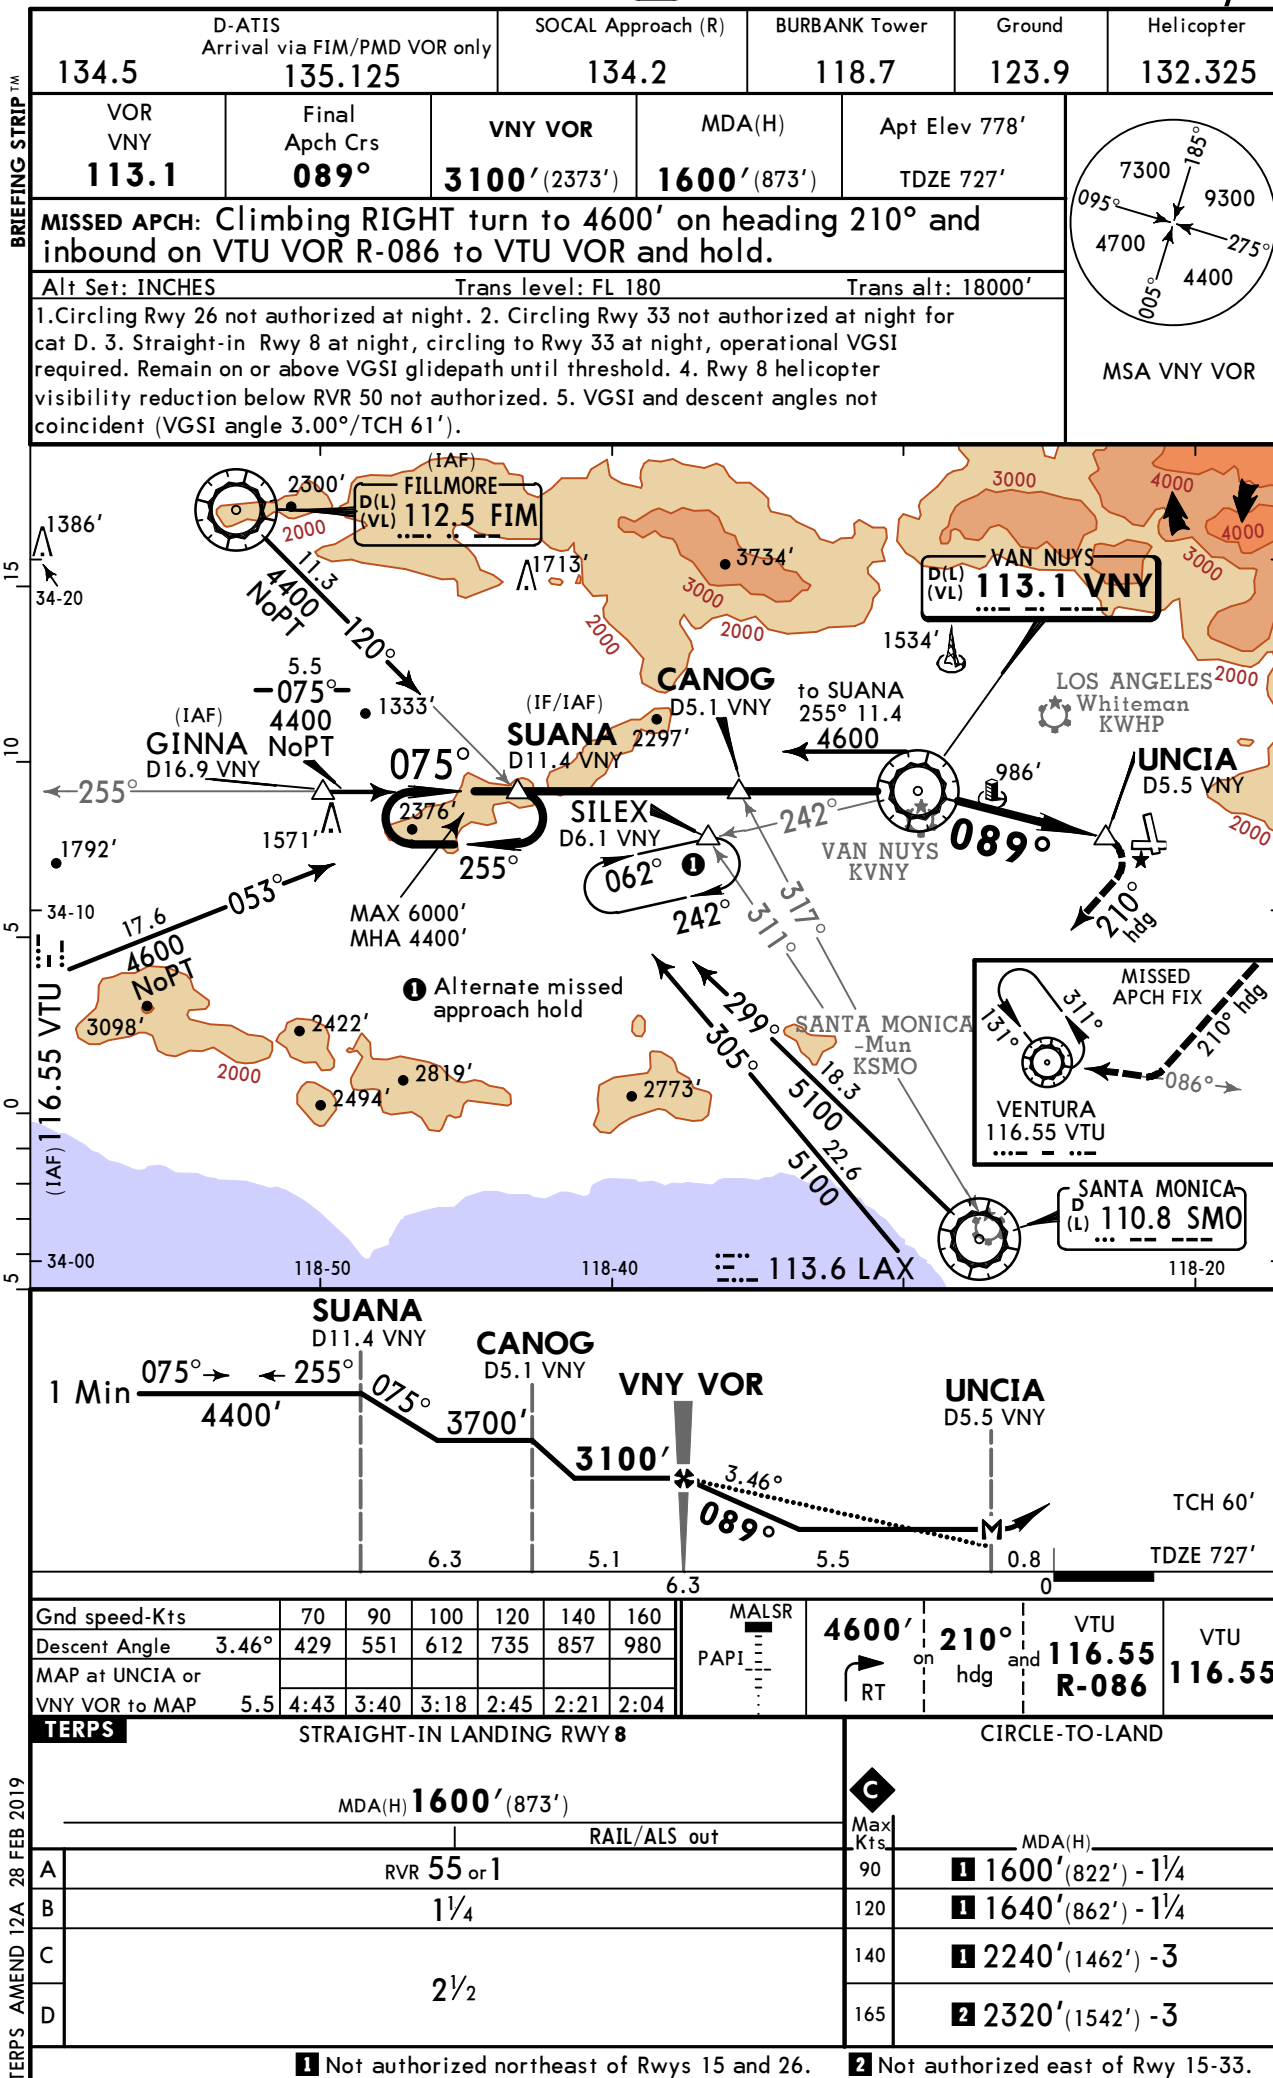

KBUR/BUR
BOB HOPE

JEPPESSEN
8 NOV 24 (19-1)

BURBANK, CALIF
FOUR STACKS VISUAL
APPROACH Rwy 15

