


OAKB/KBL
KABUL INTL

JEPPESSEN
5 AUG 22 10-3

KABUL, AFGHANISTAN
RNAV SID

*KABUL Departure 132.500	Apt Elev 5877	Trans alt: 14000
		RNAV 1
		1. GPS required. 2. RADAR required for non-GPS equipped aircraft. 3. Emergency safe altitude within 100 NM of Kabul Intl airport 21700.

LOGAR 3
RNAV DEPARTURE
(RWY 29)

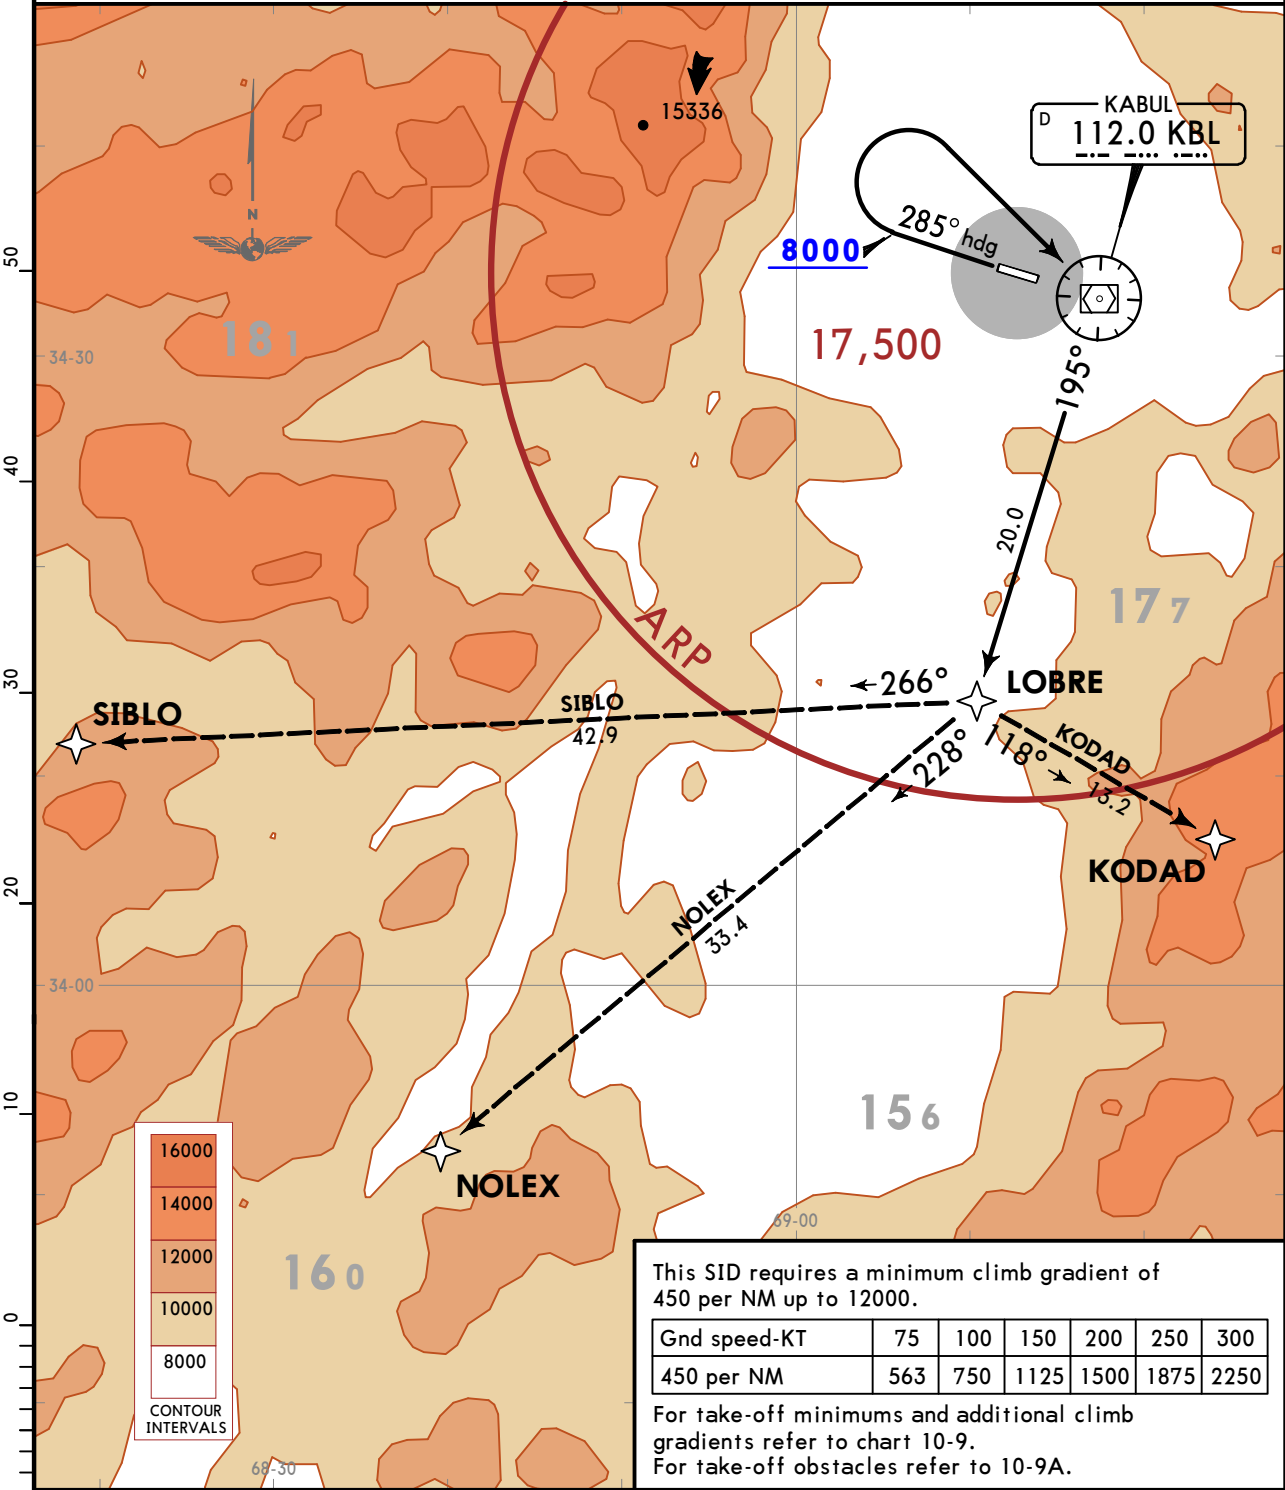

INITIAL CLIMB	
Climb on 285° heading to 8000 then turn RIGHT direct to KBL, turn RIGHT 195° track to LOBRE.	
TRANSITION	ROUTING
KODAD	At LOBRE turn LEFT, 118° track to KODAD. MAINTAIN assigned altitude.
NOLEX	At LOBRE turn RIGHT, 228° track to NOLEX. MAINTAIN assigned altitude.
SIBLO	At LOBRE turn RIGHT, 266° track to SIBLO. MAINTAIN assigned altitude.

OAKB/KBL
KABUL INTL

JEPPESSEN

KABUL, AFGHANISTAN

5 AUG 22 (10-3B)

SID

*KABUL Departure
132.500


Apt Elev
5877

Trans alt: 14000
1. RADAR or DME required.
2. N/A for CAT E acft.
3. Emergency safe altitude within 100 NM of Kabul Intl airport 21700.

OBSTACLE

KABUL 4
DEPARTURE

SPEED: MAX 250 KT BELOW UNTIL ESTABLISHED ON KBL R195

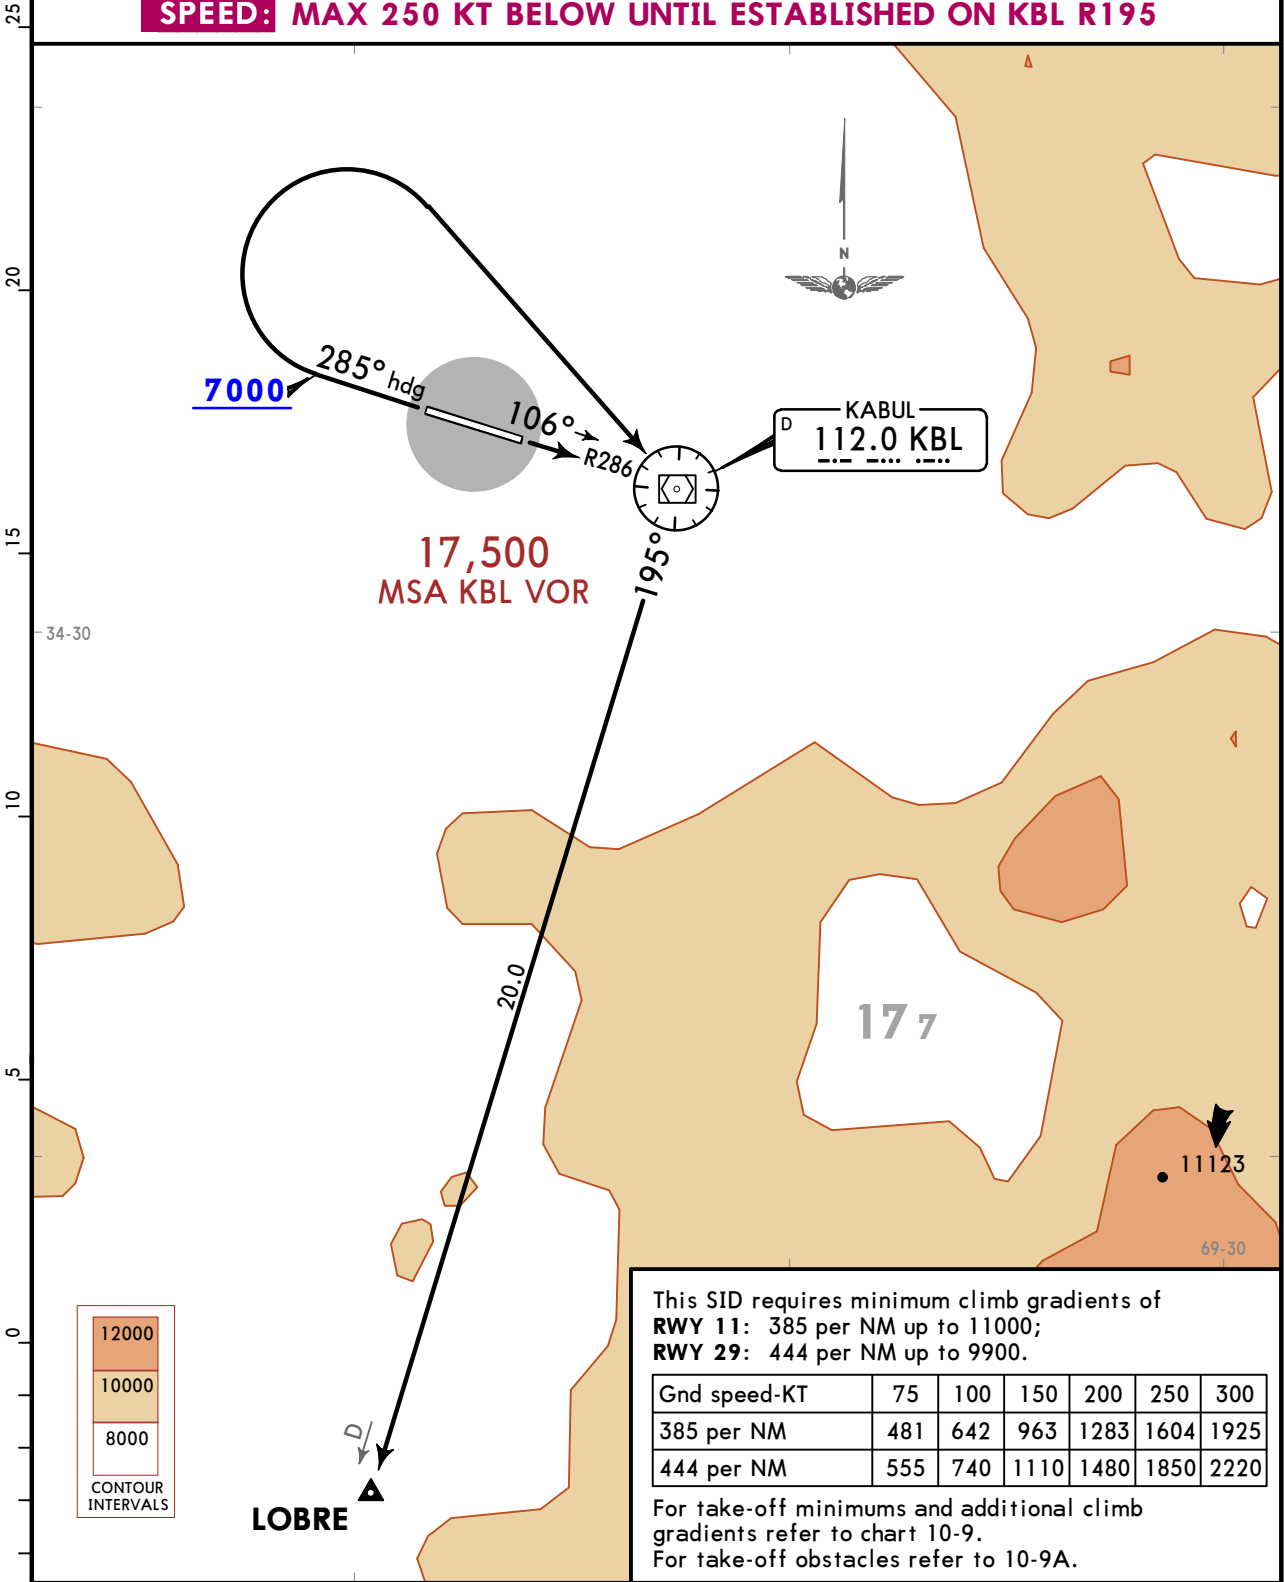

RWY

ROUTING

11

Climb on KBL R286 inbound to KBL, turn RIGHT, KBL R195 to LOBRE.
MAINTAIN ATC assigned altitude.

29

Climb on 285° heading, at or above 7000 turn RIGHT direct to KBL, KBL R195 to LOBRE.
MAINTAIN ATC assigned altitude.

OAKB/KBL


Apt Elev **5877'**
N34 34.0 E069 12.8

JEPPESSEN

28 MAR 25 **(10-9)**

KABUL, AFGHANISTAN

KABUL INTL

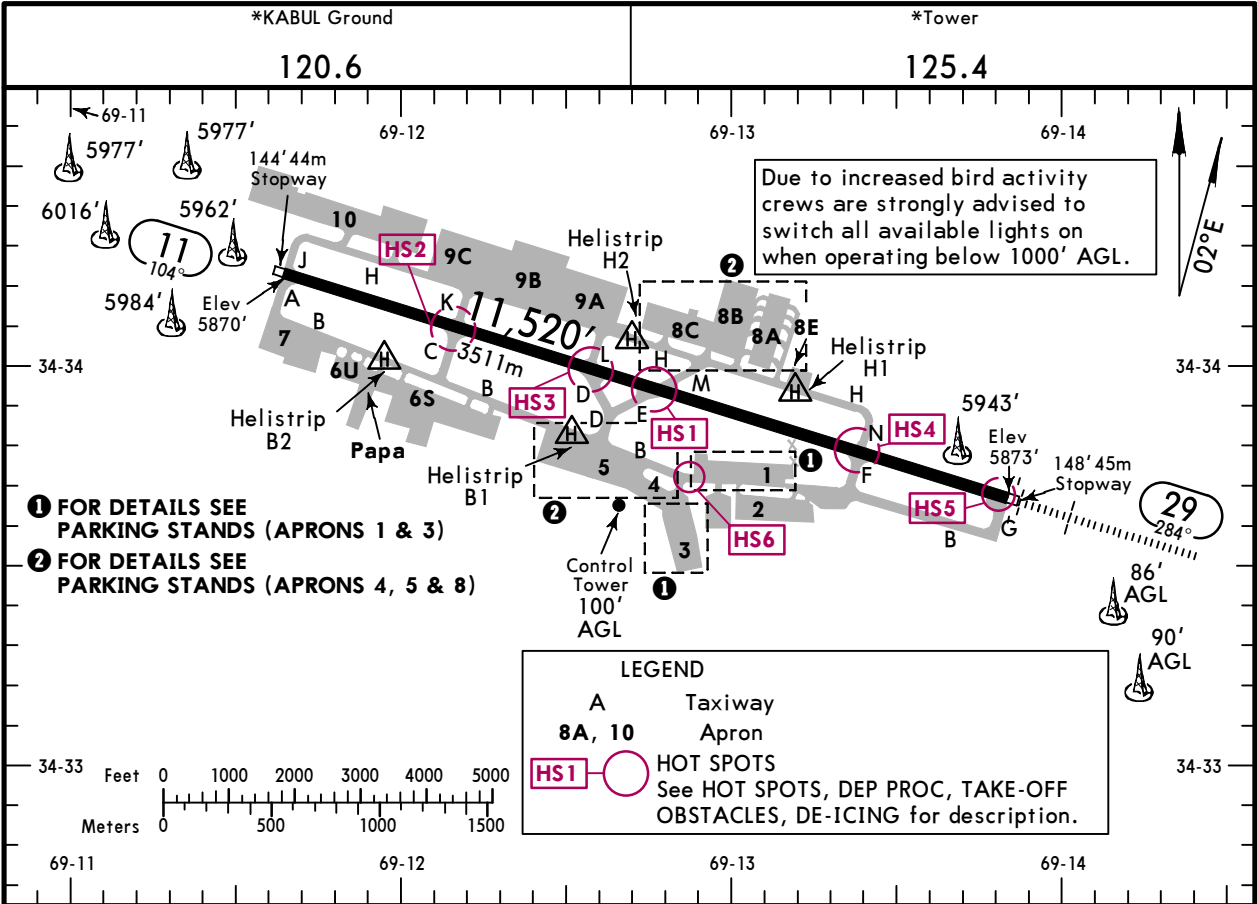

ADDITIONAL RUNWAY INFORMATION						
RWY				USABLE LENGTHS		WIDTH
				LANDING BEYOND	TAKE-OFF	
				Threshold	Glide Slope	
11	HIRL (60m)	HIALS ③	PAPI (3.5°)			148'
29	HIRL (60m)	ALSF-I ④	PAPI (3.5°) ⑤		10,609' 3234m	45m

③ Configuration unknown. ④ SFL are out of service. ⑤ Unusable beyond 5° Right of RCL.

⑥ TAKE-OFF RUN AVAILABLE

RWY 11:

From rwy head	11,520' (3511m)
twy C/K int	8750' (2667m)
twy D/L int	6600' (2012m)
twy E int	5700' (1737m)
twy M int	5650' (1722m)

RWY 29:

From rwy head	11,520' (3511m)
twy N/F int	9150' (2789m)
twy M int	5850' (1783m)
twy E int	5800' (1768m)
twy D/L int	4900' (1494m)

180° turn on the Rwy is not allowed for heavy and medium ACFT above B-190.

PREFERENTIAL RUNWAY

When tailwind component is less than 10 KT sustained use rwy 29.

TAKE-OFF ①				
	Rwy 11		Rwy 29	
	STD ②	For climb in Visual Conditions	STD ③	For climb in Visual Conditions
1 & 2 Eng	1600m	ceil 4300' - 4800m	1600m	ceil 4300' - 4800m
3 & 4 Eng	800m		800m	

① Diverse departure not authorized. ② With minimum climb of 390'/NM to 10900'.

③ With minimum climb of 450'/NM to 9400'.

OAKB/KBL



KABUL, AFGHANISTAN

KABUL INTL

HOT SPOTS

(For information only, not to be construed as ATC instructions.)

- HS1** Rwy crossing by vehicles between twy M & E.
- HS2** Rwy crossing by vehicles and acft under tow between twy K & C.
- HS3** Rwy crossing by vehicles and acft between twy L & D.
- HS4** Rwy crossing by acft from twy N to twy F.
- HS5** Potential for rwy incursion due to interference in communications with ATC.
- HS6** Twy B crossing by vehicles/pedestrians between apron 3 and apron 1.

DEPARTURE PROCEDURE

Obtain ATC approval for VCOA when requesting IFR clearance.

Departing acft on departure roll or immediately after take-off shall not change to Departure frequency until explicitly instructed by ATC TWR.

Climb in visual conditions to cross KBL VOR/DME at or above 10000' then intercept KBL R-195 to LOBRE. Remain within 5.2 NM of OAKB during climb in visual conditions.

TAKE-OFF OBSTACLES

Rwy 11:

Tower 2805' from DER, 1114' right of centerline, 86' AGL/5951' MSL.

Terrain 41' from DER, 500' left of centerline, 5876' MSL.

Terrain 46' from DER, 512' left of centerline, 5876' MSL.

Rwy 29:

Power line 1824' from DER, 1334' right of centerline, 115' AGL/5977' MSL.

Building 895' from DER, 461' left of centerline, 10' AGL/5887' MSL.

Pylon 2437' from DER, 1039' right of centerline, 98' AGL/5959' MSL.

Power line 3652' from DER, 566' right of centerline, 115' AGL/5977' MSL.

Disabled acft 667' from DER, 308' left of centerline, 29' AGL/5899' MSL.

Power line 1826' from DER, 1303' left of centerline, 115' AGL/5984' MSL.

Terrain 0' from DER, 500' left of centerline, 5873' MSL.

Terrain 8' from DER, 109' right of centerline, 5873' MSL.

Terrain 0' inward from DER, 500' right of centerline, 5873' MSL.



Tower 925' from DER, 476' left of centerline, 25' AGL/5829' MSL.

Power line 3752' from DER, 323' right of centerline, 98' AGL/5967' MSL.

OAKB/KBL

 **JEPPesen**
5 AUG 22 **(10-9B)**

KABUL, AFGHANISTAN
KABUL INTL

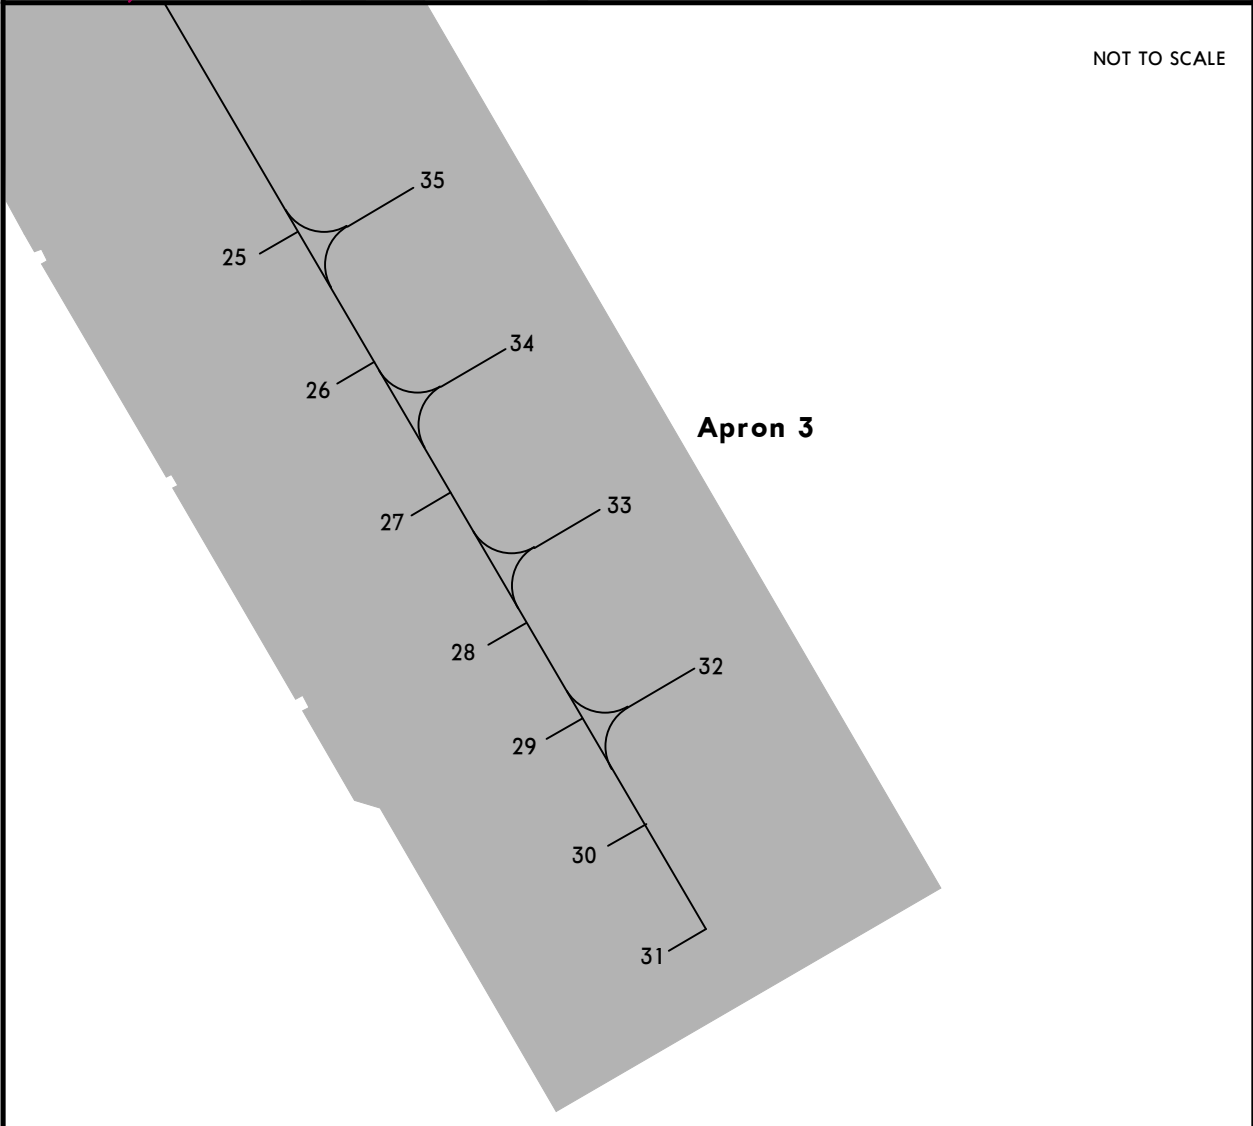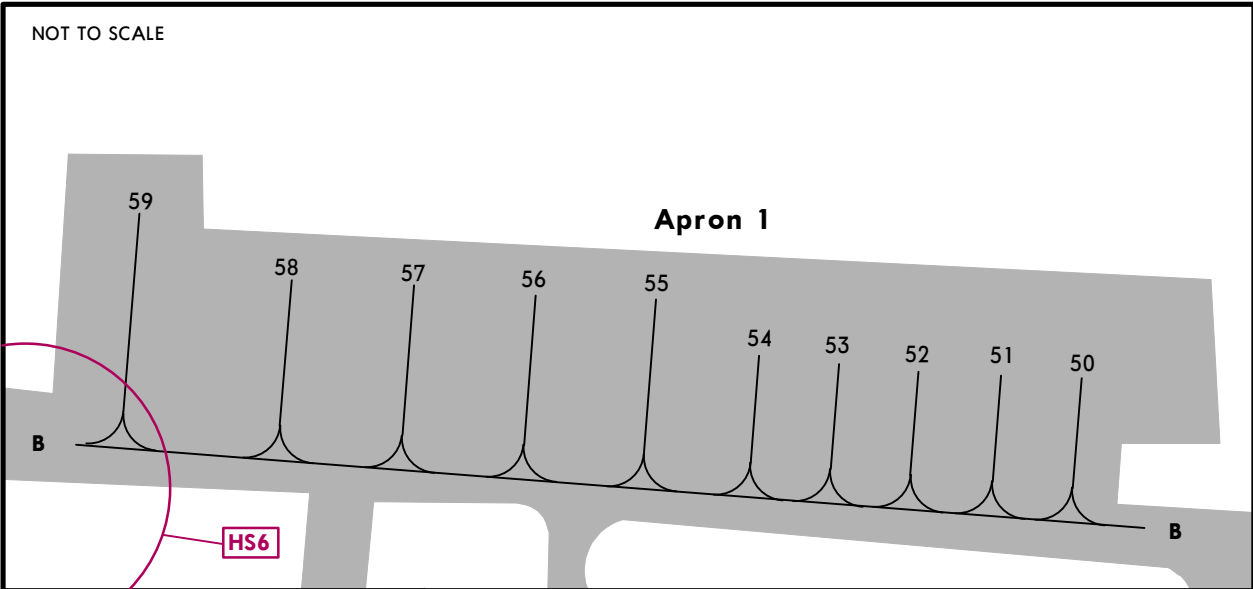

LEGEND



- 1 Parking stand
- B** Taxiway
- A-3** Apron
- HOT SPOTS**
See 10-9A for description

 **HS** — 

OAKB/KBL

JEPPESSEN
5 AUG 22 10-9C

KABUL, AFGHANISTAN
KABUL INTL

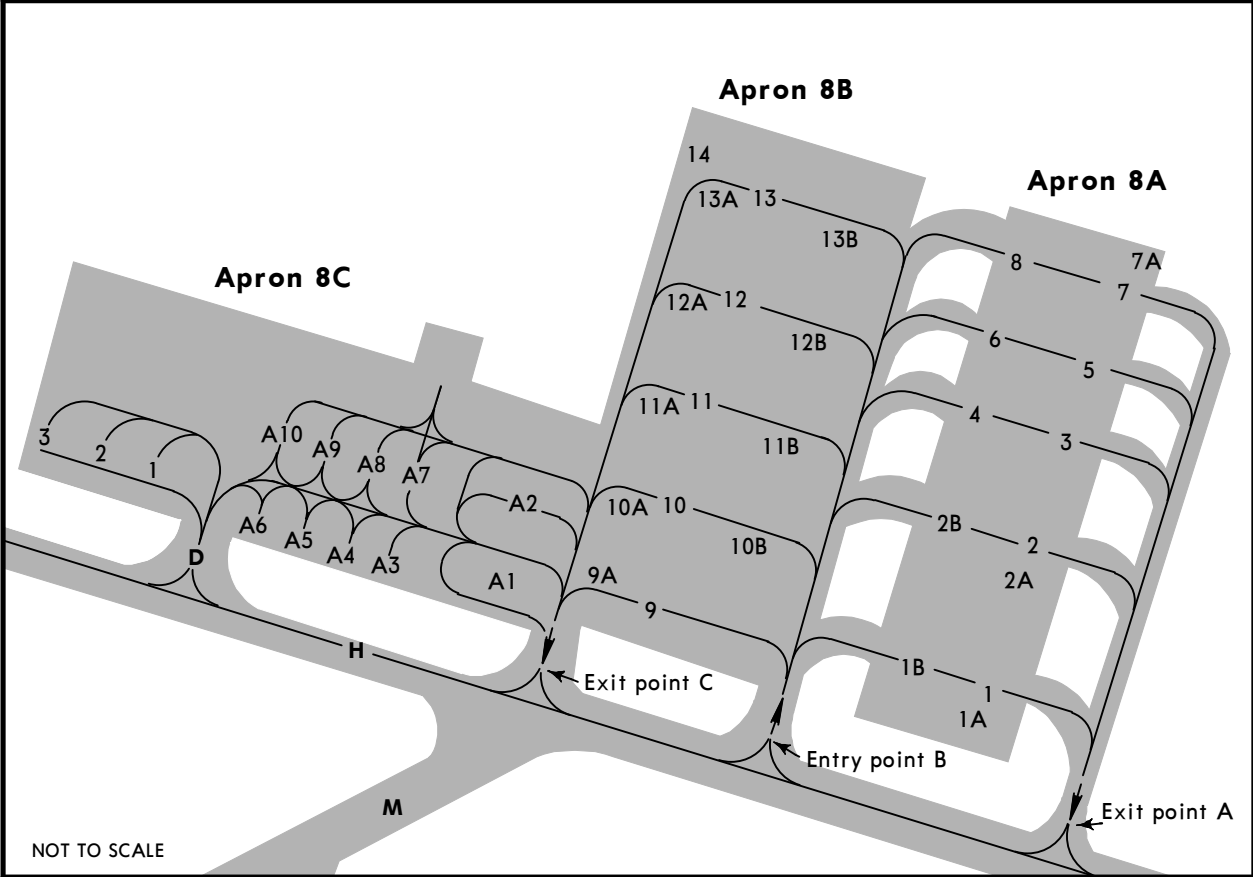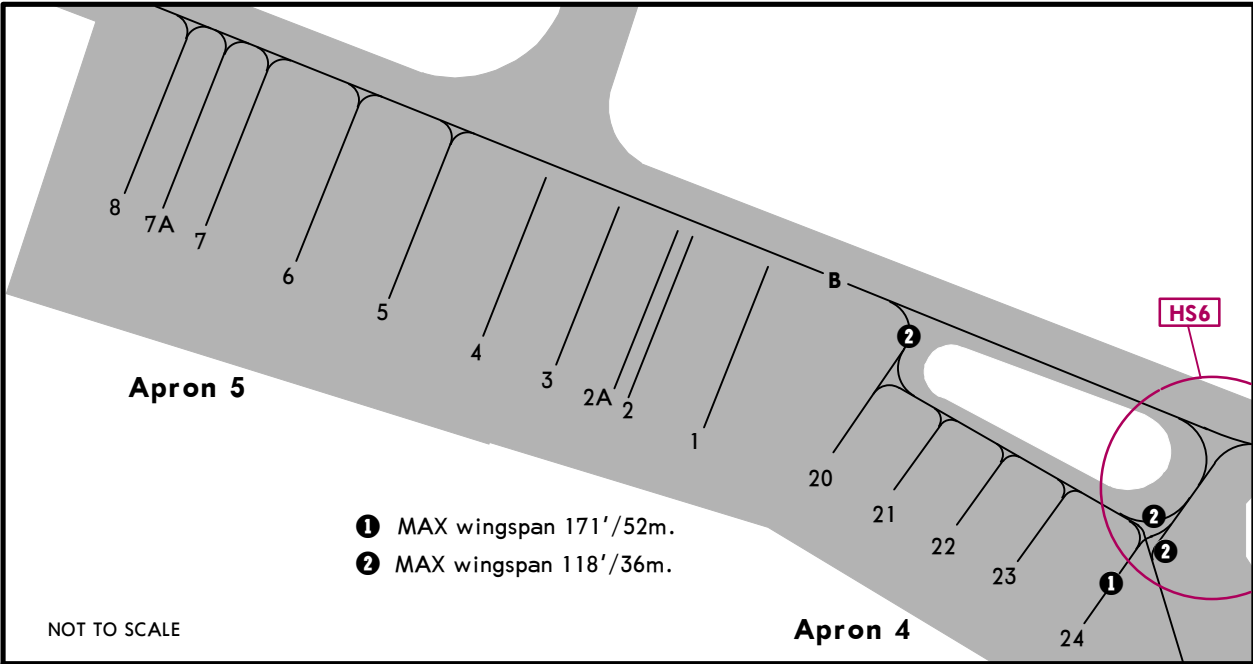

LEGEND	
1	Parking stand
B	Taxiway
A-3	Apron
HS	HOT SPOTS
See 10-9A for description	
→	One way

OAKB/KBL

JEPPESSEN
27 SEP 24 10-9D Eff 3 Oct

KABUL, AFGHANISTAN


KABUL INTL

TAXI ROUTES ARRIVAL


MAX taxi speed shall not exceed 16 KT.

On first contact prior landing and after loading on Apron 8 or 9, aircrew shall report when ACFT exceeds TWY H PCN 29. Overweight ACFT expect taxi routes as follows.

RWY 29

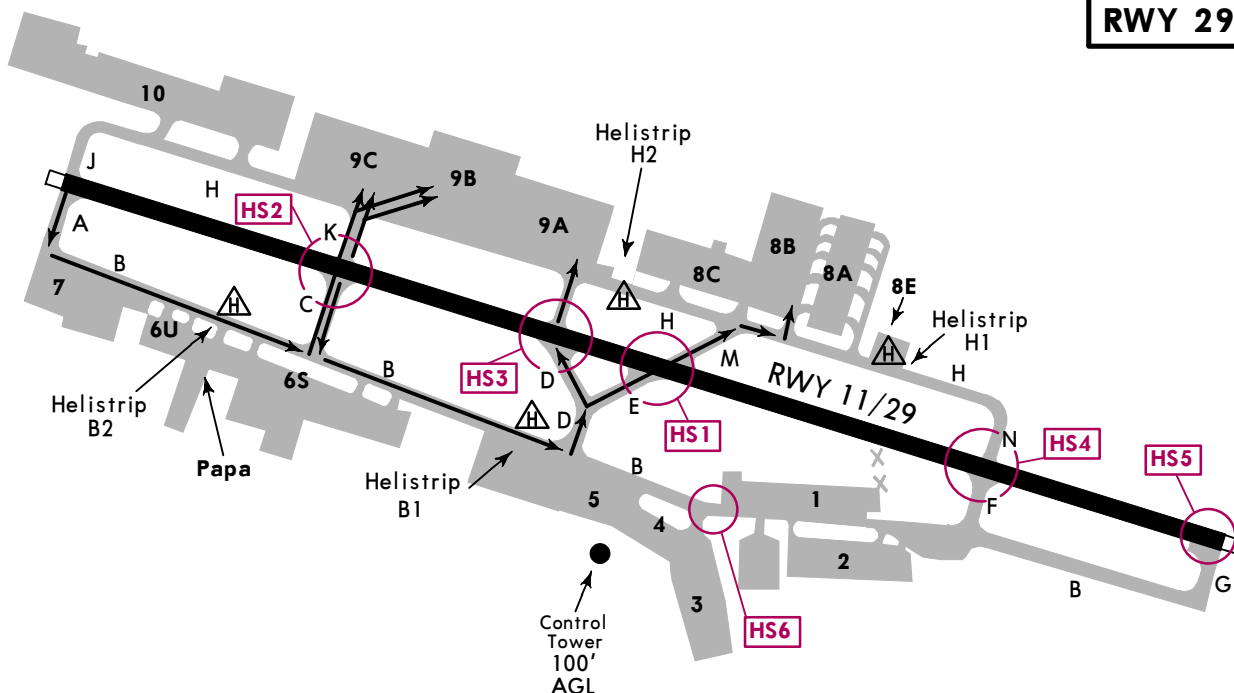

RWY 11

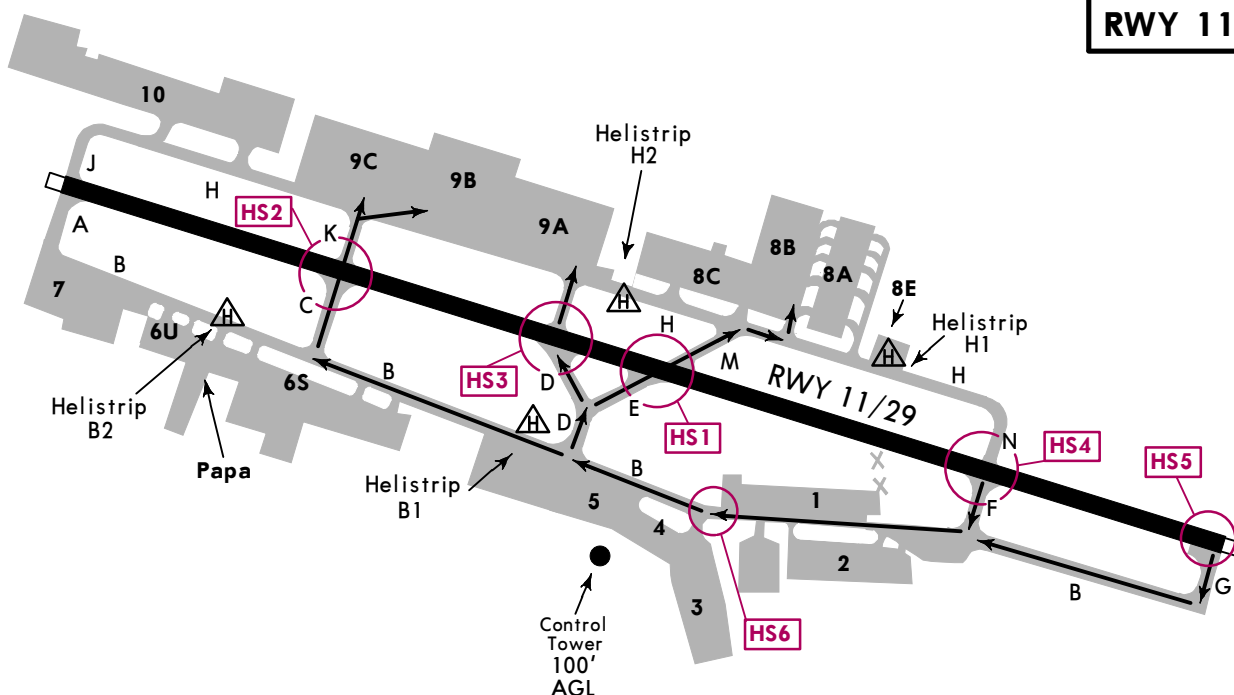

LEGEND


- A Taxiway
- 8A, 10 Apron
- HS1 HOT SPOTS
See HOT SPOTS,
DEP PROC, TAKE-OFF
OBSTACLES,
DE-ICING for description.

TAXI ROUTES DEPARTURE


MAX taxi speed shall not exceed 16 KT.

On first contact prior landing and after loading on Apron 8 or 9, aircrew shall report when ACFT exceeds TWY H PCN 29. Overweight ACFT expect taxi routes as follows.

RWY 29

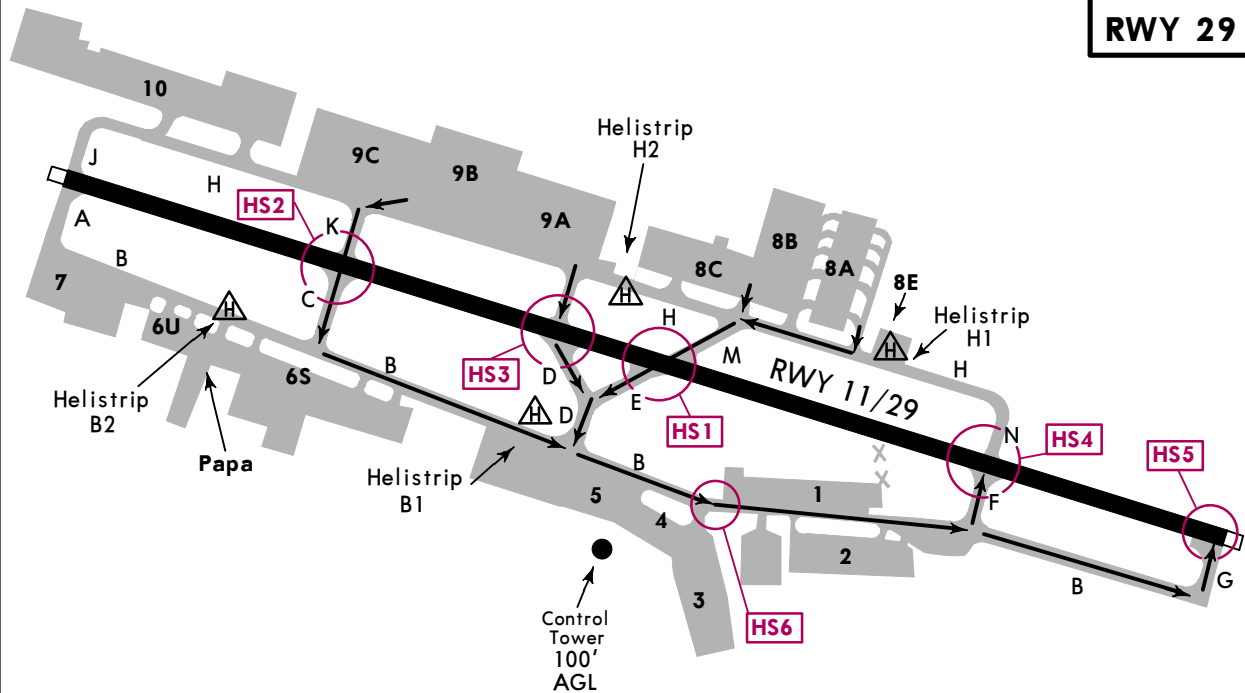

RWY 11

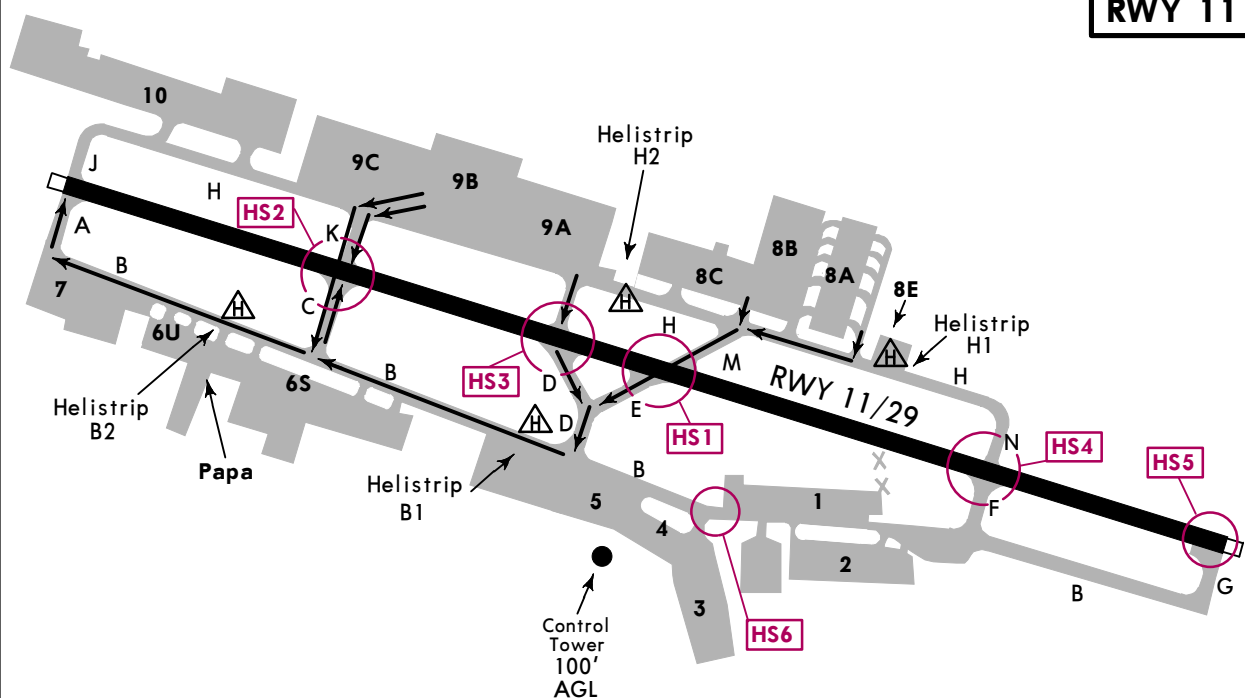

LEGEND

A Taxiway

8A, 10 Apron

HS1  **HOT SPOTS**
See **HOT SPOTS**,
DEP PROC, **TAKE-OFF**
OBSTACLES,
DE-ICING for description.

OAKB/KBL



5 AUG 22

10-9S

Standard

KABUL, AFGHANISTAN
KABUL INTL

STRAIGHT-IN RWY	A	B	C	D
29 ILS ❶	6193'(320') ceiling 400' - 750m	6193'(320') ceiling 400' - 750m	6193'(320') ceiling 400' - 750m	6193'(320') ceiling 400' - 750m
ALS out	ceiling 400' - 1400m	ceiling 400' - 1400m	ceiling 400' - 1400m	ceiling 400' - 1400m
ILS ❷	7052'(1179') ceiling 1200' - 4900m	7052'(1179') ceiling 1200' - 4900m	7052'(1179') ceiling 1200' - 4900m	7052'(1179') ceiling 1200' - 4900m
ALS out	ceiling 1200' - 5600m	ceiling 1200' - 5600m	ceiling 1200' - 5600m	ceiling 1200' - 5600m
LOC	NOT AUTHORIZED	NOT AUTHORIZED	NOT AUTHORIZED	NOT AUTHORIZED
RNAV ❸	7040'(1167') ceiling 1200' - 1500m	7040'(1167') ceiling 1200' - 1600m	7040'(1167') ceiling 1200' - 4600m	7040'(1167') ceiling 1200' - 4600m
ALS out	ceiling 1200' - 2000m	ceiling 1200' - 2400m	ceiling 1200' - 5000m	ceiling 1200' - 5000m
VOR DME ❸ ❹	8480'(2607') ceiling 2700' - 5100m	8480'(2607') ceiling 2700' - 5100m	8480'(2607') ceiling 2700' - 5100m	8480'(2607') ceiling 2700' - 5100m
ALS out	ceiling 2700' - 5800m	ceiling 2700' - 5800m	ceiling 2700' - 5800m	ceiling 2700' - 5800m
VOR DME ❷ ❸	8880'(3007') ceiling 3100' - 5100m	8880'(3007') ceiling 3100' - 5100m	8880'(3007') ceiling 3100' - 5100m	8880'(3007') ceiling 3100' - 5100m
ALS out	ceiling 3100' - 5800m	ceiling 3100' - 5800m	ceiling 3100' - 5800m	ceiling 3100' - 5800m

- ❶ Missed apch climb gradient min 350'/NM to 18000'.
❷ Missed apch climb gradient min 200'/NM.
❸ Continuous Descent Final Approach.
❹ Missed apch climb gradient min 290'/NM to 18000'.

CIRCLE-TO-LAND ❹ ❺	90 KT	120 KT	140 KT	165 KT
After RNAV 29	7540'(1663') ceiling 1700' - V2400m	7540'(1663') ceiling 1700' - V2400m	7540'(1663') ceiling 1700' - V5000m	7540'(1663') ceiling 1700' - V5000m
After VOR DME 29❷	8480'(2603') ceiling 2700' - V5800m	8480'(2603') ceiling 2700' - V5800m	8480'(2603') ceiling 2700' - V5800m	8480'(2603') ceiling 2700' - V5800m
After VOR DME 29❸	8880'(3003') ceiling 3100' - V5800m	8880'(3003') ceiling 3100' - V5800m	8880'(3003') ceiling 3100' - V5800m	8880'(3003') ceiling 3100' - V5800m

- ❹ After ILS rwy 29: NOT AUTHORIZED.
❺ Not authorized South of rwy. Not authorized to rwy 11 at NIGHT.
❷ Missed apch climb gradient min 290'/NM to 18000'.
❸ Missed apch climb gradient min 200'/NM.

TAKE-OFF ❶

	Rwy 11		Rwy 29	
	STD ❷	For Climb in Visual Conditions	STD ❸	For Climb in Visual Conditions
1 & 2 Eng	1600m	ceiling 4300' - 4800m	1600m	ceiling 4300' - 4800m
3 & 4 Eng	800m		800m	

- ❶ Diverse departure not authorized. ❷ With minimum climb of 390'/NM to 10900'.
❸ With minimum climb of 450'/NM to 9400'.

OAKB/KBL
KABUL INTL

JEPPESSEN
8 MAR 24 (11-1)

KABUL, AFGHANISTAN
ILS Rwy 29

BRIEFING STRIP™



*KABUL Arrival 132.5		*KABUL Approach (R) 131.6		*KABUL Tower 125.4		*Ground 120.6	
LOC IAKW 110.5		Final Apch Crs 285°		HIGEL 9800' (3927')		ILS DA(H) (CONDITIONAL) 6193' (320')	
Apt Elev 5877' Rwy 5873'							
MISSED APCH: Climb to FL180 via KBL R-287 to RALOY, then turn RIGHT direct KBL. Cross KBL and proceed on KBL R-195 to LOBRE and hold. Continue climb-in-hold to FL180. CAUTION: Missed apch requires minimum climb of 350'/NM to 18000'.							
				Gnd speed-Kts		60	120
						180	240
						300	
350'/NM				V/V fpm		350	700
						1050	1400
						1750	

17,500

MSA
KBL VOR

Alt Set: hPa Rwy Elev: 197 hPa Trans level: FL160 Trans alt: 14000'

1. ATC RADAR required to ensure separation from CAMPA (OA(P)-201). 2. CAUTION: Do not begin descent unless established on both localizer and glidepath. 3. CAUTION: Execution of missed approach at DA(H) is essential. 4. EMERG SAFE ALT 100 NM 21700'. 5. VGSI and descent angle not coincident.

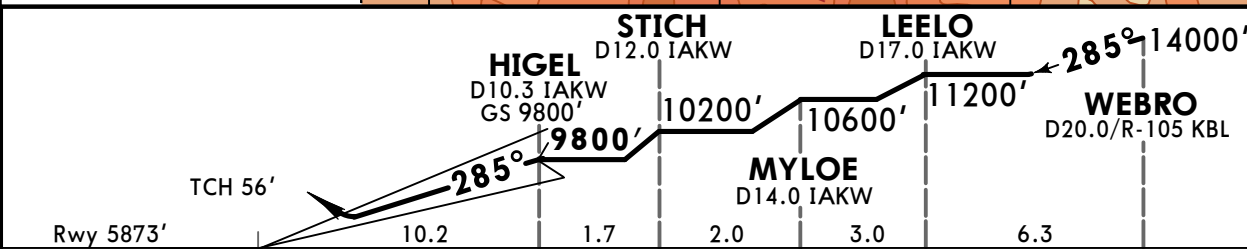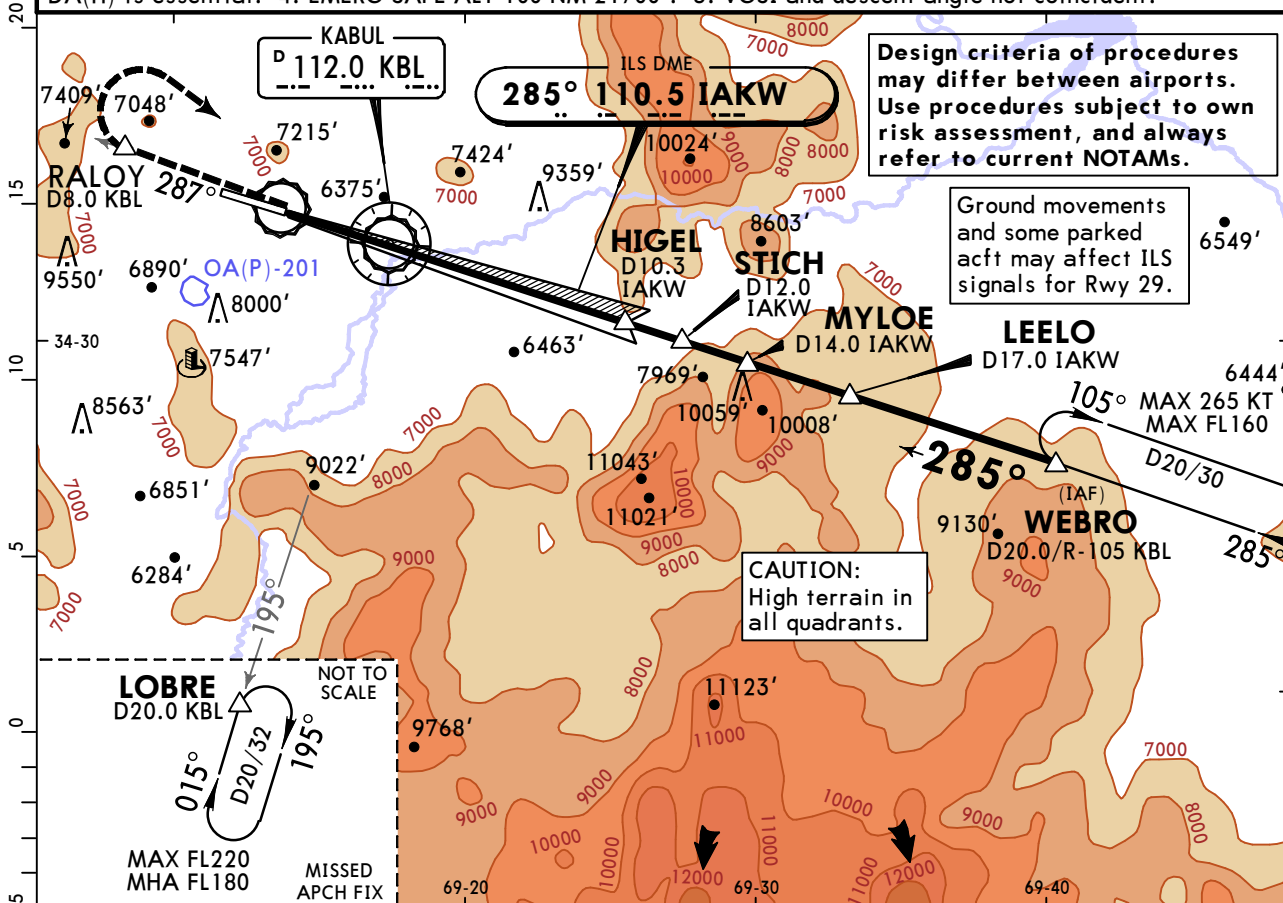

Gnd speed-Kts	70	90	100	120	140	160	PAPI ALSF-I	FL 180 via KBL 112.0 R-287	RALOY
GS	3.50°	434	557	619	743	867			

STRAIGHT-IN LANDING RWY 29				CEILING REQUIRED		CIRCLE-TO-LAND	
ILS		LOC (GS out)					
Missed apch climb gradient MIN 350'/NM to 18000'		Missed apch climb gradient MIN 200'/NM					
DA(H) 6193' (320')		DA(H) 7052' (1179')					
FULL	ALS out	FULL	ALS out				
A						A	
B	400' - 750m	400' - 1400m	1200' - 4900m	NOT AUTHORIZED		B	NOT AUTHORIZED
C			1200' - 5600m			C	
D						D	



OAKB/KBL
KABUL INTL

JEPPESSEN
8 MAR 24 (12-1)

KABUL, AFGHANISTAN
RNAV (GPS) Rwy 29

BRIEFING STRIP™

*KABUL Arrival		*KABUL Approach (R)		*KABUL Tower		*Ground	
132.5		131.6		125.4		120.6	
RNAV	Final Apch Crs 284°	NAKOE 9600' (3727')		LNAV MDA(H) 7040' (1167')		Apt Elev 5877' Rwy 5873'	17,500 MSA RW29
MISSED APCH: Climb direct to SIXER, then on 358° to ILONN, then on 111° to HURCK climbing to 12500'. Maintain ATC assigned altitude and hold.							
Alt Set: hPa Rwy Elev: 197 hPa Trans level: FL160 Trans alt: 14000'							
1. EMERG SAFE ALT 100 NM 21700'. 2. DME/DME/RNP-0.3 not authorized.							

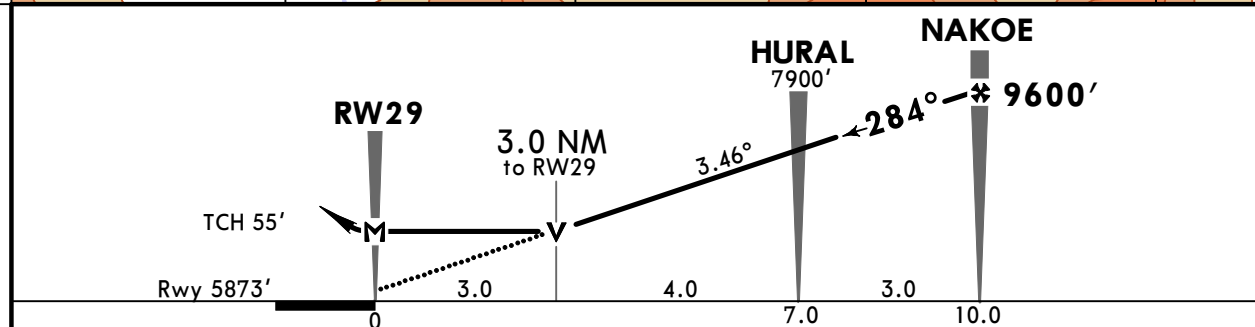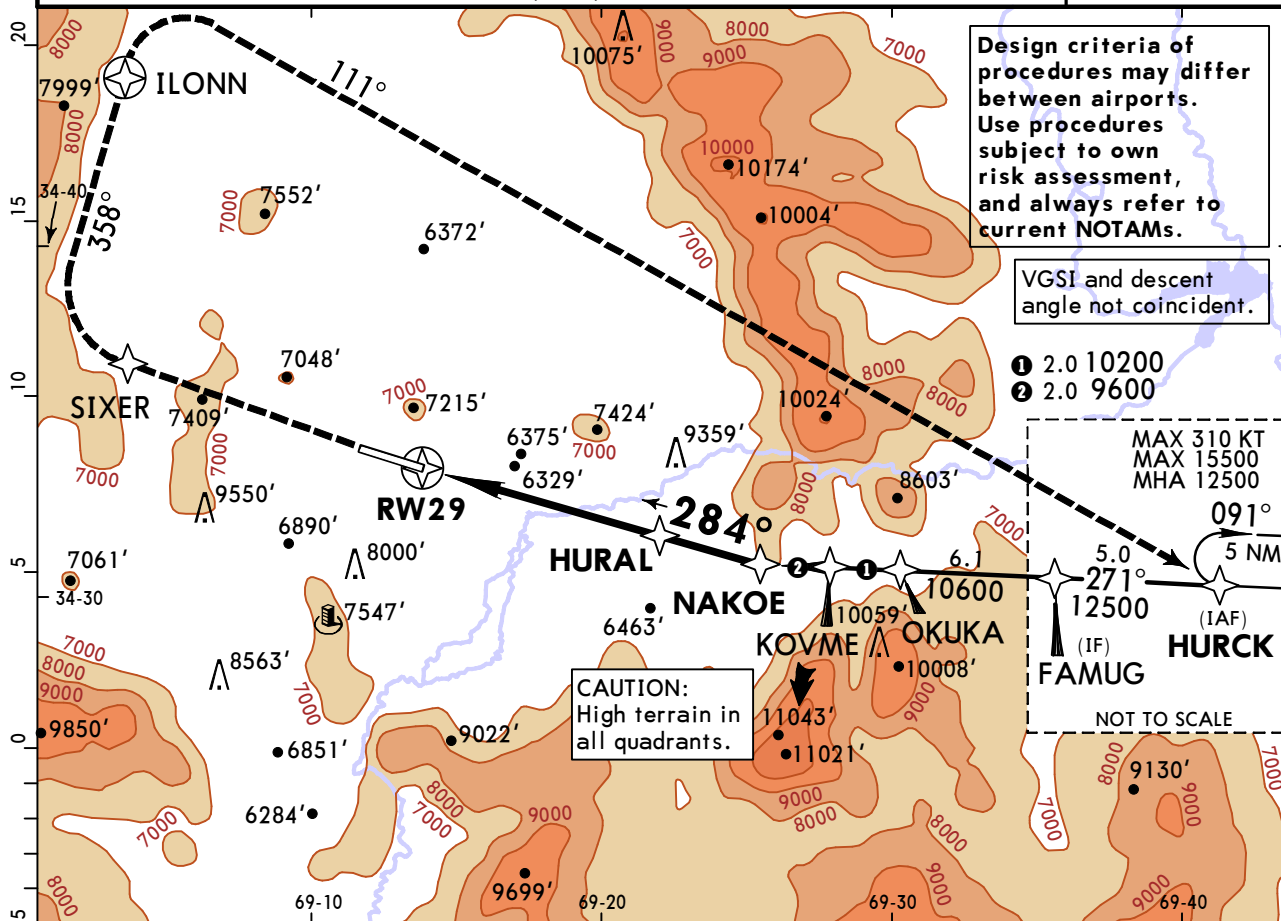

Gnd speed-Kts	70	90	100	120	140	160	PAPI ALSF-I SIXER
Descent Angle 3.46°	429	551	612	735	857	980	
MAP at RW29							

STRAIGHT-IN LANDING RWY 29			CEILING REQUIRED	CIRCLE-TO-LAND 1	
LNAV			Max Kts	Not authorized South of rwy	
MDA(H) 7040' (1167')				MDA(H)	CEIL-VIS
A	1200' - 1200m	1200' - 2000m	90	7540' (1663')	1700' - 2400m
B	1200' - 1600m	1200' - 2400m	120		
C	1200' - 4600m	1200' - 5000m	140	7540' (1663')	1700' - 5000m
D			165		

1 Not authorized to rwy 11 at NIGHT.

CHANGES: Note added.

© JEPPESSEN, 2008, 2024. ALL RIGHTS RESERVED.

OAKB/KBL
KABUL INTL

JEPPESSEN
8 MAR 24 (13-1)

KABUL, AFGHANISTAN
VOR DME Rwy 29

ING STRIP™

*KABUL Arrival 132.5		*KABUL Approach (R) 131.6		*KABUL Tower 125.4		*Ground 120.6		17,500
VOR KBL 112.0		Final Apch Crs 282°		KEEMO 10800' (4927')		MDA(H) (CONDITIONAL) 8480' (2607')		
						Apt Elev 5877' Rwy 5873'		

MISSED APCH: Climb to FL180 via KBL R-287 to RALOY, then turn RIGHT to KBL. Cross KBL and proceed on KBL R-195 to LOBRE and hold. Continue climb-in-hold to FL180.

Alt Set: hPa Rwy Elev: 197 hPa Trans level: FL160 Trans alt: 14000'

1. ATC RADAR required to ensure separation from CAMPA (OA(P)-201). 2. CAUTION: Execution of missed approach at MAP is essential. 3. EMERG SAFE ALT 100 NM 21700'.

