

ZWWW/URC
TIANSHAN

JEPPESEN

26 SEP 25

10-1P

Eff 1 Oct 1600Z

URUMQI, PR OF CHINA

AIRPORT BRIEFING

1. GENERAL

1.1. ATIS

D-ATIS Departure 126.7

D-ATIS Arrival 126.8

1.2. RADAR PROCEDURES AND/OR ADS-B PROCEDURES

1.2.1. GENERAL

Radar and ADS-B combined control is implemented within Urumqi APP.

The minimum horizontal separation between ACFT is 3 NM/5.6km, it is 5.4 NM/10km when only ADS-B monitoring is used. The minimum vertical separation between ACFT is 990'/300m.

1.2.2. RADAR VECTORS AND SEQUENCING

Approach

Usually, ACFT receive approach radar guidance and sequencing from AGOXA, IKARA, NIXER, EPDAG or ATC handover point until the corresponding final approach track or RWY in sight. According to ACFT performance or ATC regulations, radar guidance, ascent or descent altitude and speed adjustment instructions are issued to maintain the specified radar separation or wake separation between ACFT.

Departure

ACFT will mainly operate according to the published departure procedures. If Delivery or TWR ATC issued take-off restrictions before take-off, ACFT will be vectored SID route by ATC after take-off.

Arrival

During busy hours, ACFT will be vectored to Arrival. The radar vectoring track will be different from the published arrival route.

1.2.3. RADAR CONTROL REGULATIONS

ACFT with SSR transponder shall open transponder A and C modes as required. Then open both code and altitude, unless otherwise required by ATC. If transponder is unserviceable (including non-display or display error), pilot shall report to ATC when entering Urumqi control area.

ACFT without an SSR transponder shall report to ATC when entering Urumqi control area, that it does not have a transponder on board.

1.2.4. EMERGENCY PROCEDURE

Communication Equipment Failure

When it is confirmed that ACFT can receive signals, radar control services can continue to be provided.

Radar Equipment Failure

During periods of radar unavailability, ADS-B control service can be provided to ADS-B capable ACFT.

For ACFT without ADS-B Ability

- All identified ACFT positions are marked out and non-radar separation between ACFT is established. Radar control service is terminated, procedural control separation implemented and all ACFT informed immediately.
- When changing from radar separation to procedural separation, half-altitude layers may be used to adjust vertical separation in an emergency, but altitude layers that meet the requirements should be allocated as early as possible.
- After the radar resumes operation, ATC will re-identify ACFT and continue to implement radar control after confirmation.

Failure of the Onboard Transponder

If ACFT has a primary radar display, radar control service can continue to be provided; otherwise, procedural control will be implemented.

ZWWW/URC
TIANSHAN

JEPPesen

26 SEP 25

10-1P1

Eff 1 Oct 1600Z

URUMQI, PR OF CHINA

AIRPORT BRIEFING

1. GENERAL

1.3. LOW VISIBILITY PROCEDURES

LVP operated when RVR is less than 550m on RWY 26R, and pronounced in D-ATIS. Flight crew shall inform ATC before implementing CAT II/III operations. During LVP take-off implemented on RWY 26L/R, all RVRs in work should be considered, each and every RVR observation should be higher than take-off minimums.

For landing ACFT, the Follow-me vehicle shall wait at the designated location issued by ATC and then guide the ACFT along the designated route to stand.

For departure ACFT, Follow-me vehicle shall guide ACFT to taxi from beginning location to the designated location along the route designated by ATC.

ACFT shall wait for the instruction of entering into RWY at holding position (type II/III) in front of stop bars of RWY 26R during LVP; if stop bars inoperative, ACFT shall wait at the designated location issued by ATC.

1.4. RWY OPERATIONS

When parallel RWY operations implementing, the use of arrival and departure RWY shall be informed by ATC. RWY 08R/26L is mainly used for departure; RWY 08L/26R is mainly used for arrival.

If downwind speed is more than 3.5m/s (7 KT), RWY direction change procedure is initiated.

During changing direction of RWY in use, if downwind speed is more than 3.5m/s (7 KT) but not exceeding 5m/s (10 KT), ATC shall inform the relevant ACFT pilot.

According to ACFT performance and operations handbook, pilot shall decide whether ACFT will take off or land on downwind RWY allocated by ATC, and report decision.

1.5. TAXI PROCEDURES

1.5.1. GENERAL

Repeat ATC taxi instructions, especially limitations, and verify any questions immediately.

If unable to contact assigned GND frequency, stop at handover point and contact original frequency.

During ILS sensitive area protecting procedure, pilot shall strictly follow ATC instructions to hold at designated holding position.

Under multi-RWY operation mode, all TWYs in APN area (except TWY H5) operate in both directions.

Taxiing via intermediate holding positions without ATC clearance is forbidden.

If ACFT encounters taxiing problems in APN control area, contact APN control for assistance.

During taxiing, pilot shall pay close attention to ATC-related activities and report the observed activities as required/unclear activities to GND Control in time.

1.5.2. RWY CROSSING REGULATIONS

1.5.2.1. TWYs FOR CROSSING

ACFT landing on RWY 08L shall cross RWY 08R/26L via TWYs Y9 - M1 / P2 - P1 / P4 - P3 after vacating RWY 08L.

ACFT landing on RWY 26R shall cross RWY 08R/26L via TWYs P6 - P5 / P8 - P7 / P10 - P9 / Y10 - M10 after vacating RWY 26R.

ZWWW/URC
TIANSHAN

JEPPESEN
26 SEP 25

10-1P2

Eff 1 Oct 1600Z

URUMQI, PR OF CHINA
AIRPORT BRIEFING

1. GENERAL

1.5.2.2. CROSSING PROCEDURE

Taxi following the instruction of ATC to the holding position and hold short of RWY.

Cross RWY immediately upon receiving crossing clearance. Any questions shall be clarified before crossing RWY.

Repeat all ATC instructions in full and report "RWY vacated" after crossing.

While crossing RWY, pilot shall monitor ATC instructions or information about RWY, and observe activities on RWY and around. While crossing RWY following a take-off ACFT, pilot is responsible for the safety distance to avoid the effect of wake turbulences.

1.5.2.3. CROSSING LIMITS

While ACFT landing on RWY 08L, crossing of RWY 08R/26L via TWYs M1 - Y9 / P1 - P2 / P3 - P4 from South to North is forbidden.

While ACFT landing on RWY 26R, crossing of RWY 08R/26L via TWYs P5 - P6 / P7 - P8 / P9 - P10 / M10 - Y10 from South to North is forbidden.

1.6. PARKING INFORMATION

Visual Docking Guidance System (VDGS) available at stands 215 thru 225, 225L, 225R, 227 thru 250, 252 thru 271, 273 thru 275, 275L, 275R, 276, 277, 277L, 277R, 278, 279, 279L, 279R, 280, 280L, 280R, 281, 282, 282L, 282R, 283, 284, 284L and 284R.

ACFT with wingspan less than 262'/80m shall enter stands 279 and 280 via TWYN, and exit via push-back to TWY N. Follow instructions of APN control for details.

ACFT parking at boarding bridge stands shall turn off APU, use bridge power supply equipment (400Hz) and special air conditioner, except for the following special circumstances:

- bridge equipment is unserviceable;
- ACFT needs APU to start-up engine;
- APU is under maintenance;
- in case of exceptional circumstance influencing the regularity and safety of operations, such as extreme weather, special plane support, and insufficient flight transition time.

Engine run-ups on stand are strictly forbidden without permission. It shall be carried out with enough safety protection measures and strictly follow relevant procedure regulation.

Each and every engine run-up shall apply to Operations Control Center, and then be carried out at designated position and time.

Engine idle tests and cool running tests can be carried out on designated stands with permissions of Operations Control center and ATC.

1.7. WARNINGS

Surrounding obstacles: There are 6 chimneys with large emissions near extended RWY centerline, D6.8 WUR, East of RWY 25, 26L and 26R THR. ACFT passing through this area may encounter moderate or above turbulence in calm winds and low temperatures. Pilot shall prepare in advance.

Do not mistake the highway north of RWY 08L/26R as RWY.

Due to complex airspace and to prevent air collision, departure and arrival ACFT via NIXER/EPDAG shall not deviate without ATC clearance.

RWY 08L/26R is parallel to RWY 08R/26L, and distance between RWY centerlines is 1247'/380m. Pilot shall distinguish them carefully. While using RWY 08R/26L for take-off, pilot shall follow ATC instructions and carefully observe for possible RWY crossings.

TWYs E1, E2, G1, G2, H, H1, H3, H4, J4, N and W1 thru W3 intersect with service lanes. Please observe carefully.

ZWWW/URC
TIANSHAN

JEPPESEN

26 SEP 25

10-1P3

Eff 1 Oct 1600Z

URUMQI, PR OF CHINA

AIRPORT BRIEFING

1. GENERAL

1.8. RNAV OPERATION

If ACFT does not have RNAV 1 capability, notify ATC at the time of initial contact with APP or TWR, and enter or leave the APT according to ATC instructions. If the ACFT loses RNAV 1 capability during RNAV flight procedures, immediately notify ATC and follow further instructions.

ACFT implementing RNAV procedures shall comply with the altitude given by ATC during RADAR control, except under special circumstances.

1.9. OTHER INFORMATION

Birds.

2. ARRIVAL

2.1. COMMUNICATION FAILURE PROCEDURES

During ACFT communication failure, pilot may use satellite phone or dial 86-991-3805010/86-991-3805051 through the operator of the airline as a means of emergency communications for URUMQI Approach Control.

If landing at ZWWW and if fuel consumption is required, proceed to OMDAX and hold, altitude FL128 (3900m), inbound track 270°, LEFT turns, outbound time 1minute, towards the end of the fuel consumption descend to FL118 (3600m) when executing the last turn of the holding procedure.

During control unit communication failure, when unable to establish effective contact, contact the previous control unit (sector), and follow ATC instructions to continue to fly.

2.2. CAT II/III OPERATIONS

RWY 26R is approved for CAT II/III operations. Special aircrew and ACFT certification required.

2.3. RWY OPERATIONS

ACFT shall vacate RWY rapidly using the appropriate rapid exit TWY and report to ATC immediately after vacating RWY.

After vacating RWY, follow ATC instruction, change frequency as soon as possible and hold before next intersection of TWYs. ACFT cannot stop on the rapid exit TWY without ATC clearance.

Time needed from landing to complete vacating RWY completely shall be less than 50 seconds, if unable, inform ATC before FAF (except for wet or contaminated RWY).

During initial contact with GND Control after vacating RWY, especially under low visibility conditions, report vacated RWY designation and TWY in use to ATC.

If necessary, actual handover position is coordinated by GND control and APN control.

2.4. TAXI PROCEDURES

ACFT shall follow GND control instructions to the handover point and be transferred to APN control.

Follow-me vehicle service within APN control area is provided.

ZWWW/URC
TIANSHAN

JEPPESSEN
26 SEP 25 10-1P4

URUMQI, PR OF CHINA
Eff 1 Oct 1600Z AIRPORT BRIEFING

3. DEPARTURE

3.1. CLEARANCE DELIVERY, DATALINK DEPARTURE CLEARANCE SERVICE (DCL)

DCL is available H24. After receiving DCL, pilot shall confirm on equipment within 5 minutes, if ATC did not receive the DCL on equipment from pilot, the pilot shall copy the voice clearance in accordance with the ATC requirements. When DCL is not available, pilot can apply for verbal delivery clearance. After receiving verbal delivery clearance, pilot shall repeat the whole delivery clearance to ATC.

After receiving delivery clearance with above ways, when ACFT is ready to push-back and start-up, pilot shall report and keep on frequency with Delivery Control until receiving instruction to change frequency

3.2. DE-ICING

De-icing shall be carried out at designated positions; de-icing on parking stands is forbidden.

De-icing Stand	Entry TWY	Exit TWY
DC51	K (wingspan less than 118'/36m)/ K1	N2 (nose to North)
DC52		N3 (nose to North)
DC53 thru DC57	K/K1	M
DC61	K	N10 (nose to North)
DC62 thru DC64		M
DC65		N11 (nose to North)
DC66 (wingspan more than 213'/65m and less than 262'/80m)	M to N12 to K	K to W3

Apply to APN Control for de-icing before push-back.

Taxi and line up following ATC instructions to de-icing apron.

According to the above TWY use restrictions, parking stand use conditions and de-icing stand taxi route requirements, follow ATC instructions to taxi into de-icing stand. Stands DC51 thru DC57 and DC61 thru DC65 are directed by APN Control, and stand DC66 is directed by GND Control to taxi from TWY N12.

After reaching de-icing position, follow requirements of de-icing personnel.

Confirm de-icing completion with de-icing personnel, then apply to APN Control for start-up and follow APN Control instructions to taxi out.

During entering and exiting de-icing position, pilot shall carefully control the throttle to avoid wake turbulence affecting nearby personnel and equipment.

3.3. START-UP, PUSH-BACK AND TAXI PROCEDURES

During push-back, confirm RWY in use and push-out direction with APN Control.

Push-back and start-up is instructed by APN Control. Pilot shall turn on taxi lights after receiving taxi-out instruction from ATC. ACFT shall taxi to designated intersection with follow-me vehicle and be transferred to GND Control. De-icing ACFT shall taxi to de-icing stand arranged by APN Control on its own.

Apply to APN Control for follow-me vehicle service as required.

ACFT from APN without a clearance to cross intermediate holding positions shall strictly follow ATC instructed taxi route to designated position or back to APN.

When holding at RWY holding positions, ACFT nose shall approach holding position markings without exceeding it. If ACFT nose is exceeding RWY holding position marking without clearance, report to ATC immediately.

ZWWW/URC
TIANSHAN

JEPPESEN

26 SEP 25

10-1P5

Eff 1 Oct 1600Z

AIRPORT BRIEFING

URUMQI, PR OF CHINA

3. DEPARTURE

3.4. COMMUNICATION FAILURE PROCEDURES

During ACFT communication failure, Pilot may use satellite phone or dial 86-991-3805010/86-991-3805051 through the operator of the airline as a means of emergency communications for URUMQI Approach Control.

During control unit communication failure, when unable to establish effective contact, contact the previous control unit (sector), and follow ATC instructions to continue to fly.

3.5. RWY OPERATIONS

It is available to use non-full length RWY to take-off when flight crew get permission from ATC.

If ACFT cannot accept non-full length take-off procedure, inform ATC immediately.

Rapid Take-off

Normally, time needed for ACFT from RWY holding position to finishing RWY alignment shall be less than 60 seconds, if unable, inform ATC before entering RWY (except for wet RWY or contaminated RWY).

ATC Handover


After take-off, TWR will instruct ACFT to change frequency when ACFT reaches true height of 328'/100m or above during DAY, or 492'/150m or above at NIGHT. Change of frequency without ATC instruction is forbidden.

ZWWW/URC
TIANSHAN

JEPPESEN
29 AUG 25
Eff 3 Sep 1600Z

URUMQI, PR OF CHINA
10-1R
RADAR MINIMUM ALTITUDES


URUMQI Approach (R)	*APP01	*APP02
	120.25	126.05
	APP03	APP04
	123.8	127.9X
Apt Elev	2126	
Alt Set: hPa		
Trans level: FL118		
Trans alt: 9850		
10830 1031 hPa or above		
8860 979 hPa or below		
Chart only to be used for cross-checking of altitudes assigned while under RADAR control.		
	① 6730	② FL118
FL CONVERSION		
FL200	FL6100m	
FL195	FL5950m	
FL185	FL5650m	
FL179	FL5450m	
FL176	FL5350m	
FL171	FL5200m	
FL167	FL5100m	
FL164	FL5000m	
FL148	FL4500m	
FL141	FL4300m	
FL136	FL4150m	
FL133	FL4050m	
FL118	FL3600m	
FT/METER CONVERSION		
QNH		
11160'	3400m	
10830'	3300m	
10340'	3150m	
9850'	3000m	
8860'	2700m	
8700'	2650m	
7880'	2400m	
7710'	2350m	
7390'	2250m	
6730'	2050m	
6570'	2000m	
5910'	1800m	
5750'	1750m	
4930'	1500m	
4270'	1300m	
3940'	1200m	

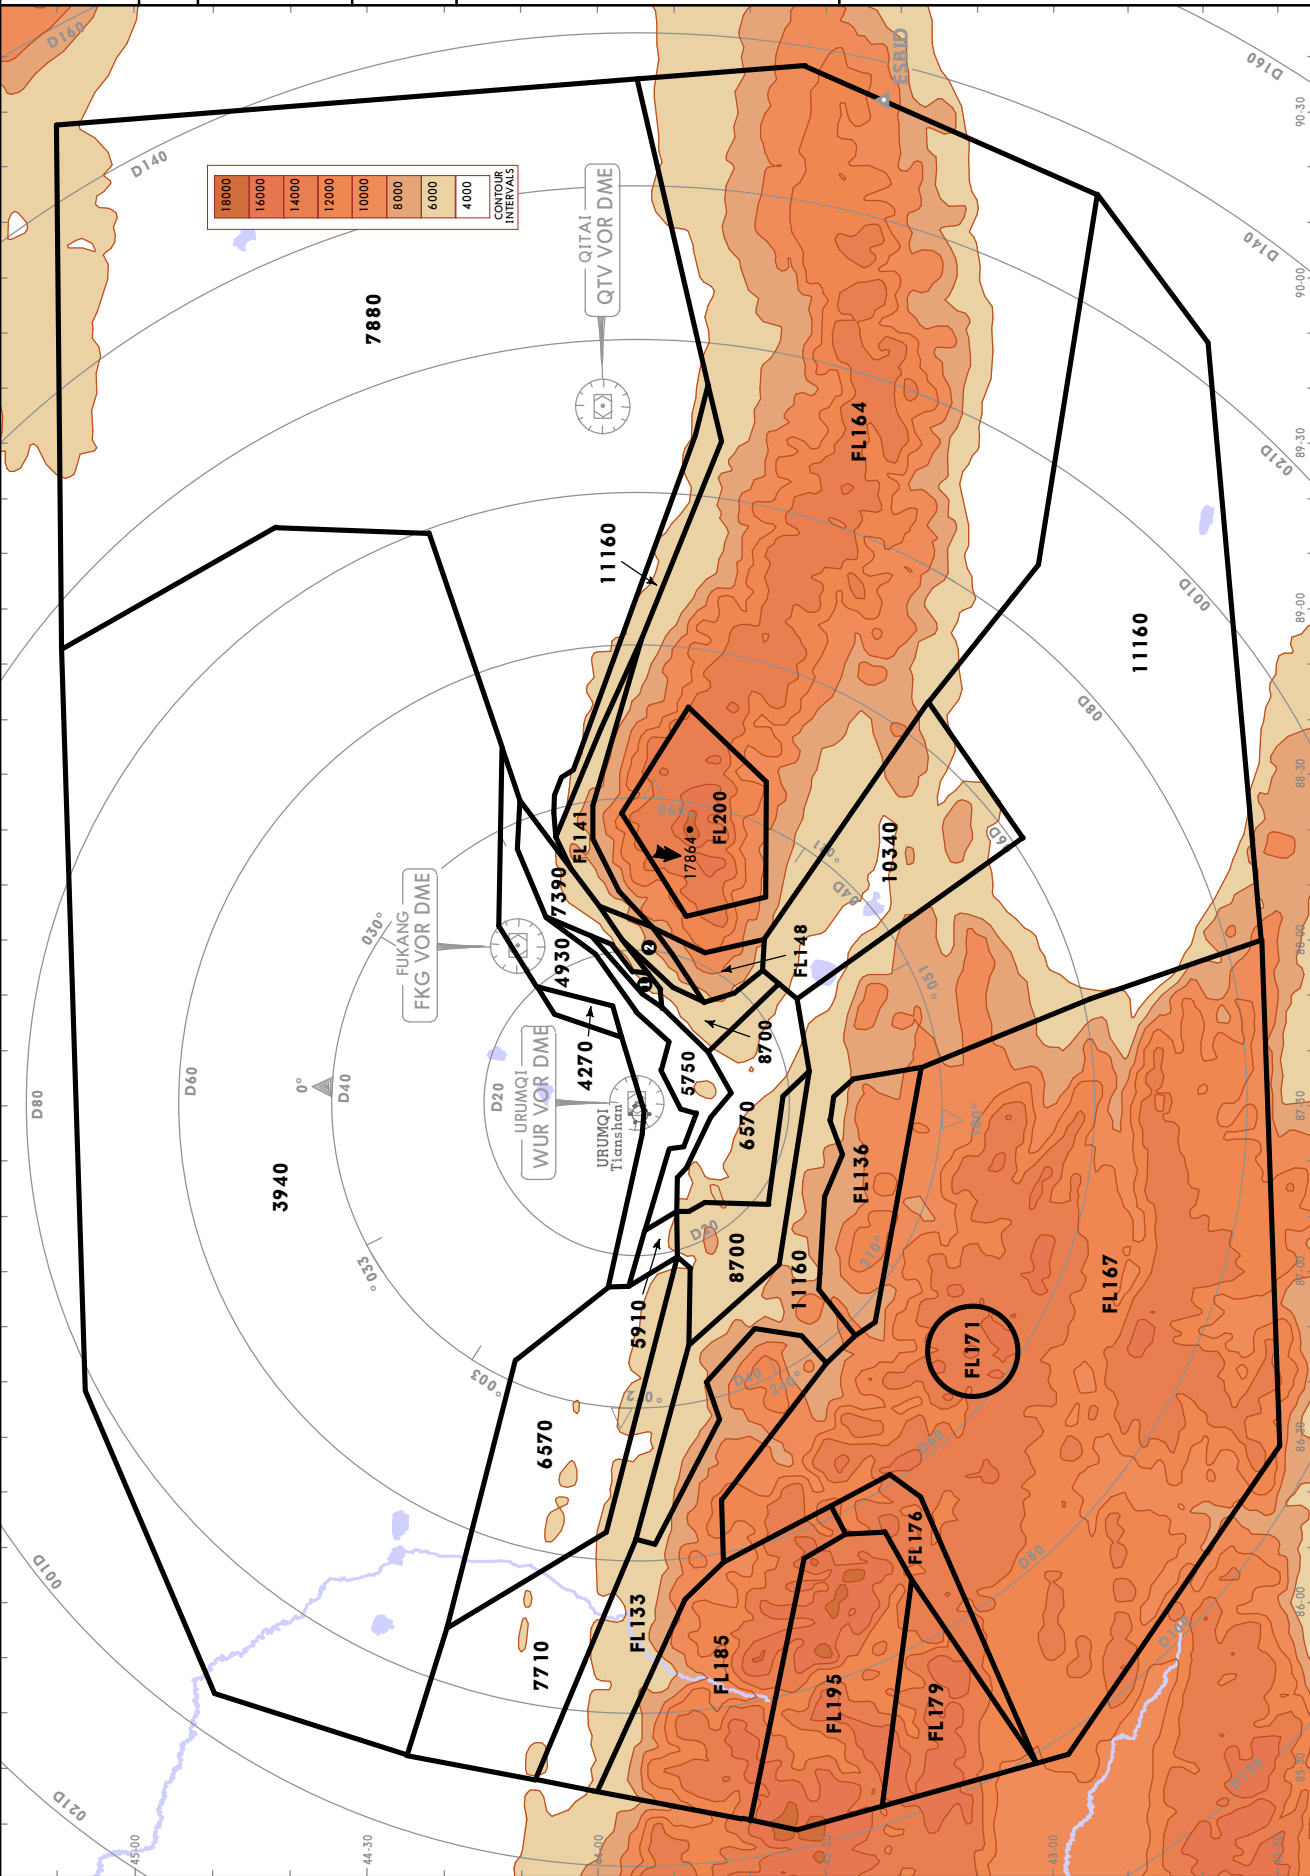

ZWWW/URC
TIANSHAN

26 SEP 25 10-2 Eff


URUMQI, PR OF CHINA

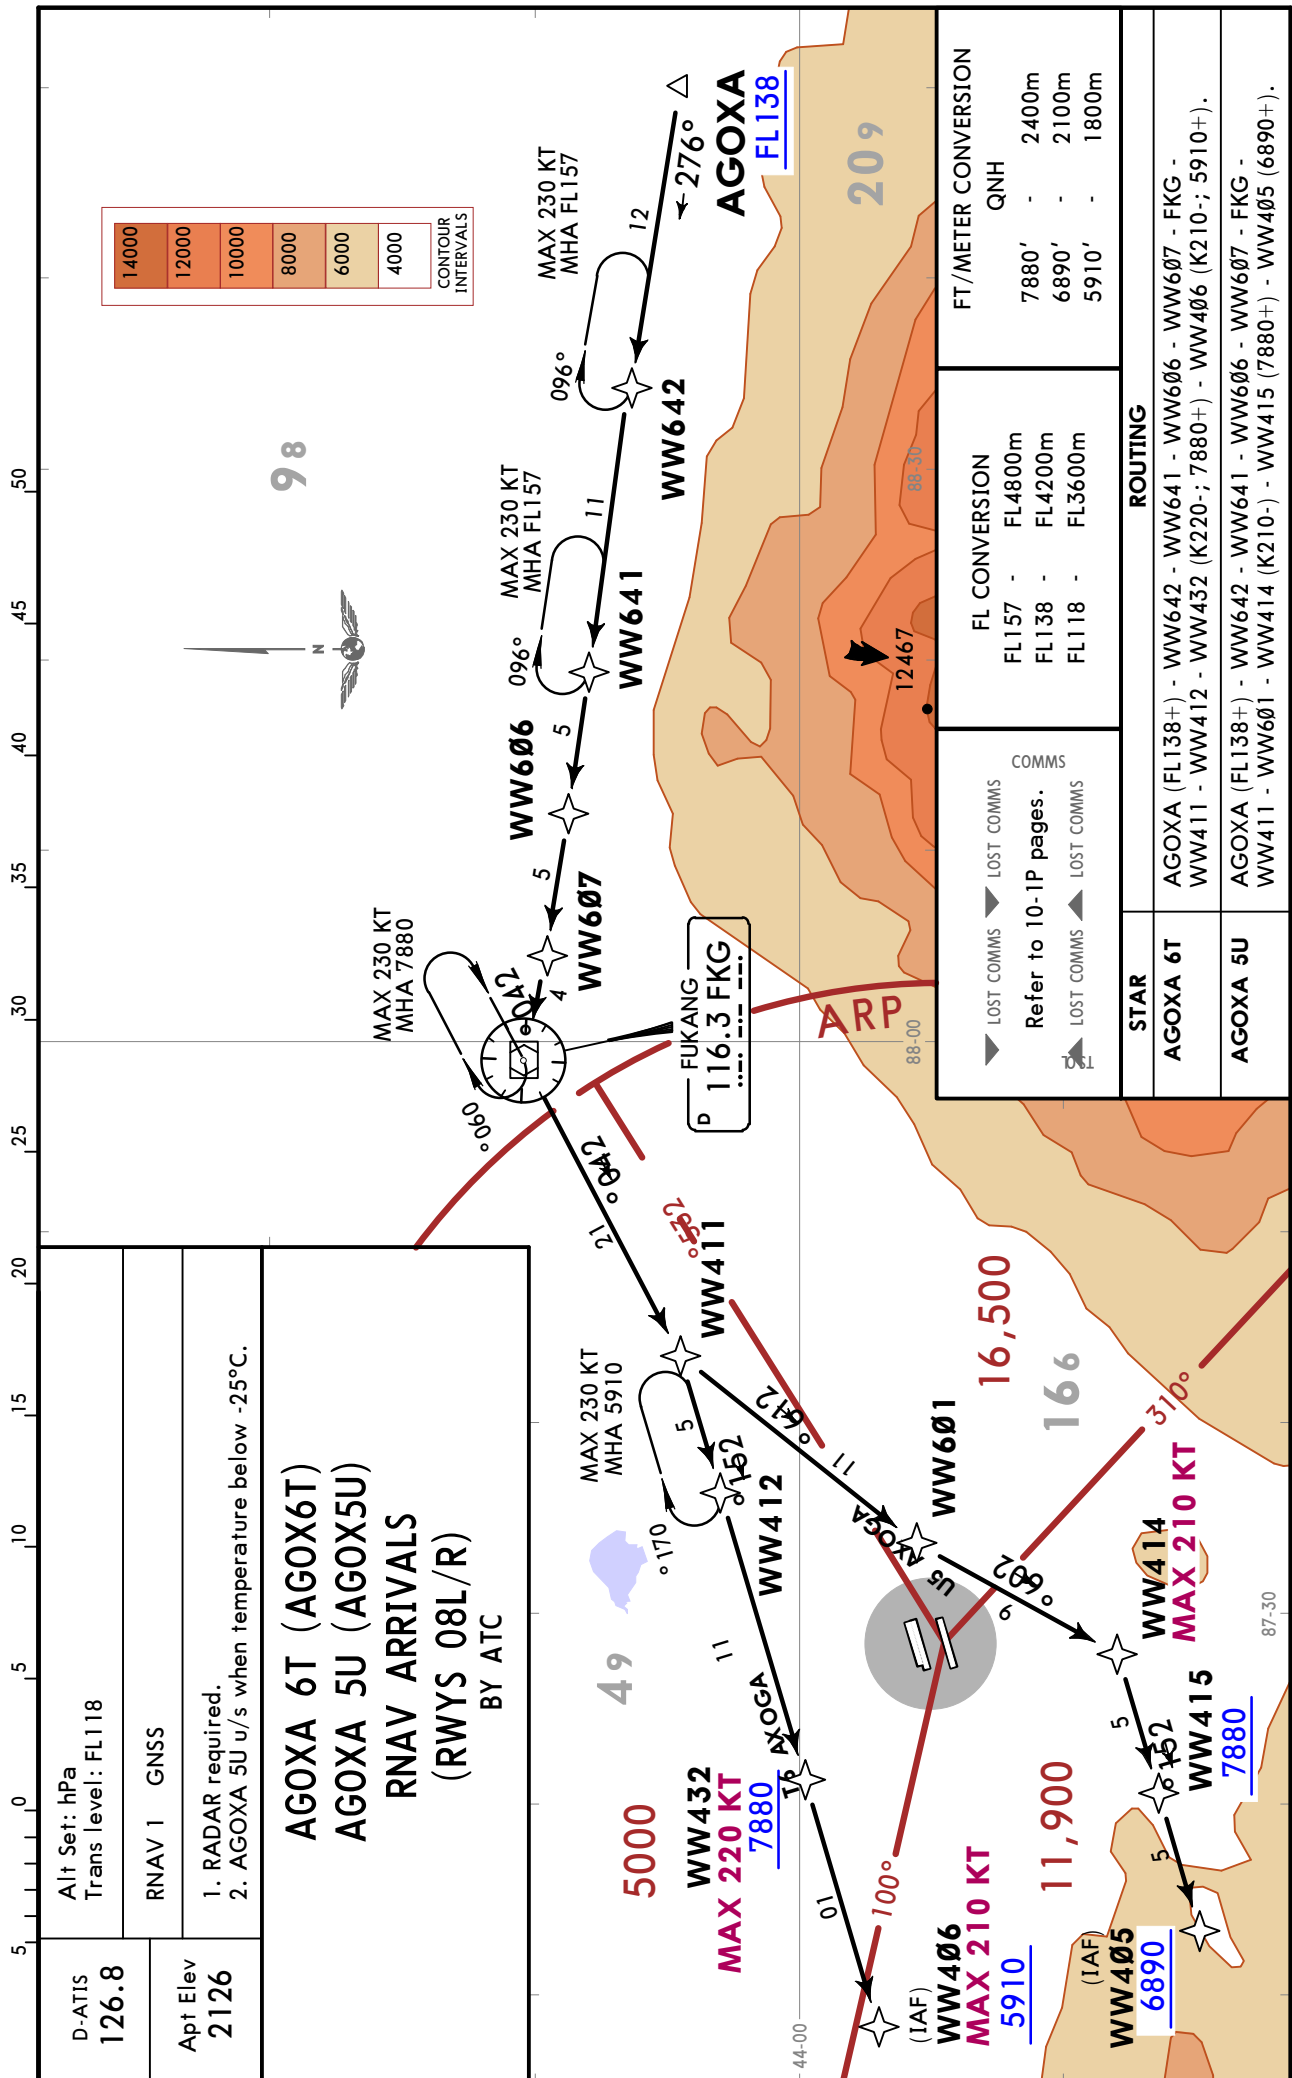RNAV STAR

ZWWW/URC
TIANSHAN

JEPPESEN
26 SEP 25 10-2A Eff


URUMQI, PR OF CHINA

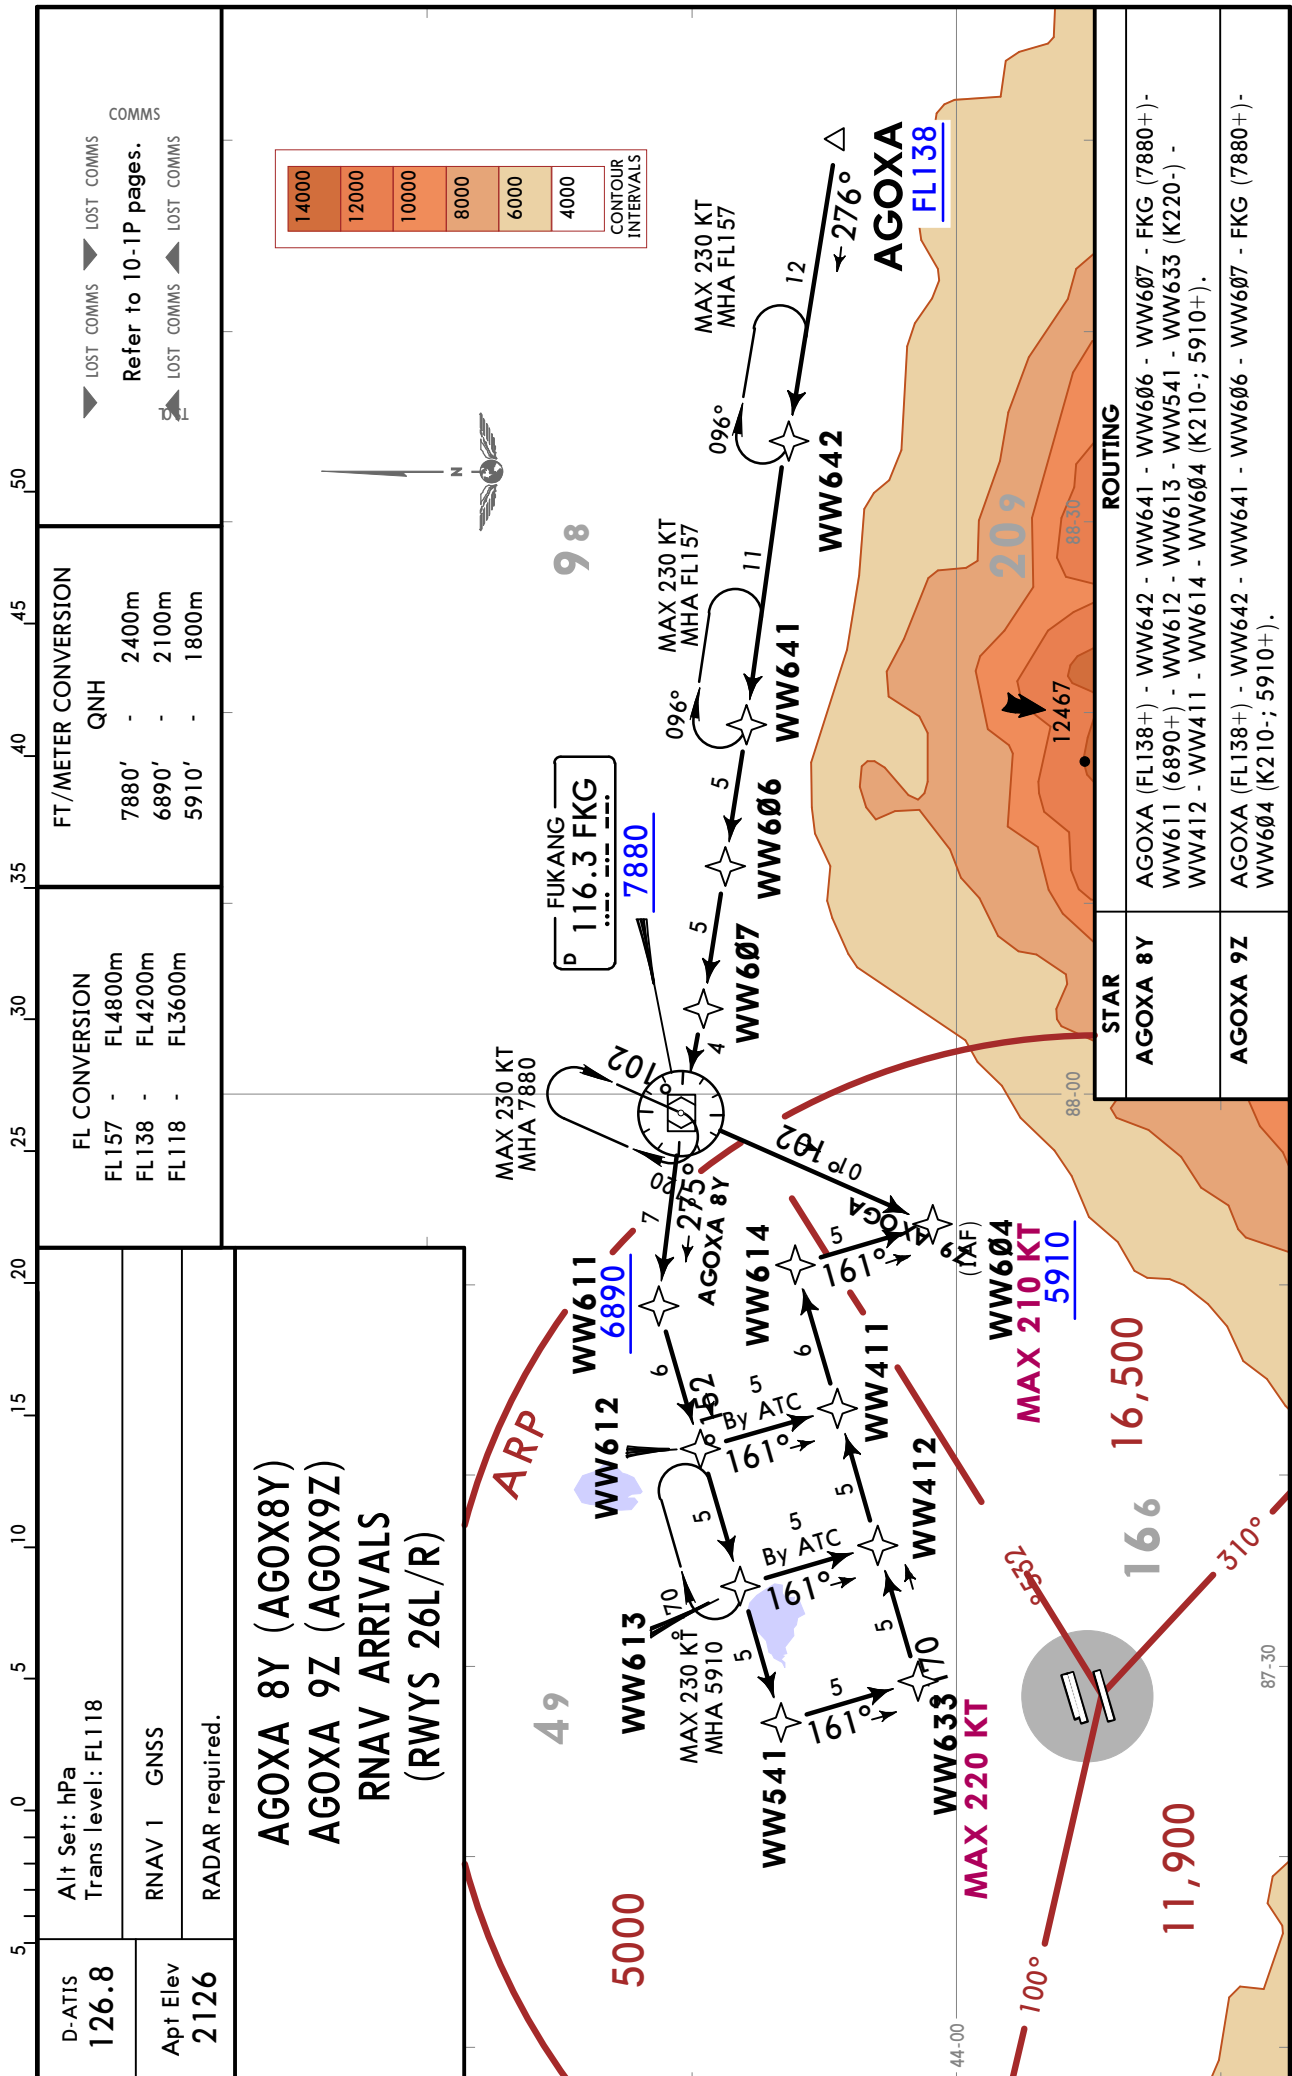RNAV STAR

ZWWW/URC
TIANSHAN

JEPPESSEN **URUM**
4 JUL 25 **10-2B** **Eff 9 Jul 1600Z**

URUMQI, PR OF CHINA

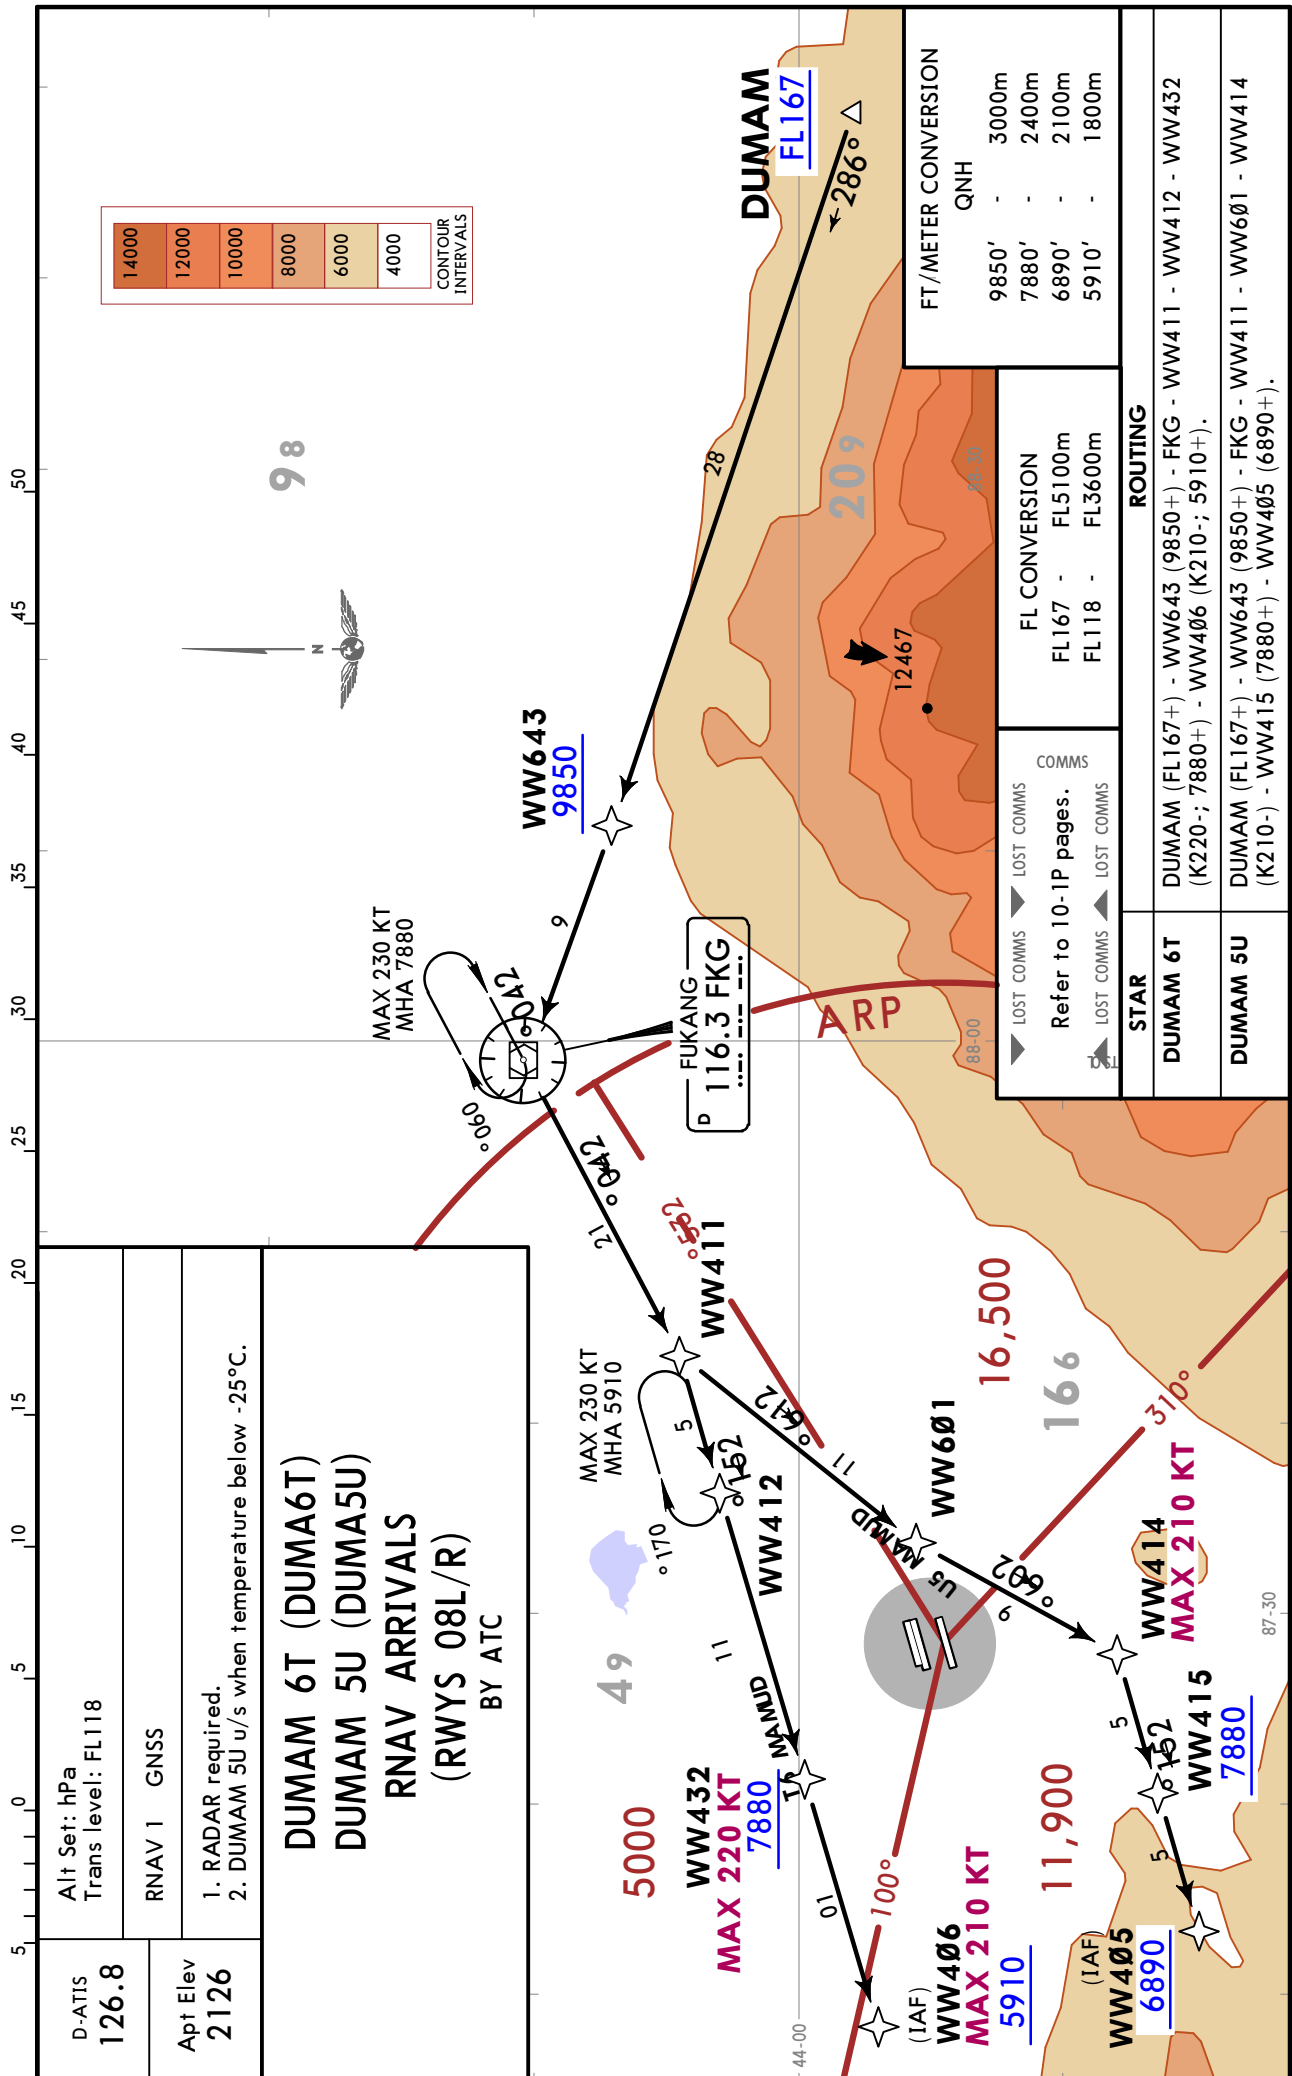
RNAV STAR


ZWWW/URC
TIANSHAN

4 JUL 25

JEPPESSEN
10-2C **Eff**

URUMQI, PR OF CHINA

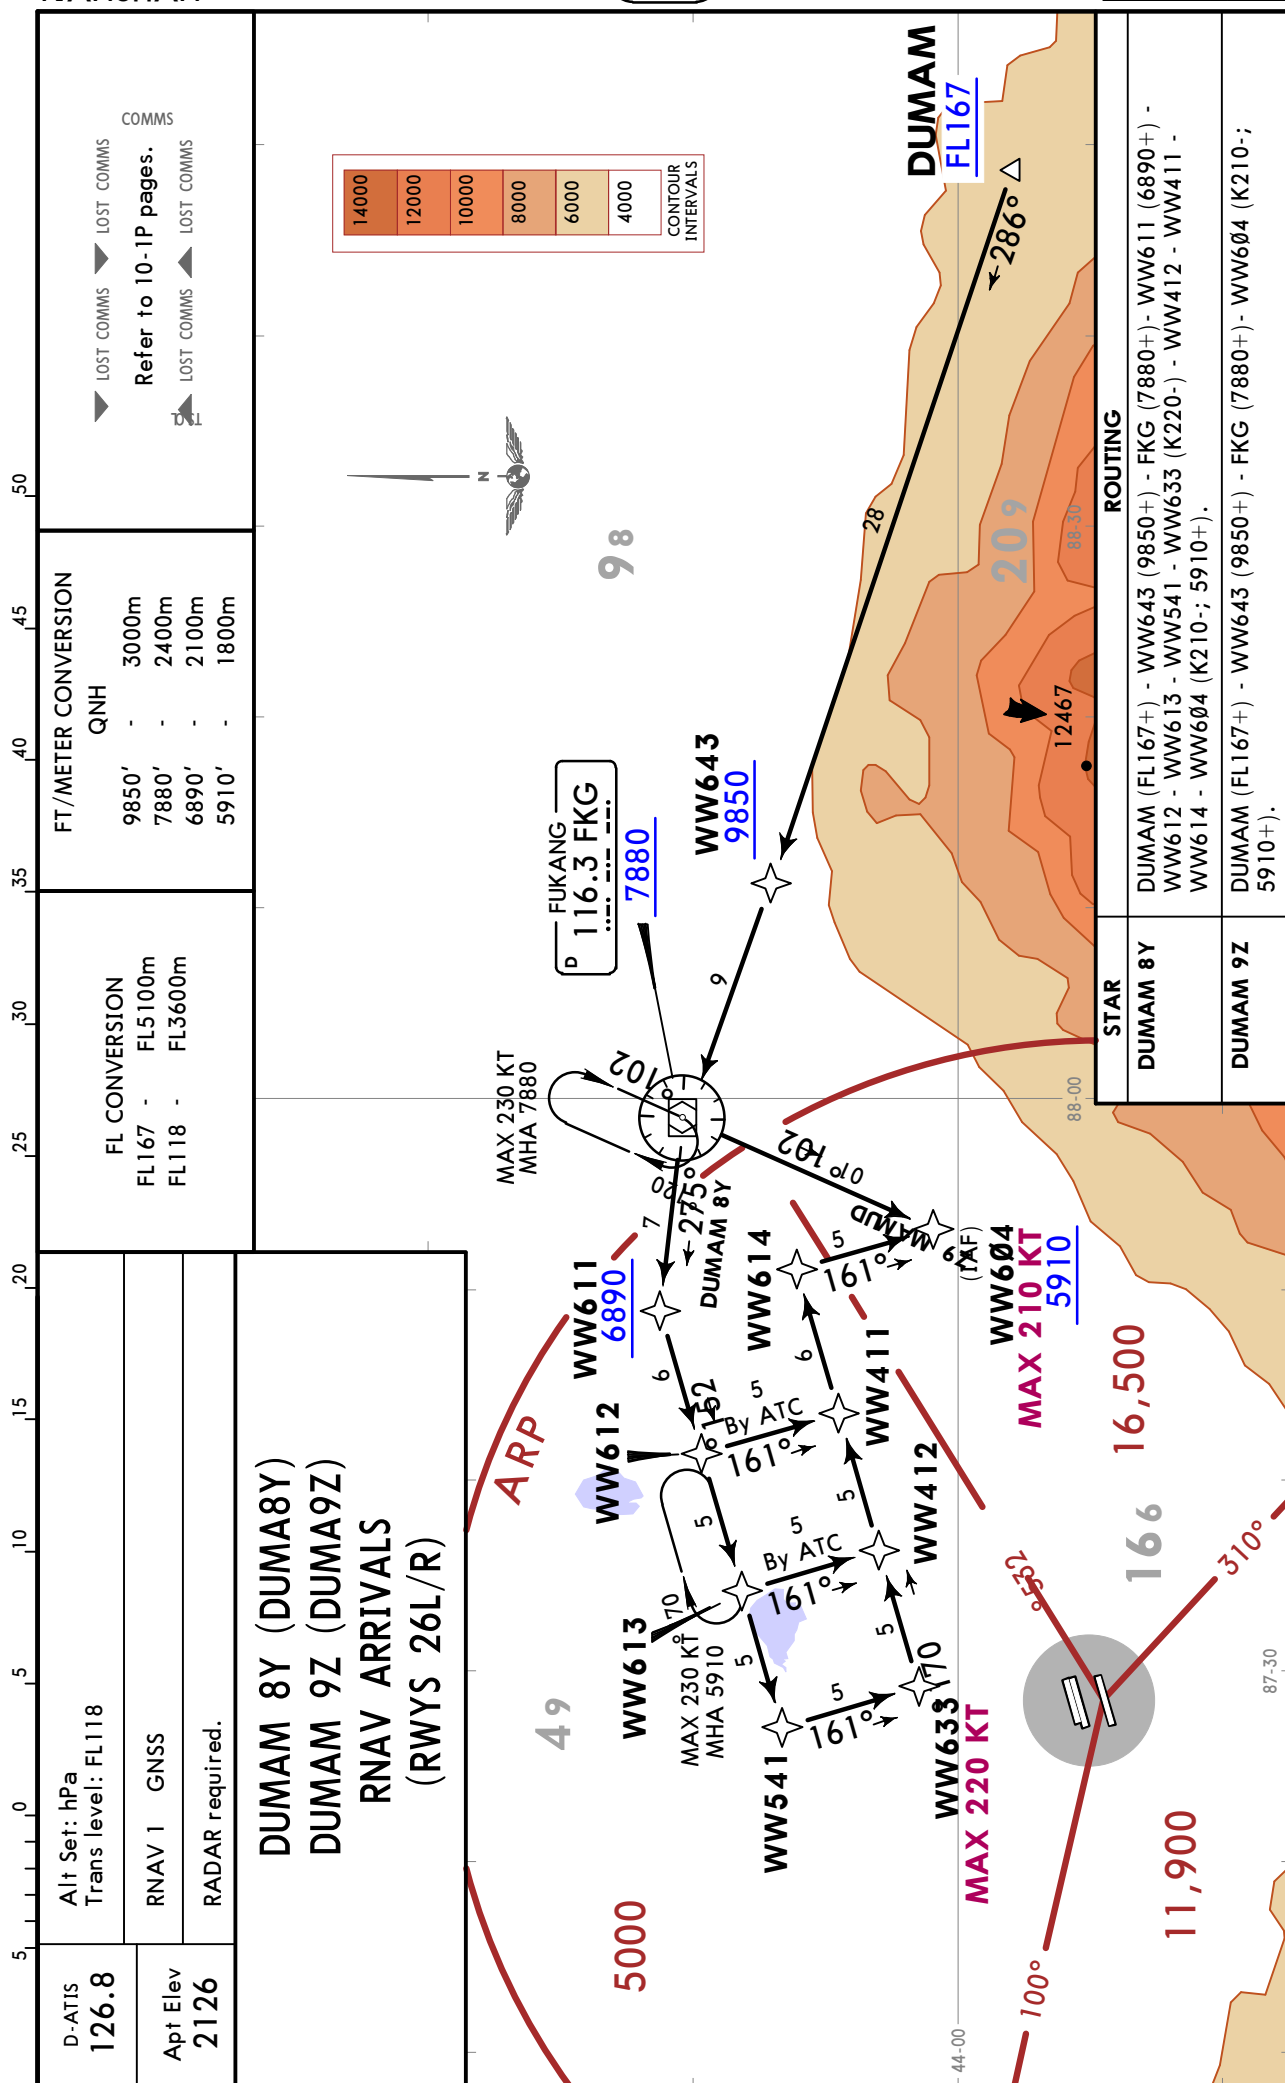Eff 9 Jul 1600Z**RNAV STAR**

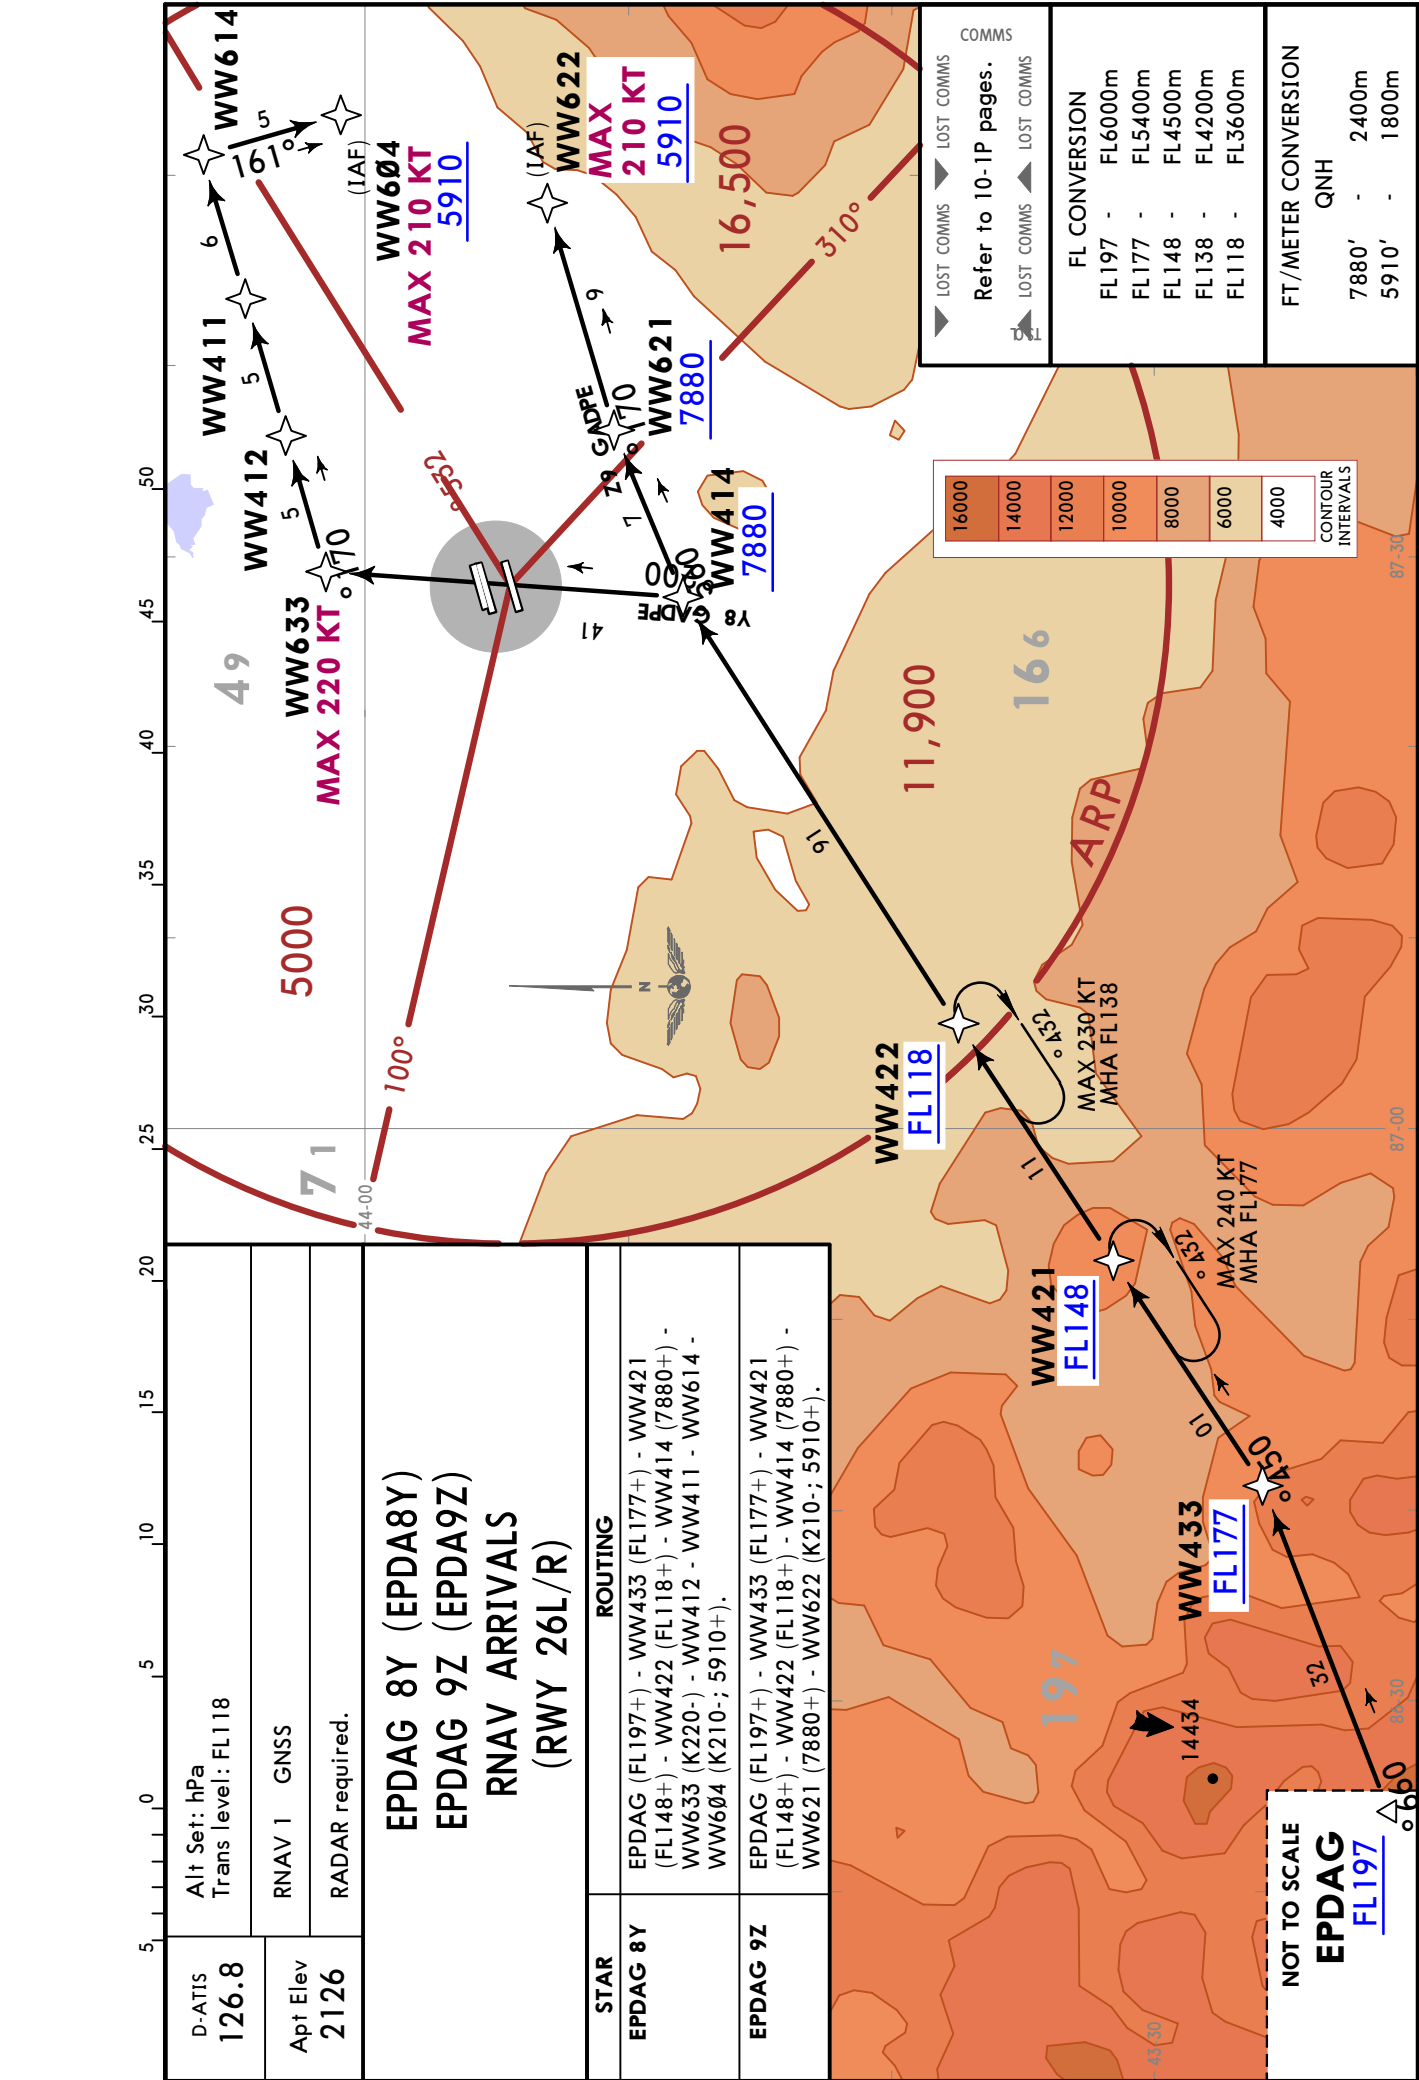


ZWWW/URC
TIANSHAN


4 JUL 25

10-2F

Eff 9 Jul 1600Z

URUMQI, PR OF CHINA


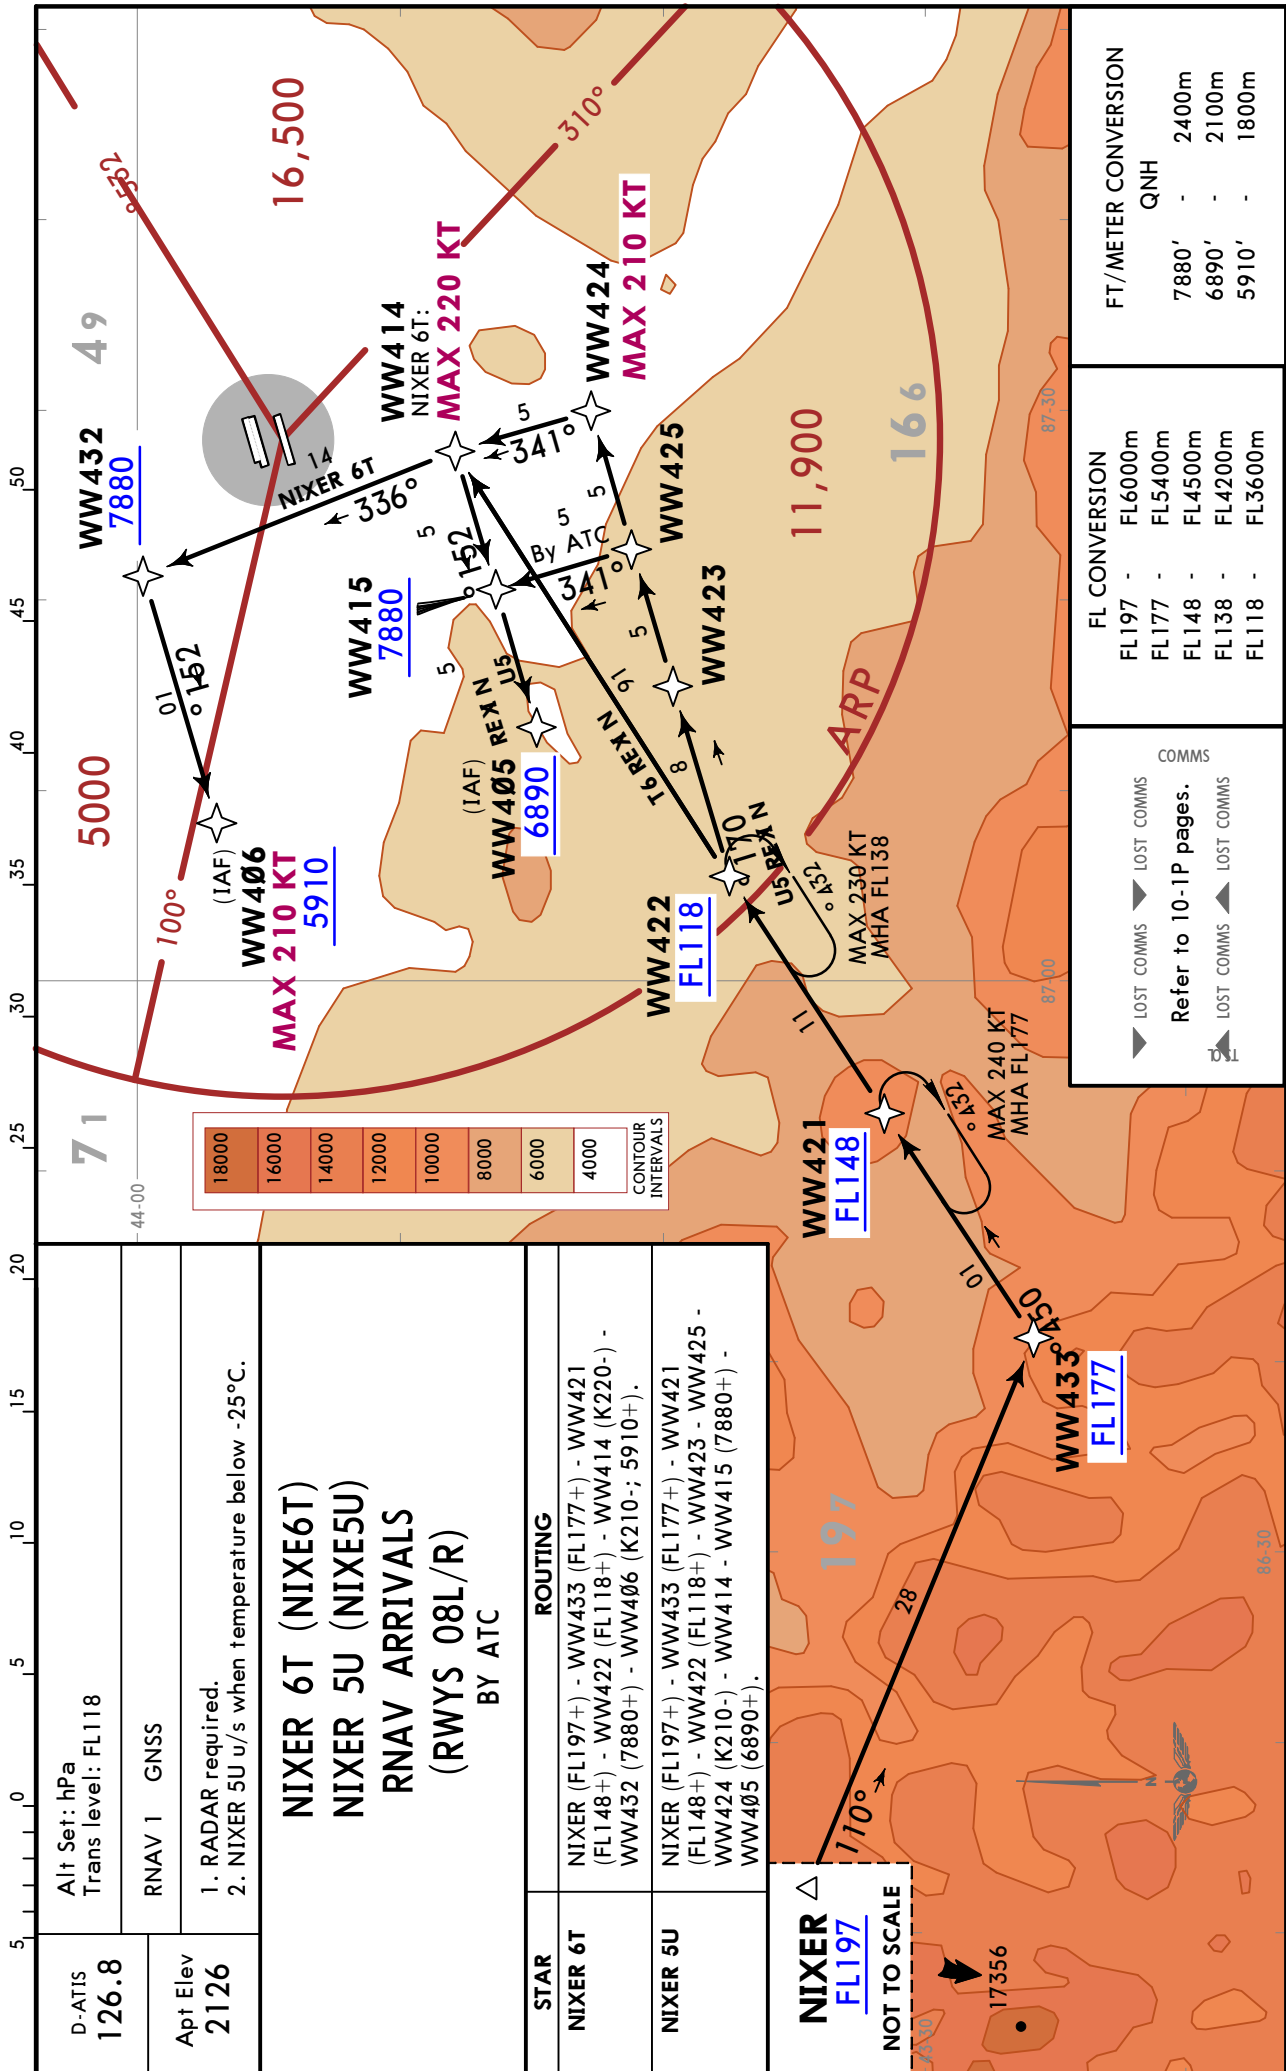
RNAV STAR

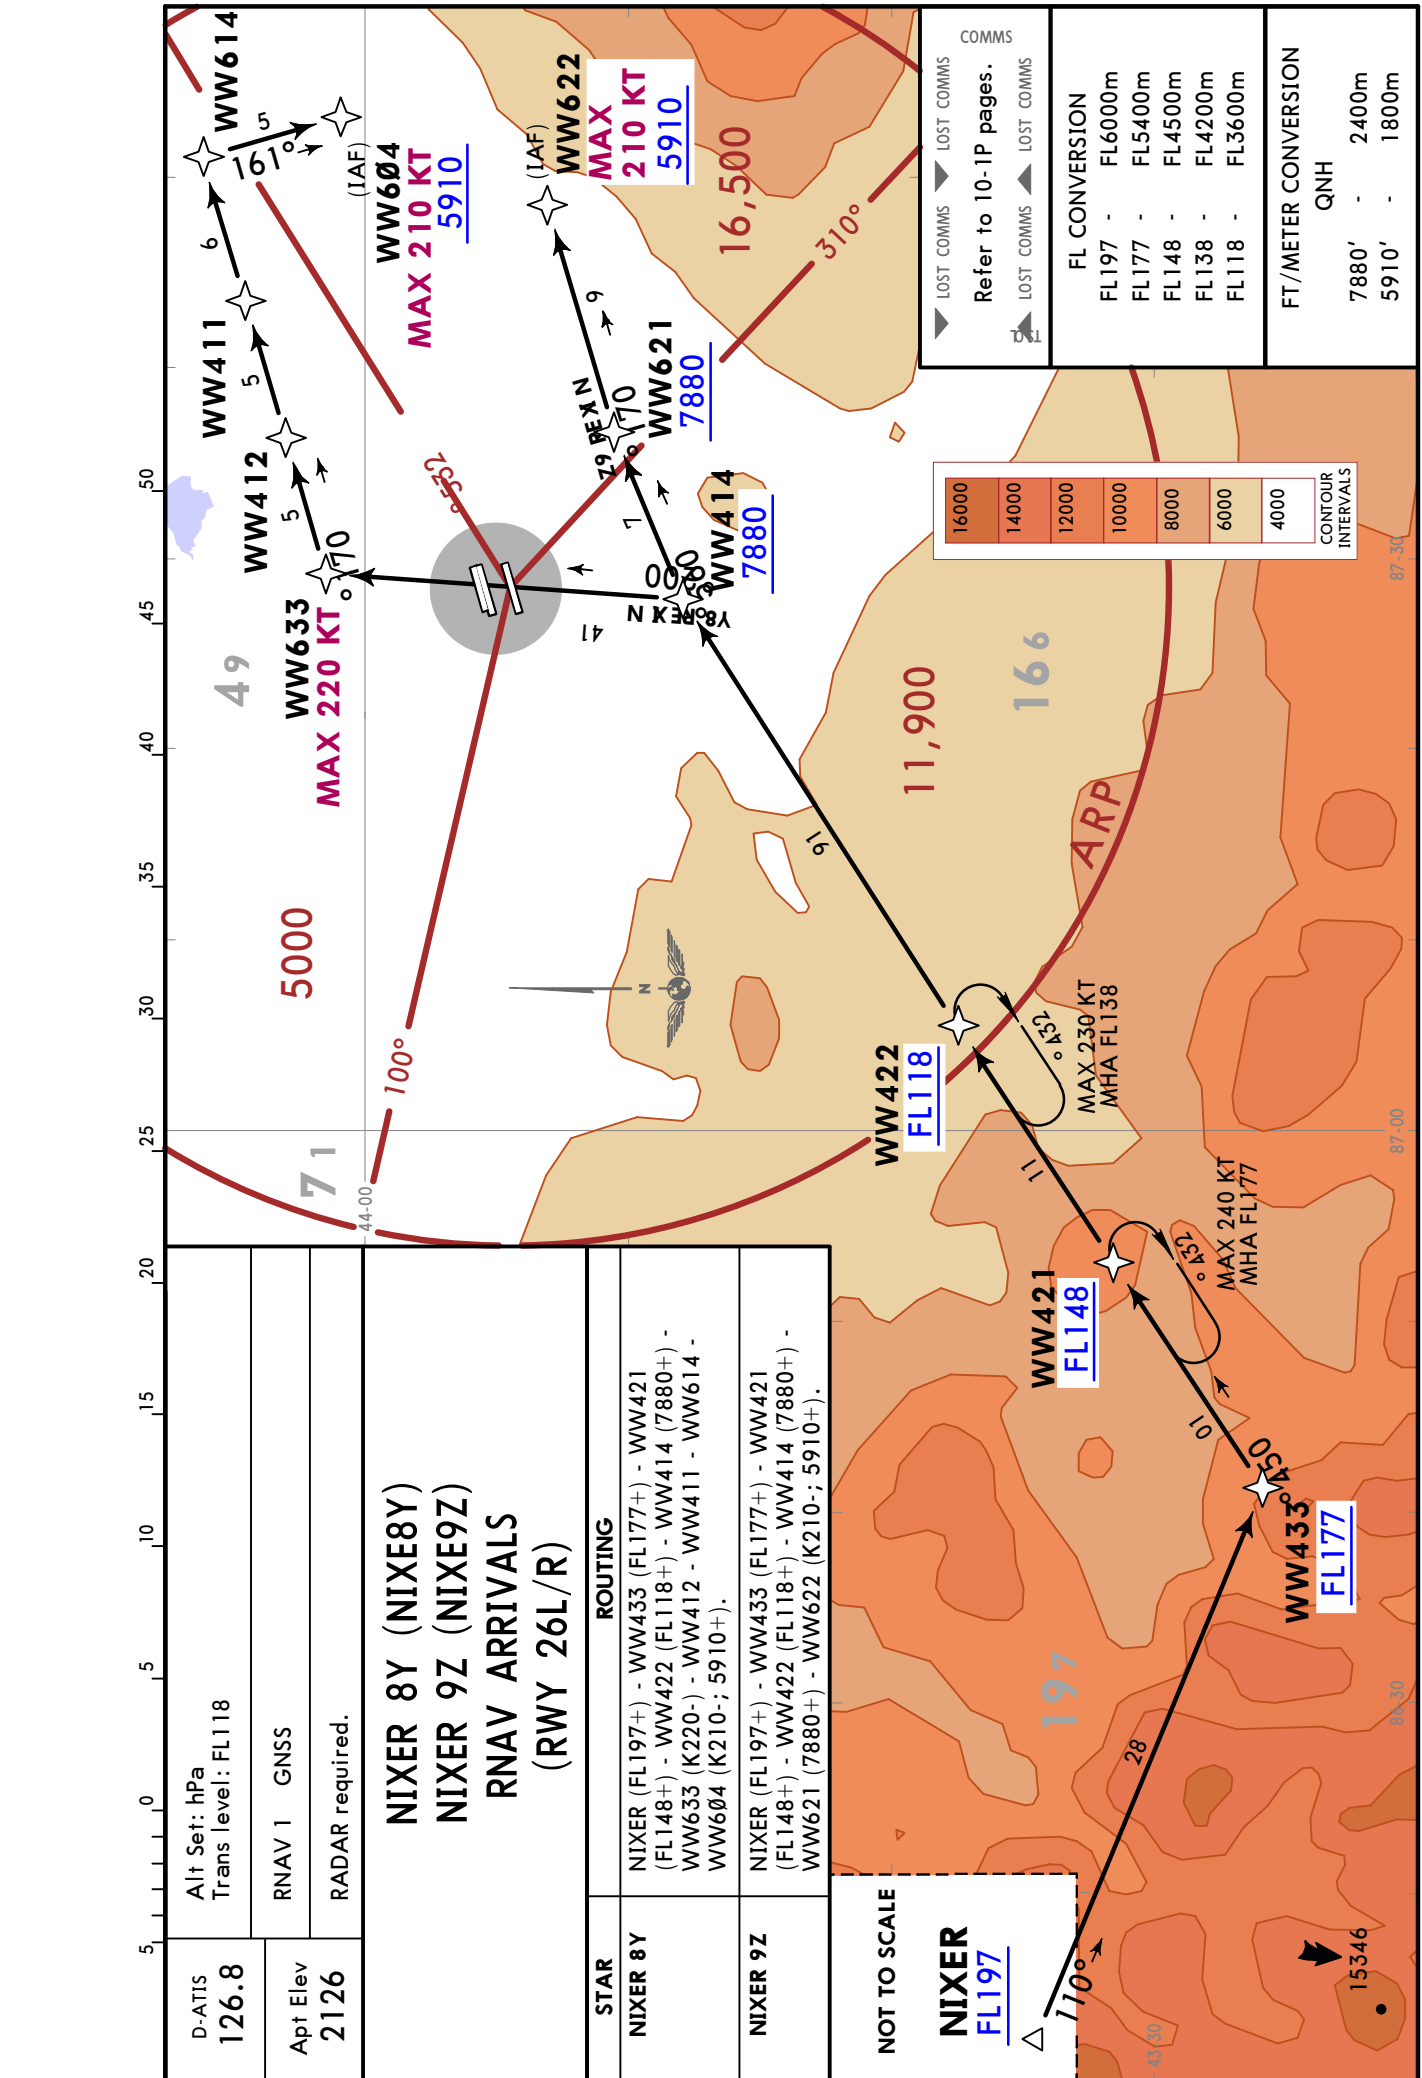




D-ATIS 126.8	Alt Set: hPa Trans level: FL118	UGPEL 8Y (UGPE8Y) UGPEL 9Z (UGPE9Z) RNAV ARRIVALS (RWYS 26L/R)
Apt Elev 2126	RNAV 1 GNSS	
RADAR required.		
STAR UGPEL 8Y	ROUTING UGPEL - WW691 - WW681 - WW671 - WW661 - WW651 - WW641 - WW606 - WW607 - FKG (7880+) - WW611 (6890+) - WW612 - WW613 - WW541 - WW633 (K220-) - WW412 - WW411 - WW614 - WW604 (K210-; 5910+).	
UGPEL 9Z	UGPEL - WW691 - WW681 - WW671 - WW661 - WW651 - WW641 - WW606 - WW607 - FKG (7880+) - WW604 (K210-; 5910+).	

COMMS Refer to 10-1P pages.	
FL CONVERSION FL157 - FL4800m FL118 - FL3600m	FT/METER CONVERSION QNH 7880' - 2400m 6890' - 2100m 5910' - 1800m

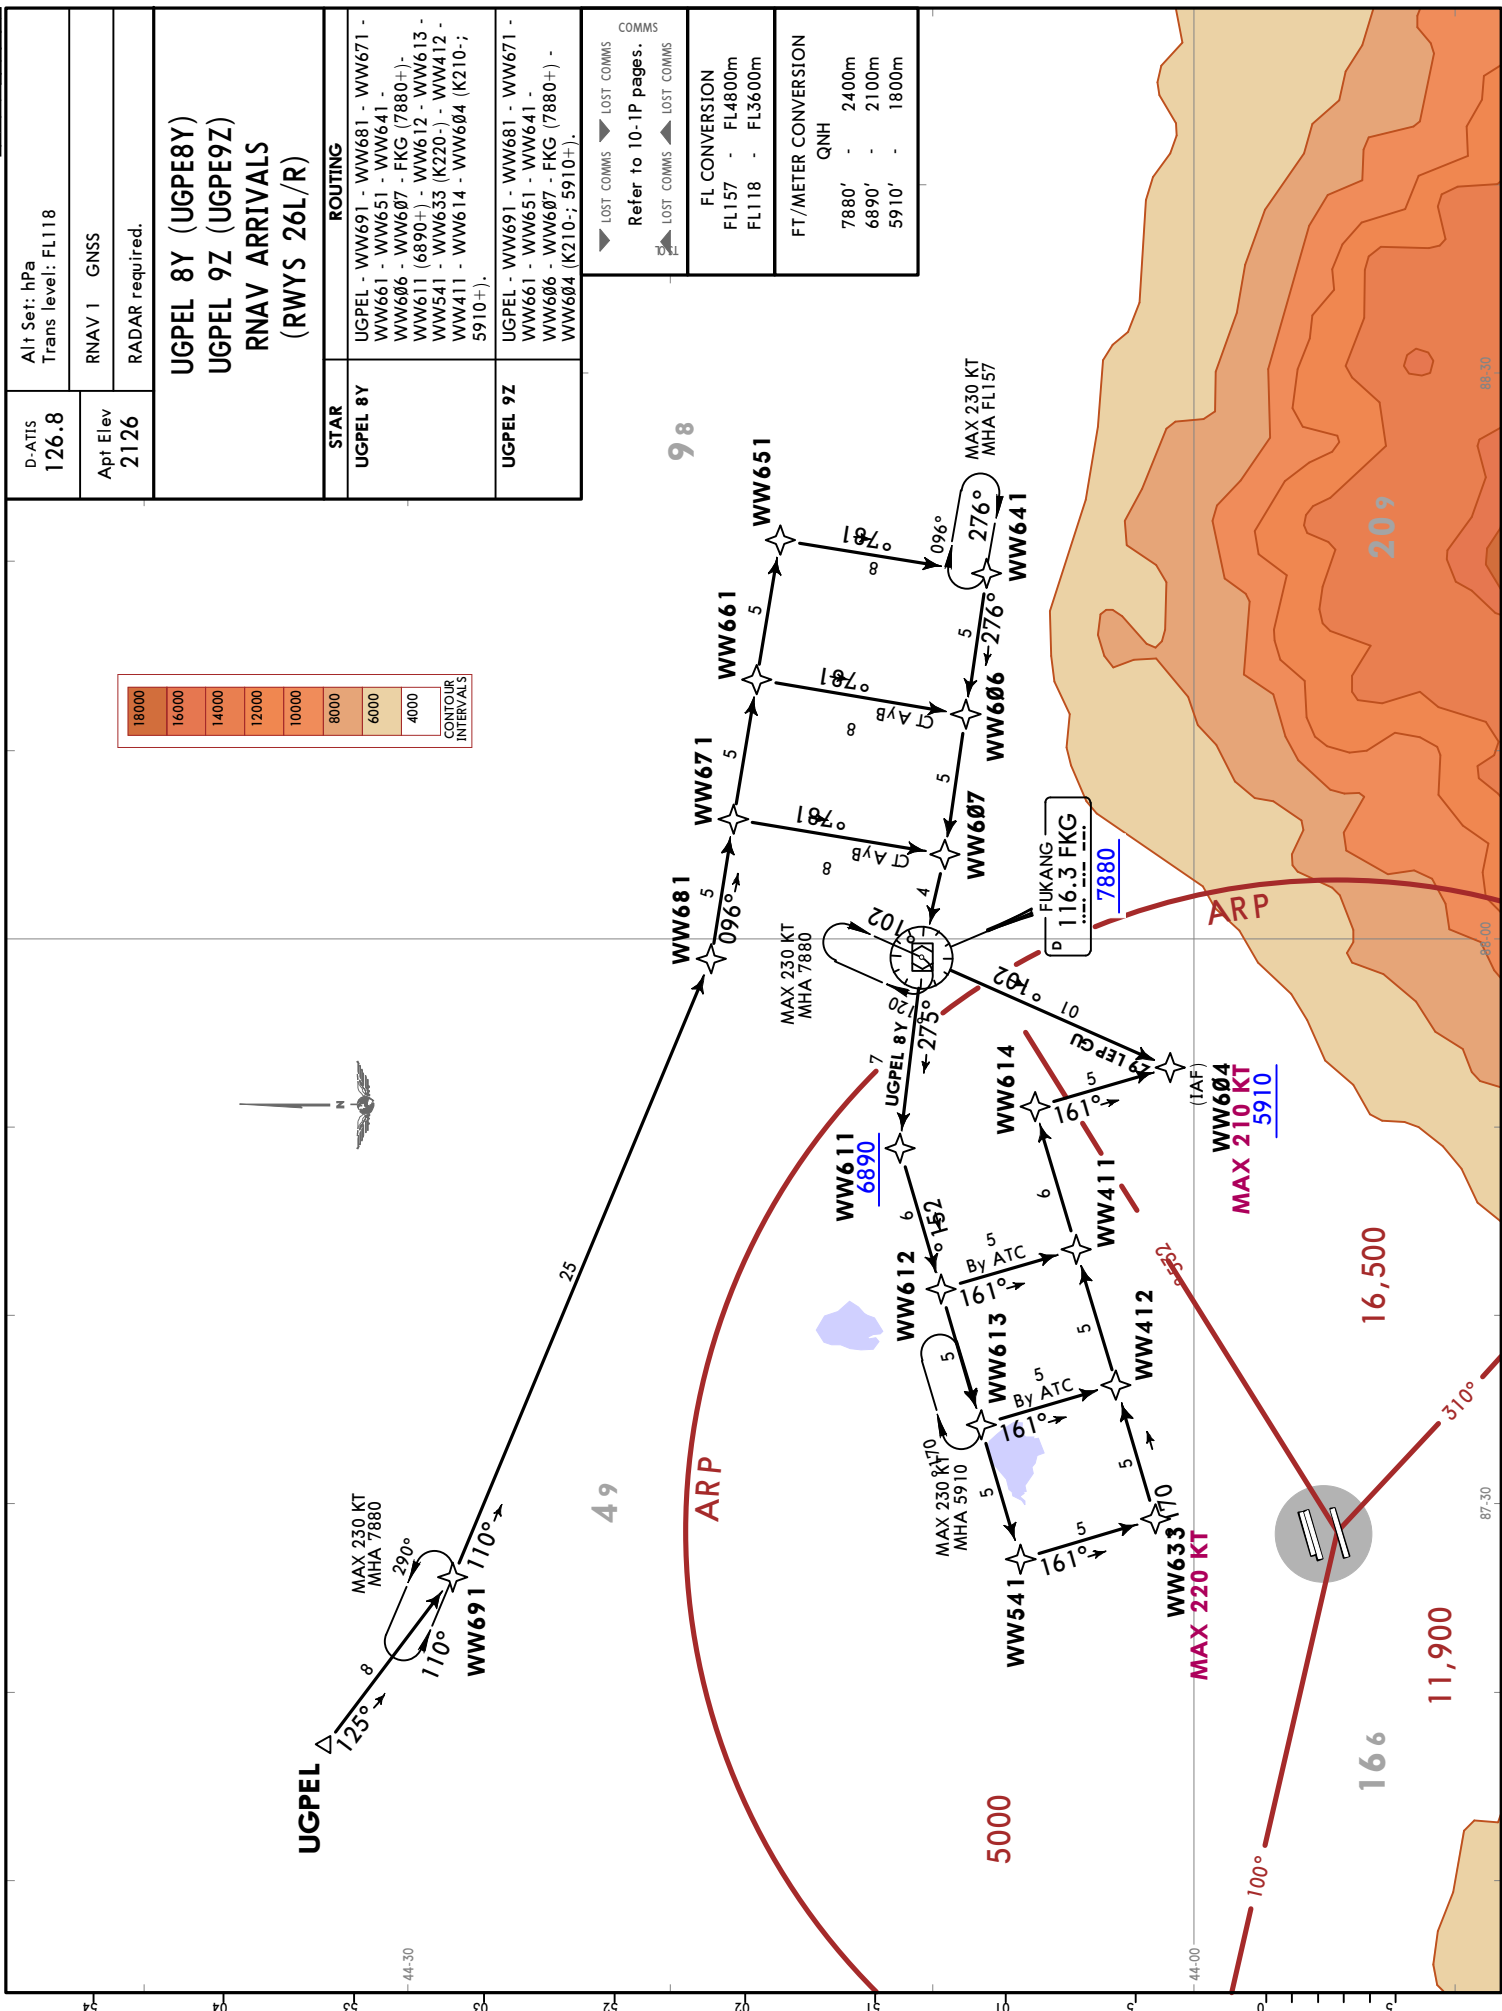

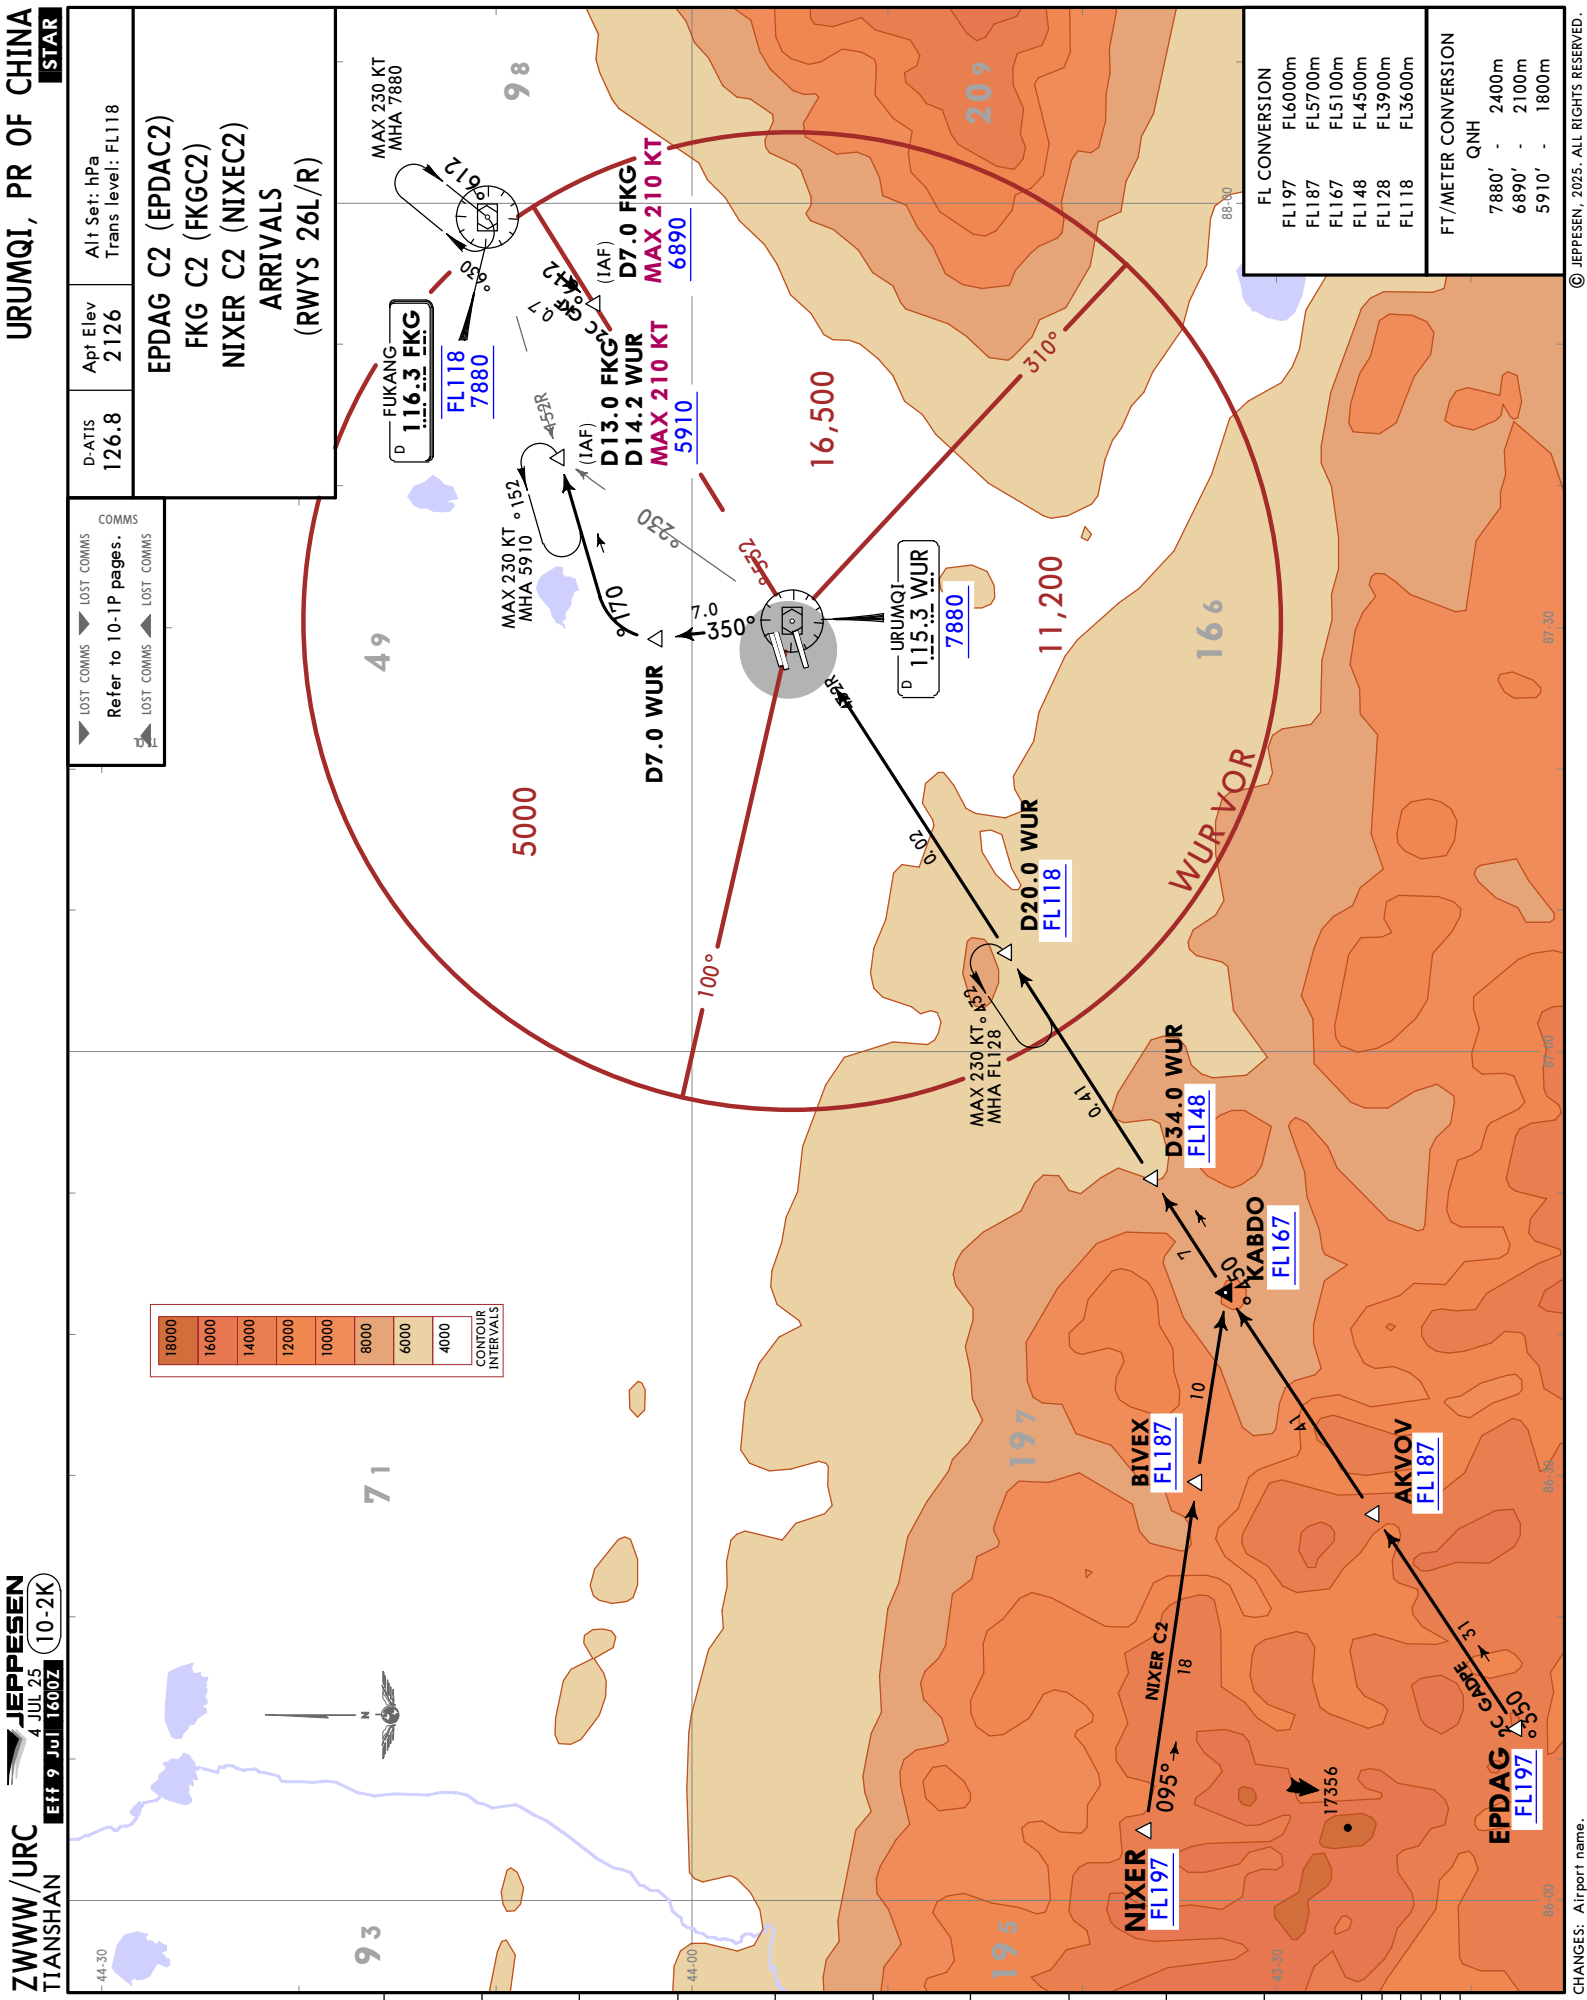

URUMQI, PR OF CHINA

STAR

EPDAG C2 (EPDAC2)
FKG C2 (FKGC2)
NIXER C2 (NIXEC2)
ARRIVALS
(RWYS 26L/R)

URUMQI
11,200
MAX 210 KT
6890

FL CONVERSION

FL	CONVERSION
FL197	FL6000m
FL187	FL5700m
FL167	FL5100m
FL148	FL4500m
FL128	FL3900m
FL118	FL3600m

FT/METER CONVERSION

QNH	CONVERSION
7880'	2400m
6890'	2100m
5910'	1800m

COMMS


Refer to 10-1P pages.

CONTOUR INTERVALS

18000
16000
14000
12000
10000
8000
6000
4000

CHANGES: Airport name.

© JEPPesen, 2025. All rights reserved.




ZWWW/URC
TIANSHAN

JEPPESSEN
4 JUL 25 10-3

URUMQI, PR OF CHINA

RNAV SID

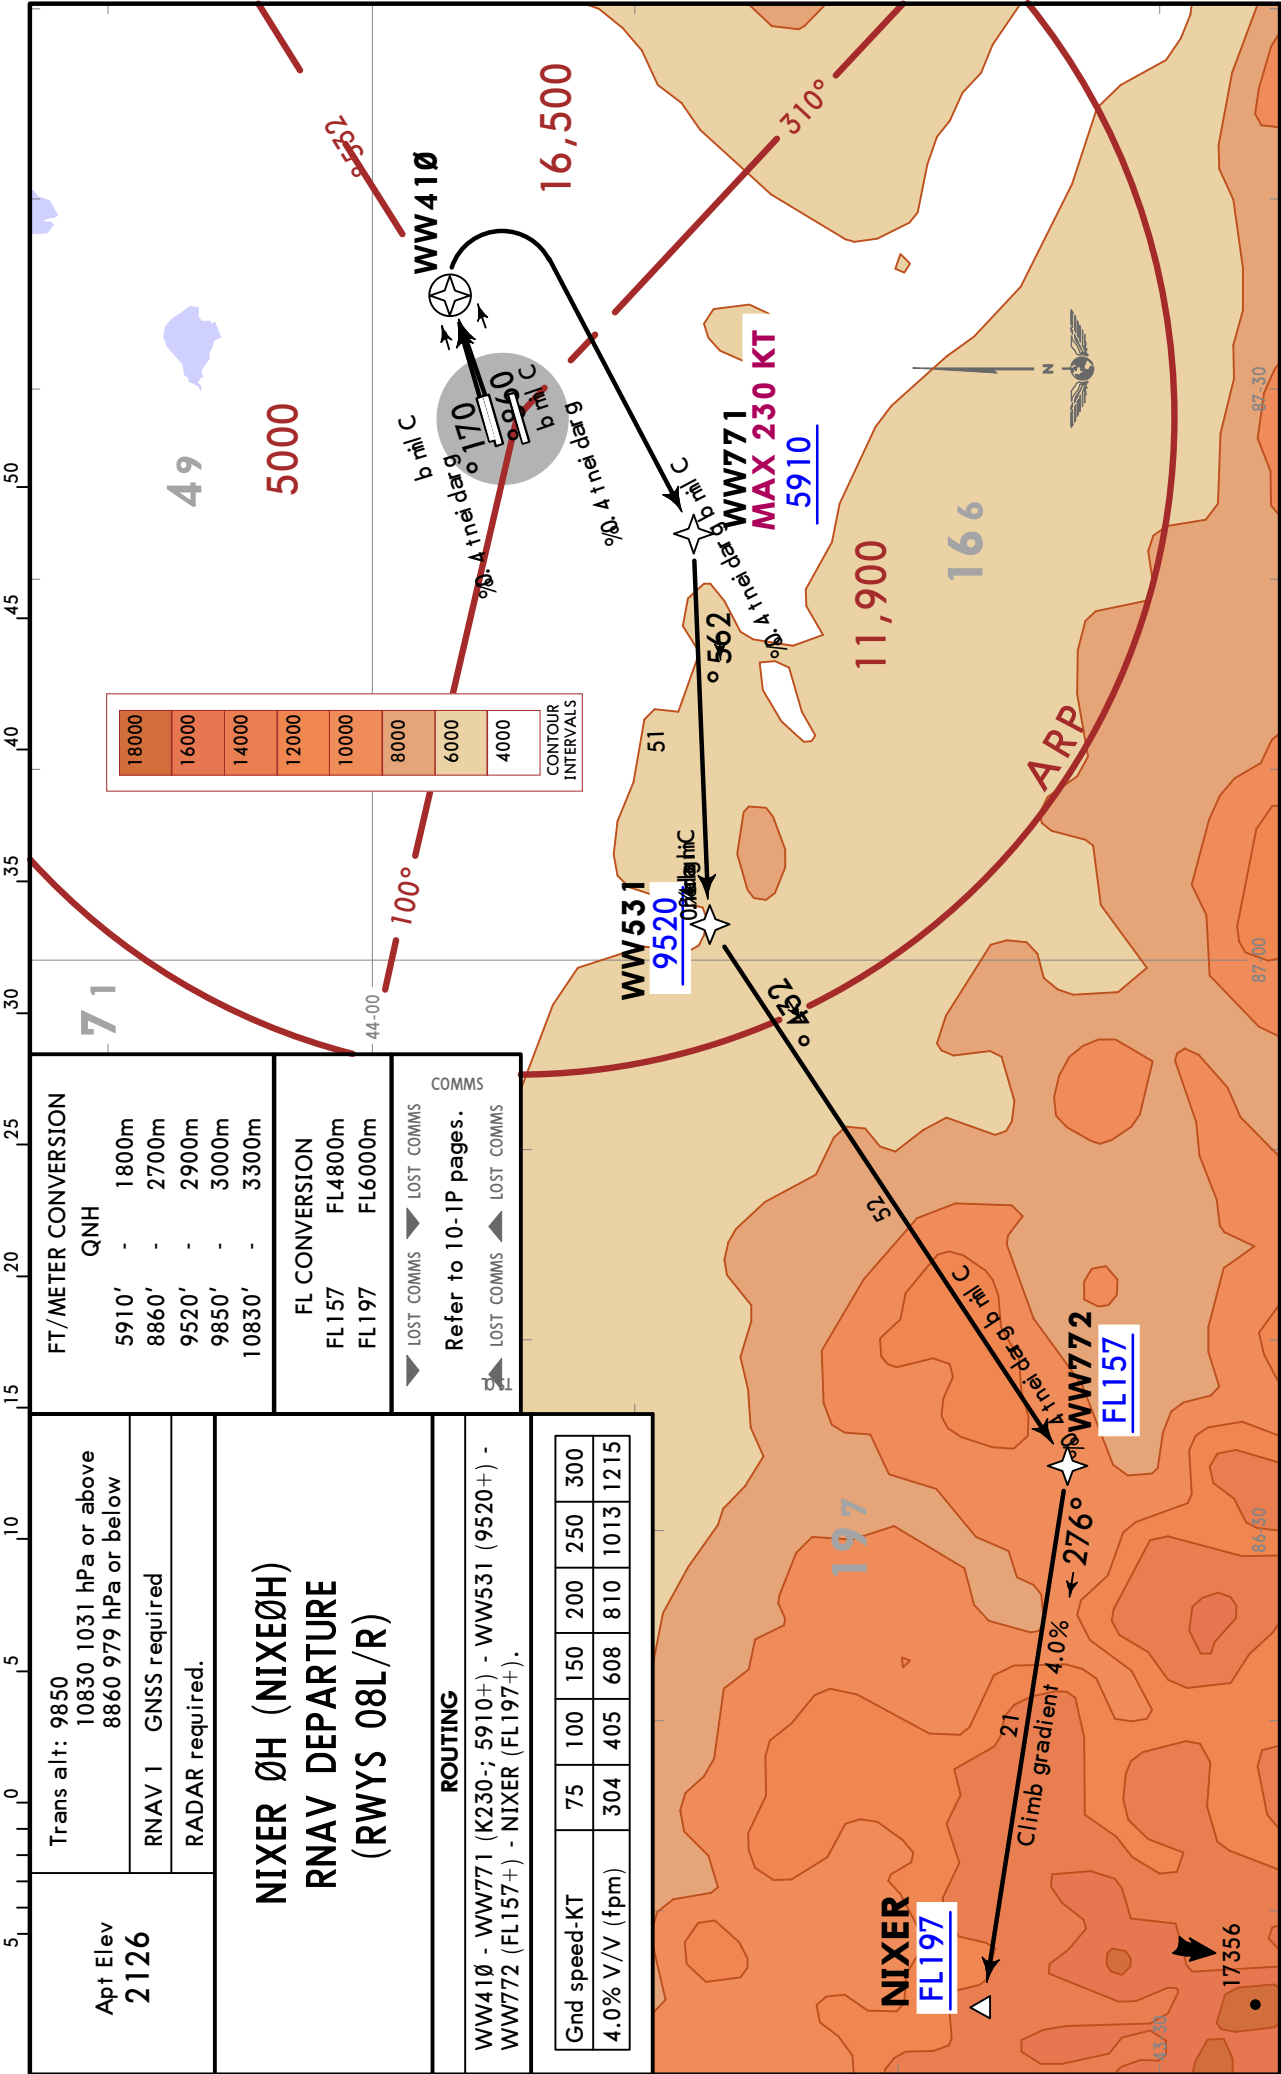


ZWWW/URC
TIANSHAN

JEPPesen
4 JUL 25 10-3A

URUMQI, PR OF CHINA

Eff 9 Jul 1600Z


RNAV SID

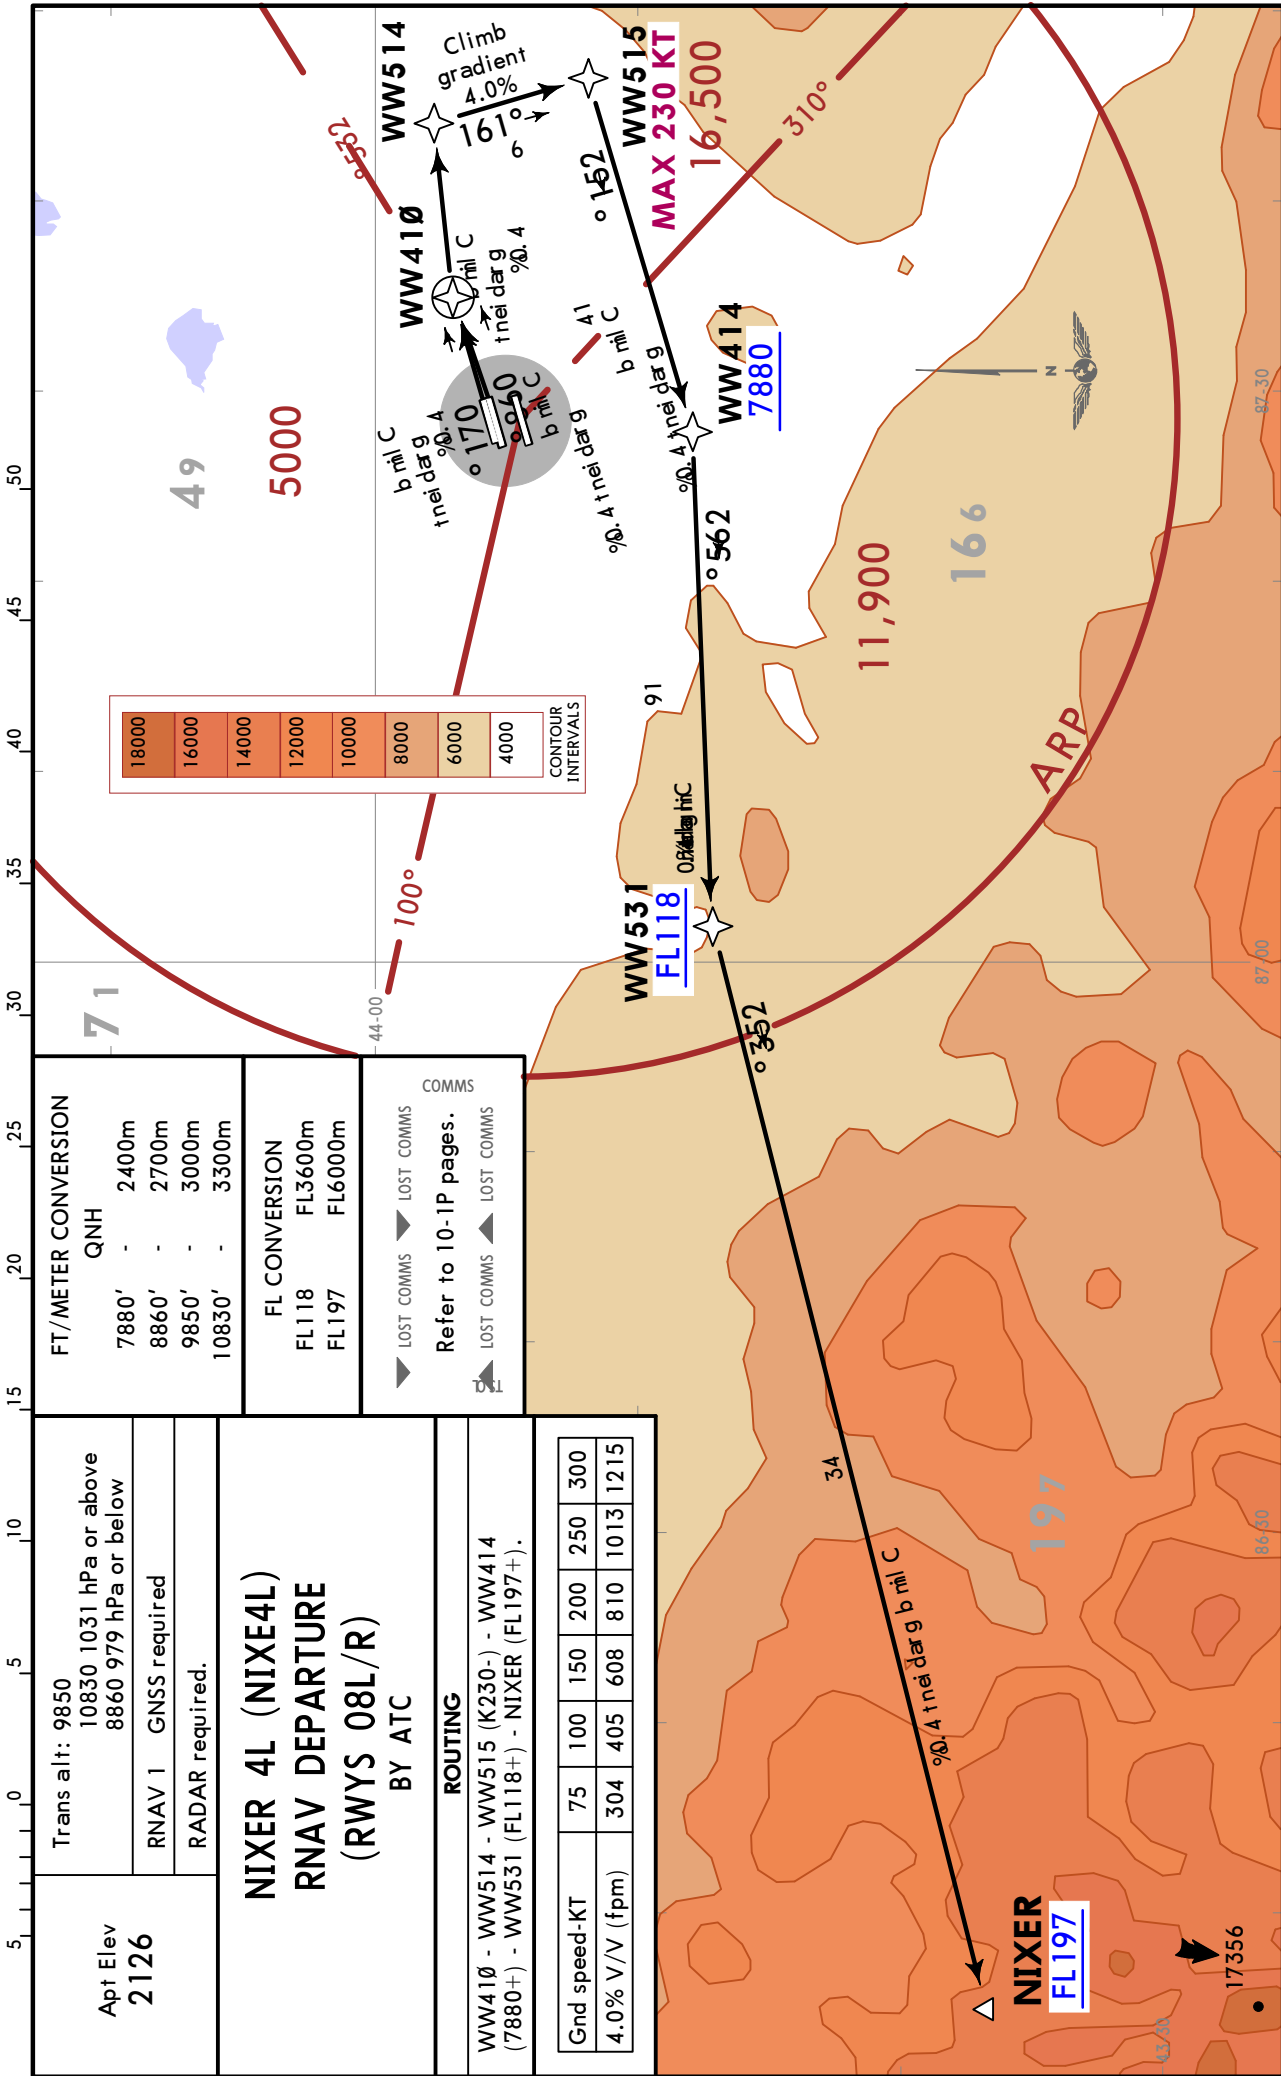

ZWWW/URC
TIANSHAN

JEPPESEN
4 JUL 25 (10-3B) Eff

URUMQI, PR OF CHINA

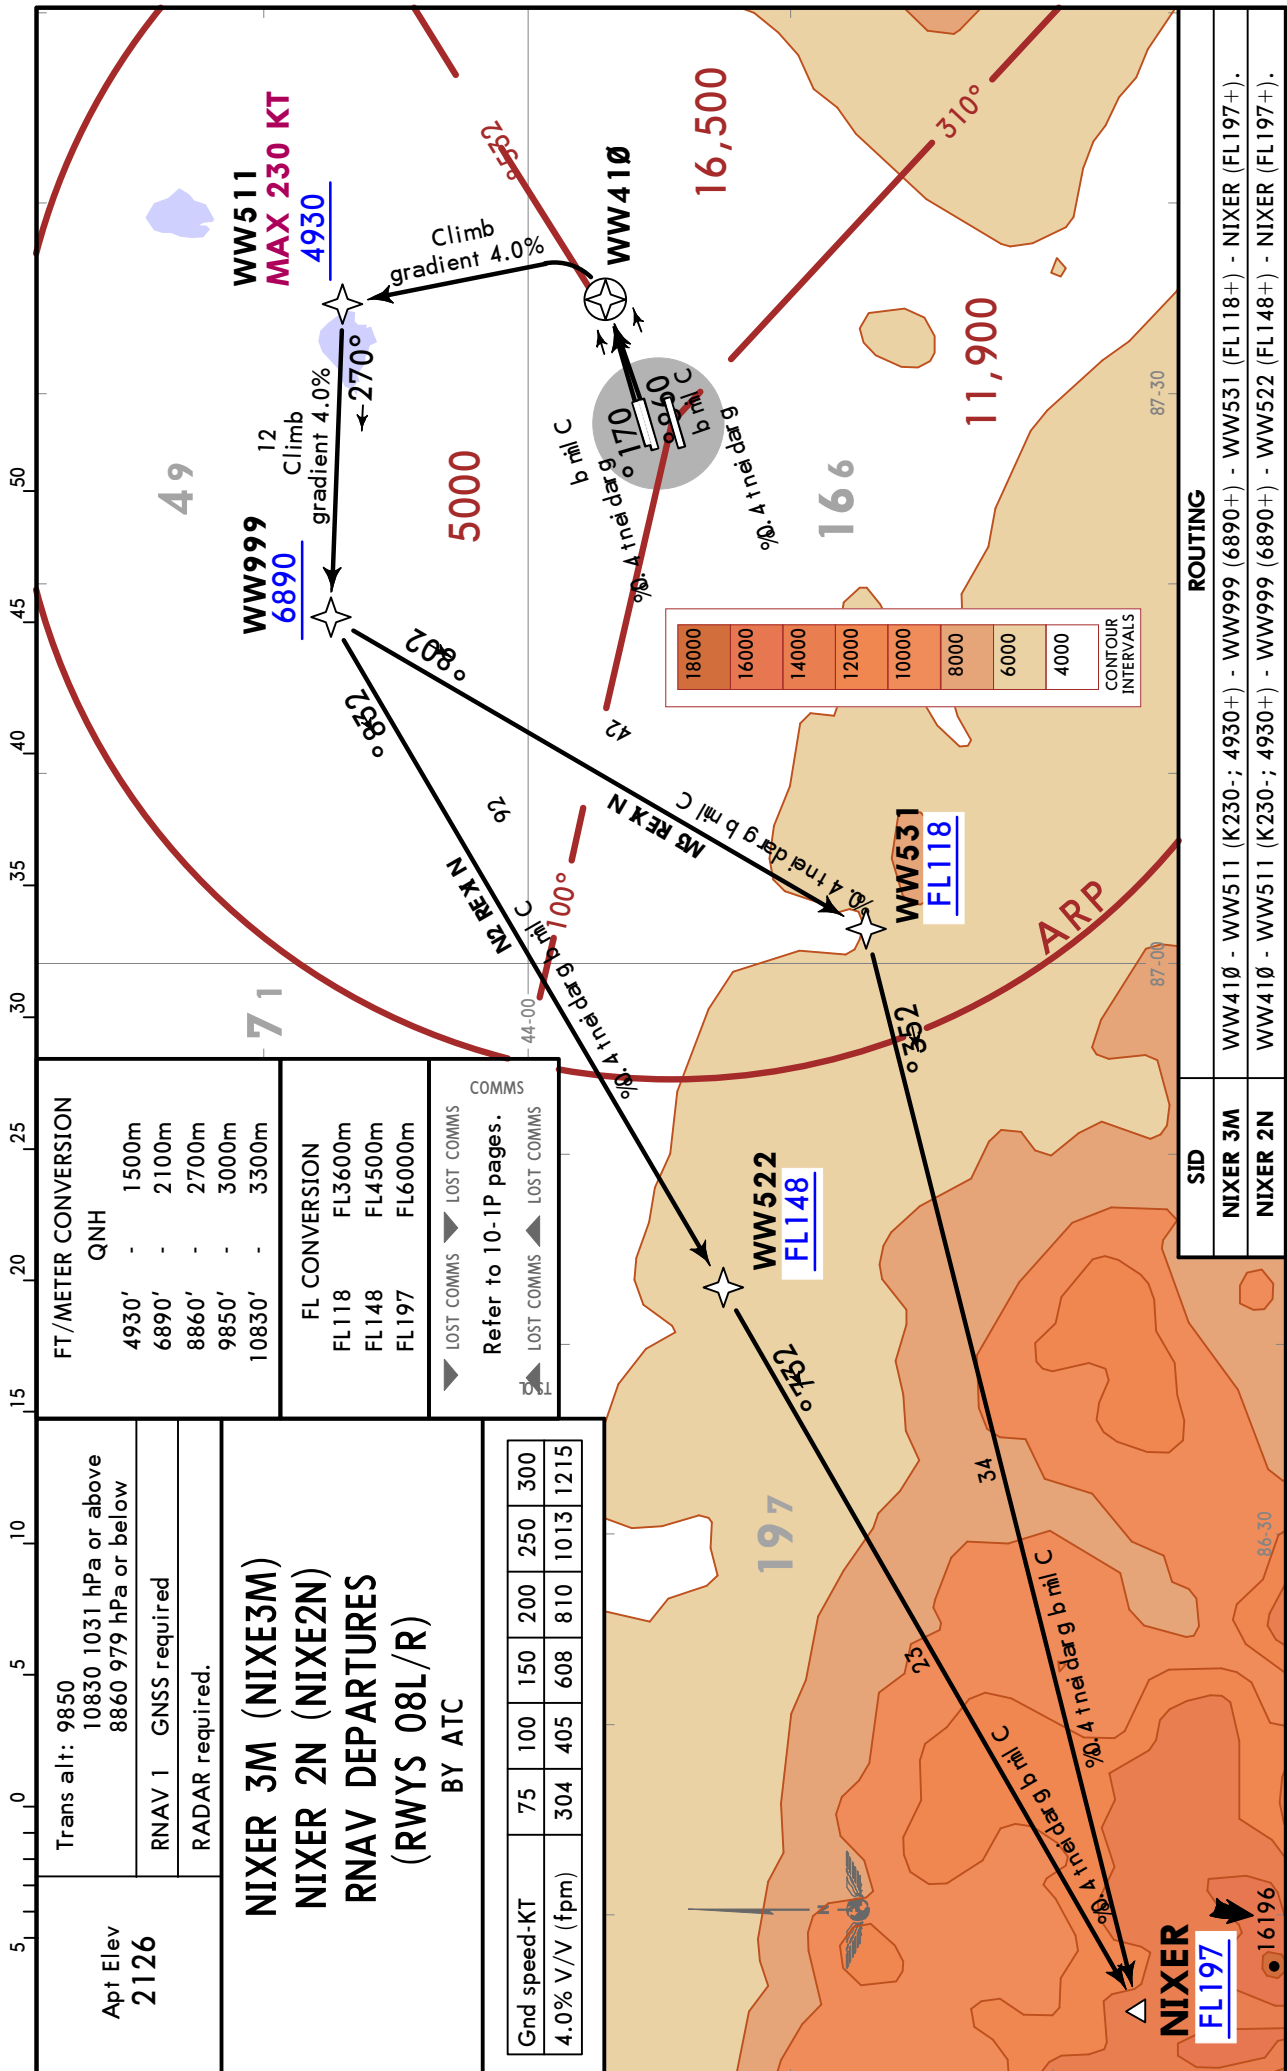RNAV SID

ZWWW/URC
TIANSHAN


JEPPESSEN
4 JUL 25

10-3C

Eff 9 Jul 1600Z

URUMQI, PR OF CHINA

RNAV SID

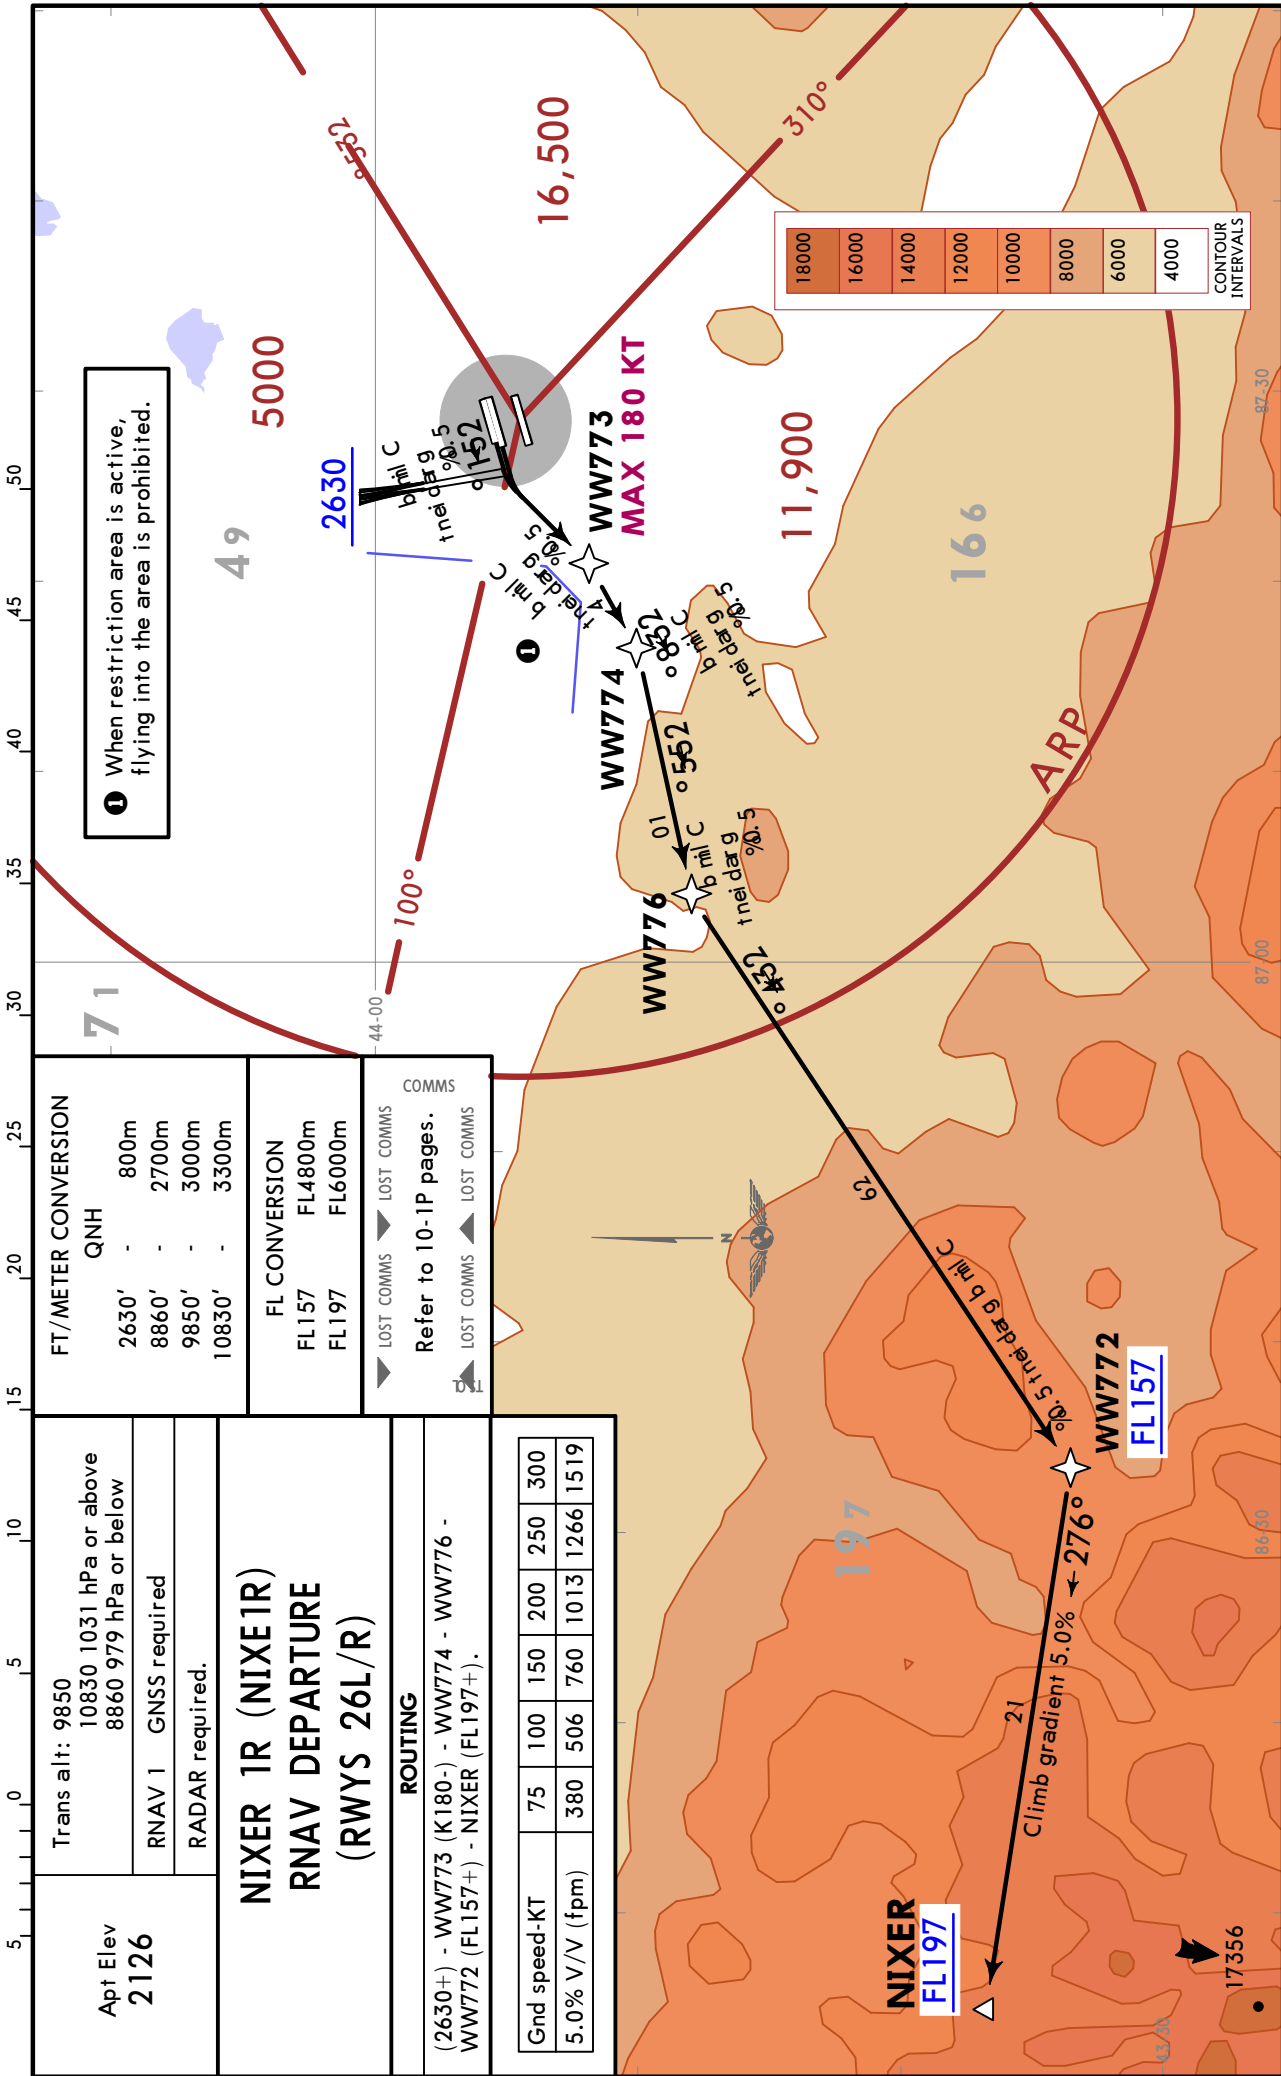

ZWWW/URC
TIANSHAN


JEPPESSEN
4 JUL 25

10-3D

Eff 9 Jul 1600Z

URUMQI, PR OF CHINA

RNAV SID

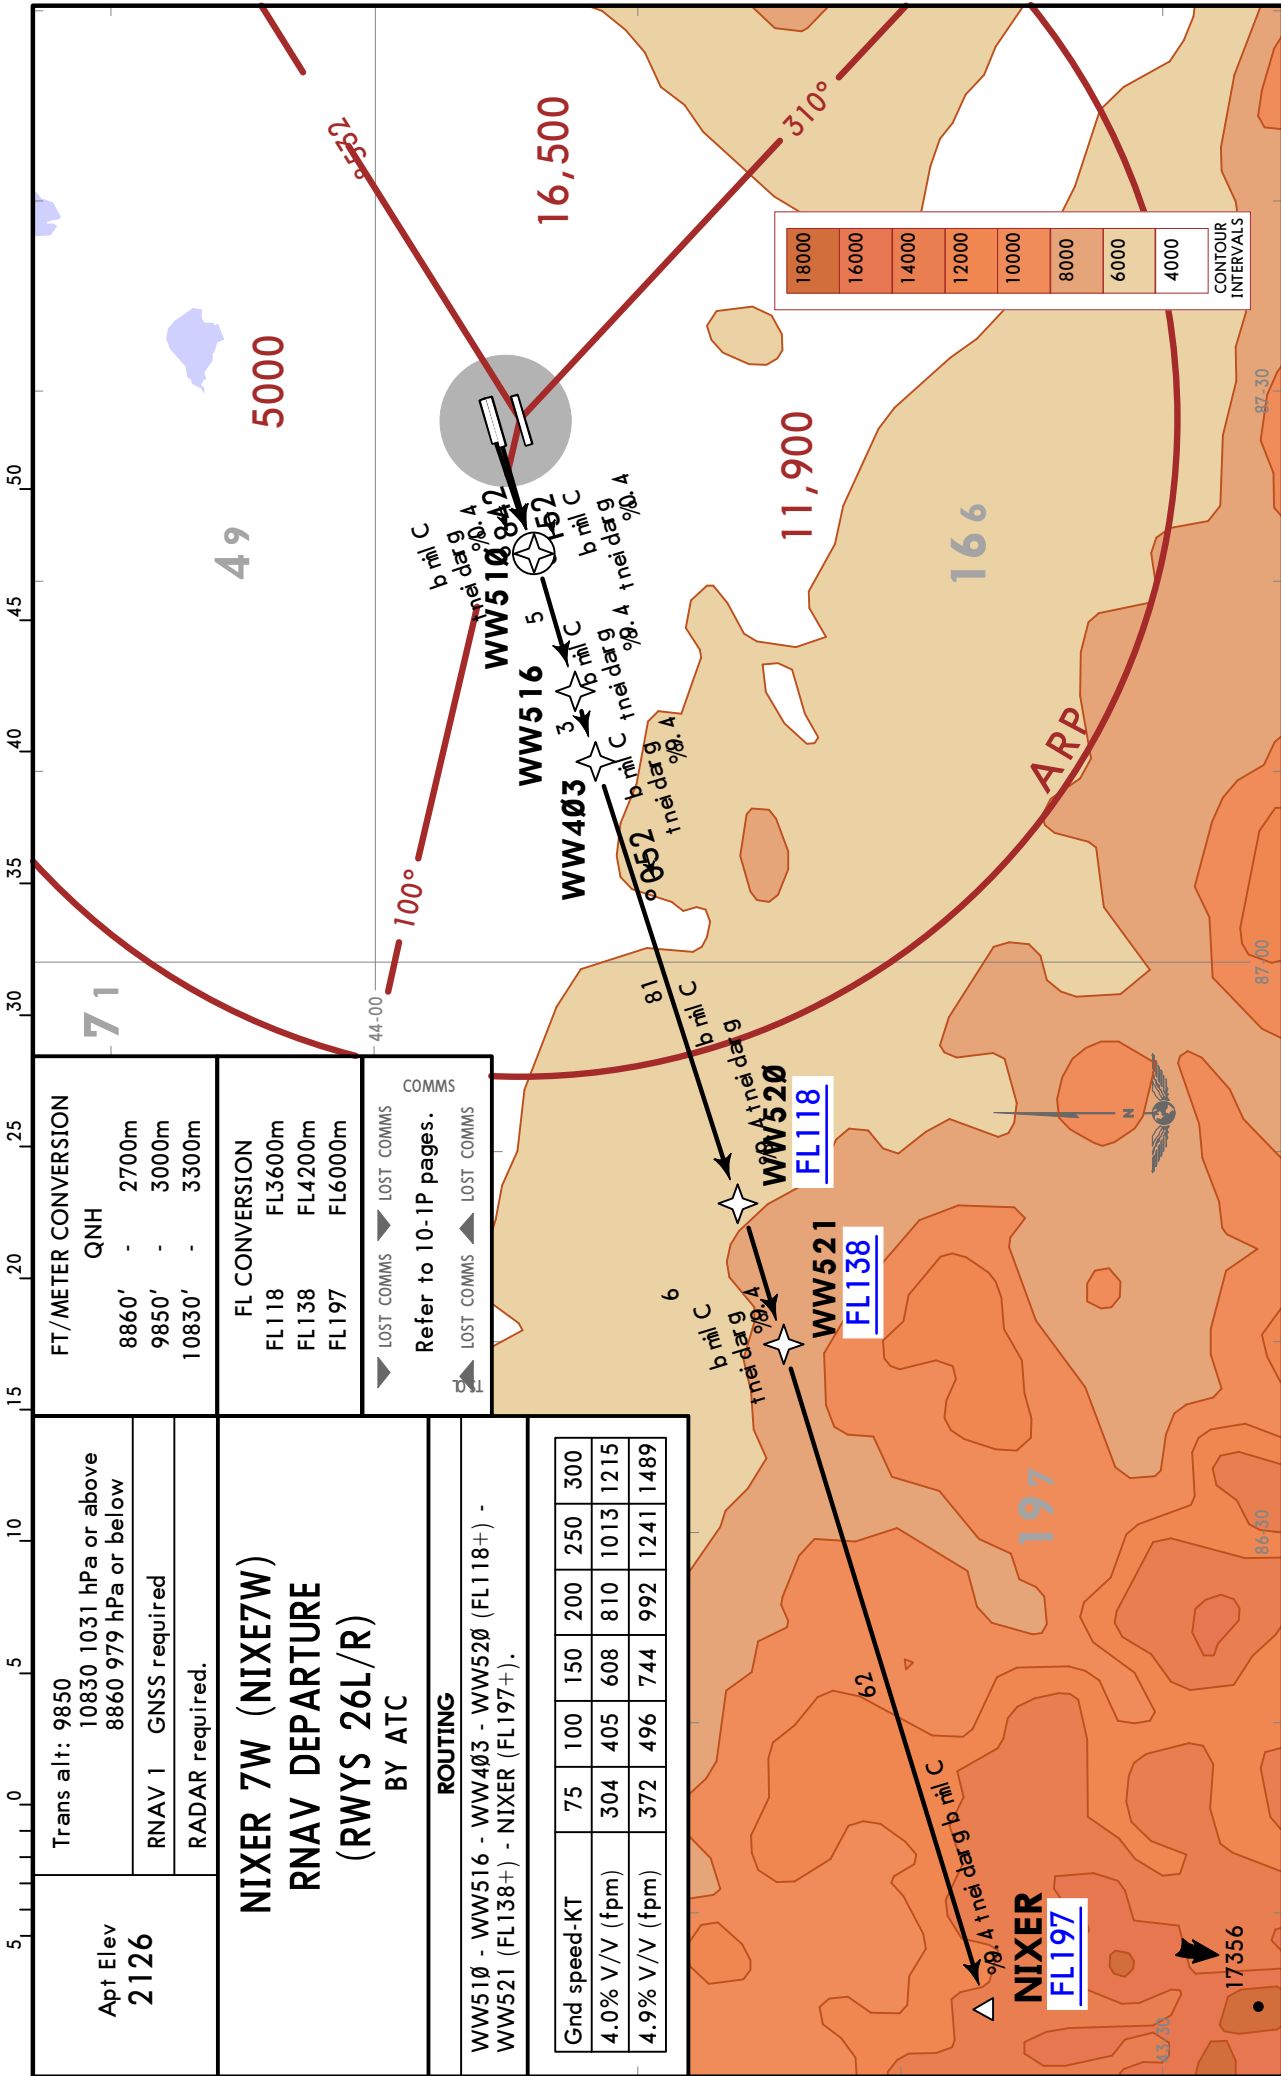

ZWWW/URC
TIANSHAN


Apt Elev 2126	Trans alt: 9850
	10830 1031 hPa or above
	8860 979 hPa or below
	RNAV 1 GNSS required
	RADAR required.

UGPEL 7W (UGPE7W), VARMI 7W (VARM7W)

RNAV DEPARTURES

(RWYS 26L/R)

BY ATC

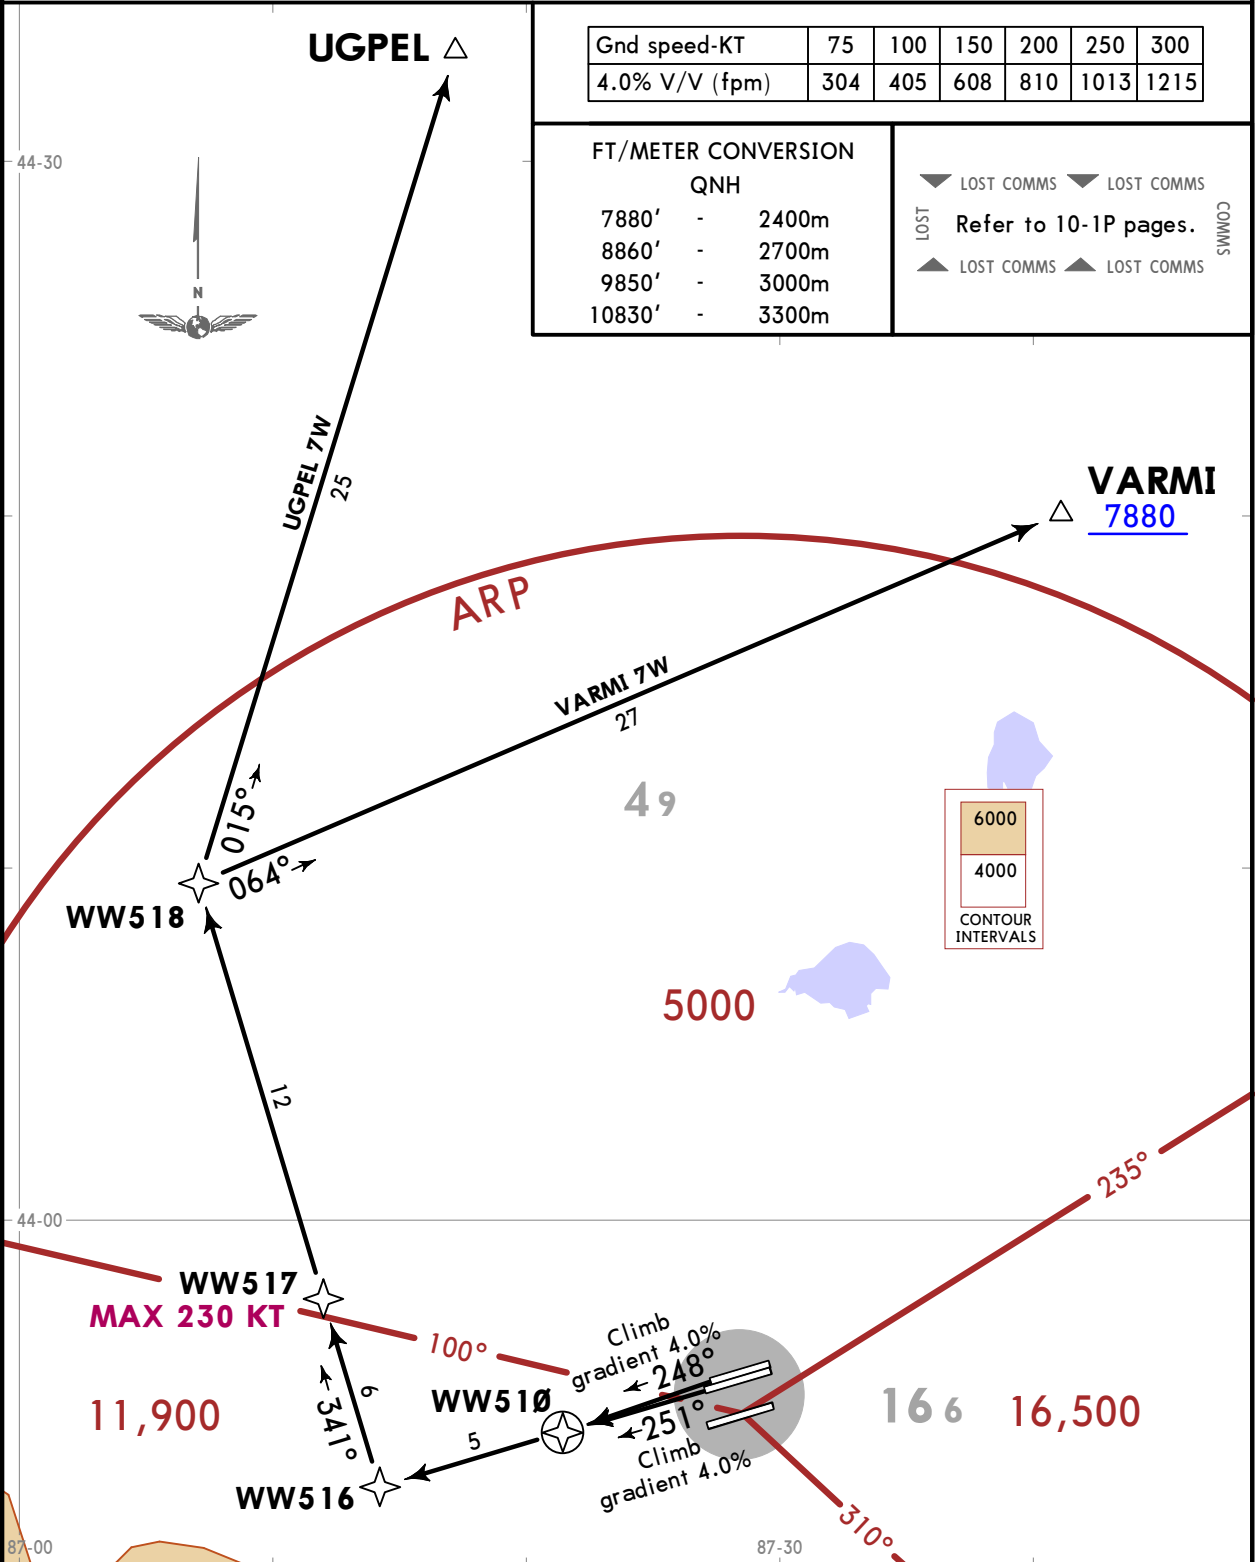

Gnd speed-KT	75	100	150	200	250	300
4.0% V/V (fpm)	304	405	608	810	1013	1215

FT/METER CONVERSION		QNH
7880'	-	
8860'	-	
9850'	-	
10830'	-	
		2400m
		2700m
		3000m
		3300m

▼ LOST COMMS

▼ LOST COMMS

Refer to 10-1P pages.


▲ LOST COMMS

▲ LOST COMMS

SID	ROUTING
UGPEL 7W	WW510 - WW516 - WW517 (K230-) - WW518 - UGPEL.
VARMI 7W	WW510 - WW516 - WW517 (K230-) - WW518 - VARMI (7880+).

ZWWW/URC
TIANSHAN


JEPPESEN
4 JUL 25 10-3G Eff 9 Jul 1600Z
URUMQI, PR OF CHINA
RNAV SID

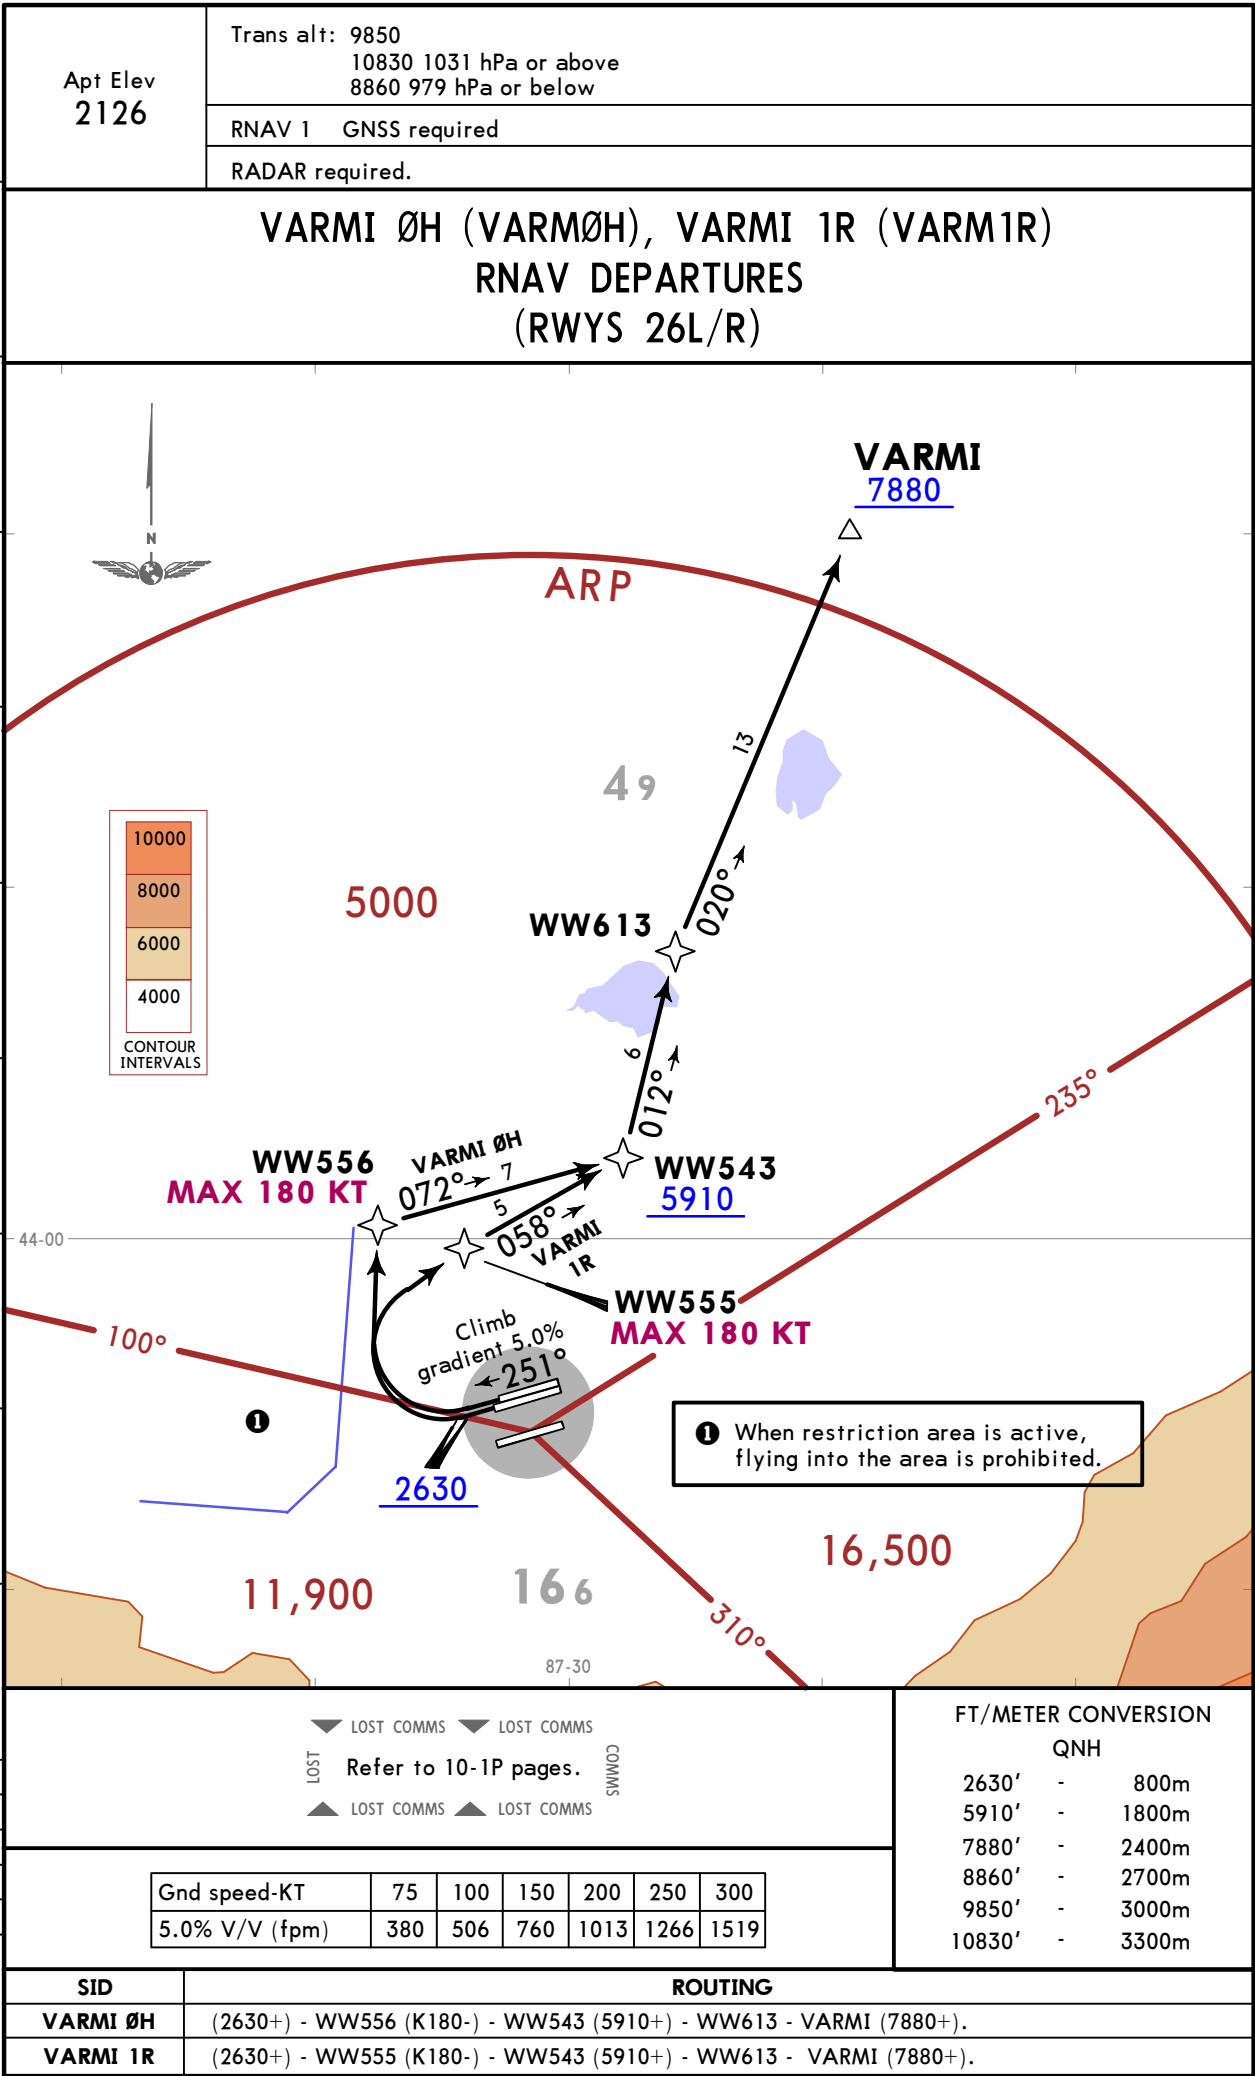

ZWWW/URC
TIANSHAN

JEPPESSEN
4 JUL 25 10-3H Eff 9 Jul 1600Z

URUMQI, PR OF CHINA
SID

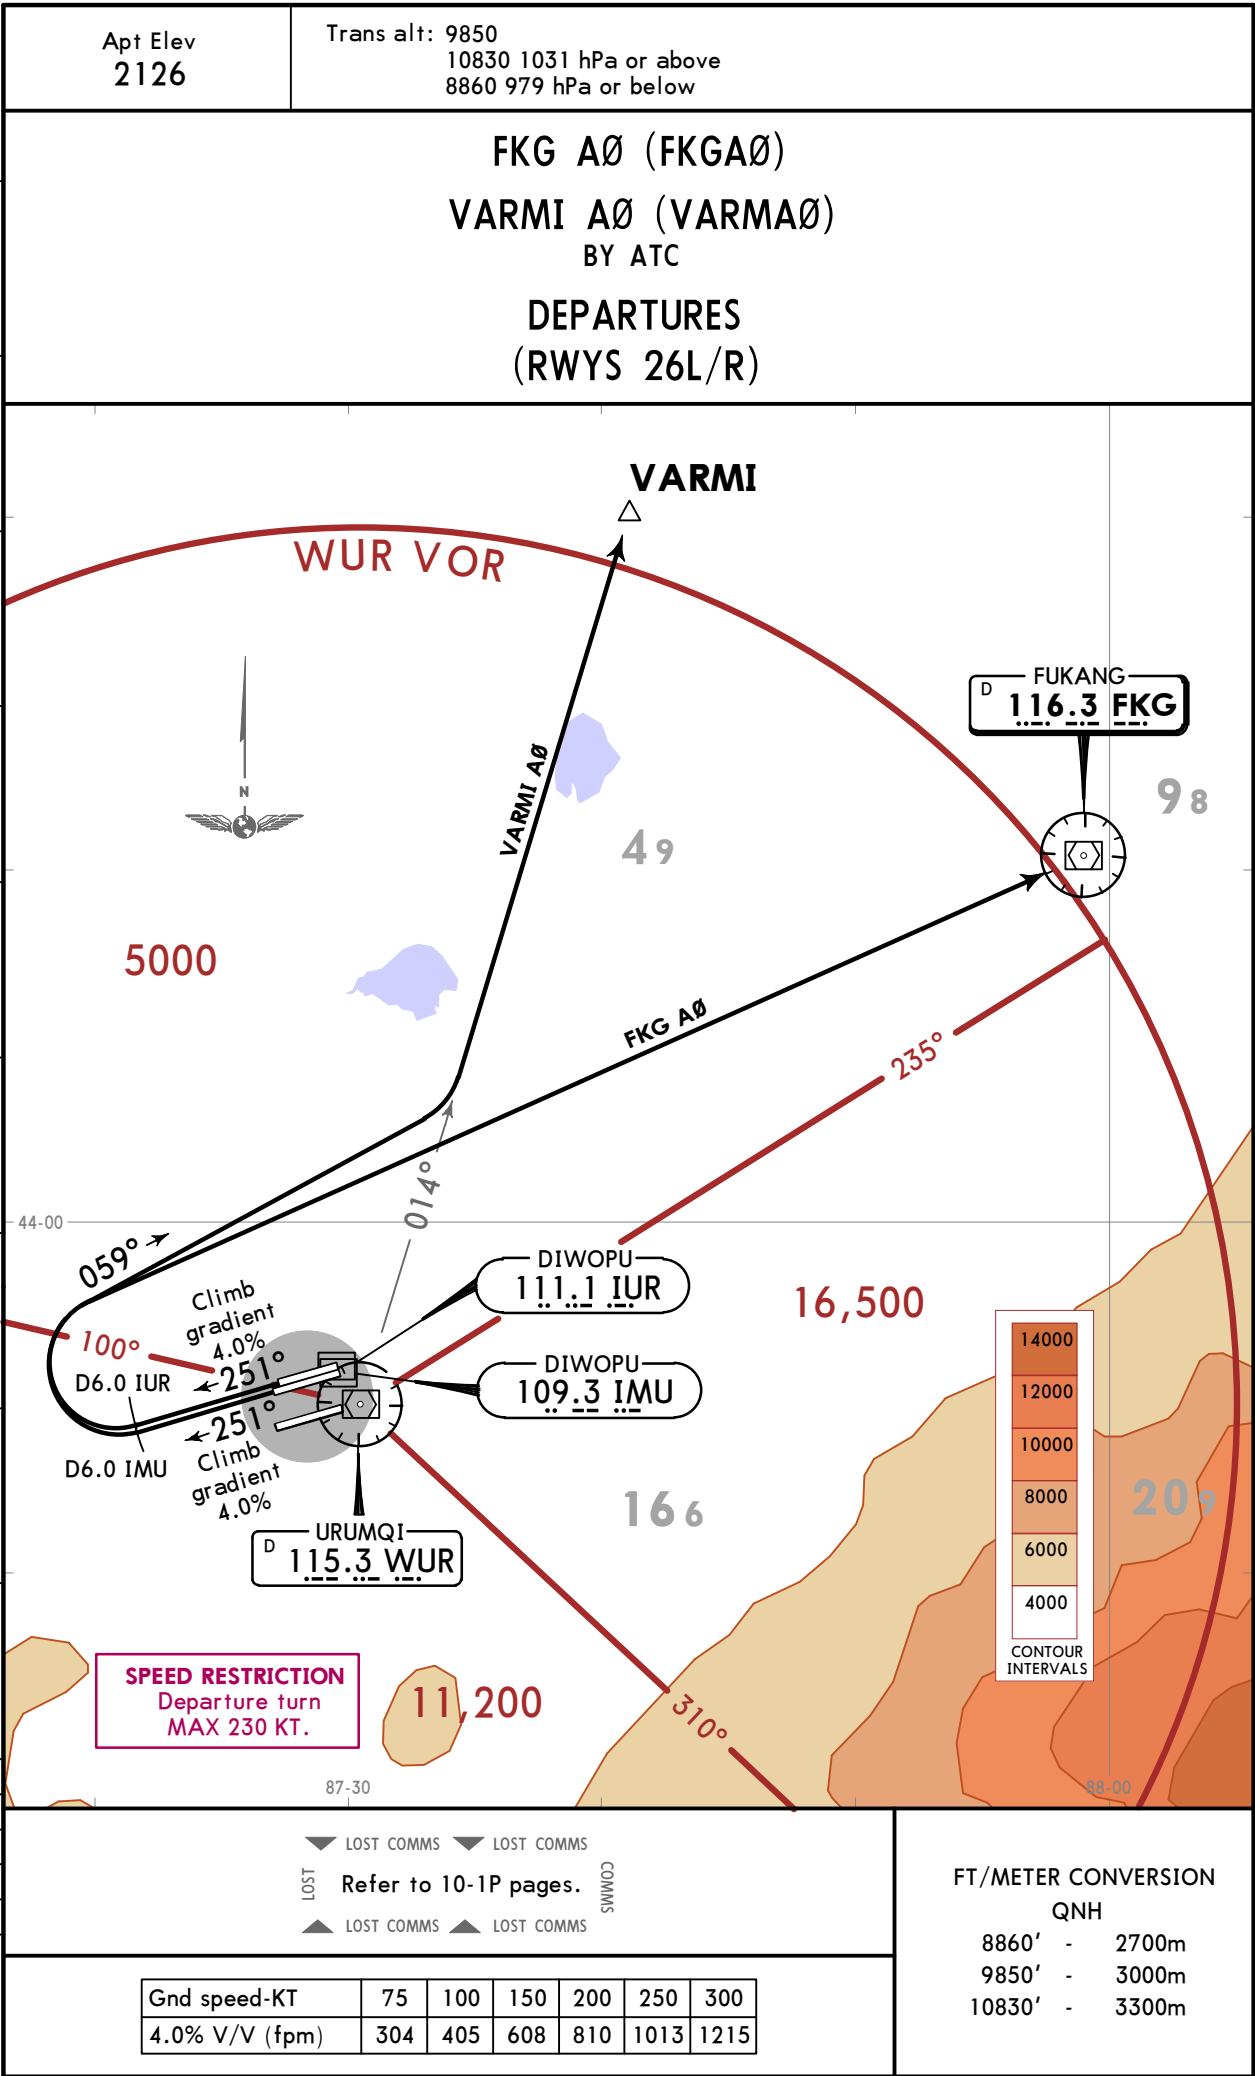

ZWWW/URC
TIANSHAN

JEPPesen
4 JUL 25 (10-3J)

URUMQI, PR OF CHINA


Eff 9 Jul 1600Z

SID

Apt Elev
2126

Trans alt: 9850
10830 1031 hPa or above
8860 979 hPa or below

FKG B1 (FKGB1)
Varmi B1 (VARMB1)
DEPARTURES
(RWYS 08L/R)

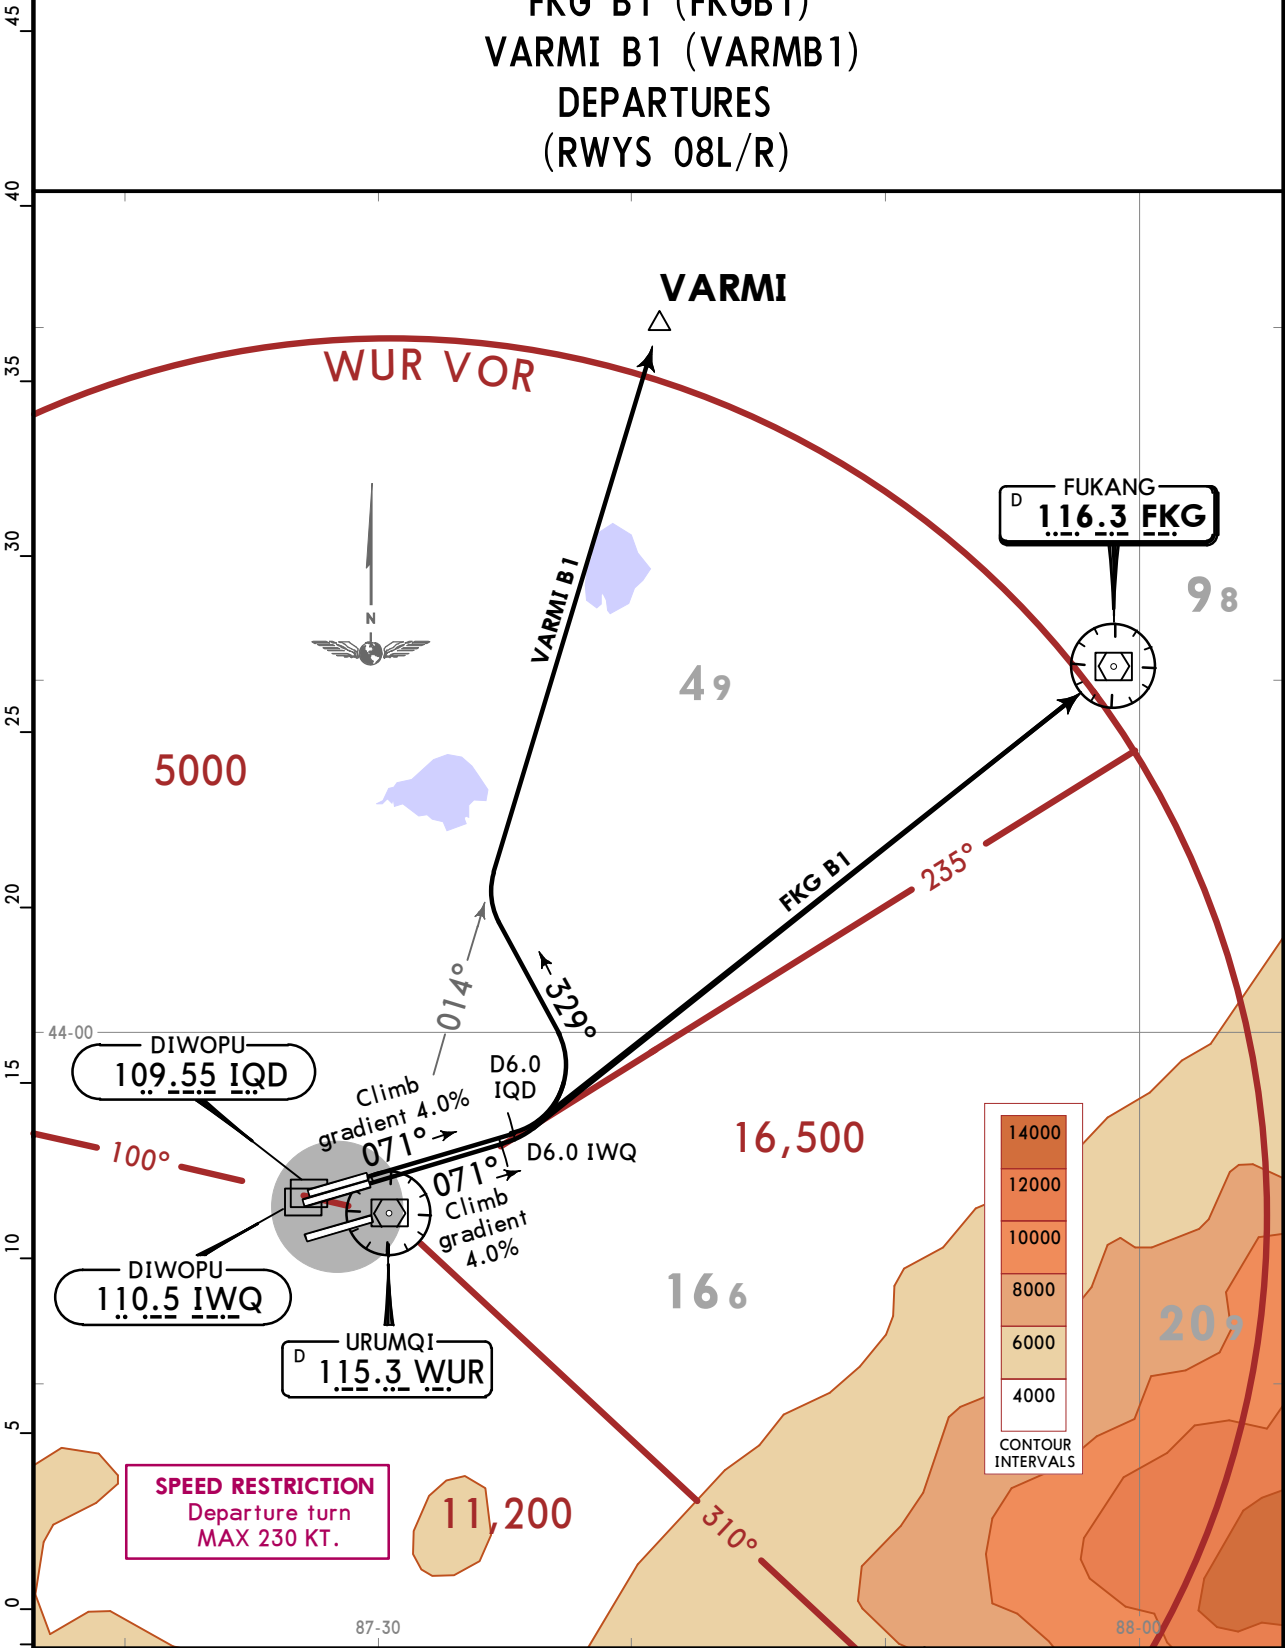

SPEED RESTRICTION
Departure turn
MAX 230 KT.

Refer to 10-1P pages.


FT/METER CONVERSION
QNH
8860' - 2700m
9850' - 3000m
10830' - 3300m

Gnd speed-KT	75	100	150	200	250	300
4.0% V/V (fpm)	304	405	608	810	1013	1215

ZWWW/URC
TIANSHAN

JEPPESSEN
4 JUL 25 10-3K Eff 9 Jul 1600Z

URUMQI, PR OF CHINA
SID

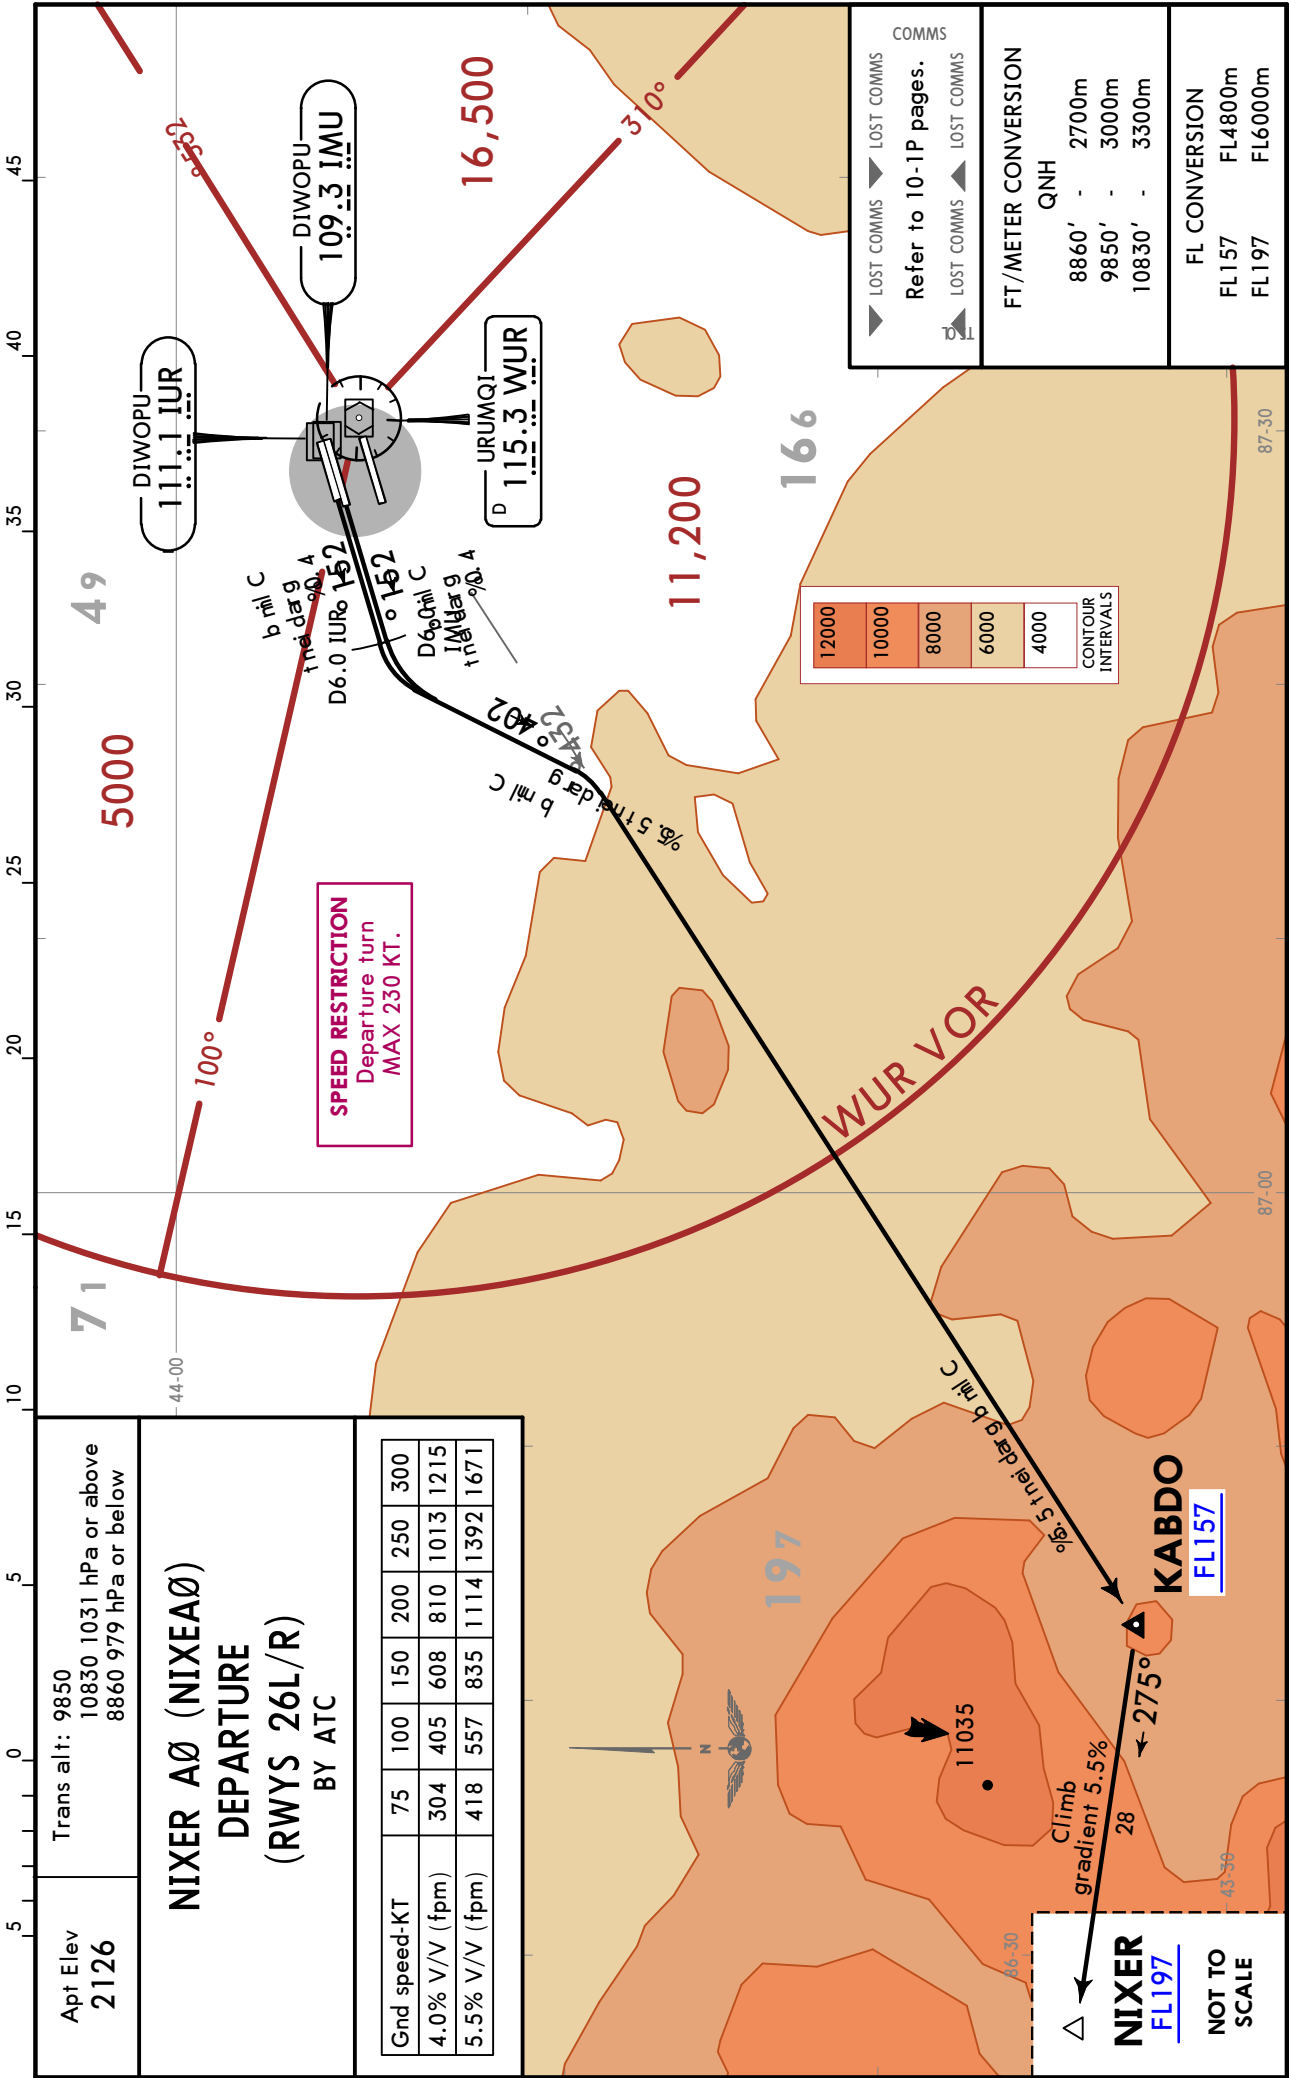



ZWWW/URC

 **JEPPESSEN**
26 SEP 25 **(10-9A)** **Eff 1 Oct 1600Z**

URUMQI, PR OF CHINA
TIANSHAN

ADDITIONAL RUNWAY INFORMATION							
RWY				USABLE LENGTHS		TAKE-OFF	WIDTH
				LANDING BEYOND			
				Threshold	Glide Slope		
08L ① 26R	HIRL (60m) CL(15m) ② PALS CAT I (LIH) SFL	RVR			9416' 2870m		148'
	PAPI-L (angle 3.0°, MEHT 68') HSTIL						45m
	HIRL (60m) CL(15m) ② PALS CAT III (LIH) SFL	RVR			9416' 2870m		
	TDZ PAPI-L (angle 3.0°, MEHT 68') HSTIL						
① grooved ② length 900m							
08R ③ 26L	HIRL (60m) CL(15m) ④ PALS CAT I (LIH) SFL	RVR			10,732' 3271m	⑤	148'
	PAPI-L (angle 3.0°, MEHT 68') HSTIL						45m
	HIRL (60m) CL(15m) ④ PALS CAT I (LIH) SFL	RVR			10,728' 3270m		
	PAPI-L (angle 3.0°, MEHT 68') HSTIL						
③ grooved ④ length 900m ⑤ TAKE-OFF RUN AVAILABLE							
RWY 08R: From RWY head 11,811' (3600m)				RWY 26L: From RWY head 11,811' (3600m)			
TWY M9 int 11,506' (3507m)				TWY M2 int 11,506' (3507m)			
TWY M8 int 10,194' (3107m)				TWY M3 int 11,178' (3407m)			

HOT SPOTS

(For information only, not to be construed as ATC instructions.)

HS1

South of intersections between TWYs N and G1, G2 and
North of intersections between TWYs K and G1, G2:

ACFT taxiing on TWY N or K from West to East shall hold out of TWY G2
before crossing;
ACFT taxiing on TWY N or K from East to West shall hold out of TWY G2
before crossing.

HS2

Intersection between TWYs E1 and G:

ACFT taxiing on TWY E1 shall hold out of TWY G before crossing,
ACFT taxiing on TWY G shall hold out of TWY E1 before crossing.


State		TAKE-OFF (with reliable alternate)			
		LVP must be in force		All Rwys	
		Rwy 26L, 26R			
		RL & CL & 3 RVRs	RL & CL	RL	NIL (DAY only)
2 TURB Eng or 3 & 4 Eng	A	R150m	R200m	R400m V800m	R500m V800m
	B				
	C				
	D	R200m	R250m		
Other 1 & 2 Eng		Minimums not established by CAAC			



D-ATIS Departure	Data Comm D-ATIS DCL	TIANSHAN Delivery	TIANSHAN Ground	TIANSHAN Apron		Tower
126.7		121.9	121.55 121.65	APN01 121.8	APN02 121.95	APN03 122.15 118.1 118.75

TAXI ROUTES DEPARTURE

If taxiing route crosses the RWY, hold short of RWY before receiving the RWY crossing clearance from ATC. Except special clarification, taxiing clearance finishes at RWY holding position.

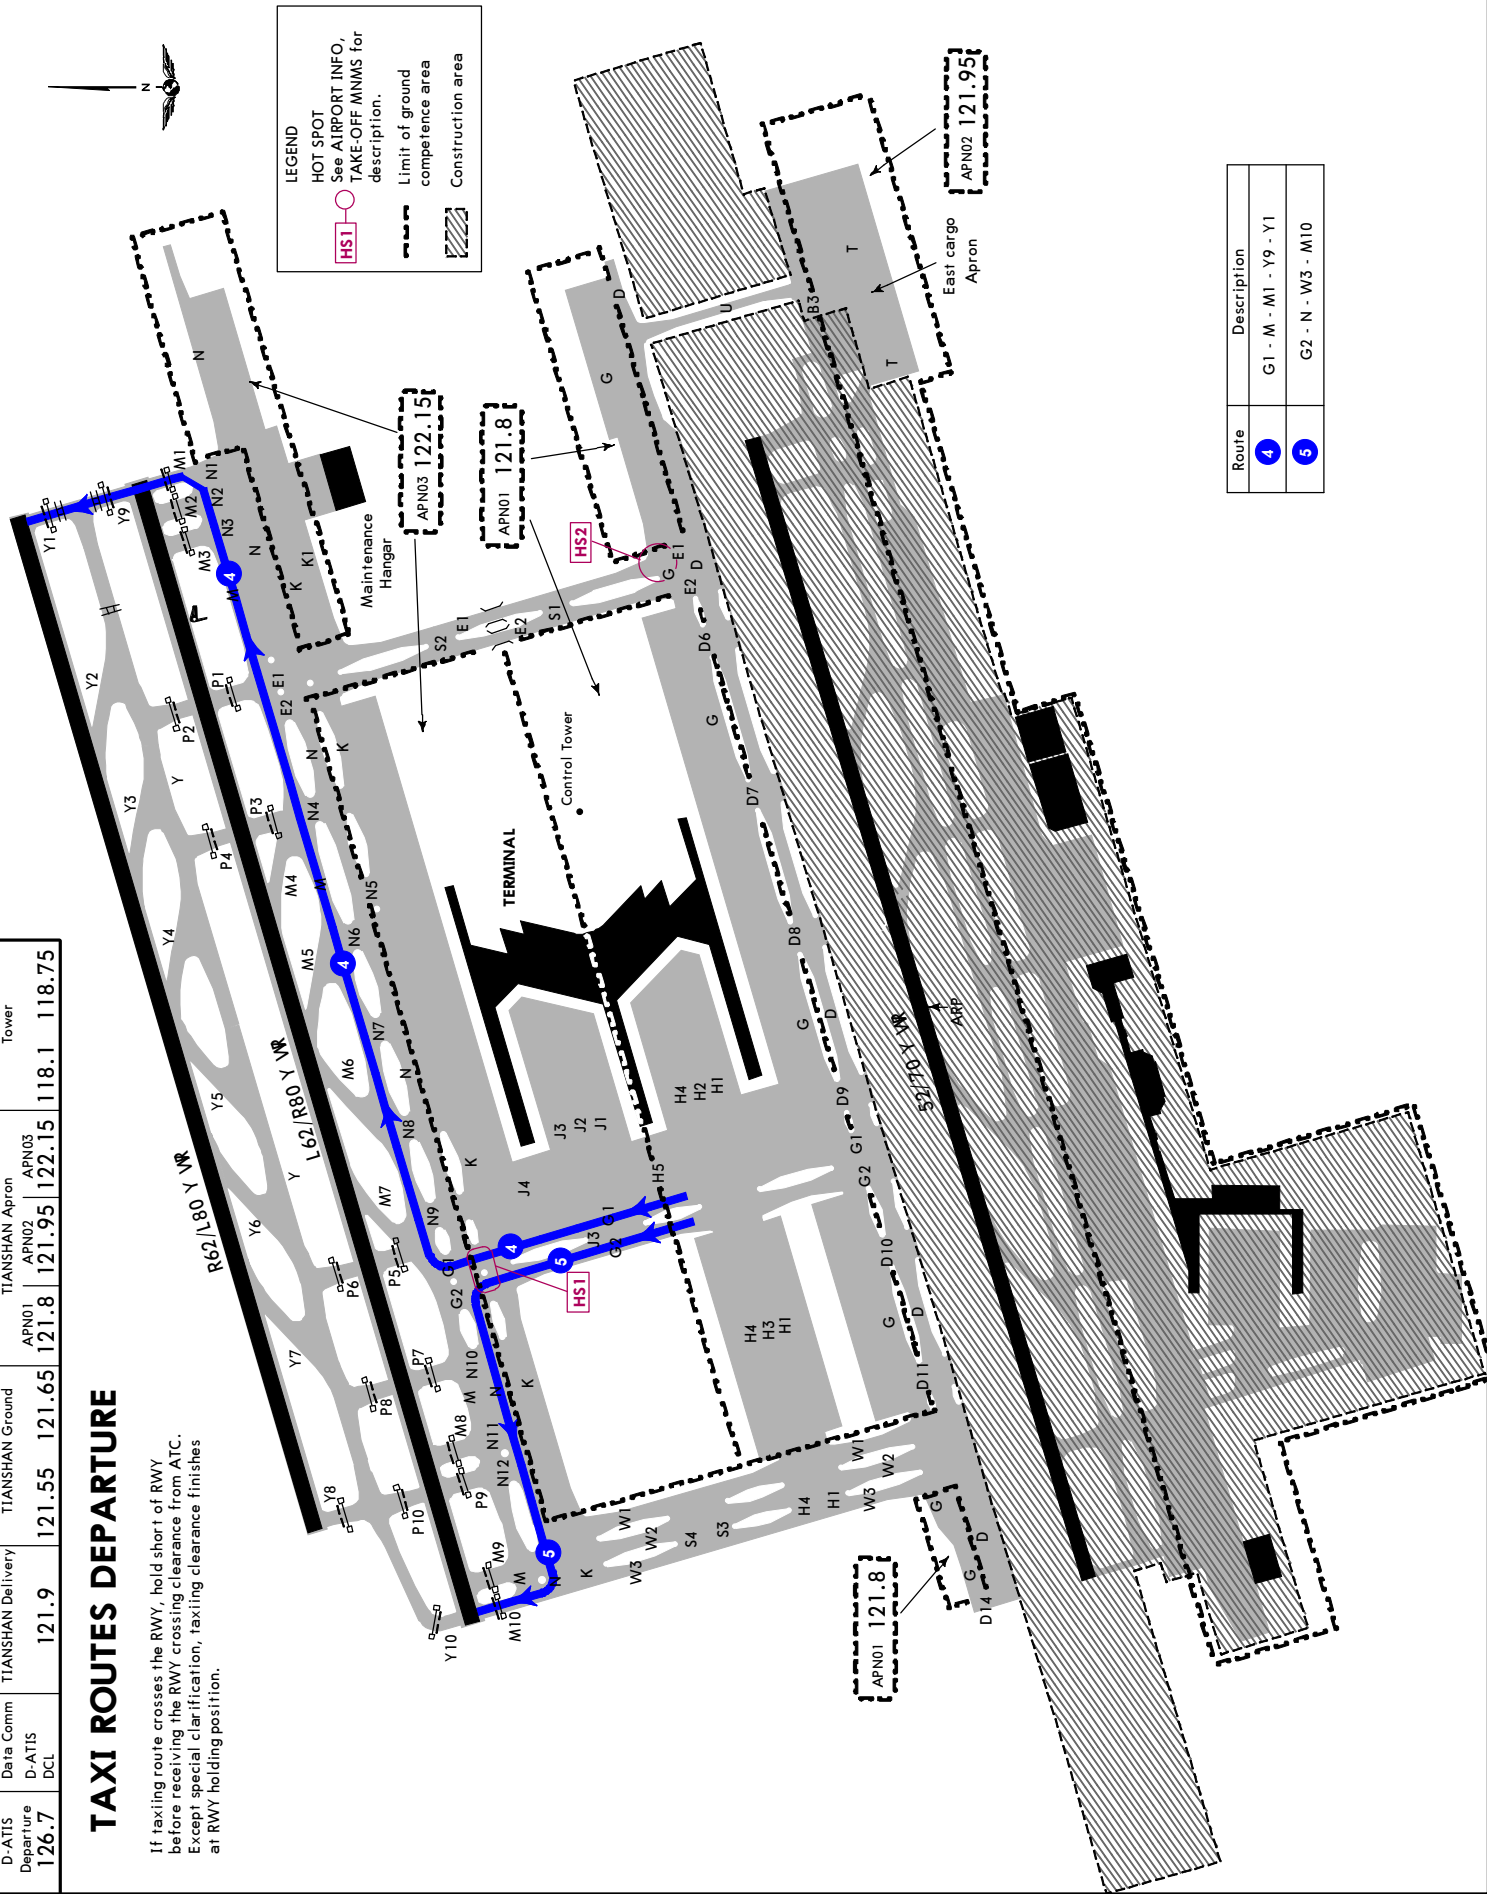


Route	Description
4	G1 - M - M1 - Y9 - Y1
5	G2 - N - W3 - M10

D-ATIS Departure	Data Comm D-ATIS DCL	TIANSHAN Delivery		TIANSHAN Ground		TIANSHAN Apron		Tower
		121.9	121.55	121.65	APN01 121.8	APN02 121.95	APN03 122.15	
126.7					118.1	118.75		

TAXI ROUTES ARRIVAL

If taxiing route crosses the RWY, hold short of RWY before receiving the RWY crossing clearance from ATC. Except special clarification, taxiing clearance finishes at RWY holding position.

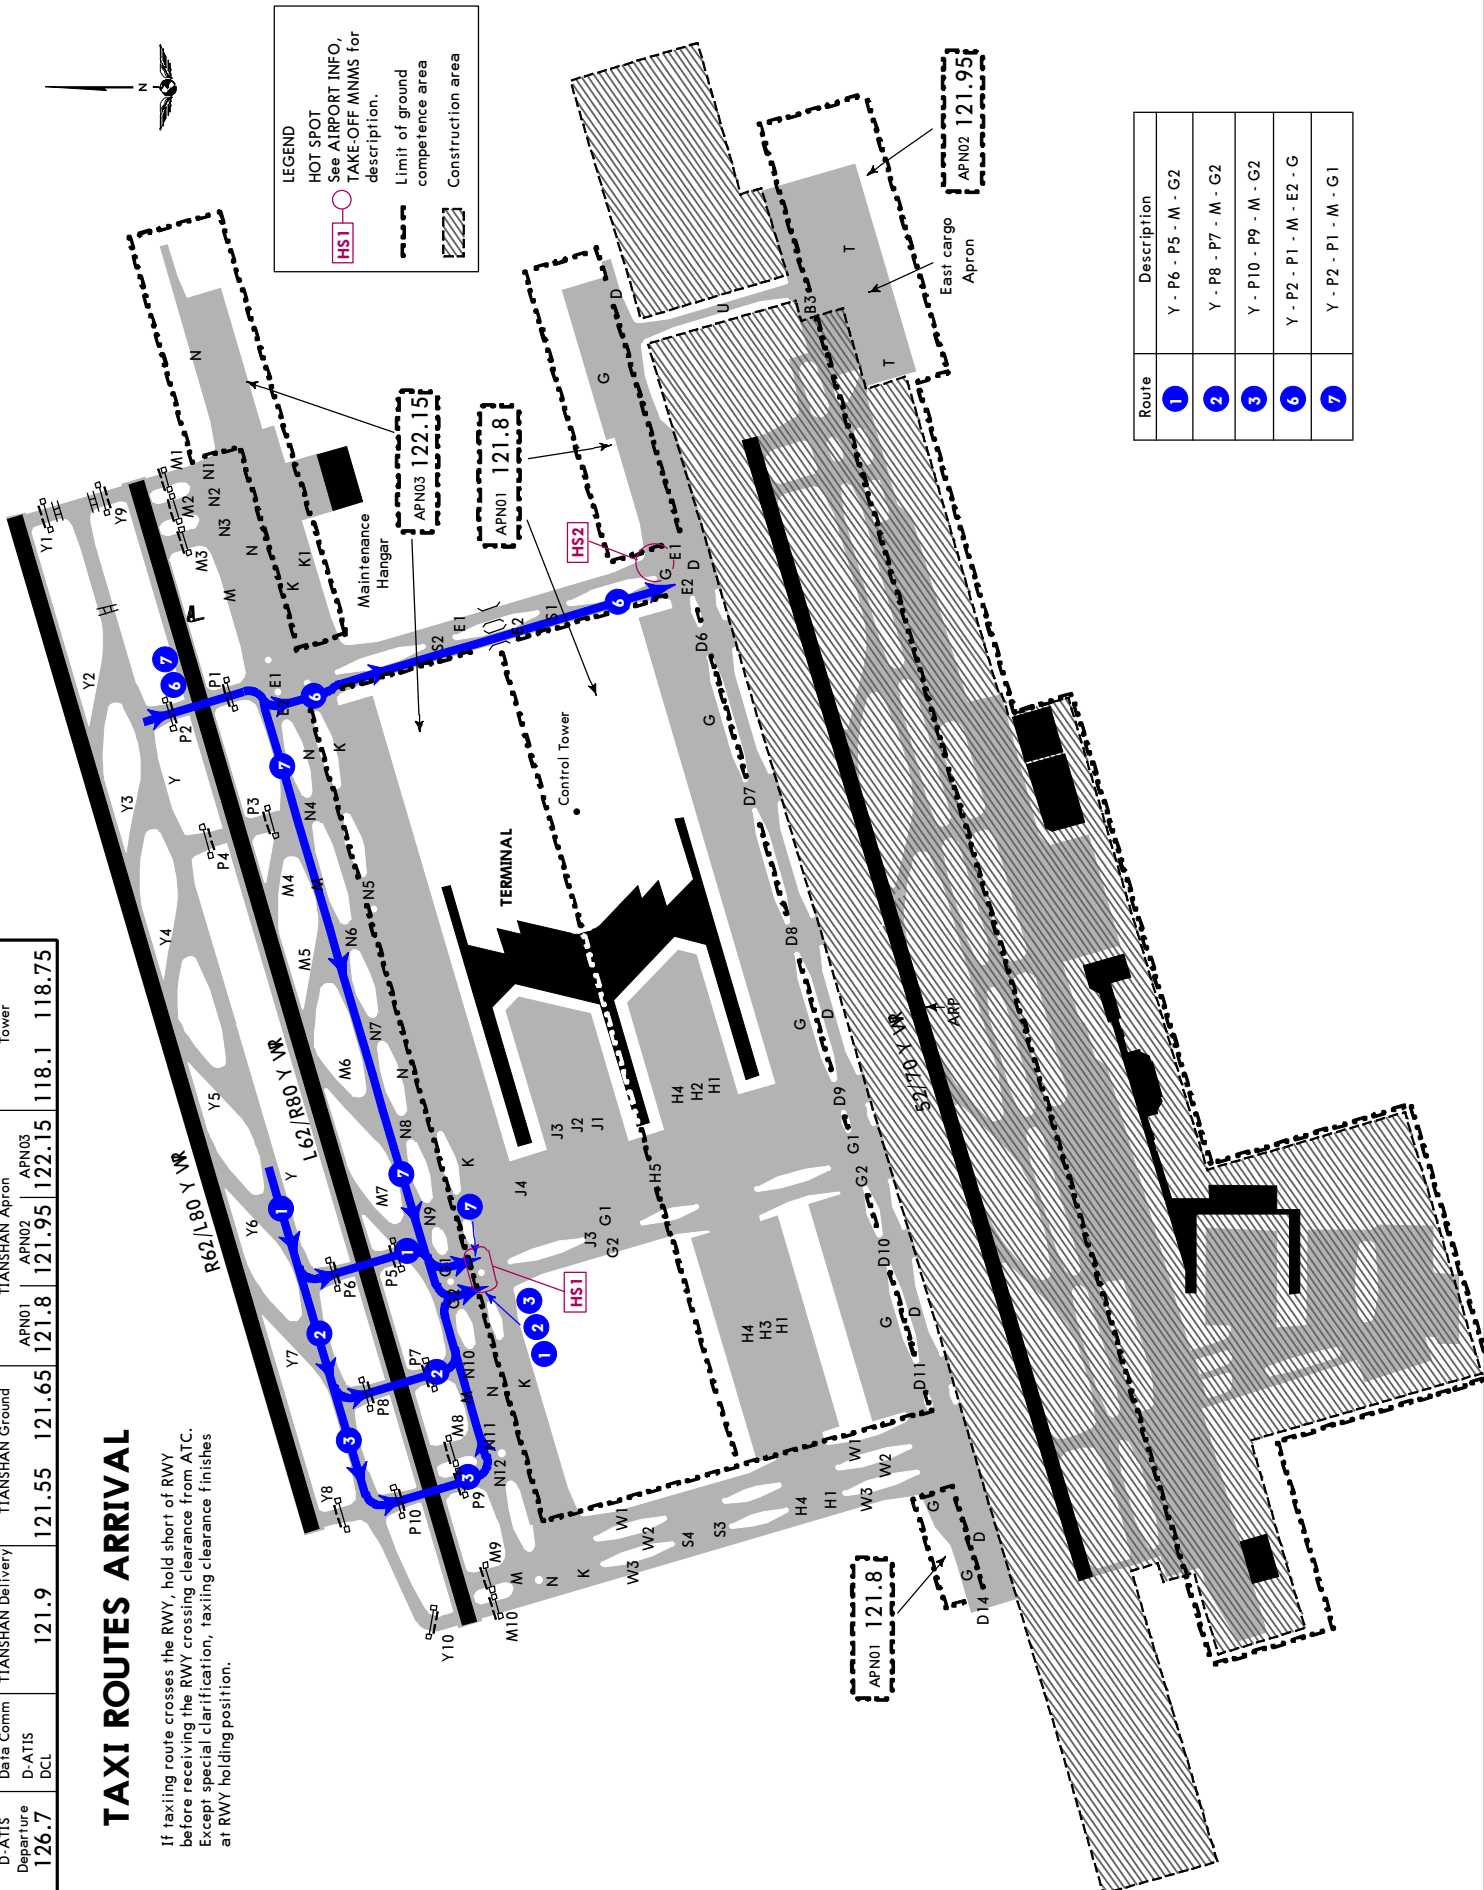

Route	Description
1	Y - P6 - P5 - M - G2
2	Y - P8 - P7 - M - G2
3	Y - P10 - P9 - M - G2
6	Y - P2 - P1 - M - E2 - G
7	Y - P2 - P1 - M - G1

ZWWW/URC

 **JEPPesen**

26 SEP 25

Eff 1 Oct 1600Z

10-9S

EASA AIR OPS

URUMQI, PR OF CHINA

TIANSHAN

STRAIGHT-IN RWY		A	B	C	D
08L	RNAV ILS DME Z or ILS DME Y	2291'(200')	2291'(200')	2291'(200')	2291'(200')
	ALS out	① R550mV800m R/V1200m	① R550mV800m R/V1200m	① R550mV800m R/V1200m	① R550mV800m R/V1200m
	② LOC	2840'(749')	2840'(749')	2840'(749')	2840'(749')
	ALS out	R/V3500m R/V4400m	R/V3500m R/V4400m	R/V3500m R/V4400m	R/V3500m R/V4400m
08R	RNAV ILS DME Z or ILS DME Y	2294'(200')	2294'(200')	2294'(200')	2294'(200')
	ALS out	① R550mV800m R/V1200m	① R550mV800m R/V1200m	① R550mV800m R/V1200m	① R550mV800m R/V1200m
	② LOC	2840'(746')	2840'(746')	2840'(746')	2840'(746')
	ALS out	R/V3500m R/V4400m	R/V3500m R/V4400m	R/V3500m R/V4400m	R/V3500m R/V4400m
26L	RNAV ILS DME Z or ILS DME Y	2294'(200')	2294'(200')	2294'(200')	2294'(200')
	ALS out	① R550mV800m R/V1200m	① R550mV800m R/V1200m	① R550mV800m R/V1200m	① R550mV800m R/V1200m
	② LOC	2810'(716')	2810'(716')	2810'(716')	2810'(716')
	ALS out	R/V3300m R/V4200m	R/V3300m R/V4200m	R/V3300m R/V4200m	R/V3300m R/V4200m
26R	CAT 3B RNAV ILS DME Z or ILS DME Y	RA0' R150m	RA0' R150m	RA0' R150m	RA0' R150m
	CAT 3A RNAV ILS DME Z or ILS DME Y	RA50' R175m	RA50' R175m	RA50' R175m	RA50' R175m
	CAT 2 RNAV ILS DME Z or ILS DME Y	2191'(100') RA109' R300m	2191'(100') RA109' R300m	2191'(100') RA109' R300m	2191'(100') RA109' ③ R300m
	④ SA CAT 1 RNAV ILS DME Z or	2241'(150') RA 174'	2241'(150') RA 174'	2241'(150') RA 174'	2241'(150') RA 174'
	④ SA CAT 1 ILS DME Y	R450m	R450m	R450m	R450m
	RNAV ILS DME Z or ILS DME Y	2291'(200')	2291'(200')	2291'(200')	2291'(200')
	R550mV800m	R550mV800m	R550mV800m	R550mV800m	R550mV800m
	TDZ or CL out	① R550mV800m	① R550mV800m	① R550mV800m	① R550mV800m
	ALS out	R/V1200m	R/V1200m	R/V1200m	R/V1200m
	② LOC	2810'(719')	2810'(719')	2810'(719')	2810'(719')
	R/V3300m	R/V3300m	R/V3300m	R/V3300m	R/V3300m
	TDZ or CL out	R/V3300m	R/V3300m	R/V3300m	R/V3300m
	ALS out	R/V4200m	R/V4200m	R/V4200m	R/V4200m

- ① R800m when a Flight Director or Autopilot or HUDLS to DA is not used.
- ② Continuous Descent Final Approach.
- ③ Requires autoland or HUDLS, otherwise: R350m.
- ④ HUD required.

ZWWW/URC

 **JEPPesen**

EASA AIR OPS

26 SEP 25
Eff 1 Oct 1600Z **10-9S1**

URUMQI, PR OF CHINA
TIANSHAN

CIRCLE-TO-LAND	100 KT	135 KT	180 KT	205 KT
North of RWY only	2880' (754')	2880' (754')	3020' (894')	3020' (894')
	1 V3500m	1 V3500m	1 V4000m	V4400m

1 or higher straight-in minimums.

TAKE-OFF

(with reliable alternate)


		Rwy 26L, 26R		All Rwys	
		Low Visibility Procedures required.			
		Approval for Low Visibility Take-off required.			
		RL & CL & 3 RVRs		RL & CL	
2 TURB Eng or 3 & 4 Eng	A	R150m	R200m	R400m V800m	R500m V800m
	B				
	C				
	D	R200m	R250m		
Other 1 & 2 Eng		Minimums not established by CAAC			

CHANGES: Take-off minimums.

© JEPPesen, 2025. ALL RIGHTS RESERVED.

ZWWW/URC
TIANSHAN


JEPPESSEN URUMQI, PR OF CHINA
18 JUL 25 (11-5) RNAV ILS DME Z Rwy 08L

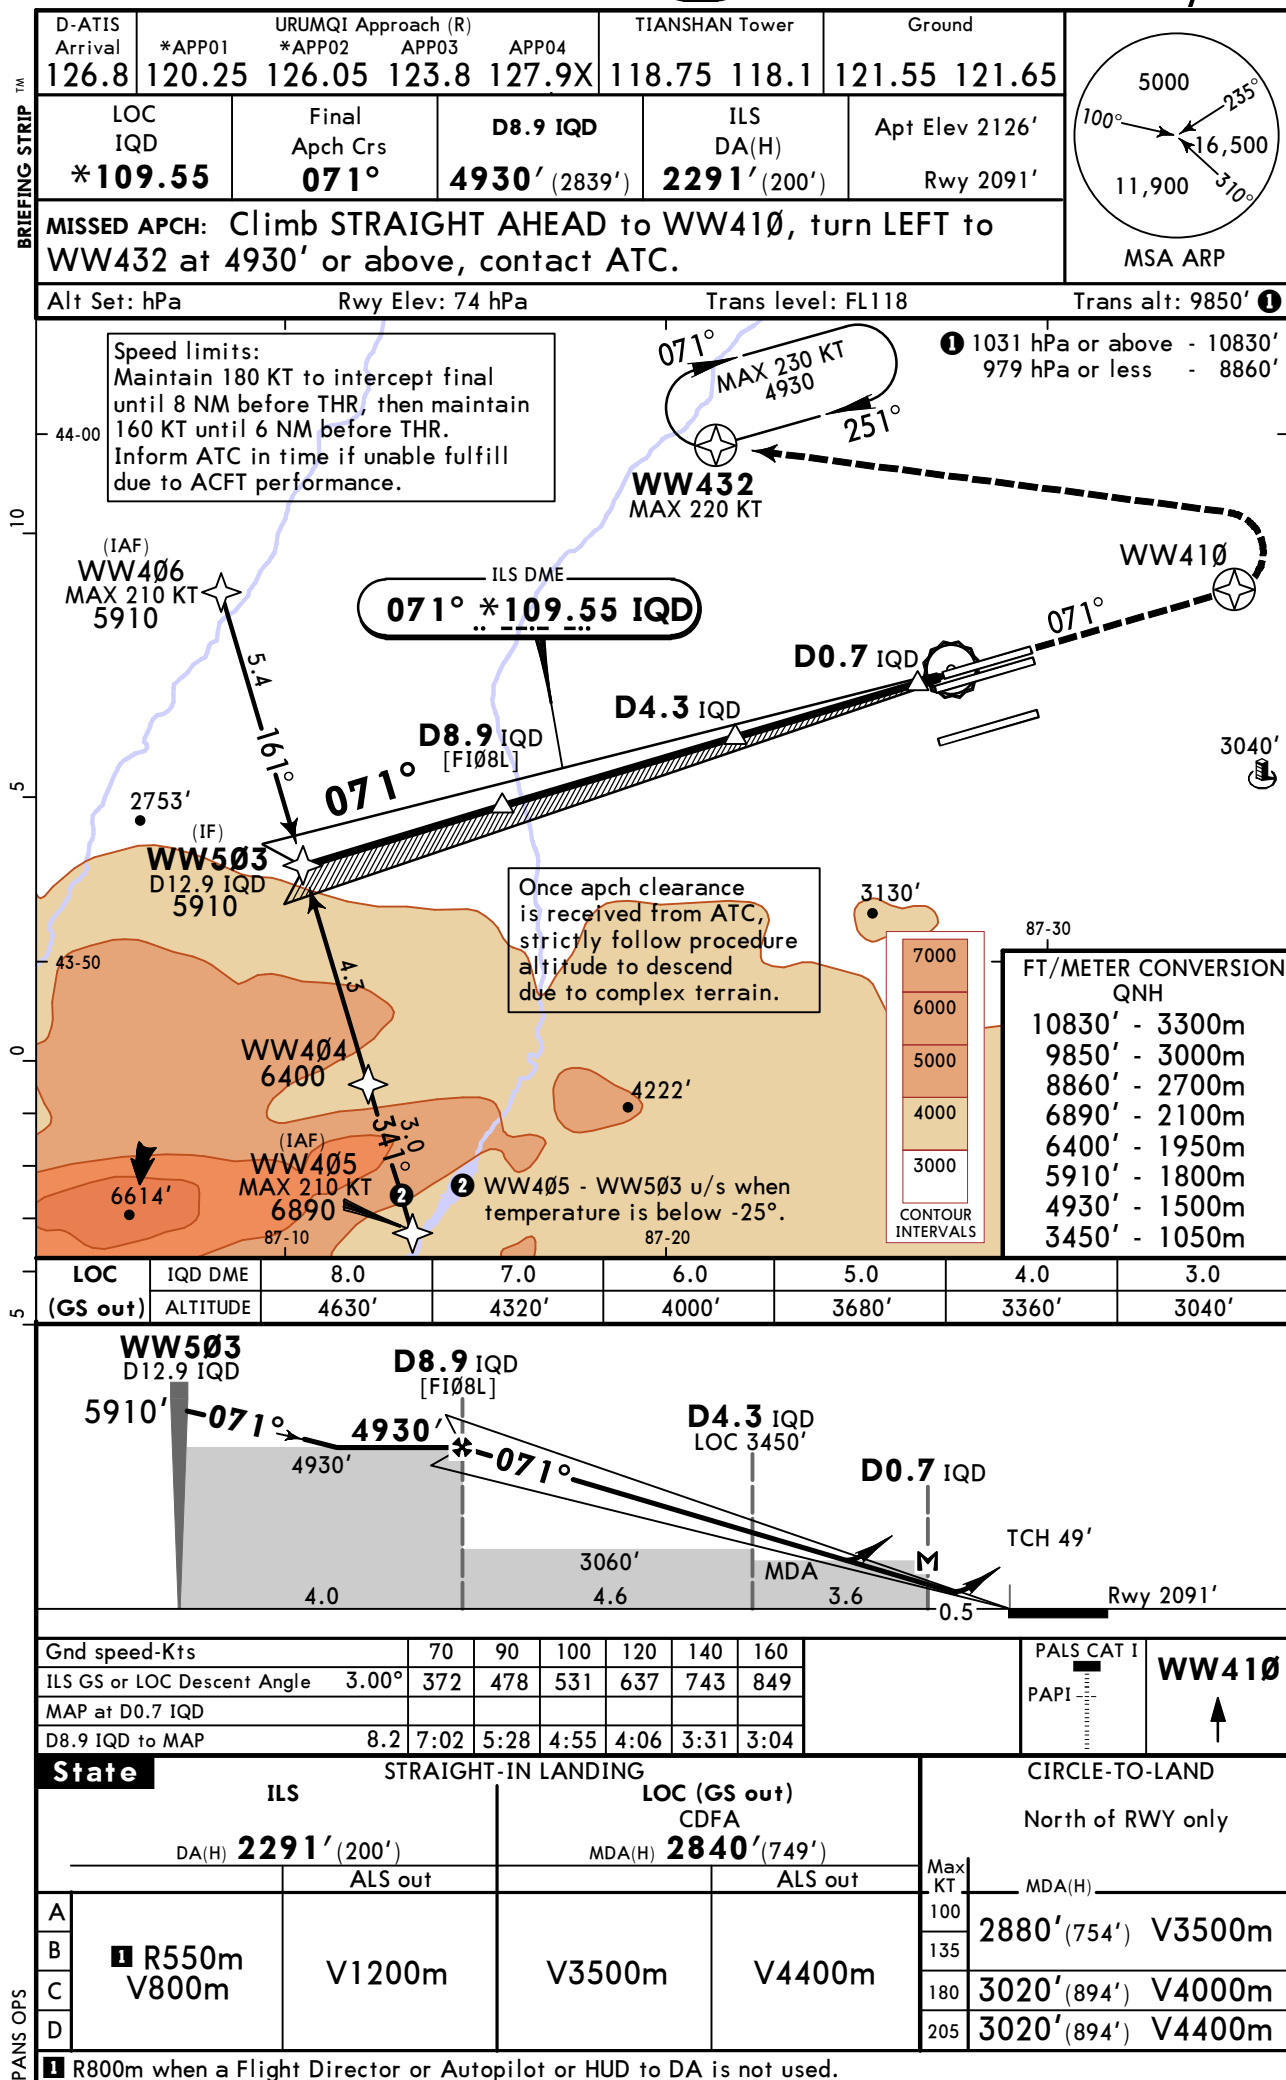

ZWWW/URC
TIANSHAN


18 JUL 25 (11-6)

URUMQI, PR OF CHINA
ILS DME Y Rwy 08L

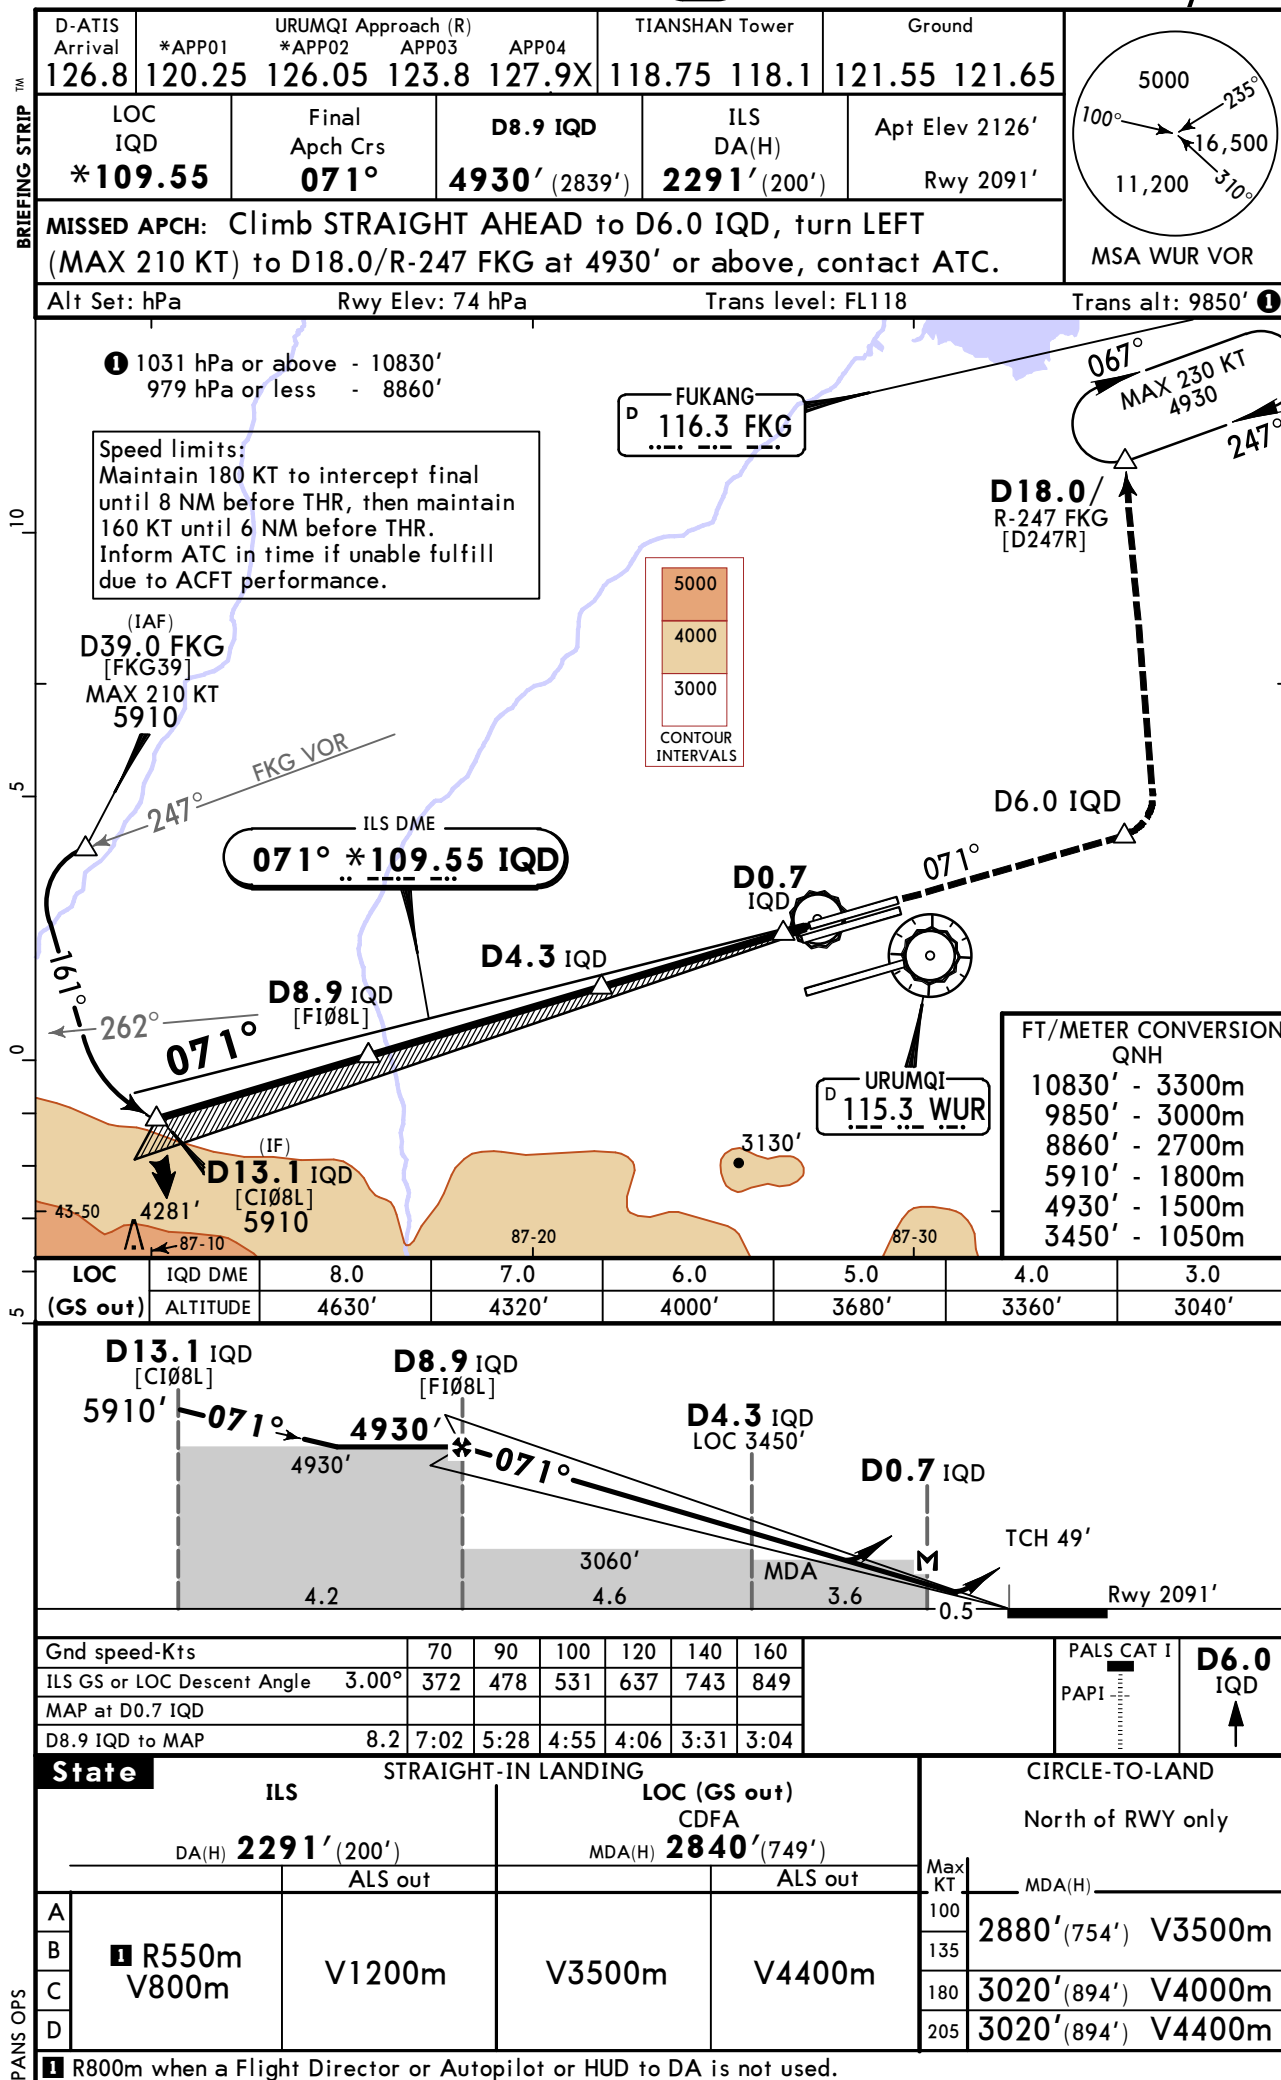


ZWWW/URC
TIANSHAN

JEPPESSEN URUMQI, PR OF CHINA
18 JUL 25 **(11-7)** RNAV ILS DME Z Rwy 08R

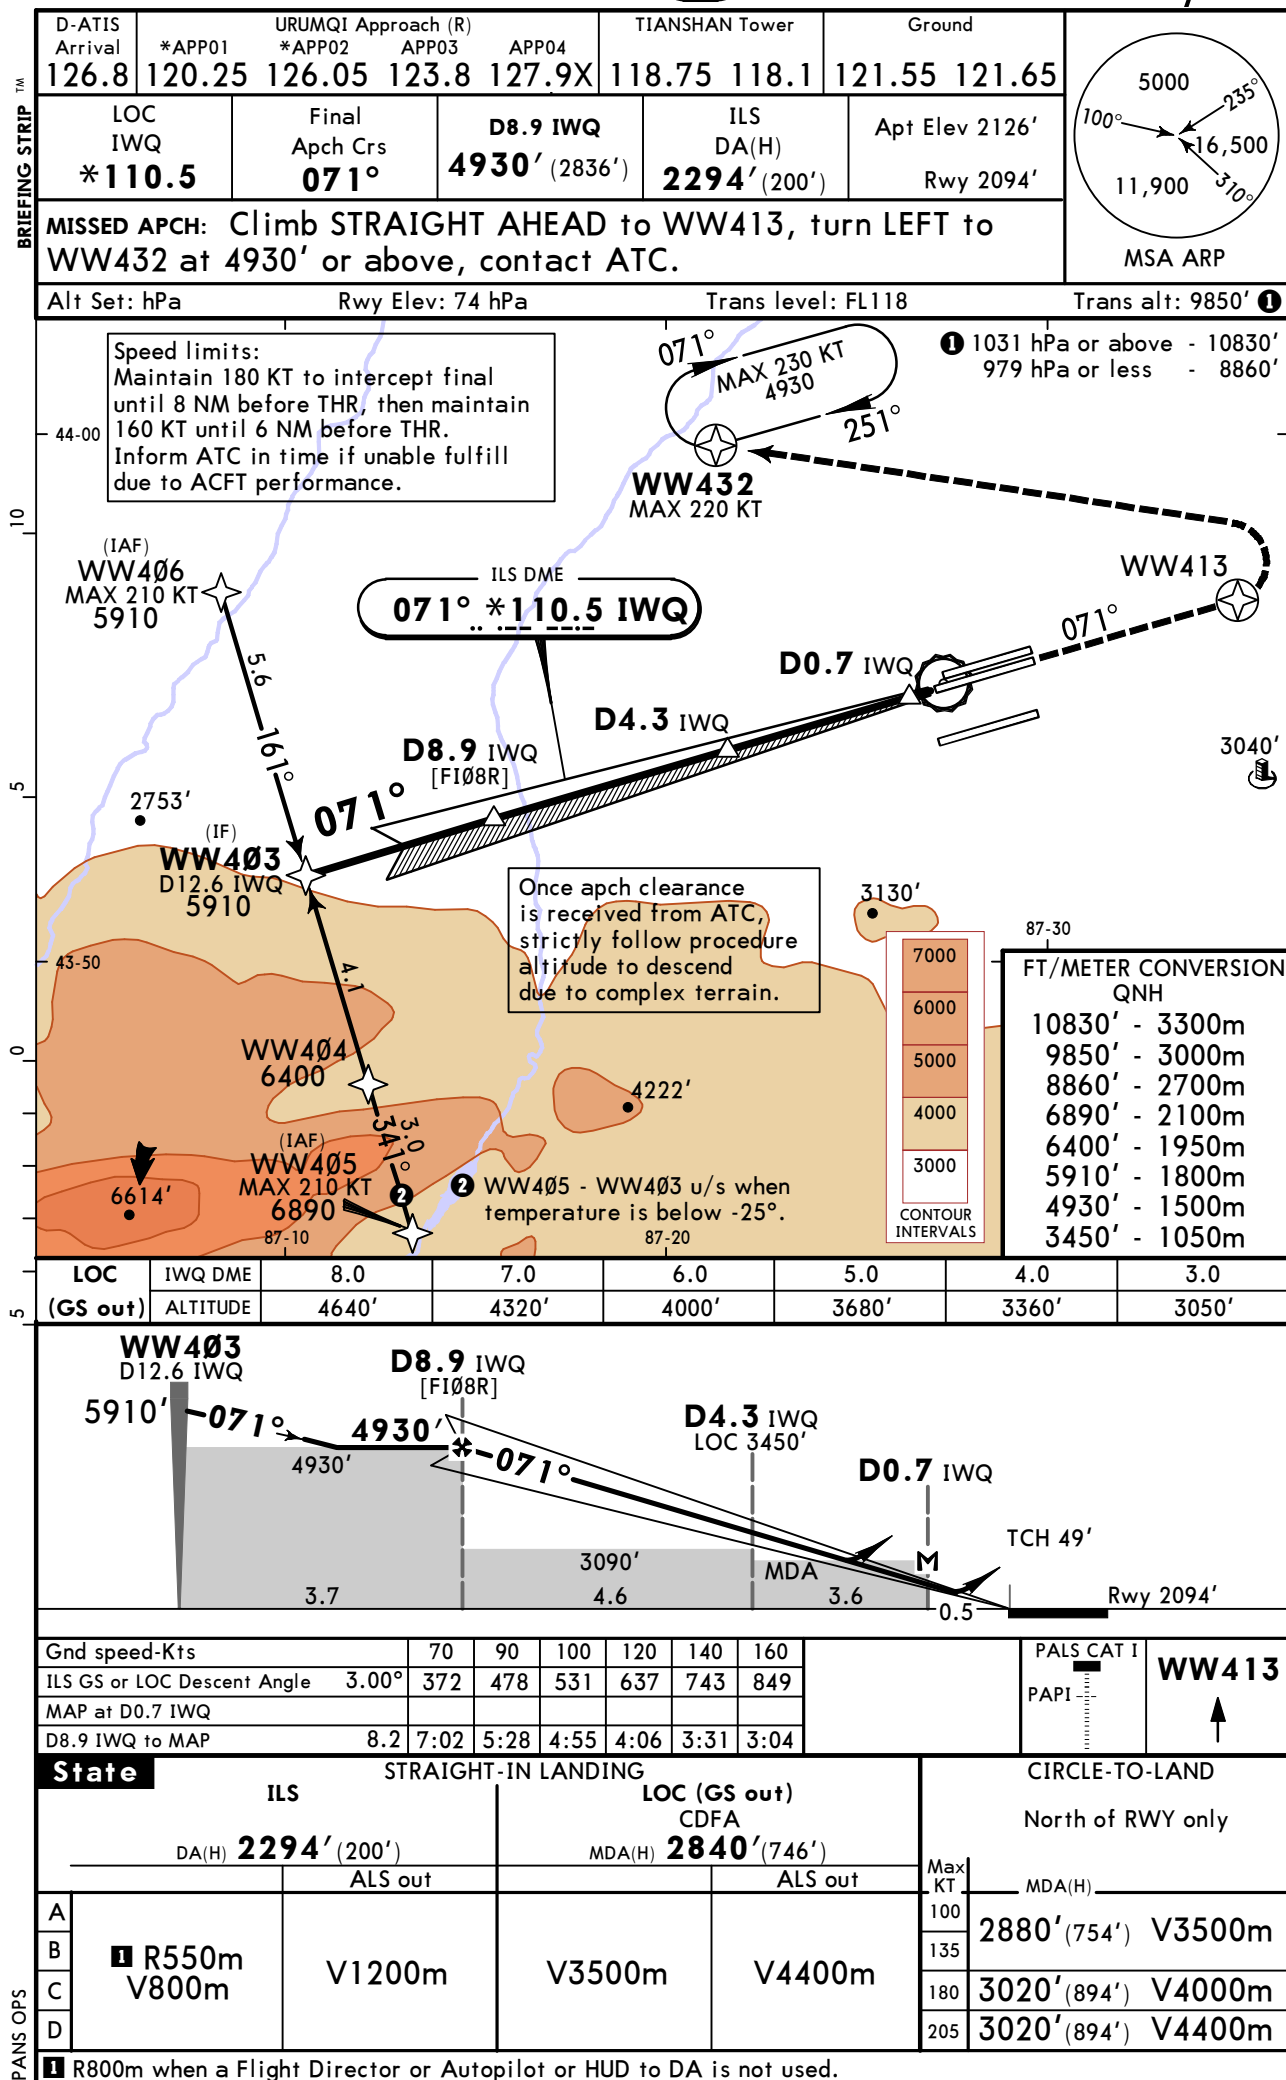

ZWWW/URC
TIANSHAN


JEPPESSEN URUMQI, PR OF CHINA
18 JUL 25 (11-9) RNAV ILS DME Z Rwy 26L

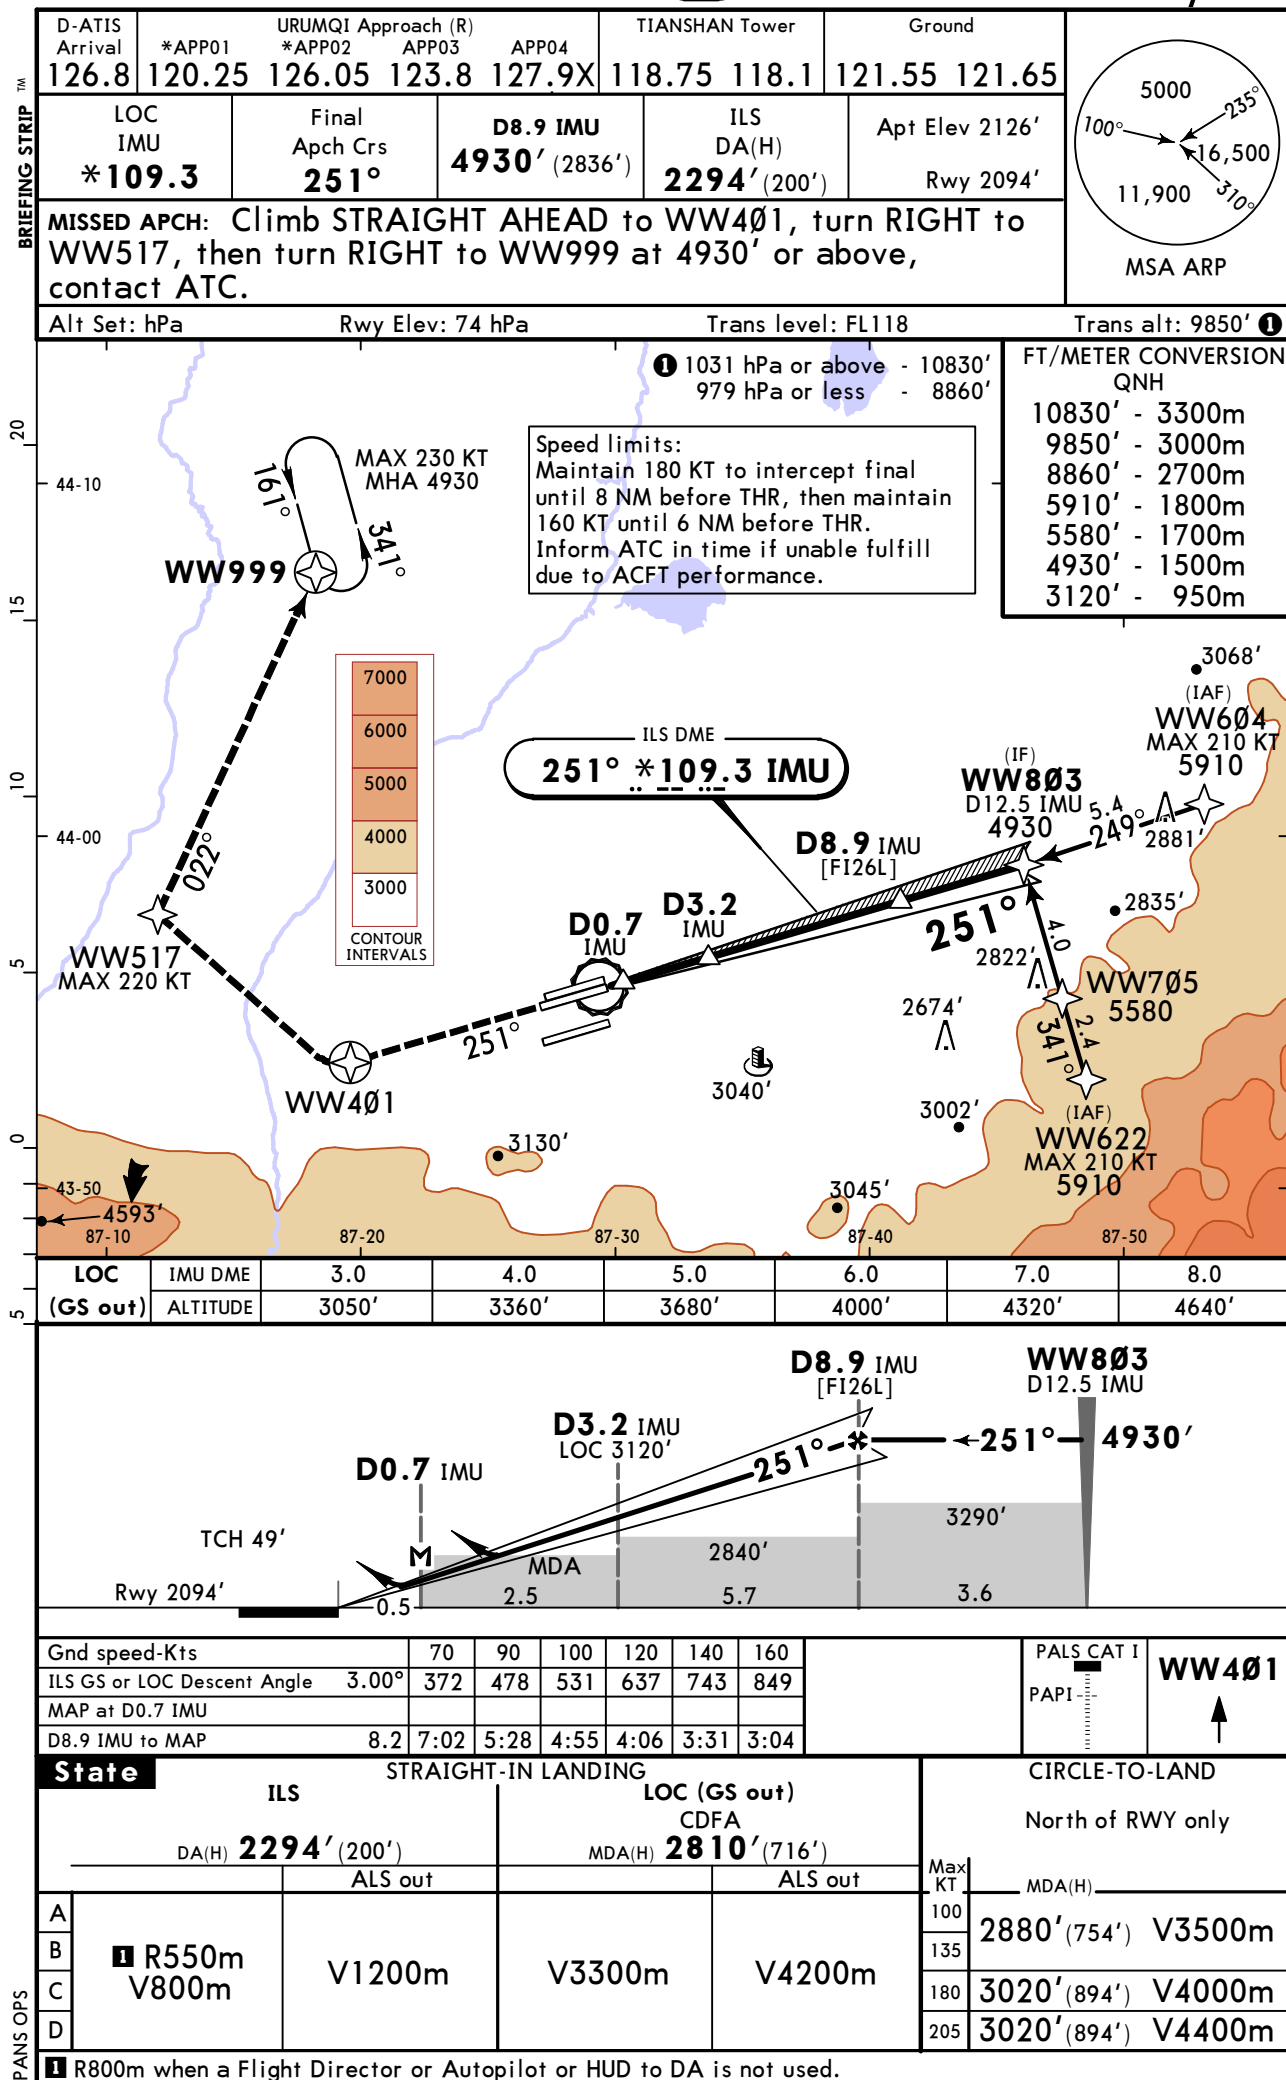

ZWWW/URC
TIANSHAN

18 JUL 25 (11-10)

URUMQI, PR OF CHINA
ILS DME Y Rwy 26L

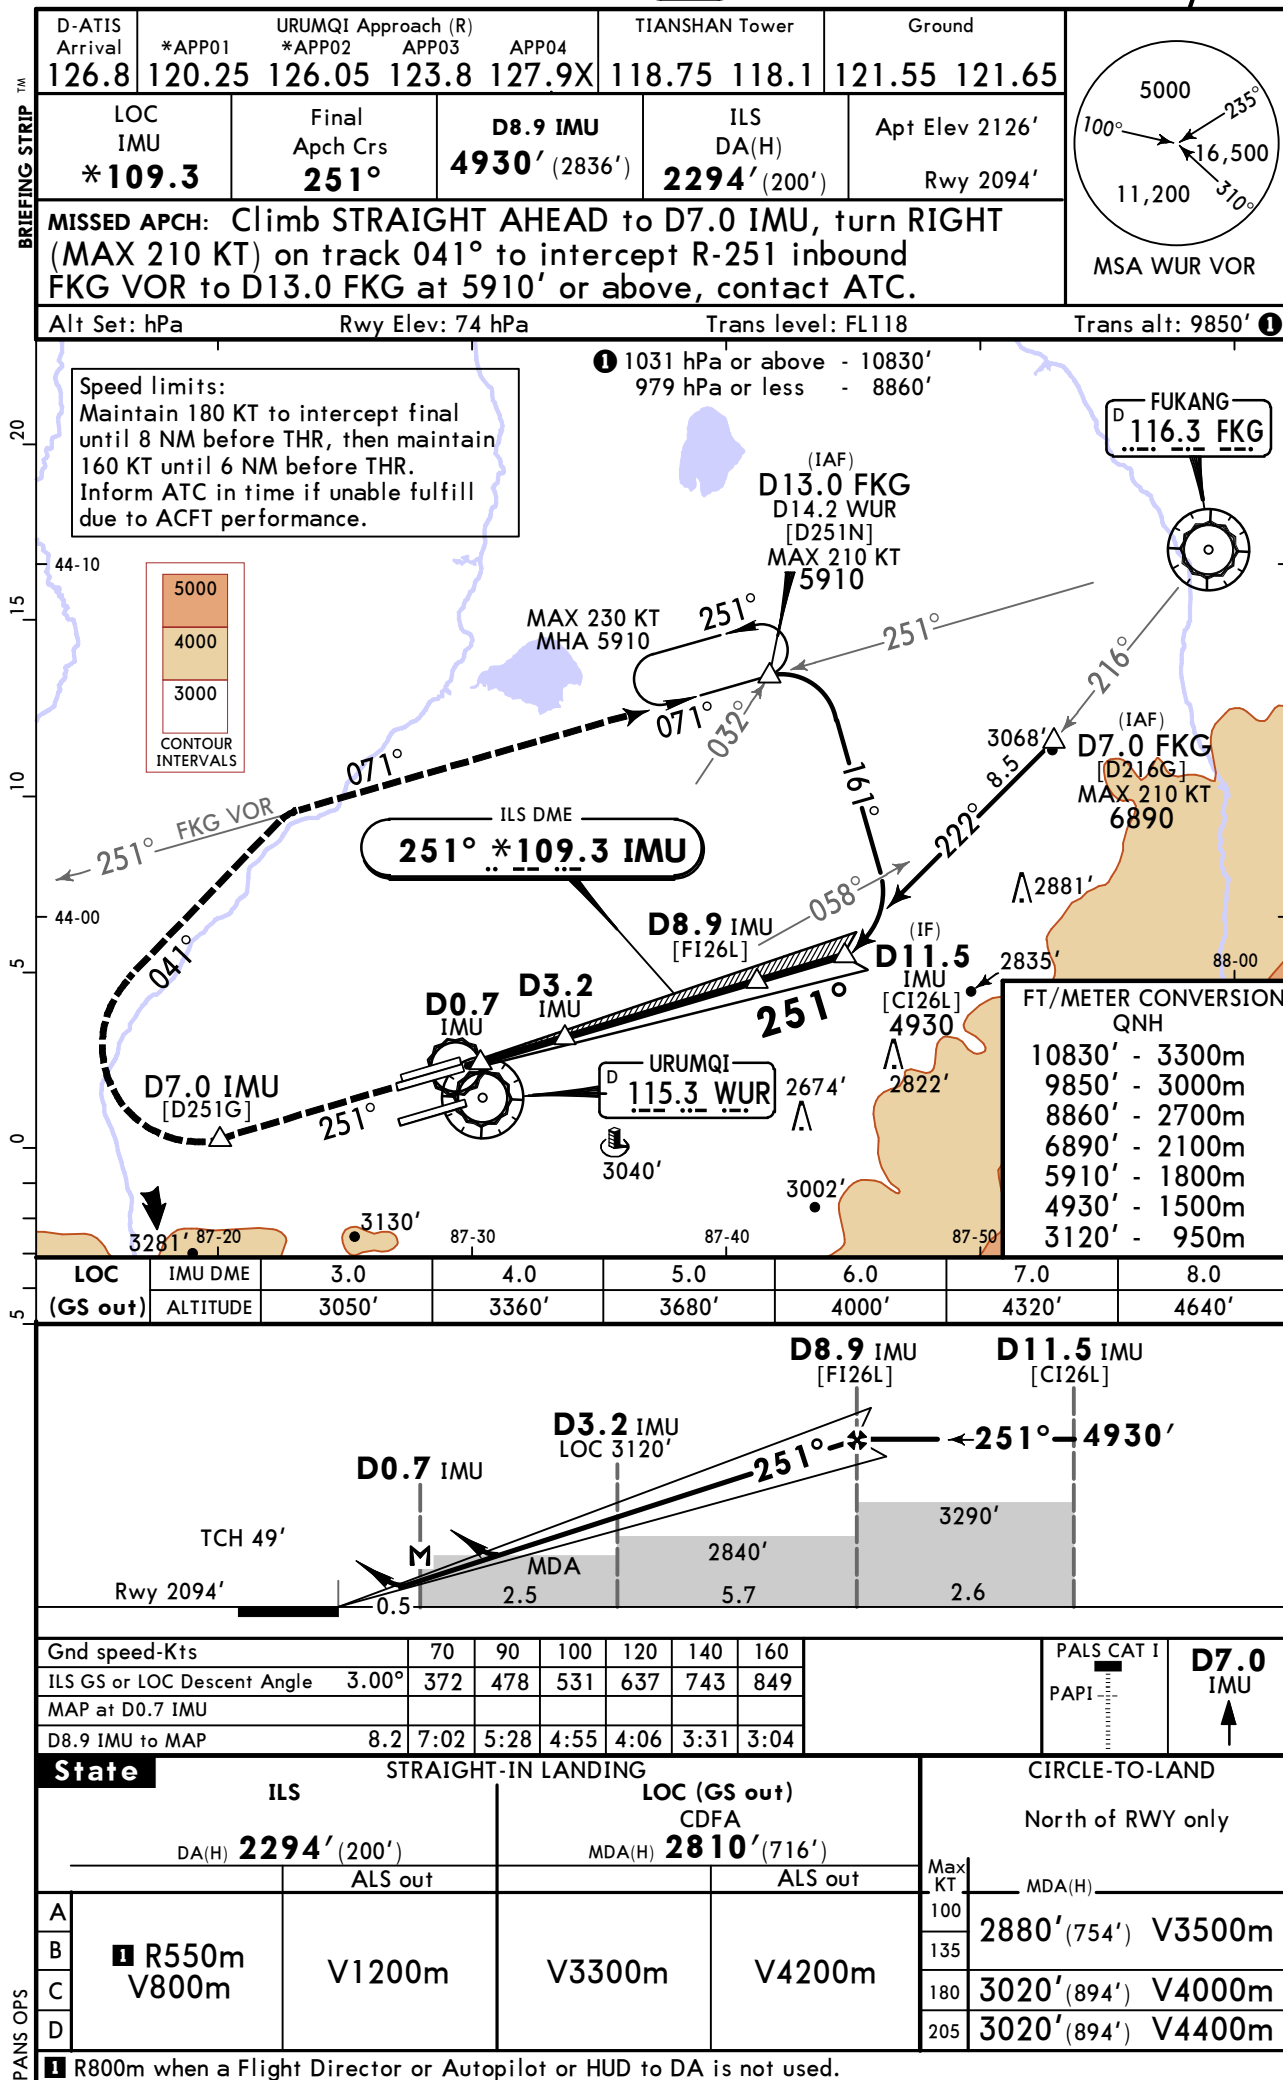

ZWWW/URC
TIANSHAN


26 SEP 25
Eff 1 Oct 1600Z

JEPPESEN


URUMQI, PR OF CHINA
11-11A CAT II/III RNAV ILS DME Z Rwy 26R

D-ATIS Arrival	*APP01	URUMQI Approach (R) *APP02	APP03	APP04	TIANSHAN Tower		Ground	
126.8	120.25	126.05	123.8	127.9X	118.75	118.1	121.55	121.65
LOC IUR	Final Apch Crs	D8.9 IUR		CAT IIIB	CAT IIIA	CAT II ILS	Apt Elev 2126'	
*111.1	251°	4930' (2839')		Refer to Minimums		RA 109' DA(H) 2191' (100')	Rwy 2091'	


MISSED APCH: Climb STRAIGHT AHEAD to WW501, turn RIGHT to WW517, then turn RIGHT to WW999 at 4930' or above, contact ATC.



Alt Set: hPa Rwy Elev: 74 hPa Trans level: FL118 Trans alt: 9850' ①

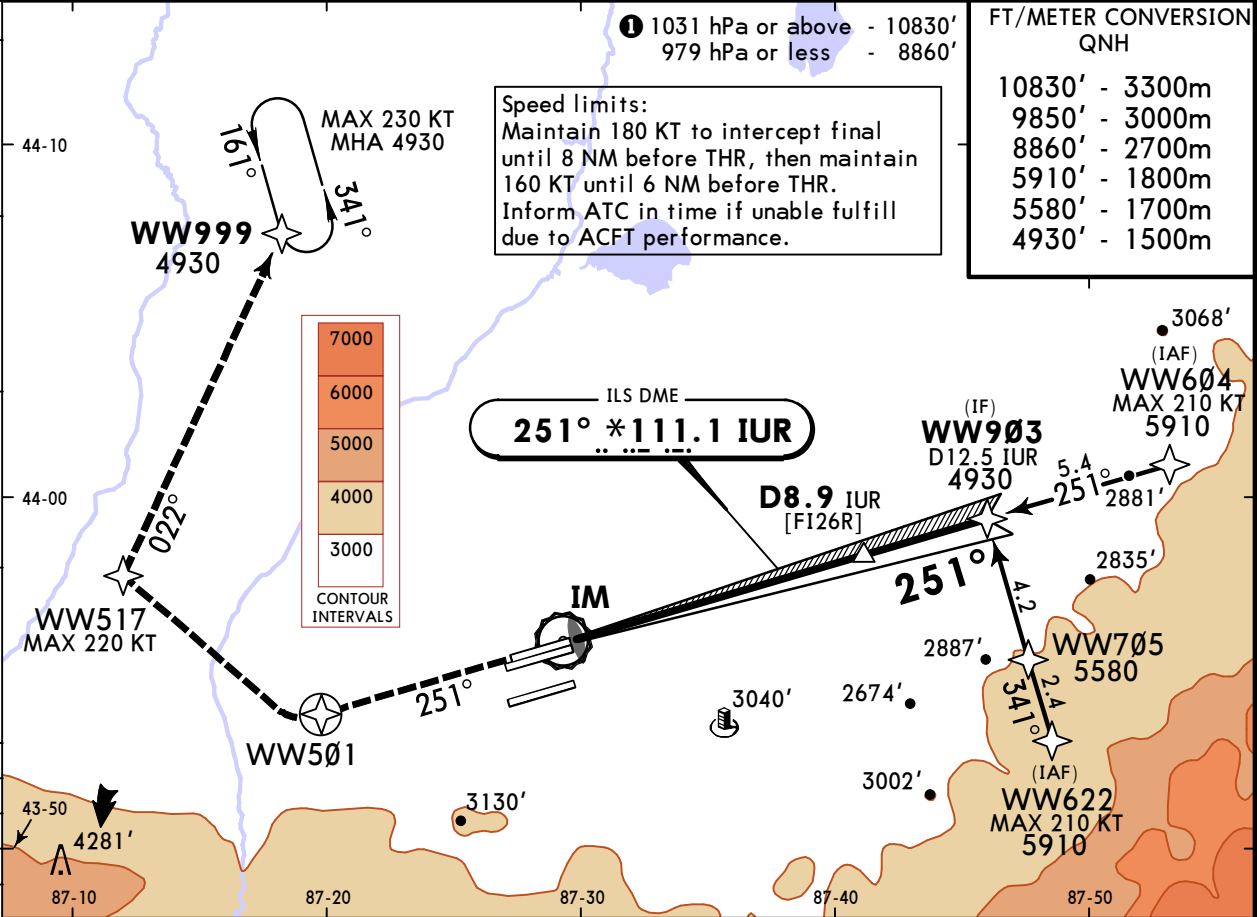

FT/METER CONVERSION QNH	
10830'	3300m
9850'	3000m
8860'	2700m
5910'	1800m
5580'	1700m
4930'	1500m

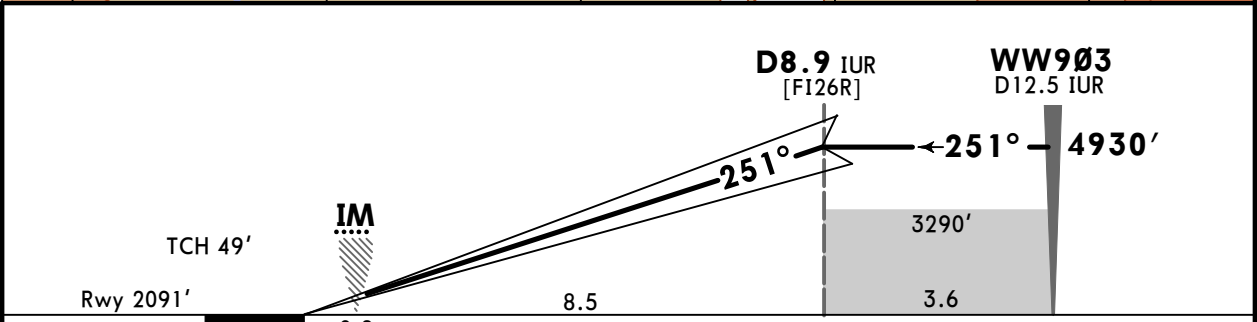


Gnd speed-Kts	70	90	100	120	140	160	PALS CAT III	
GS	3.00°	372	478	531	637	743	849	WW501

State		STRAIGHT-IN LANDING	
CAT IIIB ILS	CAT IIIA ILS	CAT II ILS	
DH RA 0'	DH RA 50'	RA 109' DA(H) 2191' (100')	
R150m	R175m	I R300m	
I CAT D: R350m for manual operation below DH			

ZWWW/URC
TIANSHAN

18 JUL 25 (11-12)

URUMQI, PR OF CHINA
ILS DME Y Rwy 26R

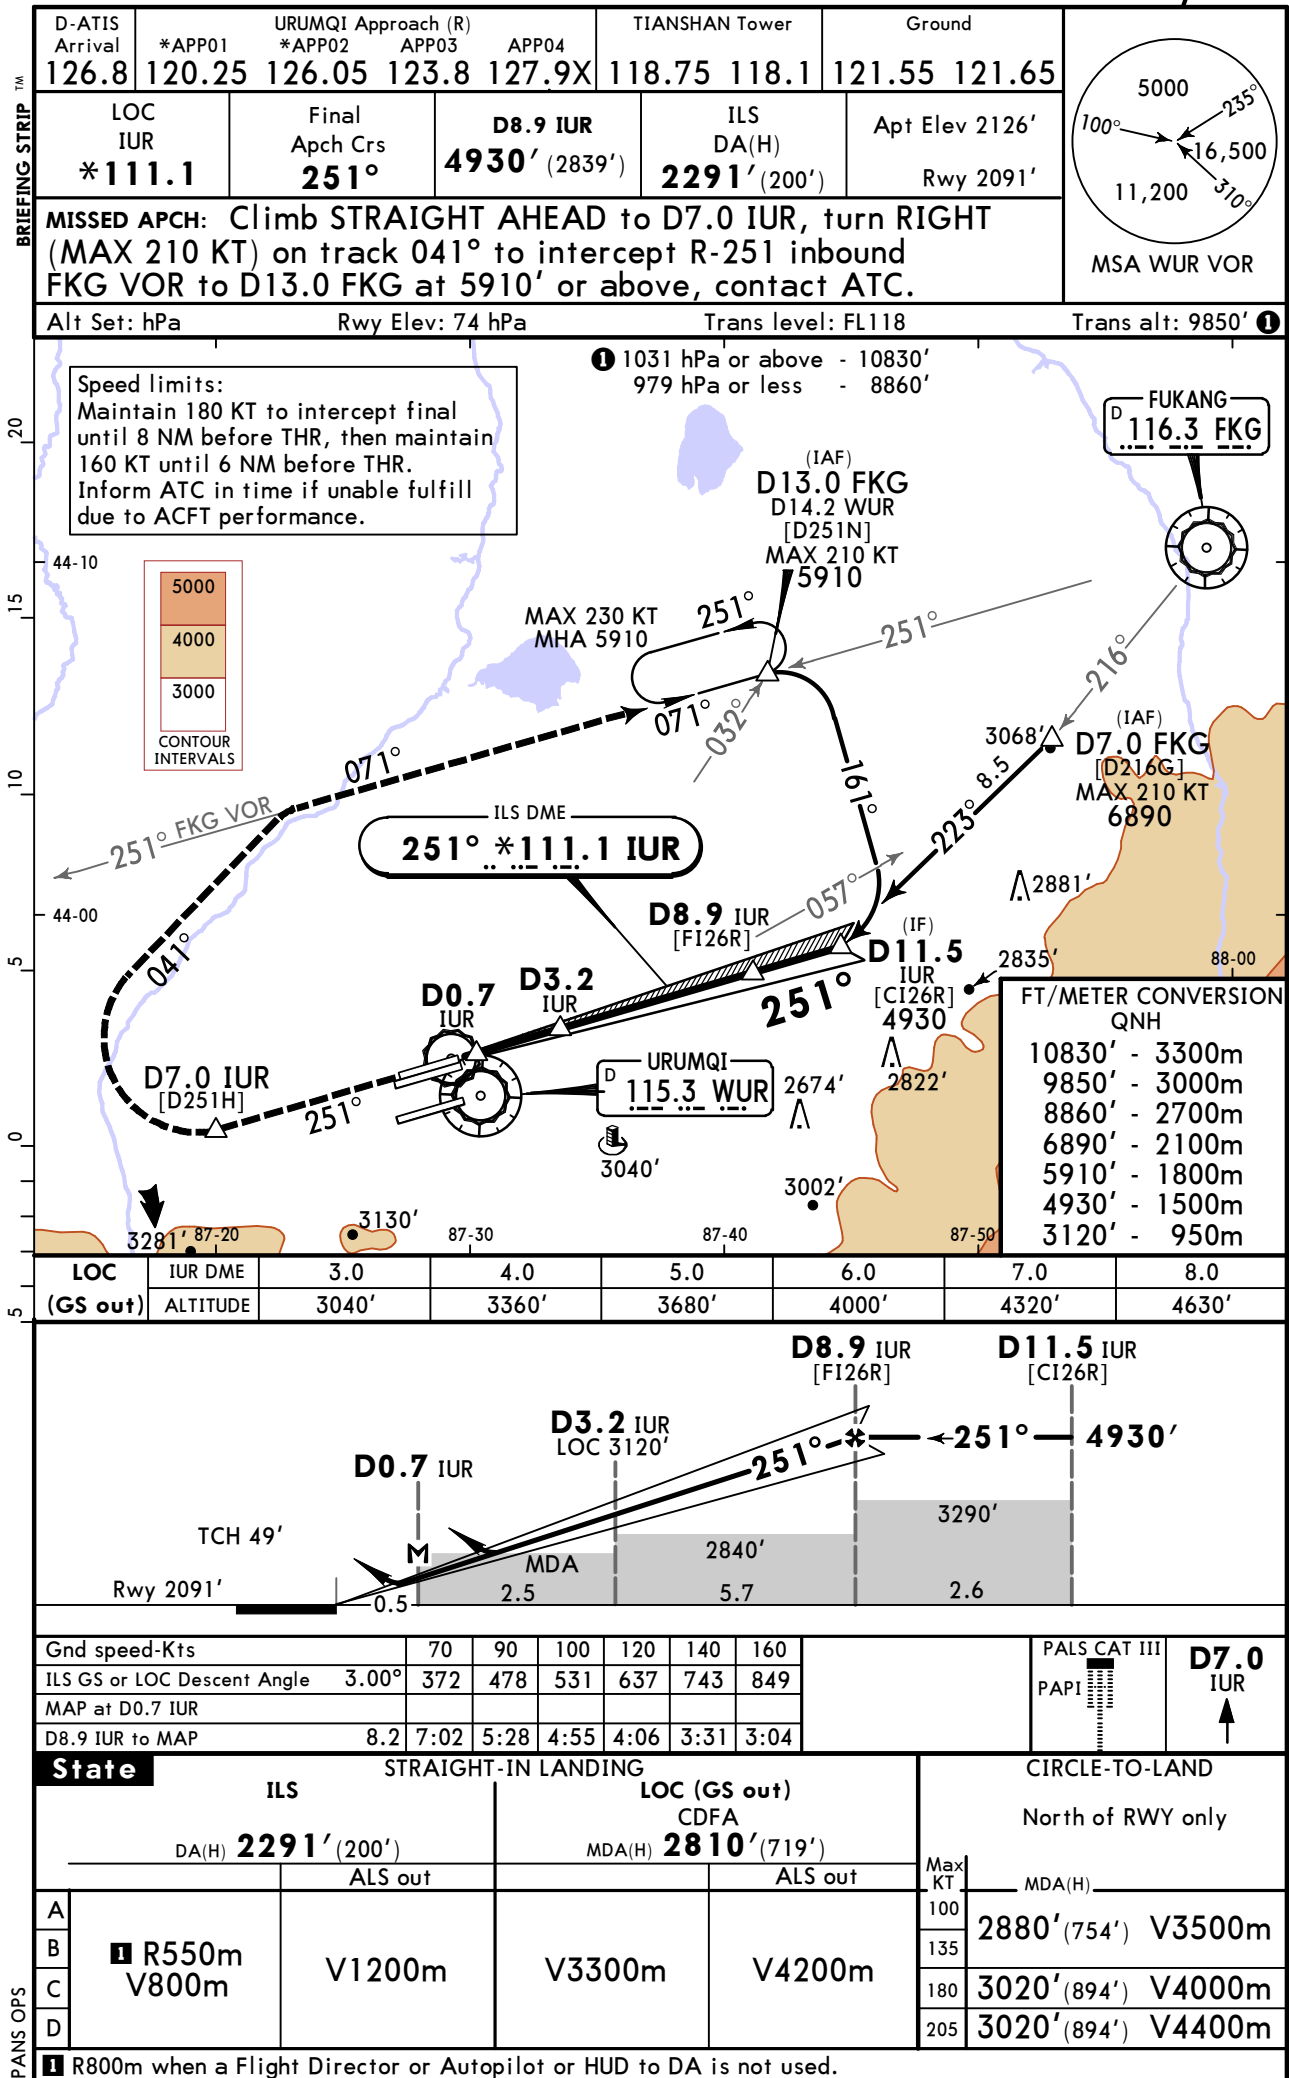


ZWWW/URC
TIANSHAN

18 JUL 25 **11-12A** SA CAT I RNAV ILS DME Z Rwy 26R

D-ATIS Arrival	*APP01	URUMQI Approach (R) *APP02	APP03	APP04	TIANSHAN Tower	Ground
126.8	120.25	126.05	123.8	127.9X	118.75 118.1	121.55 121.65
LOC IUR	Final Apch Crs	D8.9 IUR 4930' (2839')		SA CAT I ILS RA 174' DA(H) 2241' (150')	Apt Elev 2126' Rwy 2091'	
*111.1	251°					

MISSED APCH: Climb STRAIGHT AHEAD to WW501, turn RIGHT to WW517, then turn RIGHT to WW999 at 4930' or above, contact ATC.





Alt Set: hPa Rwy Elev: 74 hPa Trans level: FL118 Trans alt: 9850' **1**

Special Aircrew & Acft Certification Required.

1 1031 hPa or above - 10830'
979 hPa or less - 8860'

FT/METER CONVERSION QNH	
10830'	3300m
9850'	3000m
8860'	2700m
5910'	1800m
5580'	1700m
4930'	1500m

Speed limits:
Maintain 180 KT to intercept final until 8 NM before THR, then maintain 160 KT until 6 NM before THR.
Inform ATC in time if unable fulfill due to ACFT performance.

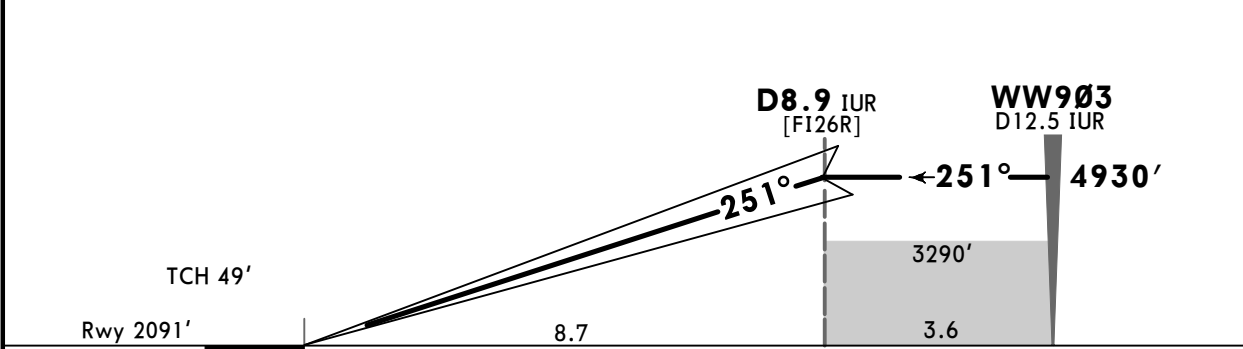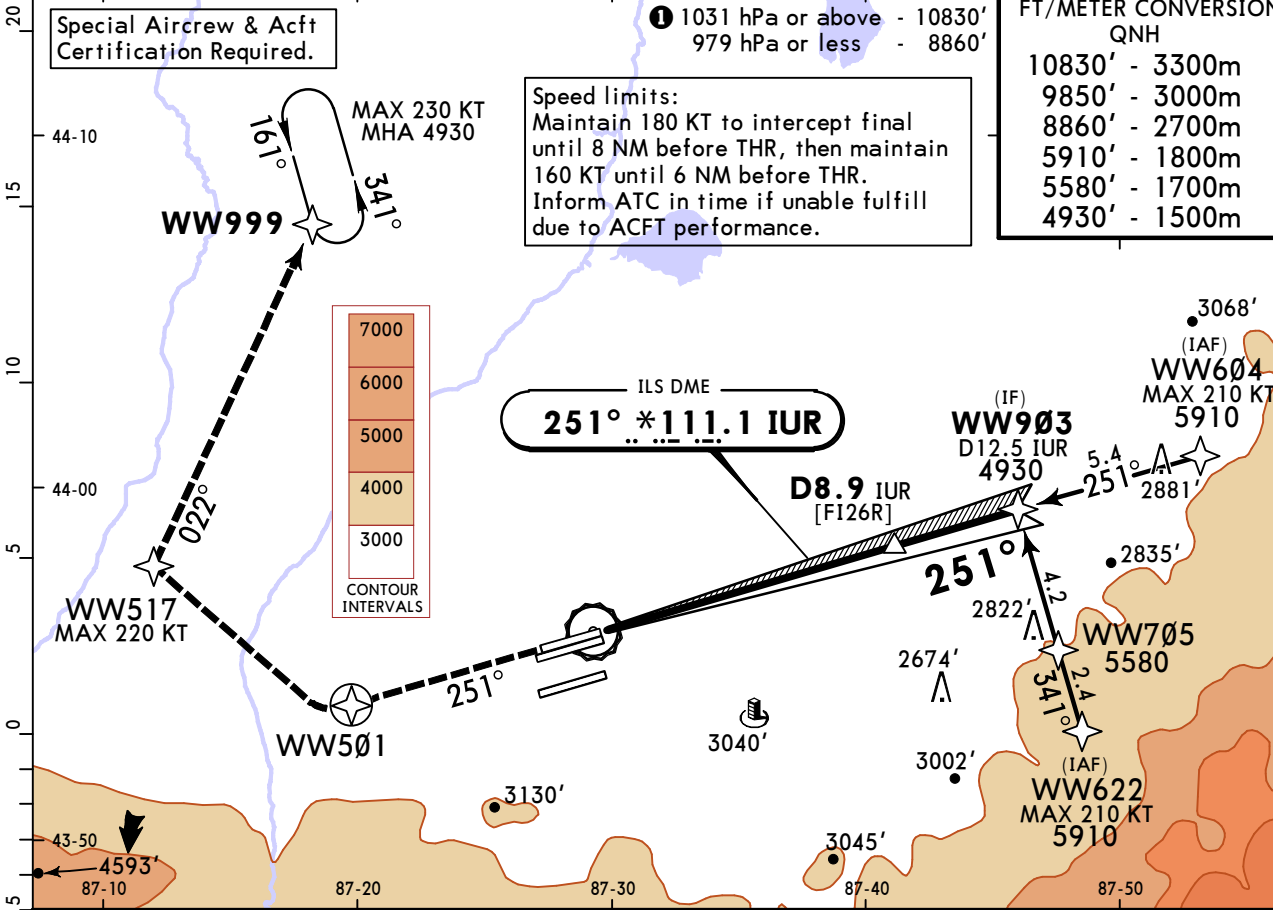

Gnd speed-Kts	70	90	100	120	140	160
GS 3.00°	372	478	531	637	743	849

PALS CAT III	WW501
PAPI	↑

State STRAIGHT-IN LANDING
SA CAT I ILS **1**
RA 174'
DA(H) 2241' (150')

R450m

1 HUD required.


CHANGES: Airport name.

© JEPPESEN, 2025. ALL RIGHTS RESERVED.

ZWWW/URC
TIANSHAN



18 JUL 25 **11-12B** SA CAT I ILS DME Y Rwy 26R

D-ATIS Arrival	*APP01	URUMQI Approach (R) *APP02 APP03 APP04				TIANSHAN Tower		Ground	
126.8	120.25	126.05	123.8	127.9X	118.75	118.1	121.55	121.65	
LOC IUR *111.1		Final Apch Crs 251°		D8.9 IUR 4930' (2839')		SA CAT I ILS RA 174' DA(H) 2241' (150')		Apt Elev 2126' Rwy 2091'	



MISSED APCH: Climb STRAIGHT AHEAD to D7.0 IUR, turn RIGHT (MAX 210 KT) on track 041° to intercept R-251 inbound FKG VOR to D13.0 FKG at 5910' or above, contact ATC.

Alt Set: hPa Rwy Elev: 74 hPa Trans level: FL118 Trans alt: 9850'

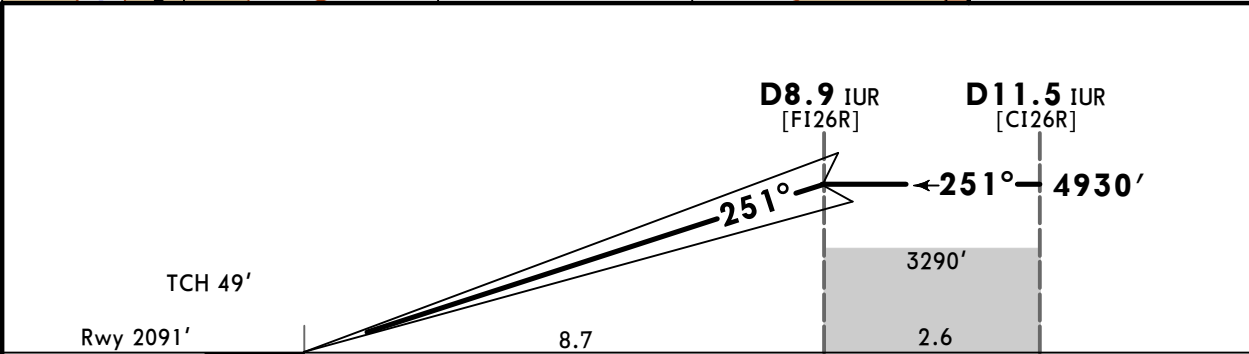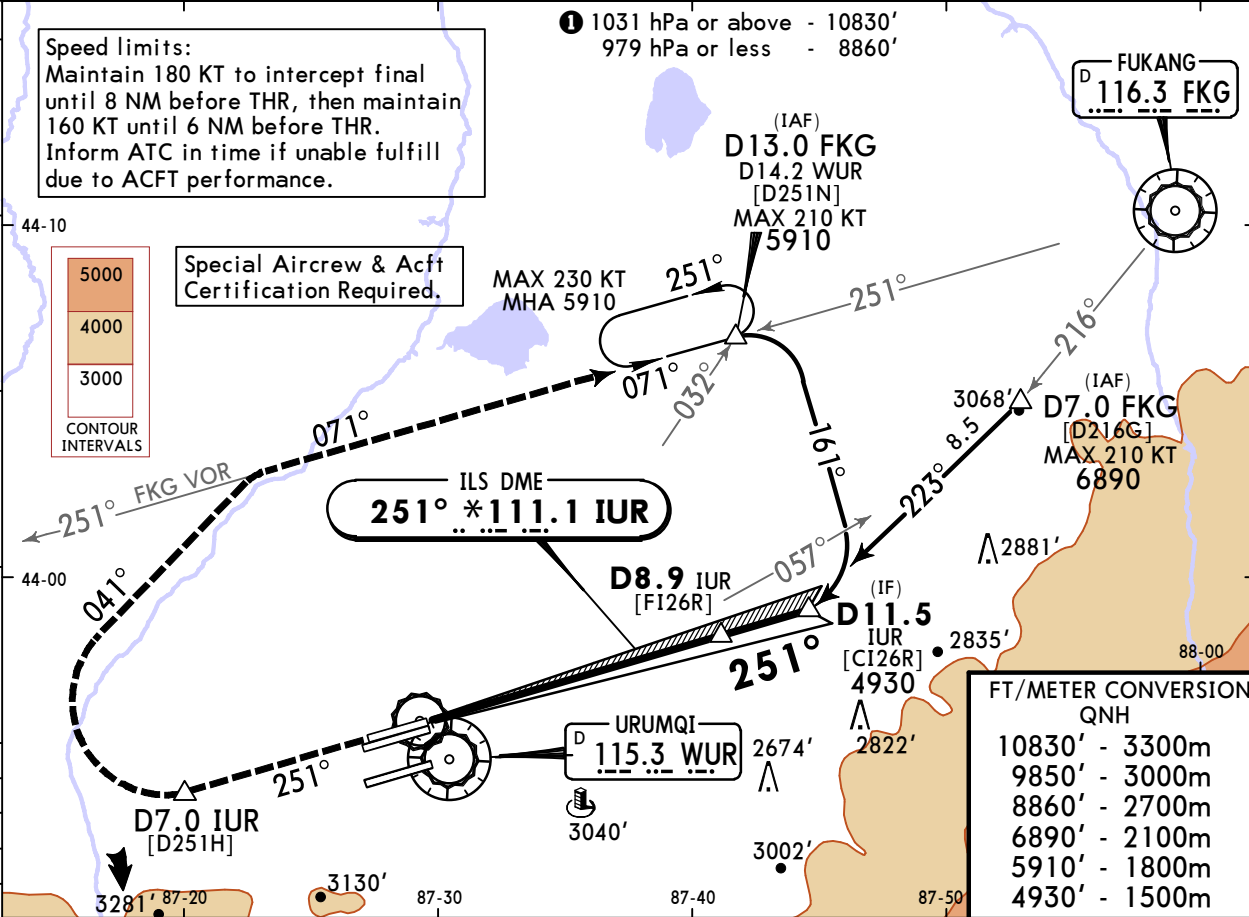

Gnd speed-Kts	70	90	100	120	140	160	PALS CAT III PAPI	D7.0 IUR
GS	3.00°	372	478	531	637	743		

State STRAIGHT-IN LANDING
SA CAT I ILS **RA 174'**
DA(H) **2241' (150')**

R450m

HUD required.

ZWWW/URC
TIANSHAN

26 SEP 25
Eff 1 Oct 1600Z


JEPPESSEN
11-12C

URUMQI, PR OF CHINA
CAT II/III ILS DME Y Rwy 26R



D-ATIS Arrival	*APP01	URUMQI Approach (R) *APP02	APP03	APP04	TIANSHAN Tower		Ground	
126.8	120.25	126.05	123.8	127.9X	118.75	118.1	121.55	121.65
LOC IUR	Final Apch Crs	D8.9 IUR		CAT IIIB	CAT IIIA	CAT II ILS	Apt Elev 2126'	
*111.1	251°	4930' (2839')		Refer to Minimums		RA 109' DA(H) 2191' (100')	Rwy 2091'	

MISSED APCH: Climb STRAIGHT AHEAD to D7.0 IUR, turn RIGHT (MAX 210 KT) on track 041° to intercept R-251 inbound FKG VOR to D13.0 FKG at 5910' or above, contact ATC.


Alt Set: hPa Rwy Elev: 74 hPa Trans level: FL118 Trans alt: 9850' ①




Speed limits:
Maintain 180 KT to intercept final until 8 NM before THR, then maintain 160 KT until 6 NM before THR. Inform ATC in time if unable fulfill due to ACFT performance.

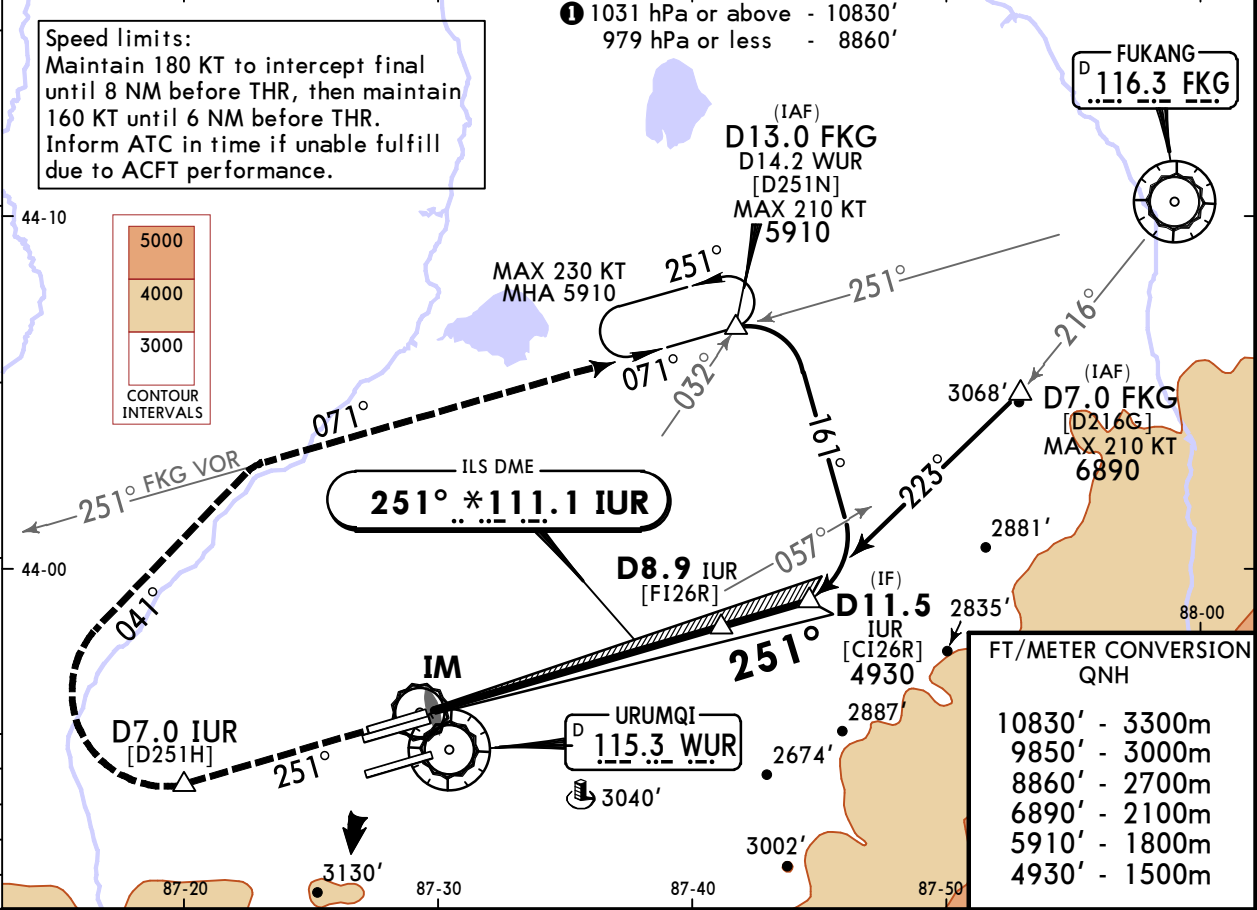

FT/METER CONVERSION QNH	
10830'	3300m
9850'	3000m
8860'	2700m
6890'	2100m
5910'	1800m
4930'	1500m

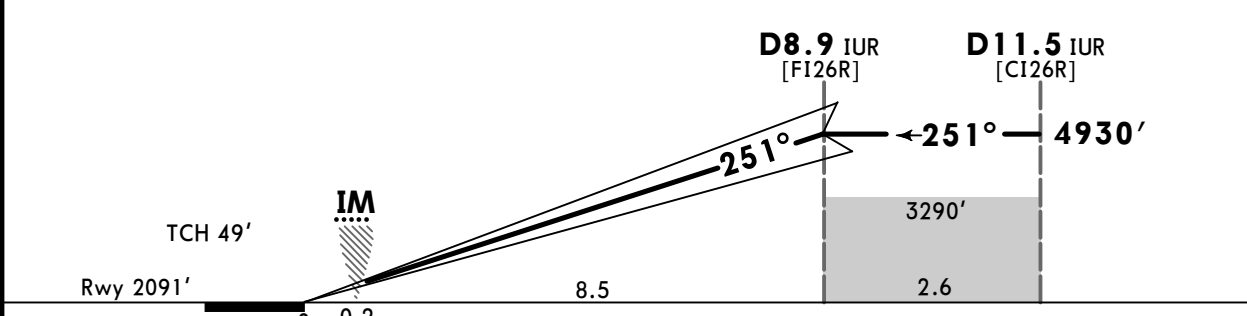

Gnd speed-Kts	70	90	100	120	140	160
GS 3.00°	372	478	531	637	743	849



State			STRAIGHT-IN LANDING		
CAT IIIB ILS			CAT IIIA ILS		CAT II ILS
DH RA 0'			DH RA 50'		RA 109' DA(H) 2191' (100')
R150m			R175m		R300m

① CAT D: R350m for manual operation below DH