


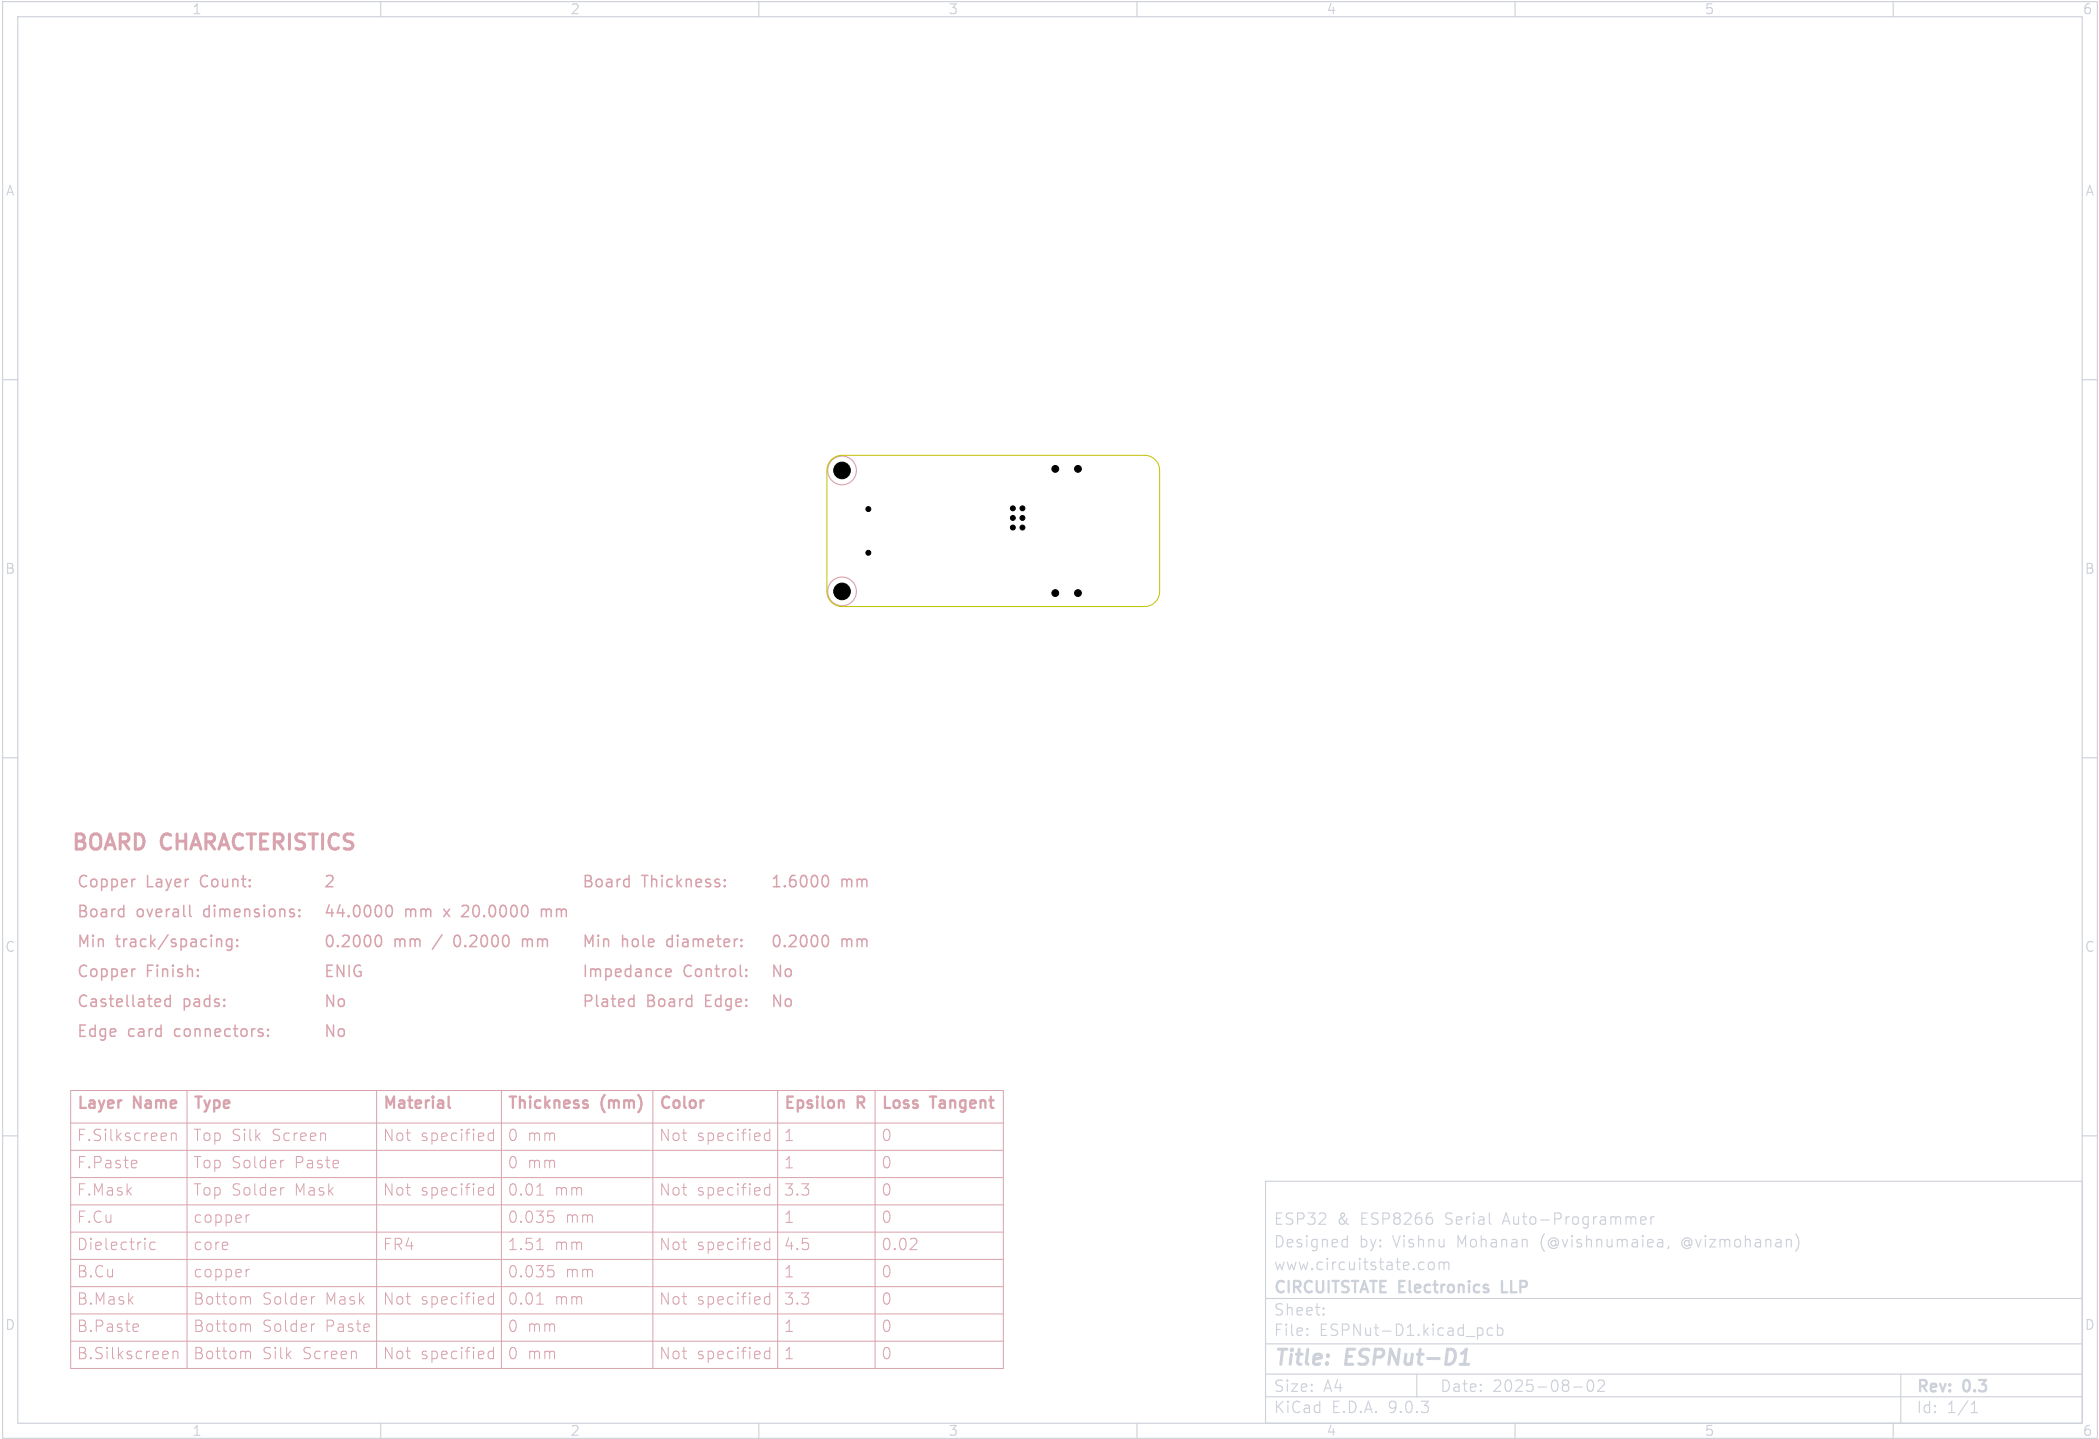

BOARD CHARACTERISTICS

Copper Layer Count: 2 Board Thickness: 1.6000 mm
Board overall dimensions: 44.0000 mm x 20.0000 mm
Min track/spacing: 0.2000 mm / 0.2000 mm Min hole diameter: 0.2000 mm
Copper Finish: ENIG Impedance Control: No
Castellated pads: No Plated Board Edge: No
Edge card connectors: No

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.01 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.51 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.01 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

ESP32 & ESP8266 Serial Auto-Programmer
Designed by: Vishnu Mohanan (@vishnumaiea, @vizmohanan)
www.circuitstate.com
CIRCUITSTATE Electronics LLP

Sheet:
File: ESPNut-D1.kicad_pcb

Title: ESPNut-D1

Size: A4

Date: 2025-08-02

Rev: 0.3

KiCad E.D.A. 9.0.3

Id: 1/1