


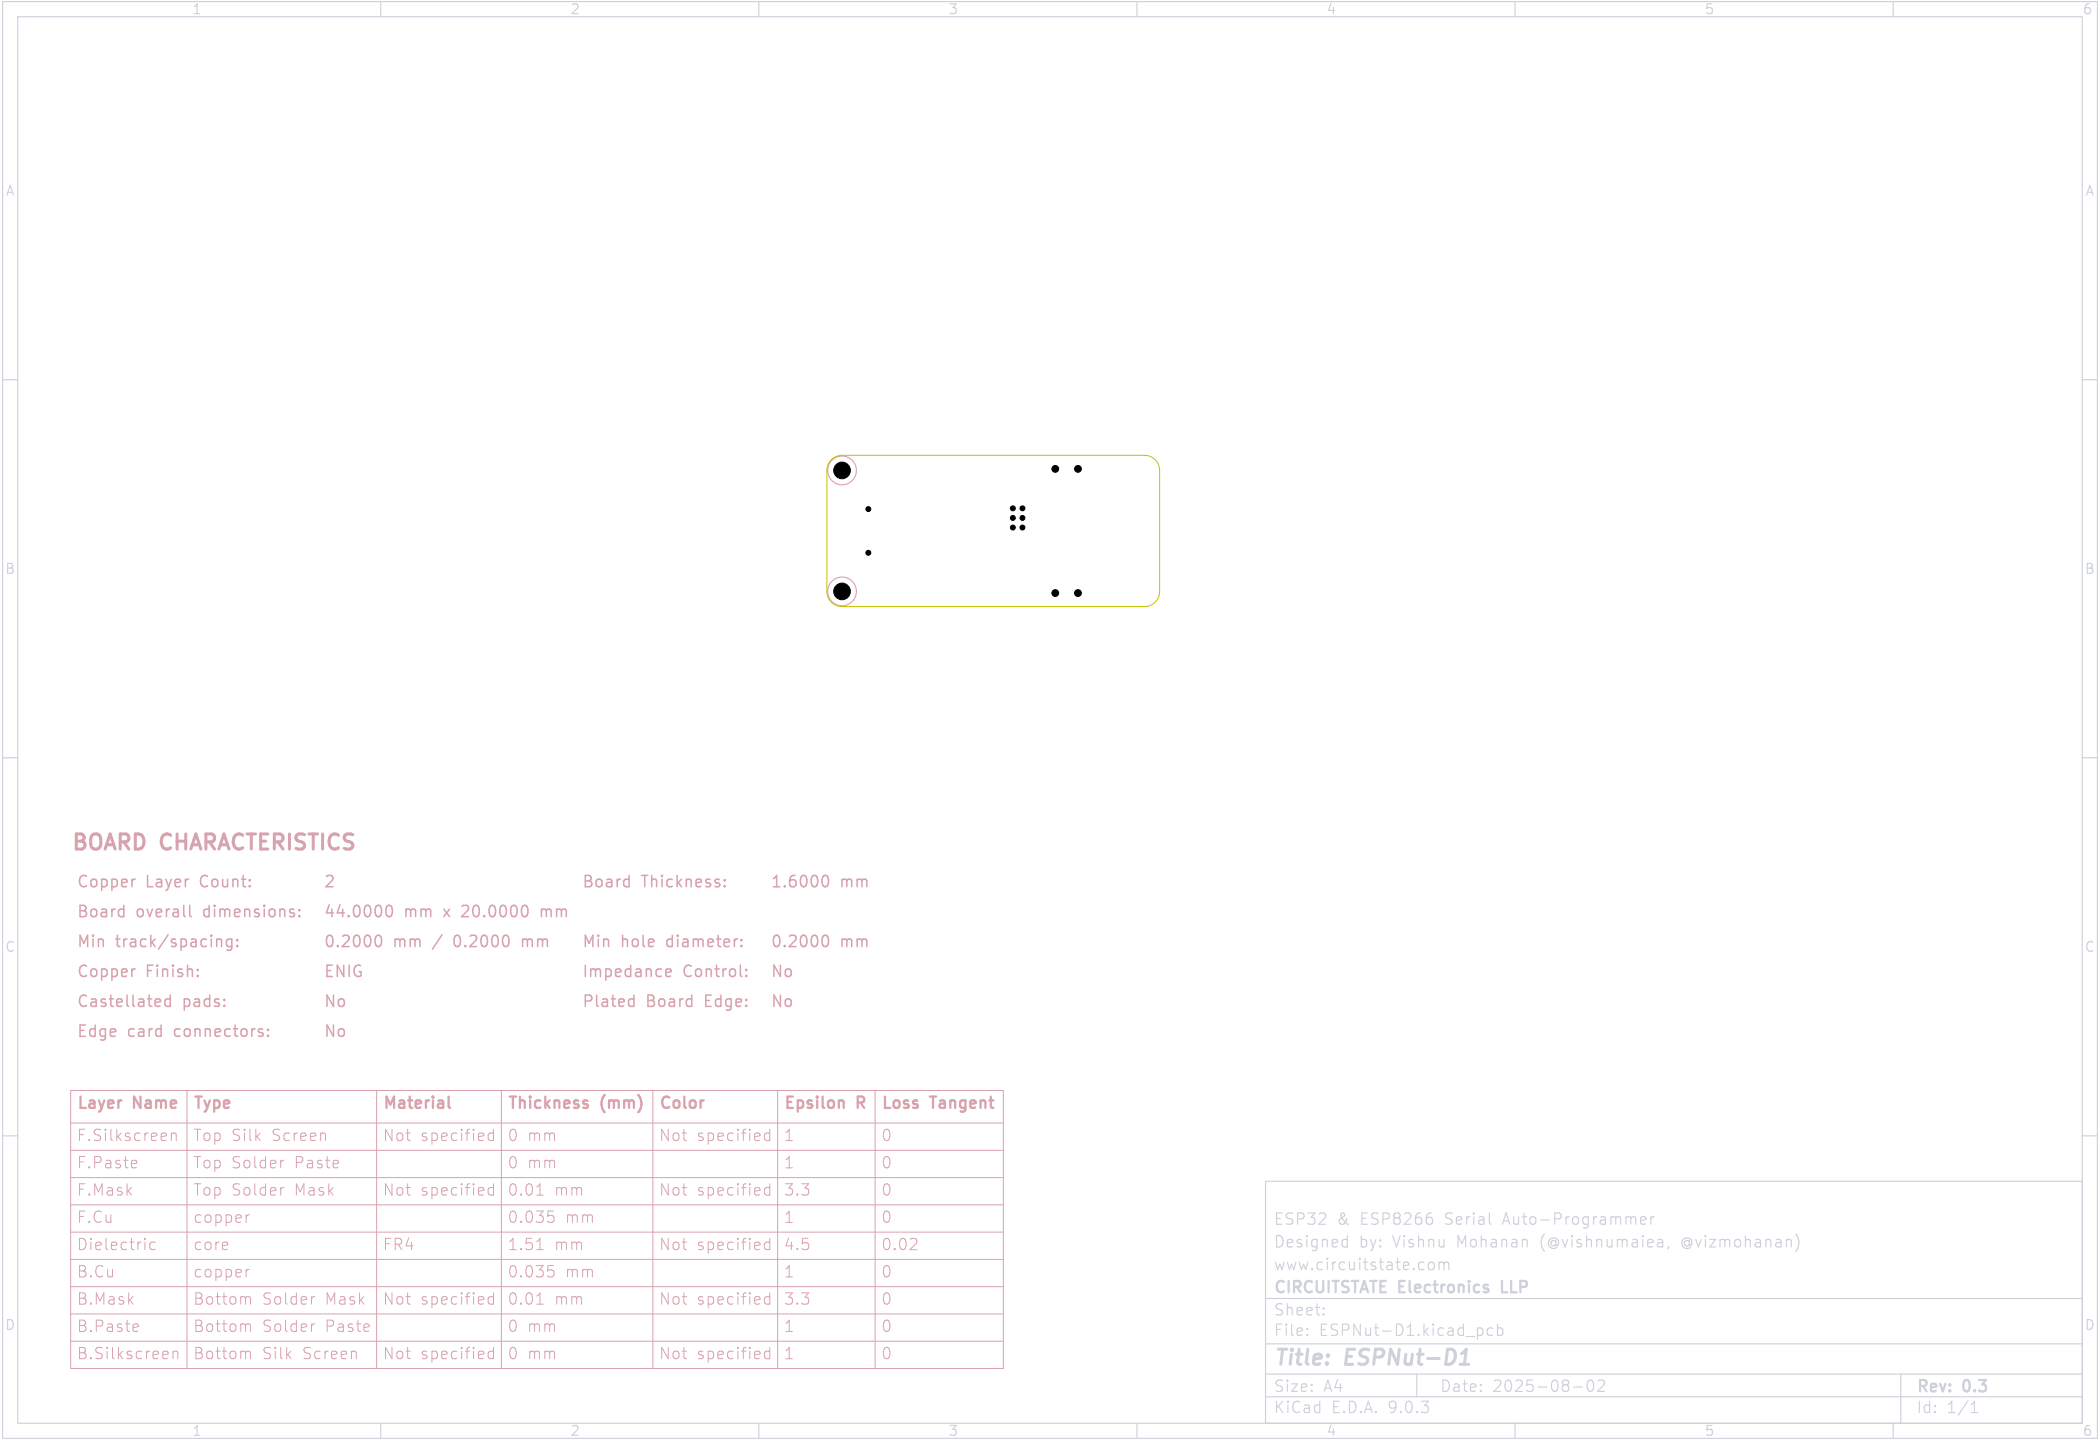

BOARD CHARACTERISTICS

Copper Layer Count:2Board Thickness:1.6000 mm

Board overall dimensions:44.0000 mm x 20.0000 mm

Min track/spacing:0.2000 mm / 0.2000 mmMin hole diameter:0.2000 mm

Copper Finish:ENIGImpedance Control:No

Castellated pads:NoPlated Board Edge:No

Edge card connectors:No

Layer Name	Type	Material	Thickness (mm)	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top Silk Screen	Not specified	0 mm	Not specified	1	0
F.Paste	Top Solder Paste		0 mm		1	0
F.Mask	Top Solder Mask	Not specified	0.01 mm	Not specified	3.3	0
F.Cu	copper		0.035 mm		1	0
Dielectric	core	FR4	1.51 mm	Not specified	4.5	0.02
B.Cu	copper		0.035 mm		1	0
B.Mask	Bottom Solder Mask	Not specified	0.01 mm	Not specified	3.3	0
B.Paste	Bottom Solder Paste		0 mm		1	0
B.Silkscreen	Bottom Silk Screen	Not specified	0 mm	Not specified	1	0

ESP32 & ESP8266 Serial Auto-Programmer

Designed by: Vishnu Mohanan (@vishnumaiea, @vizmohanan)

www.circuitstate.com

CIRCUITSTATE Electronics LLP

Sheet:
File: ESPNut-D1.kicad_pcb

Title: ESPNut-D1

Size: A4Date: 2025-08-02

Rev: 0.3Id: 1/1