
TIANYUAN WATERPROOF ASPHALT FELT

Technical Data Sheet (TDS)

Asphalt Felt, also known as asphalt roofing felt or asphalt-saturated felt, is a traditional roofing underlayment and auxiliary waterproofing material. It is manufactured by saturating a base felt with asphalt to provide economical moisture protection, good conformity and convenient installation.

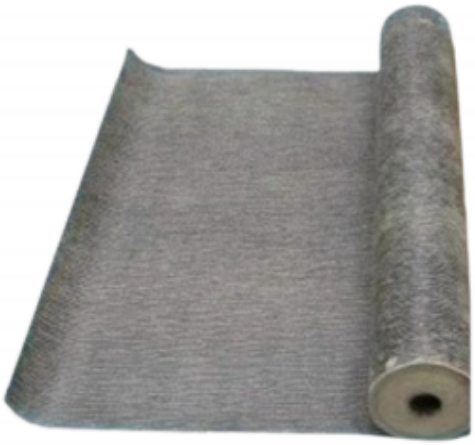

Quick Specification	Standard Option	Available Option
Width	1.0 m	Custom width on request
Thickness	0.5 mm	0.8 mm / customized
Color	Grey	Black / customized
Supply Form	Roll	Roll / special packaging
Reference Grades	Type I	Type II

Main Uses	Main Benefits
Roofing underlayment Secondary moisture barrier Bituminous roofing assemblies Industrial and civil building roofing	Economical solution Good asphalt saturation Easy installation Flexible and practical for general roofing works

1. Product Description

The product is produced from felt base material that is impregnated with asphalt under controlled processing. The finished roll provides a practical underlayment layer that helps improve water-shedding performance beneath the final roof covering. It is commonly used where a cost-effective bituminous felt underlayment is required.

2. Key Features

Feature	Description
Economical Waterproofing Layer	Provides a cost-effective auxiliary moisture barrier for roofing assemblies.
Good Conformity	Flexible sheet adapts well to general roofing and waterproofing work.
Asphalt Saturation	Bitumen saturation improves water resistance and practical service performance.
Easy Installation	Can be laid and overlapped in a straightforward manner on suitable substrates.
Multiple Grades Available	Type I and Type II grades can be discussed according to market and project needs.

3. Typical Applications

Recommended Applications	Selection Notes
• Roofing underlayment below asphalt shingles • Underlayment below selected metal or tile roofing systems • Auxiliary waterproofing or separation layer • Industrial and civil building roofing works	• Type I is generally suitable for lighter-duty requirements • Type II offers a heavier option for more demanding conditions • Final product selection should follow project design and local code requirements

4. Product Specification

Property	Typical Value
Product Name	Asphalt Felt / Asphalt Roofing Felt
Material Type	Asphalt-saturated felt underlayment
Appearance	Smooth felt roll
Color	Grey / Black
Width	1.0 m (standard)
Thickness	0.5 mm / 0.8 mm
Supply Form	Roll
Available Types	Type I / Type II
Reference Standards	ASTM D226 and ASTM D4869 grades can be discussed where required

5. Reference Export Grade Options

Grade	Reference Standard	Typical Roll Size	Approx. Coverage
Type I / No. 15	ASTM D226	36" × 144'	432 sq ft
Type II / No. 30	ASTM D226	36" × 72'	216 sq ft
Type I / 15#	ASTM D4869	36" × 144'	432 sq ft
Type II / 30#	ASTM D4869	36" × 72'	216 sq ft

Note: The above ASTM-based grade information is provided as a general export-market reference. Actual confirmed specifications, roll dimensions and performance data should be finalized according to the agreed order, target market and project requirement.

6. Installation Recommendations

Step	Recommendation
Substrate Preparation	Ensure the roof deck or substrate is smooth, clean, dry and free of loose debris.
Laying Direction	Lay the material evenly according to the project design, avoiding wrinkles, trapped air and distortion.
Overlap Guidance	Typical overlap recommendation: side lap not less than 100 mm; end lap not less than 150 mm.
Weather Condition	Do not install when the material or roof deck is wet. It is recommended to install in suitable dry weather.
Finishing	Install the primary roof covering or subsequent waterproofing layer promptly after application where applicable.

7. Packaging, Storage & Transportation

Item	Guideline
Packaging	Packed in rolls and wrapped with protective film or as agreed in the order.
Storage	Store in a dry, ventilated area. Protect from prolonged sun exposure, rain and moisture.
Handling	Different styles and sizes should be stored separately. Avoid crushing, sharp damage and rough handling.
Transportation	Keep rolls stable during transportation and avoid leaning, deformation or heavy pressure.

8. Disclaimer

This TDS is prepared based on the user-provided catalog information and common industry reference practice for asphalt-saturated felt products. All figures are for general guidance only. Final technical parameters, dimensions, packaging and compliance details should be confirmed before production, shipment and project use.