What is fixed, and what is calibrated?

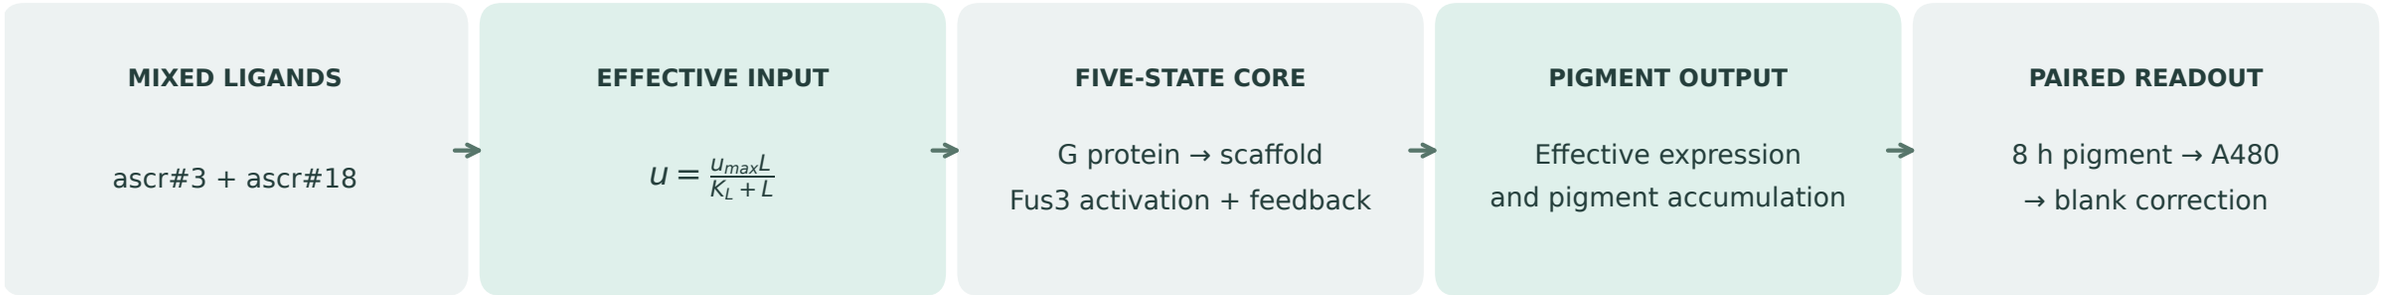

$$\frac{dC}{dt} = b + a\frac{m^n}{K^n + m^n} - \delta C, \qquad m = \frac{Fus3_{active}}{Fus3_{total}}$$

Two independent sensors share the core structure. Each channel has its own fitted K_L and a.
Synthetic endpoint calibration; cross-response weights and remaining output parameters are assumptions.