Reason. Plan. Act. Physical AI Workshop

Lecture 1a: Introduction

Sarah Keren

The Taub Faculty of Computer Science
Technion - Israel Institute of Technology

Physical AI

https://youtu.be/cRZNwgvcWUg?si=kIfNi9zTUdHsXraJ&t=787

Physical AI

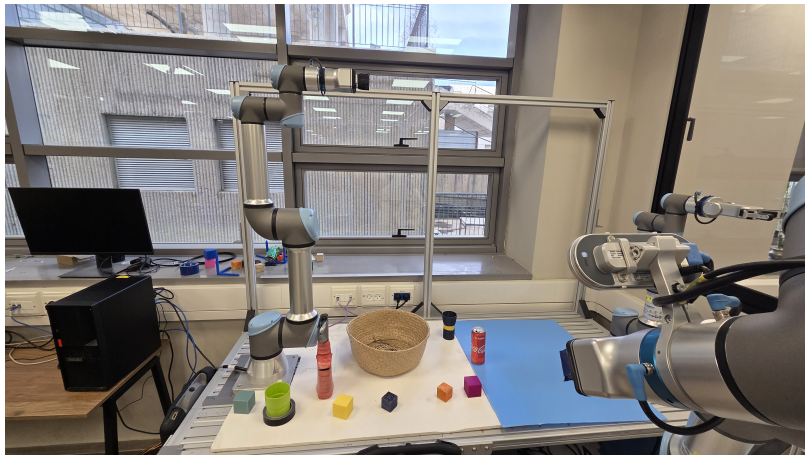

Objectives

Physical AI

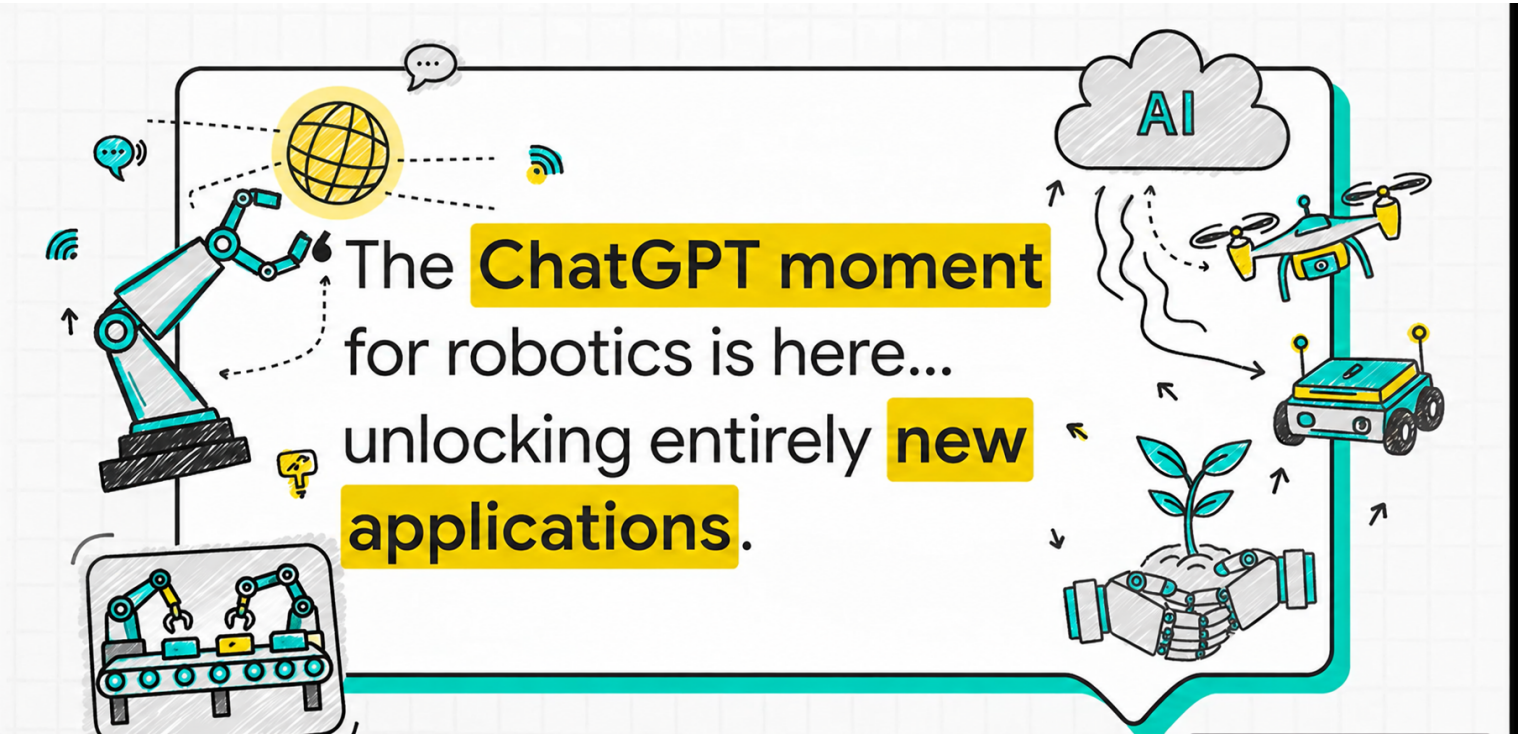
AI
The ChatGPT moment
for robotics is here...
unlocking entirely new
applications.

Physical artificial intelligence

4 languages

Article Talk Read Edit View history

From Wikipedia, the free encyclopedia

Not to be confused with Physical Intelligence Inc.

Figure AI robot package handling

Physical artificial intelligence or **physical AI** refers to artificial intelligence (AI) systems that perceive, reason about and act within the physical world, specially at the human scale. These systems generally combine AI models with sensors, control systems, actuators and machines such as robots or autonomous vehicles. Physical AI overlaps with embodied artificial intelligence, robotics and autonomous systems, but it emphasizes the complete process of perceiving an environment, motion planning an action and physically executing the task to perform work. This differs from digital AI or generative AI (GenAI), which primarily stays in the information or digital realm.[1][2][3]

The term became increasingly prominent during the AI boom in the 2020s as AI development expanded from primarily digital applications toward humanoid robots, self-driving vehicles, smart factories and other autonomous machines.[4] Its boundaries are not standardized, and it is often treated as a continuation of earlier research in robotics and embodied intelligence rather than an entirely separate field.[5]

No universally accepted formal definition. Many different interpretations.

Objectives

CLAIR

Example

Autonomy in Robotics

Physical AI

Task and Motion Planning

Logistics

Physical AI

Unlike traditional abstract AI, Physical AI must account for the properties and constraints of the physical environment.

Currently a ‘hot’ topic, but underlying research builds on decades of work in robotics, embodied intelligence, planning, control, reinforcement learning, and autonomous systems.

The Continuous Closed Loop

Continuous interaction between intelligence and the physical world.

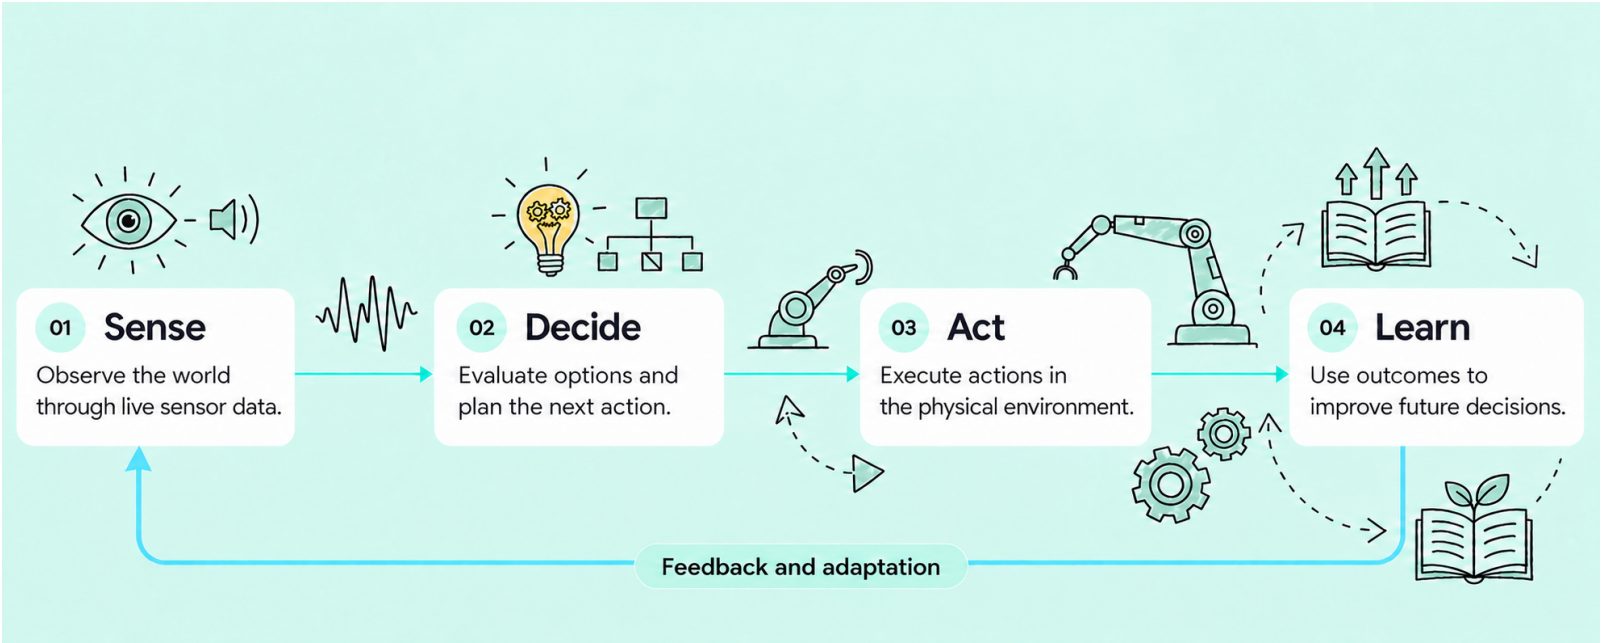

Sim-to-Real Gap

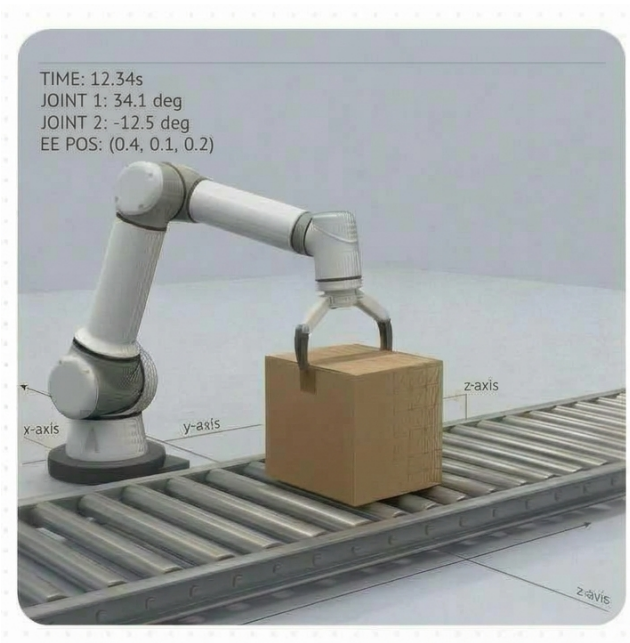

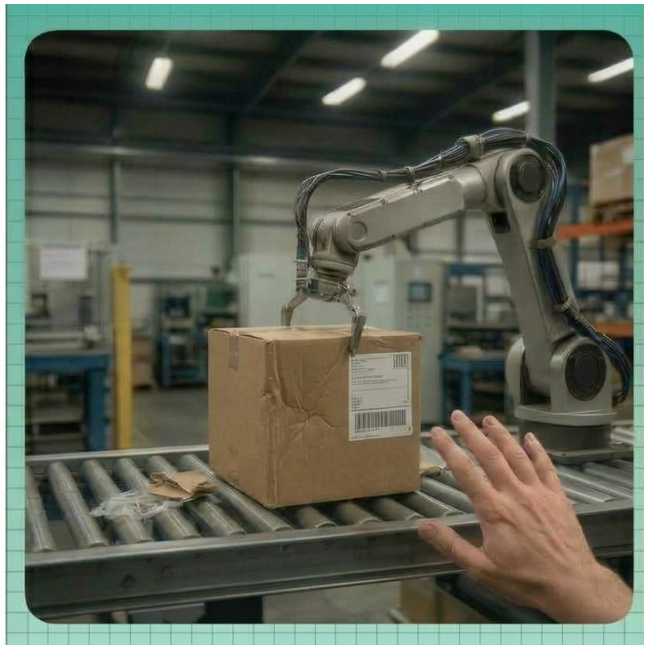

Our Objectives

Provide a practical understanding of how Physical AI systems combine **discrete task decisions** with **continuous** geometry, collision **constraints**, and **feasible** robot motion.

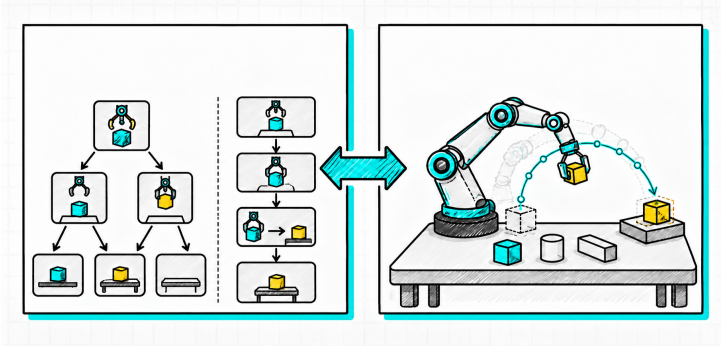

Account for **uncertainty and imperfect** sensing, changing environments, and execution **failures**.

Implement and evaluate core algorithms in simulation and on physical robotic platforms.

CLAIR

CLAIR





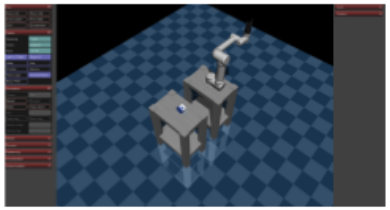

Collaborative AI and Robotics

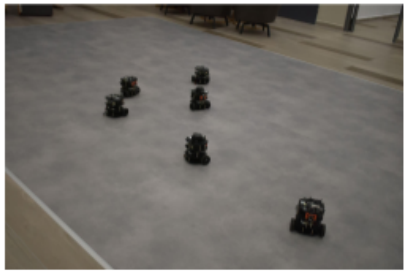

TECHNION | The Henry and Marilyn Taub Faculty of Computer Science

46

CLAIR

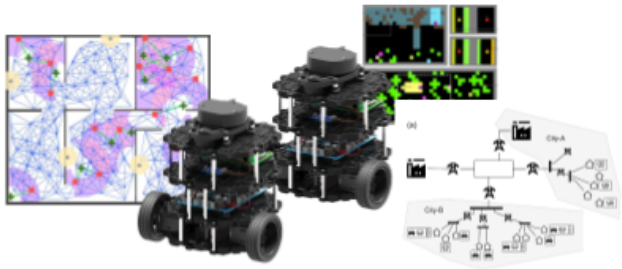



Provide theoretical foundations for designing AI systems that are capable of effective partnership in sustainable and efficient collaborations of automated agents as well as of automated agents and people.

experience (data)  knowledge

47

Team: Sarah Keren

Head of the Collaborative AI and Robotics (CLAIR) lab

Developing novel approaches to identify AI agents' inherent capabilities and limitations and modify their environment to maximize performance and promote effective multi-agent collaboration.

Sarah Keren

Objectives

CLAIR

Example

Autonomy in Robotics

Physical AI

Task and Motion Planning

Logistics

Team: David Dovrat

- Roboticist
- **PhD Research:** An Automata Theory Method for the Analysis of Unicycle Pursuit Problems", supervised by Prof. Alfred M. Bruckstein, Technion.
- This week could not have happened without him.

Sarah Keren
Objectives
CLAIR
Example
Autonomy in Robotics
Physical AI
Task and Motion Planning
Logistics

Team: Guy Azran

- PhD, advised by Sarah Keren
- **Research:** Robust task-aware state estimation
- Robust Task-Aware State Estimation from Pretrained (NeurIPS 2026)
- **This week:** Sunday-Tuesday tutorials

Figure 1: Grocery task from Example 1.

Sarah Keren
Objectives
CLAIR
Example
Autonomy in Robotics
Physical AI
Task and Motion Planning
Logistics

Team: Almog Anschel

- MSc (finishing) → PhD, advised by Sarah Keren
- **Research:** diffusion models for robot planning and goal recognition
- **WoRD**: Waypoint Recognition with Diffusion (NeurIPS 2026)
- **This week:** Wed tutorial: Intro to Robotics with Deep Learning and World Models

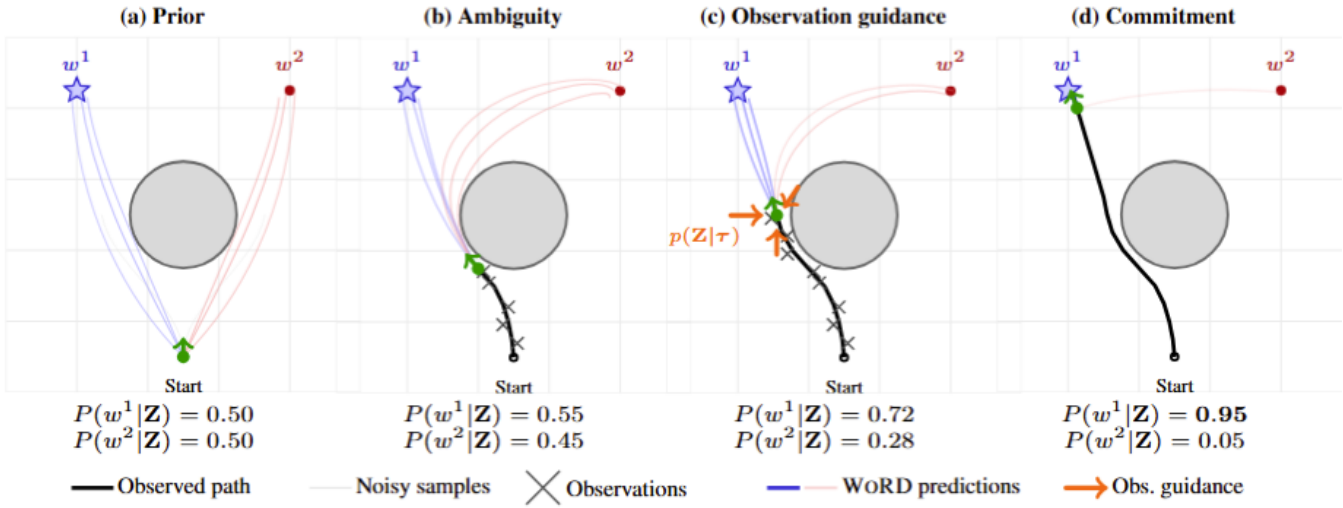

Sarah Keren
Objectives
CLAIR
Example
Autonomy in Robotics
Physical AI
Task and Motion Planning
Logistics

Work done at the CLAIR lab



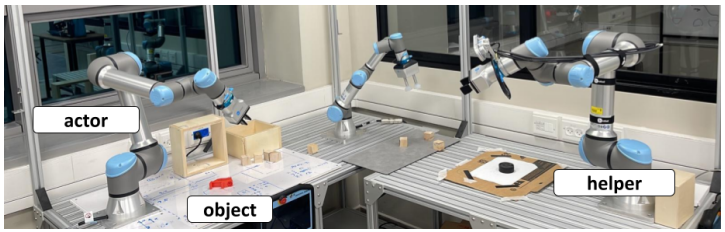

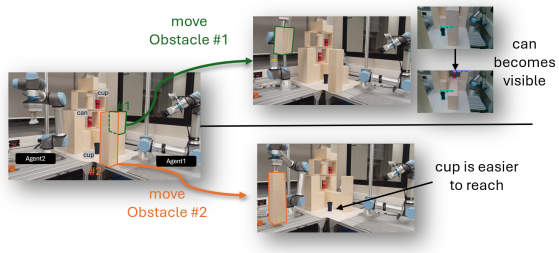

Example

”Pick up an apple”

”Pick up an apple”

”I am hungry”

Bluey and Bingo

https://youtu.be/n4rh2jD8OkY

CLAIR Demo

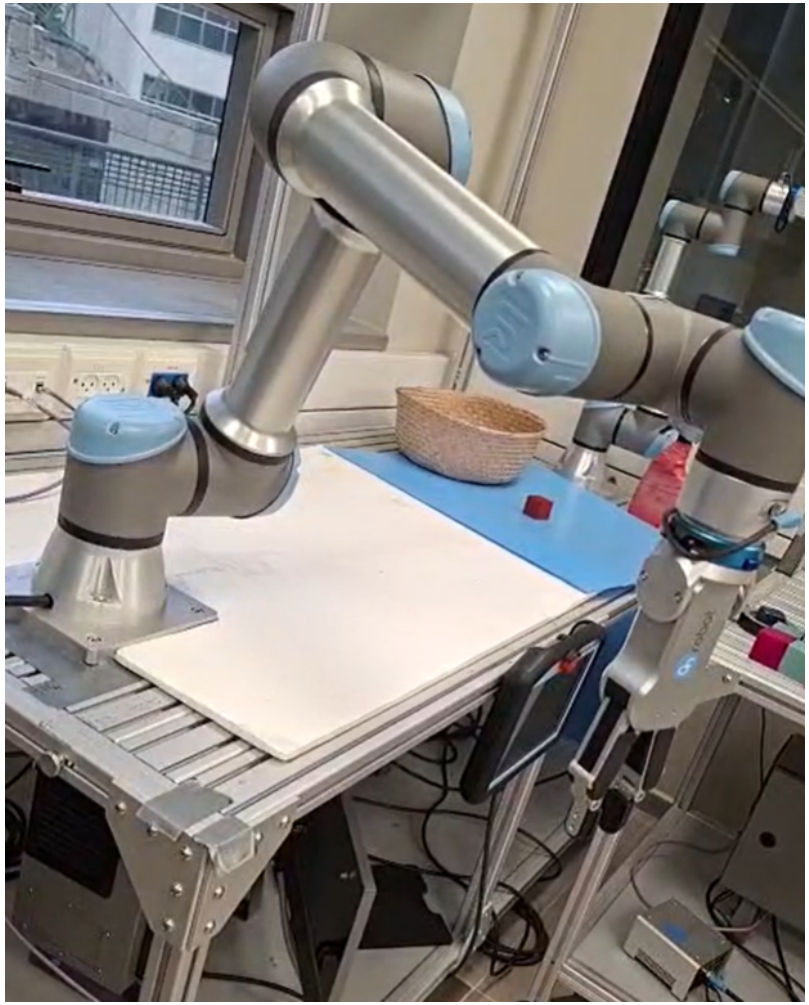

Autonomy in Robotics

Reactive Agents

Fixed policy based on sensor input
No internal model of the world
Fast but limited adaptability

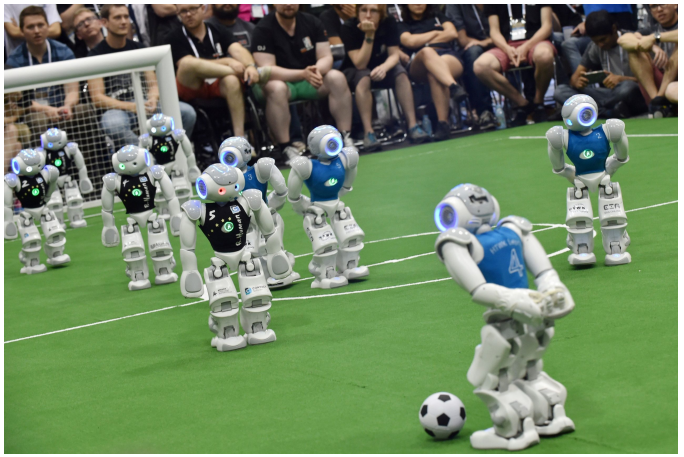

Rational Agents

Use planning and reasoning
Represent world knowledge
Flexible but computationally costly

Autonomy

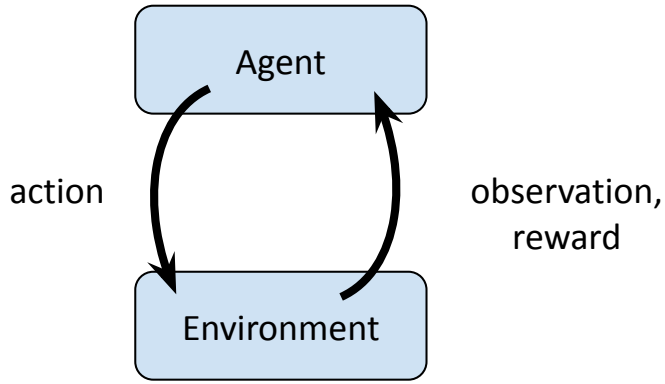

Autonomy

- Action (Actuation)
  - Locomotion
  - Manipulation
- Perception (Sensors)
  - Internal
  - External
- Cognition (Control)
  - From reactive to proactive
  - From finite state machines to cognitive robotics

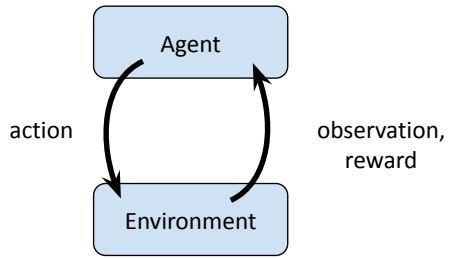

Approaches to AI Decision Making

We are seeking a **policy**, a (potentially probabilistic) mapping from the state space to actions.

Basic approaches:

- **Programming/reactive** - fixed decision making
- **Planning** - using a domain-independent descriptive language
- **Machine Learning** - extracting a policy from data and experience
- **Reinforcement Learning** - learning by interacting with the environment

Best approach for our setting?

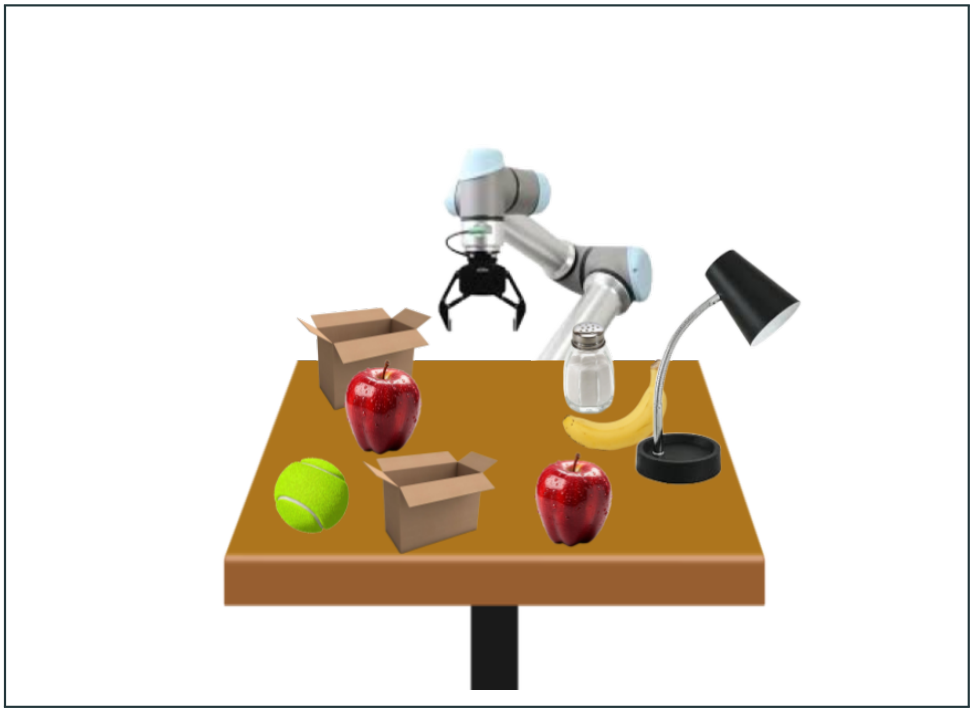

Model-free vs. Model-based

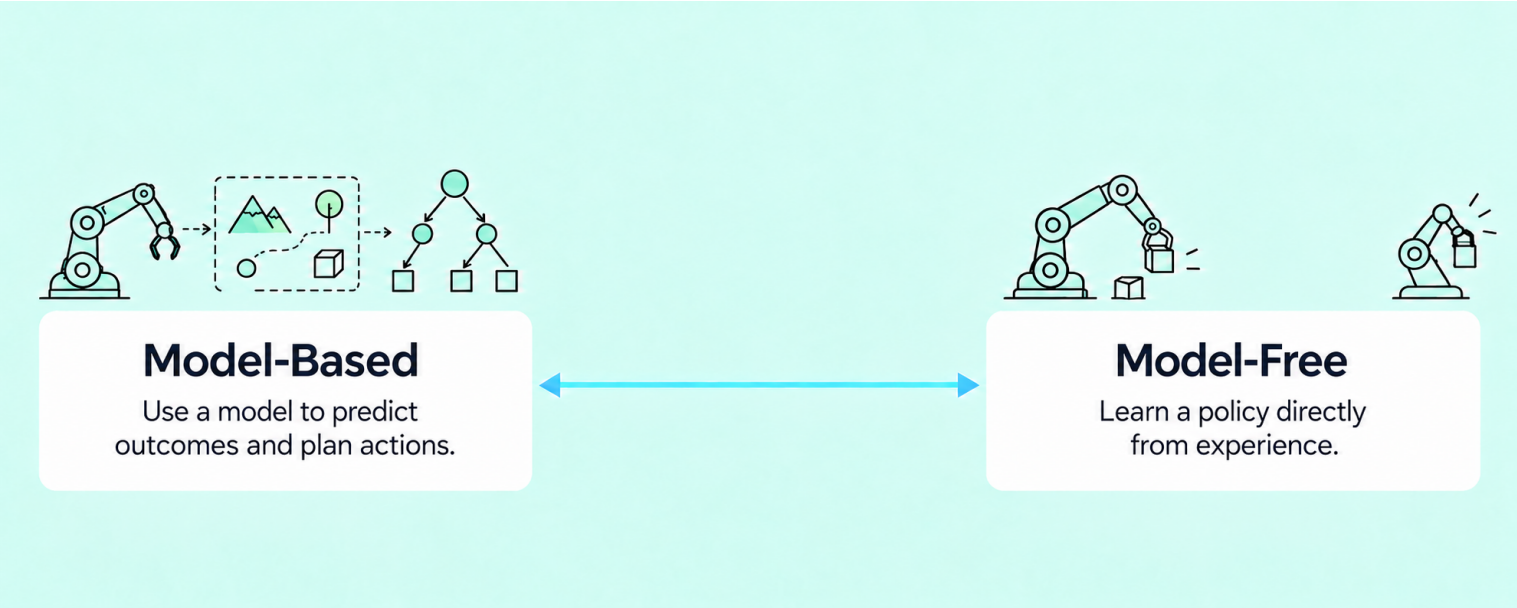

Model-free vs. Model-based

Model-based

- Has (or learns) a **model** of the world: $T(s' \mid s, a)$, $R(s, a)$
- Chooses actions by **planning** with the model (search, value iteration, MPC, MCTS)
- \+ Sample efficient, can reason about new goals
- – Model errors lead to bad plans (*model bias*)

Model-free

- No explicit model of the dynamics
- Learns a **policy** $\pi(a \mid s)$ or **value** $Q(s, a)$ directly from experience (Q-learning, policy gradient, PPO)
- \+ Simple, no modeling effort, strong asymptotic performance
- – Needs a lot of interaction data, hard to transfer to new tasks

Hybrids combine both: learn a model, then use it for planning or training

Uncertainty

Uncertainty

Sources of uncertainty:

- **Perception** – noisy, partial sensor readings (*partial observability*)
- **Action** – actuators slip, grasps fail (*stochastic outcomes*)
- **Model** – dynamics and environment only approximately known

Physical AI

Robotics

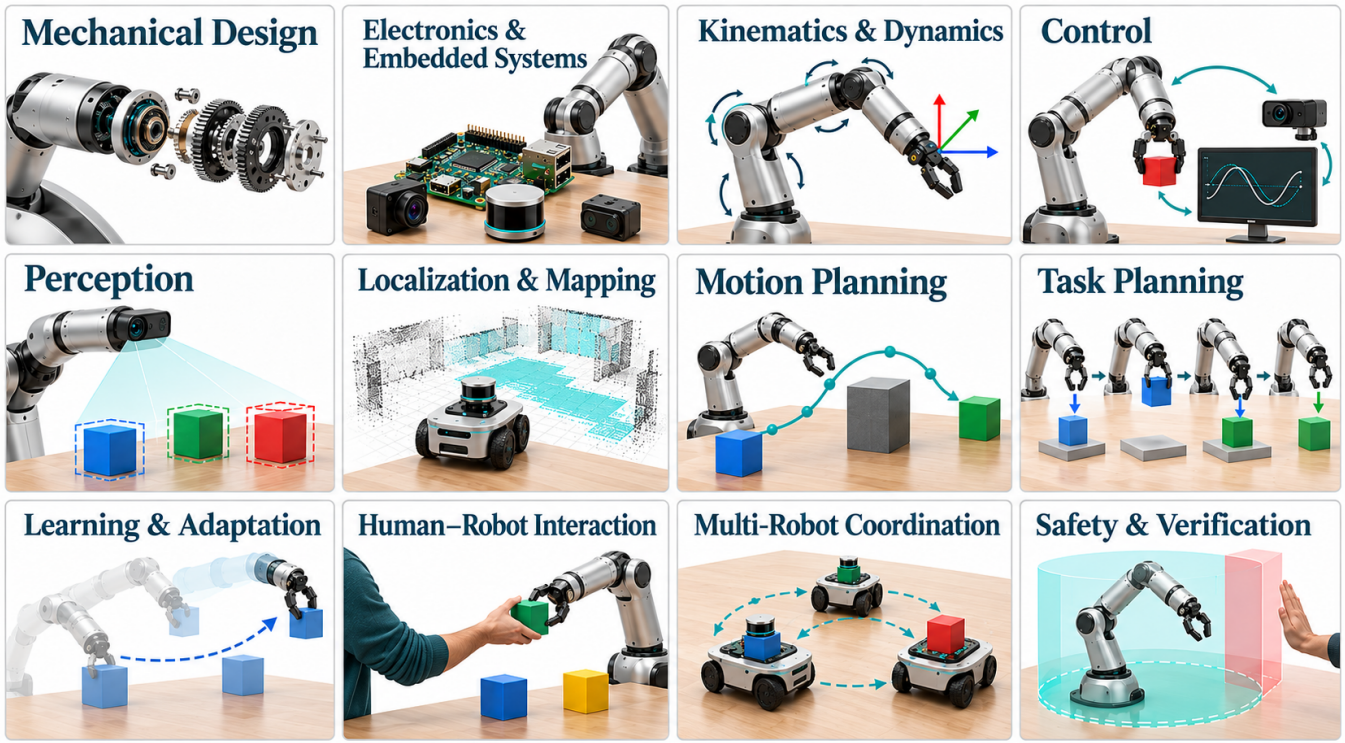
Mechanical Design
Electronics & Embedded Systems
Kinematics & Dynamics
Control
Perception
Localization & Mapping
Motion Planning
Task Planning
Learning & Adaptation
Human–Robot Interaction
Multi-Robot Coordination
Safety & Verification

Timeline: Learning

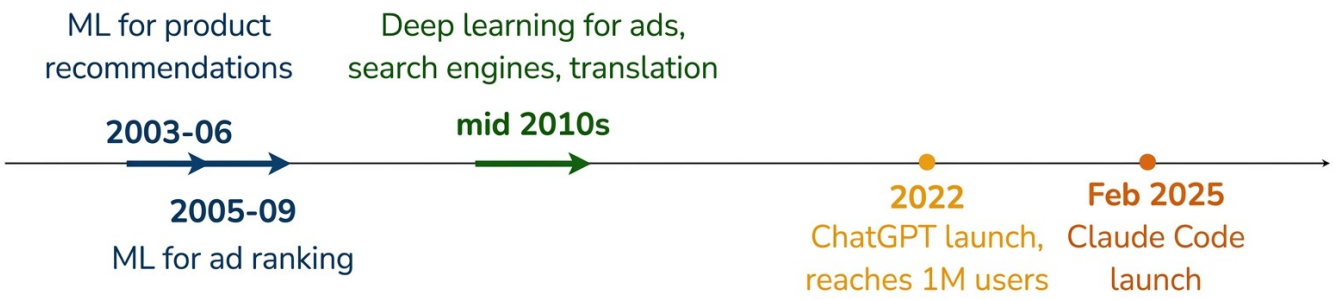

Timeline: Robotics (and learning)

- **Before ~2020**: Classical robotics: localization, mapping, model-based control, motion planning, task planning.
- **2021–2023**:Language-conditioned manipulation, large robot datasets, RT-1/RT-2, diffusion policies.
- **2024**: OpenVLA and larger cross-robot learning ecosystems accelerate open VLA research.
- **2025**: Gemini Robotics, on-device variants, $\pi 0$-style policies, and new embodied reasoning systems.
- **2026**: Stronger planning and spatial reasoning; expanding evaluation, data pipelines and commercialization.

Four technical paradigms

1. Classical / modular

Explicit state estimation, symbolic task planning, motion optimization and feedback control.

2. Imitation / offline policies

Behavior cloning, diffusion policies and action-chunking trained on demonstrations.

3. Foundation-model VLA

A multimodal model maps observations + language goals to actions or action tokens.

4. Hybrid agentic systems

Embodied reasoning orchestrates skills, tools, symbolic constraints and reactive policies.

Foundation Models for Robotics

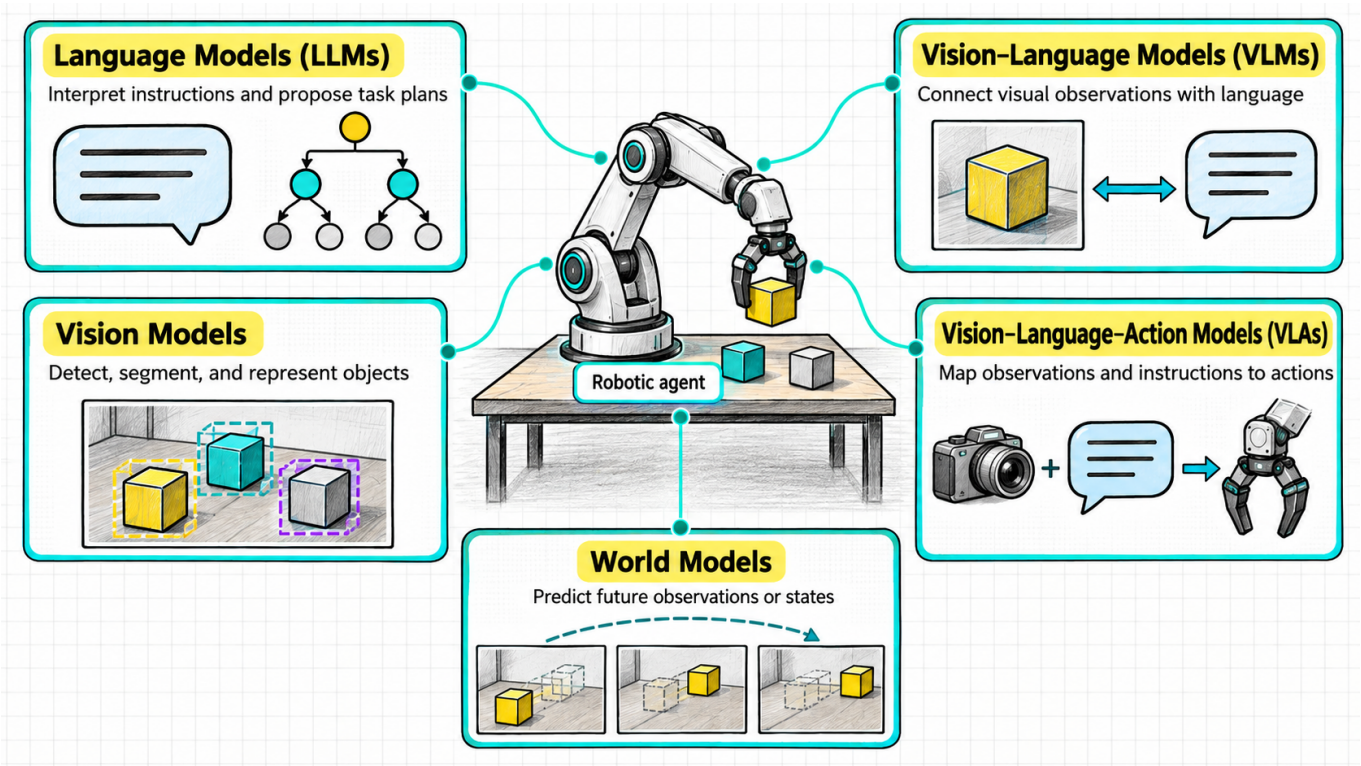

Foundation Models for Robotics

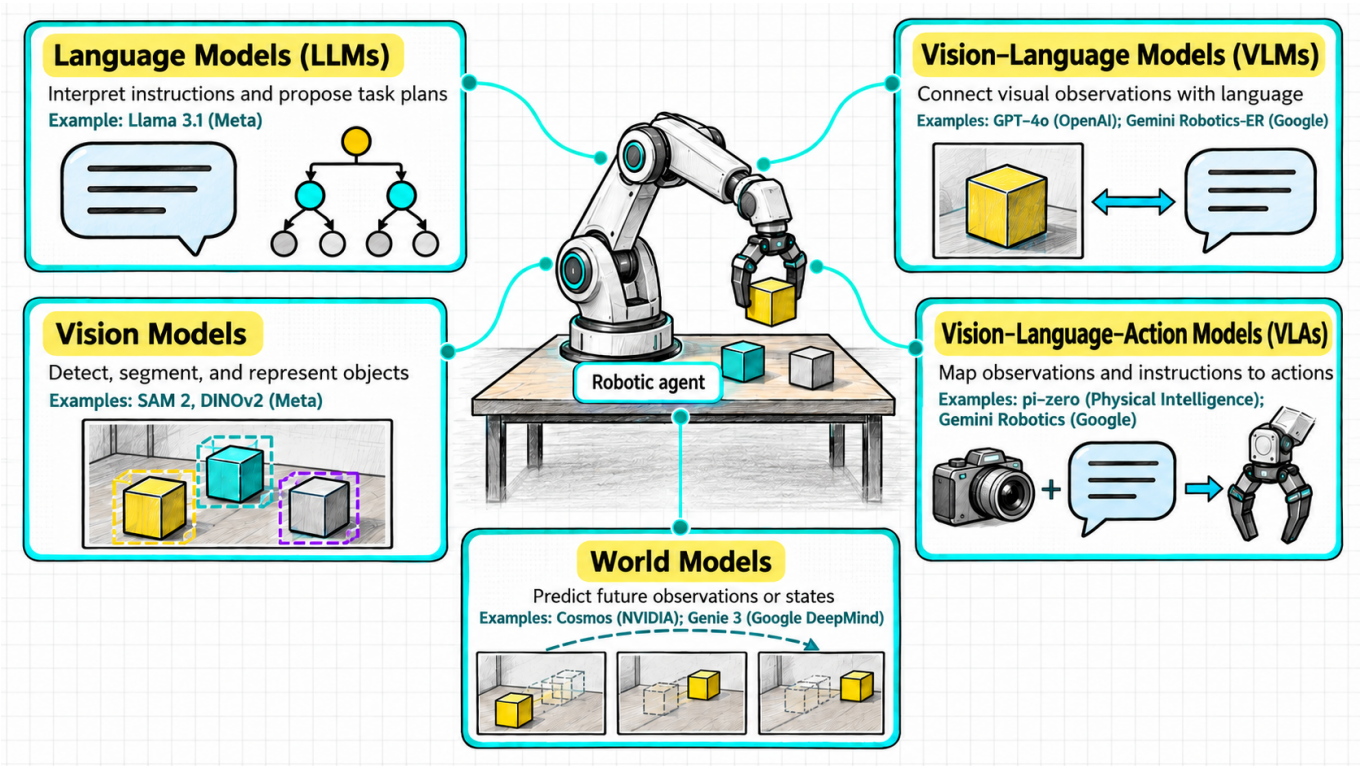

Robotics Solved?

Robotics Solved?

Still unresolved

Reliable multi-hour autonomy, guarantees under shift, dexterity in unstructured homes.

Persistent bottlenecks

Long-horizon reliability, uncertainty, manipulation, safety and evaluation remain unresolved.

Data engines

Teleoperation, large-scale demonstrations, simulation and synthetic augmentation now shape progress.

Why physical intelligence is harder than text generation

- **Partial observability** Occlusion, sensor noise, ambiguous objects and hidden contact states.
- **Distribution shift** Rooms, illumination, tools, humans and hardware are never exactly repeated.
- **Continuous dynamics** Actions have geometry, torque, friction, latency and stability constraints.
- **Costly data** Physical trials require equipment, operators, resets and risk management.
- **Long-horizon coupling** An early bad grasp can invalidate a sequence of downstream actions.
- **Safety** A mistake may damage property or injure someone; monitoring matters.

Vision–Language–Action

Foundation models as planners: Vision-language-action (VLA) policies connect semantic instructions and perception to robot actions.

maps: (image, instruction) $\rightarrow$ **motor actions**

Inputs: Camera / depth / proprioception Natural-language task Optional robot history

VLA Policy: $\pi(a_{t:t+H} \mid o_{\leq t}, g)$

Outputs:

End-effector poses Joint commands Discrete skill selections

Challenge:

language-level intent must translate into continuous, contact-rich, feasible motion.

VLA Structure

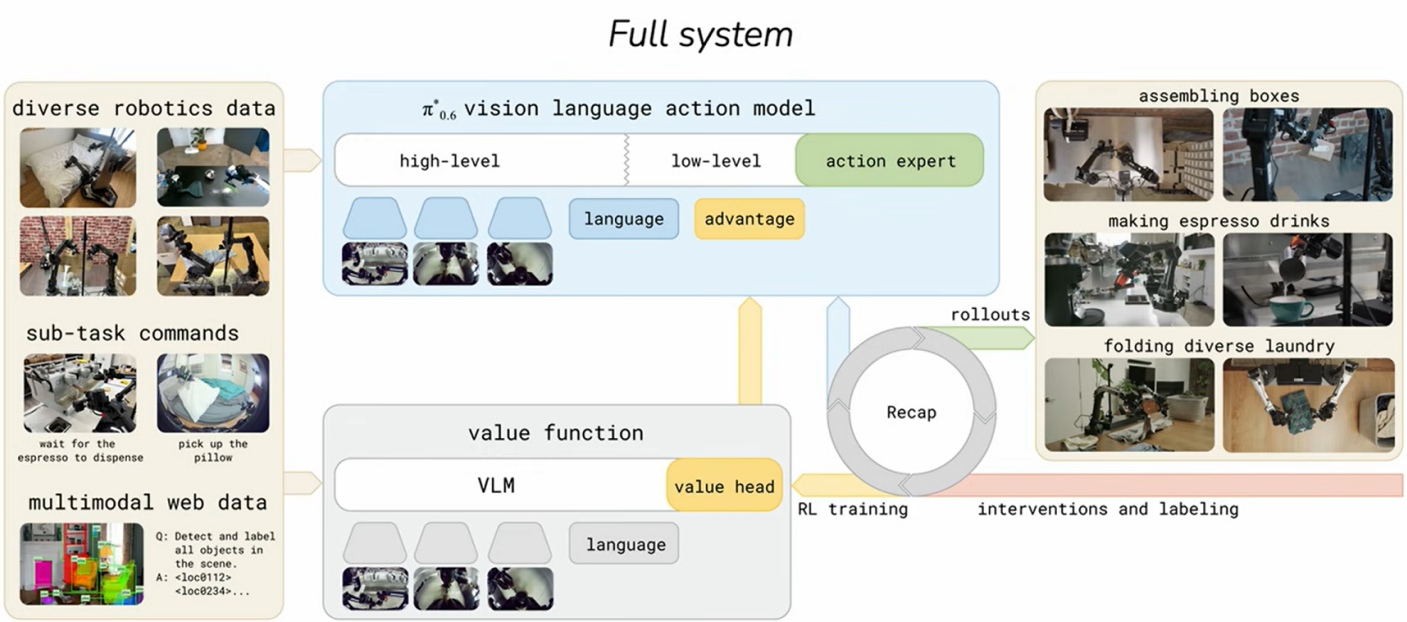

Teaching Neil new Skills

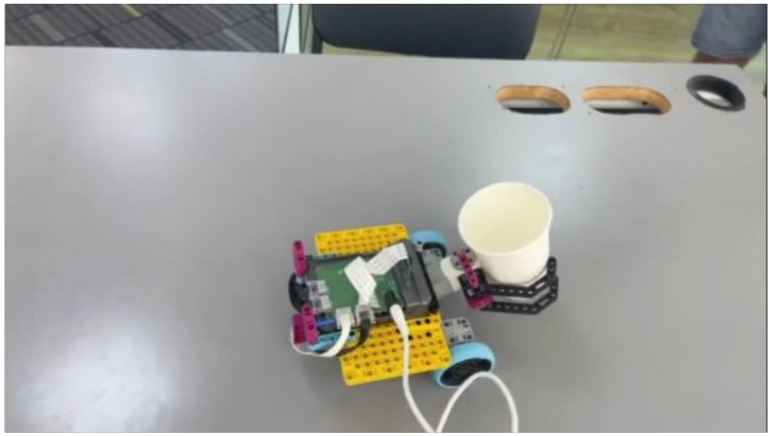

Acquiring new skills for mobile-manipulators

Why do we still need to understand robotics?

Objectives

CLAIR

Example

Autonomy in Robotics

Physical AI

Task and Motion Planning

Logistics

Why do we still need to understand robotics?

What are included

✓ RGB images from workspace and wrist cameras
✓ Proprioception
✓ Language task specifications
✓ PDDL scene descriptions

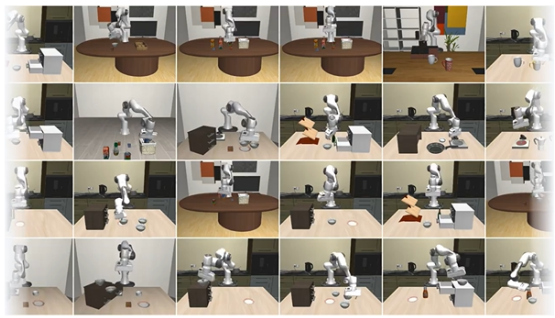

Task and Motion Planning

’go from A to B’?

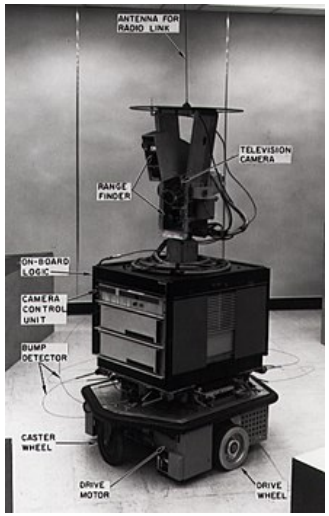
ANTENNA FOR RADIO LINK
TELEVISION CAMERA
RANGE FINDER
ON-BOARD LOGIC
CAMERA CONTROL UNIT
BUMP DETECTOR
CASTER WHEEL
DRIVE MOTOR
DRIVE WHEEL

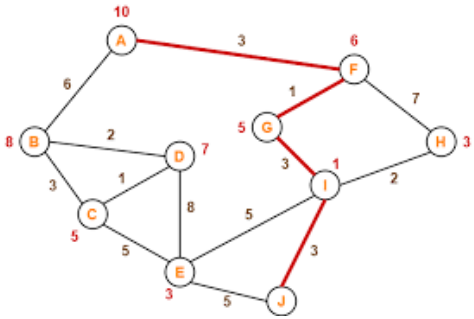
A
B
C
D
E
F
G
H
I
J

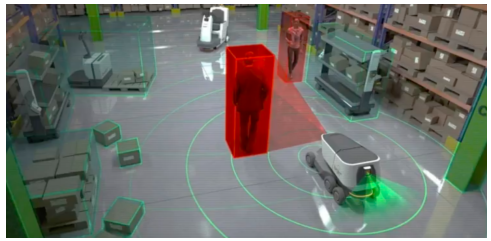

Layered Decision-Making

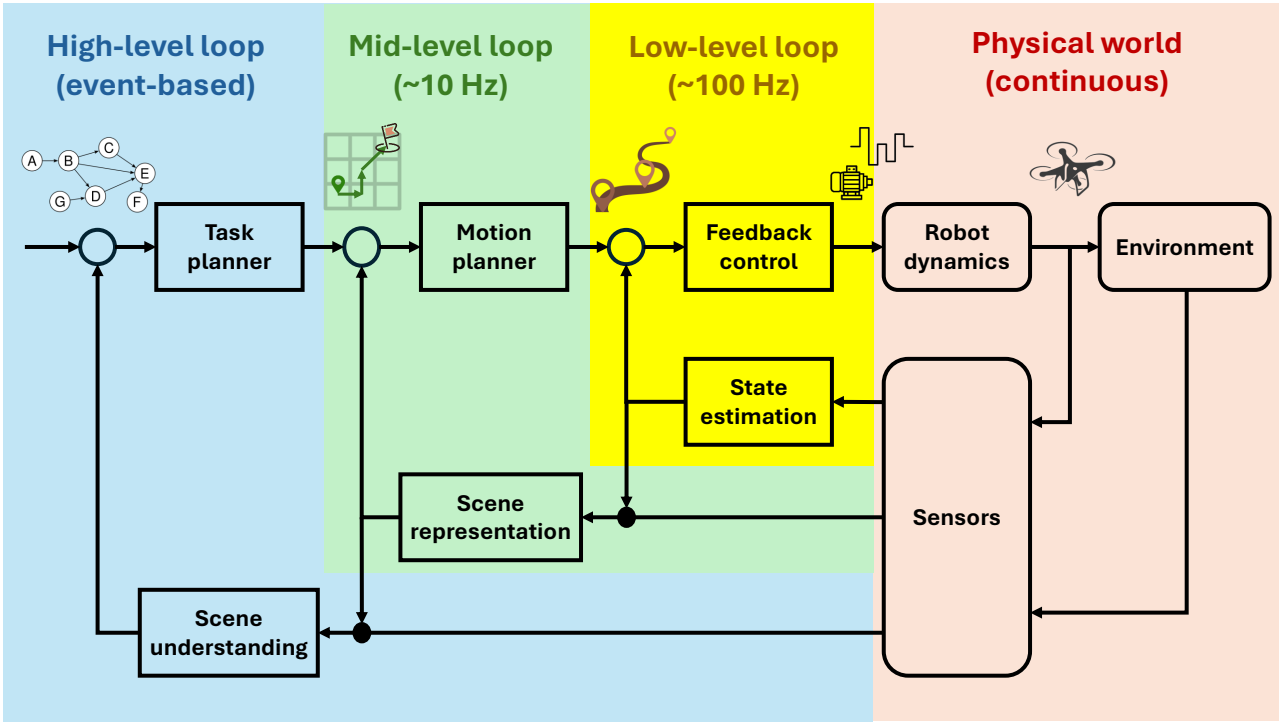

Task Interpretation - Task Planning

Translate the scene into a symbolic representation

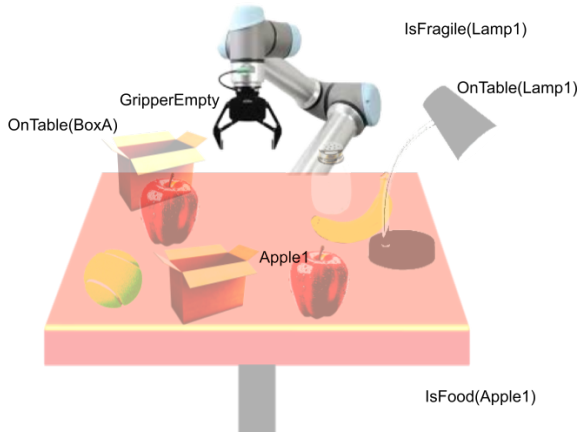

The representation (e.g., using PDDL or STRIPS domain) is designed to be used by the high-level symbolic planner that finds a sequence of actions or policy to achieve the goal.

Task Planning

Let $\mathcal{R}$ be a robot operating in a discrete environment described by a set of symbolic **states** $\mathcal{S}$ and **actions** $\mathcal{A}$. Given an initial state $s_0 \in \mathcal{S}$ and a **goal condition** $G \subseteq \mathcal{S}$, determine whether there exists a sequence of actions $\pi = \langle a_1, a_2, \ldots, a_n \rangle$, such that executing π from s_0 leads to a state $s_n \in G$.

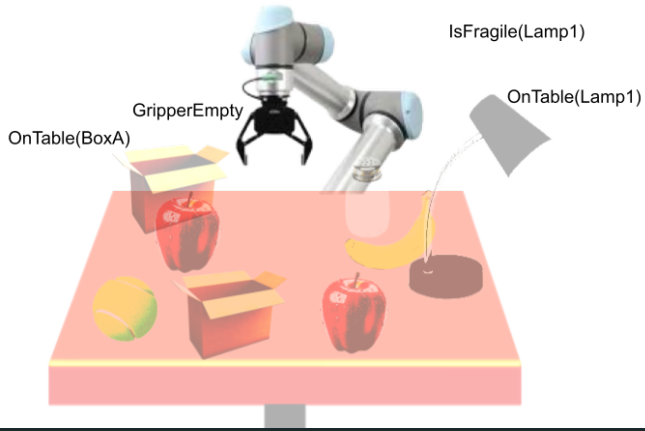

Motion Planning

A motion planner is used to compute a collision-free trajectory for the robot's arm to reach the apple.

The planner ensures:

- desired position is reached (the gripper's approach vector aligns with the apple)
- no collision occurs with the table or nearby objects.
- kinematic feasibility (joint limits, reachability, etc.) is satisfied.

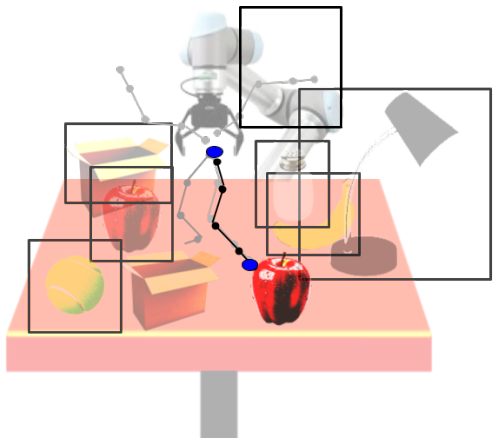

Motion Planning

Let $\mathcal{R}$ be a robot system with d **degrees of freedom**, moving in a known environment with obstacles. Given start and target **configurations** q_0 and q_g for $\mathcal{R}$, decide whether there is a collision-free, continuous path $\tau : [0, 1] \rightarrow \mathcal{C}_{free}$ such that $\tau(0) = q_0$ and $\tau(1) = q_g$ and if so, plan such a motion.

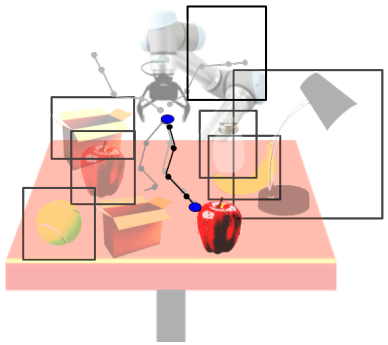

Control and Execution

”Move the arm, close the gripper, and lift the apple”

- **Trajectory Execution** - low-level controller (e.g., PID, MPC) uses feedback from joint encoders and force sensors to follow the planned trajectory.
- **Force control loop** - tactile sensors measure contact pressure so that the controller can regulate the grasp force.
- **Vision-based feedback** - (visual servoing) refines the alignment if necessary; the apple disappears from the table view and appears in gripper view.

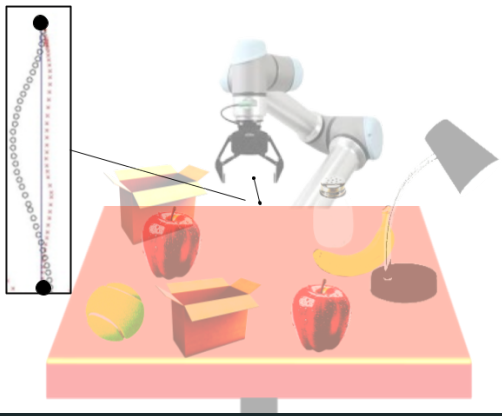

Motion Control

Given a desired trajectory $\tau(t)$ for a robotic system $\mathcal{R}$ with d **degrees of freedom**, the goal of motion control is to compute and apply control inputs $\mathbf{u}(t)$ (e.g., joint torques, velocities, or forces) such that the system's actual motion $q(t)$ follows $\tau(t)$ as closely as possible.

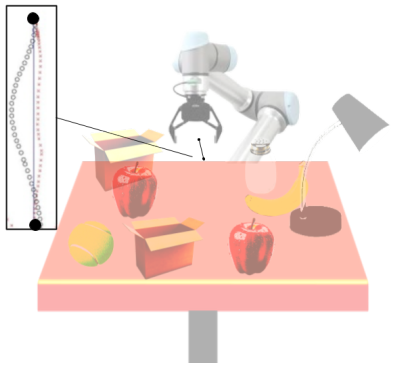

Connecting the Layers

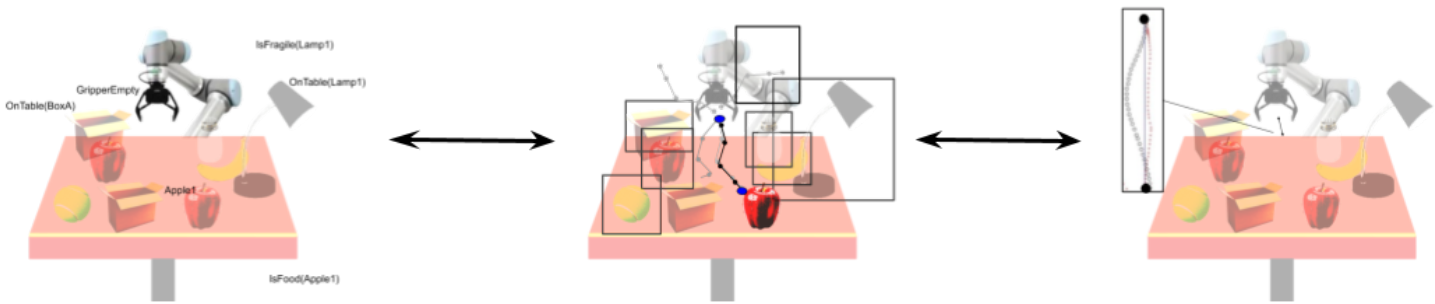

Perception and Scene Understanding

Logistics

Agenda

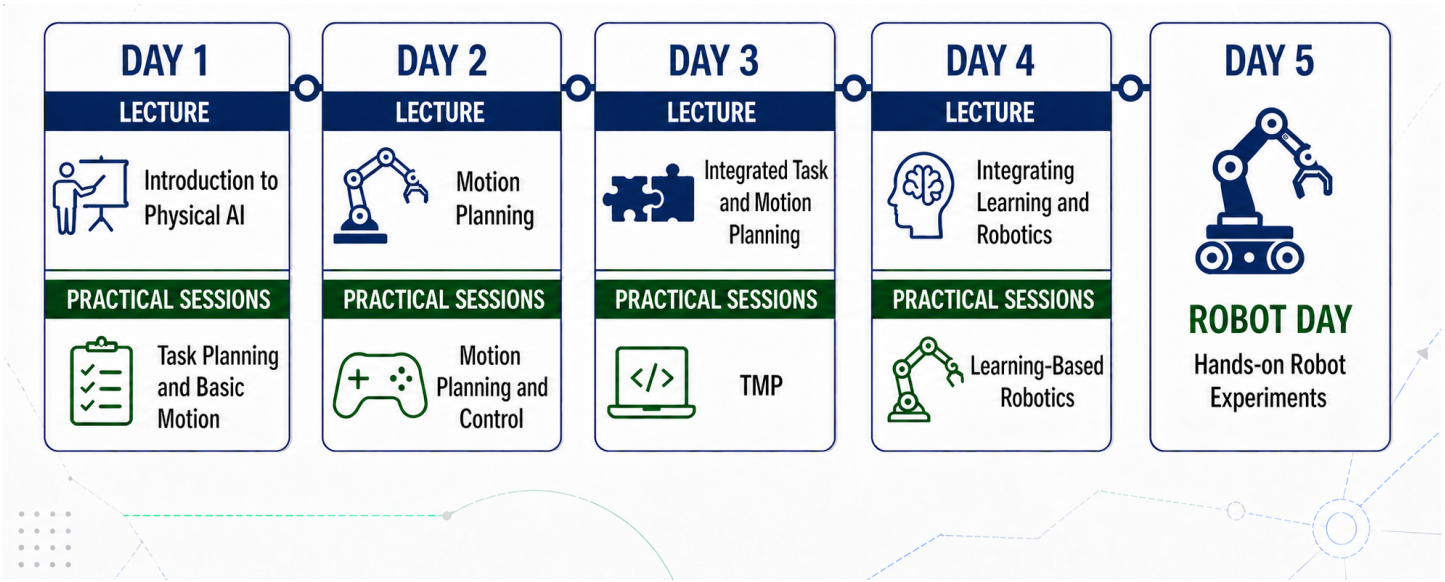
DAY 1
LECTURE
Introduction to Physical AI
PRACTICAL SESSIONS
Task Planning and Basic Motion
DAY 2
LECTURE
Motion Planning
PRACTICAL SESSIONS
Motion Planning and Control
DAY 3
LECTURE
Integrated Task and Motion Planning
PRACTICAL SESSIONS
TMP
DAY 4
LECTURE
Integrating Learning and Robotics
PRACTICAL SESSIONS
Learning-Based Robotics
DAY 5
ROBOT DAY
Hands-on Robot Experiments

Clarifications

- Labs are intentionally more elaborate than we have time to complete.
- All materials will be available after the deadline.
- You will be welcome to come and work on the robots at the lab after the WS is over.

WS info

Website:
https://clair-lab-technion.github.io/physical-ai-workshop

Repo:
https://github.com/CLAIR-LAB-TECHNION/physical-ai-workshop