
GAJANAN PUMPS

MOVING FLUIDS POSITIVELY

GAJANAN PUMPS & SYSTEM
TRUSTED SINCE 20 YEARS

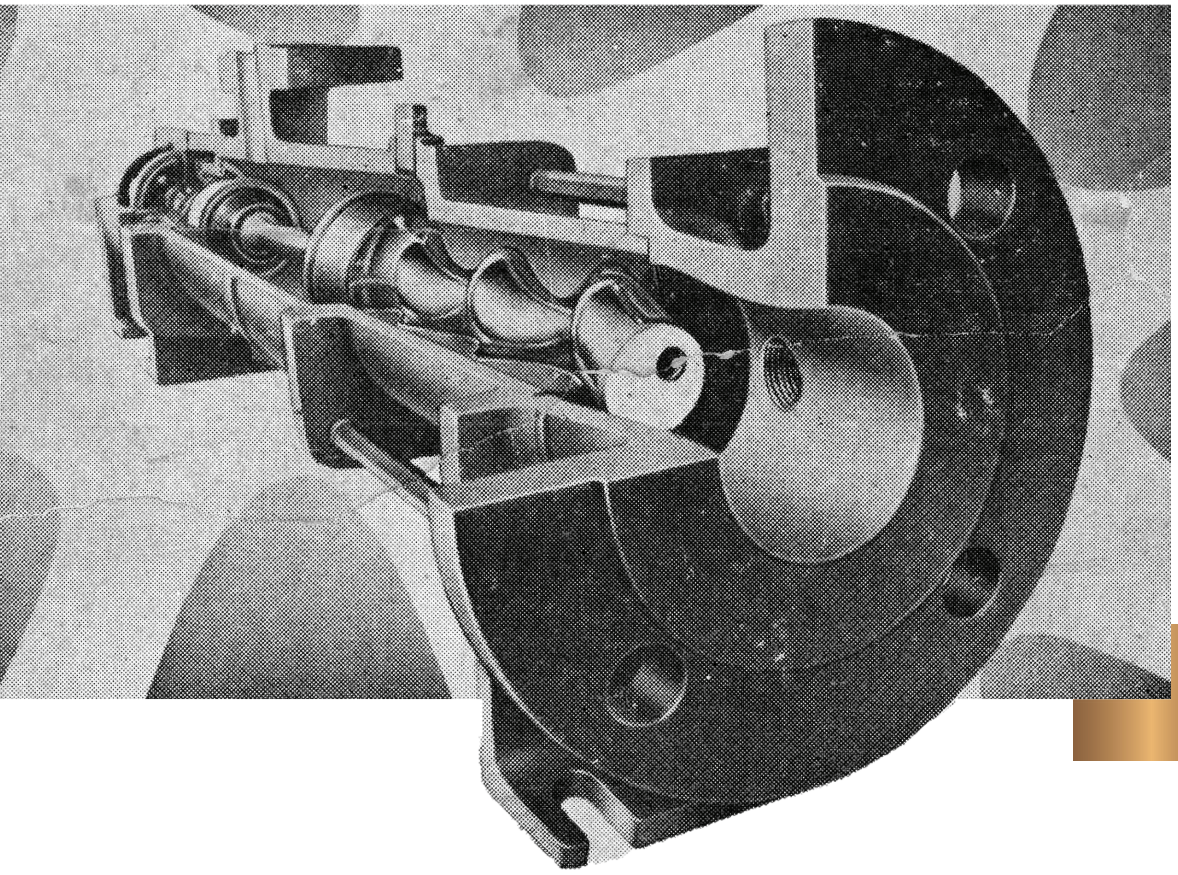

Product Range

Company, Technology & Application areas

Gajanan Pumps & Systems

Solutions you can trust

Table of Contents

01 Who we are

02 Business Fields

03 Characterstics

04 Selection Pump

05 Wide range of application

06 Progressive cavity pumps

07 GP Series

08 Extruder

GAJANAN PUMPS

MOVING FLUIDS POSITIVELY

Who we are ?

For more than two decades Gajanan pumps has manufactured positive displacement pumps worldwide. In 2002, the Gajanan Pumps group has acquired license to manufacture and distribute progressive cavity pumps.

Our product range includes :

Standard pumps
Hopper pumps
Wide throat pumps
Chemical pumps
Hygiene pumps
Immersible pumps
Downhole pumps
Multi phase pumps
High pressure pumps(injection pumps)
Custom built pumps
Dosing Pumps
Barrel emptying pumps
Namkeen making machine

Our Strategy

Our development and sales locations are focused on trend-setting technologies and applications,to expand our market and technology leadership for the benefit of our customers. Hereby, we don't see ourselves only as a developer and manufacturer but more as your partner from project planning through case management to complete service concepts.

Our Quality

With the worldwide implementation of common standards in accordance with DIN EN ISO 9001 in development and research we gurantee the highest quality at each production site.


We set benchmarks

Our innovative and high quality products are globally much valued and accepted. Each year we set further benchmarks and get patents.

PROUDLY MADE IN BHARAT

BUSINESS FIELDS

Permanently quickening development cycles together with constantly increasing process requirements call for ambitious and uncompromising solutions for all industries. Through our worldwide business field organization with experienced we meet and exceed the requirements of our customers.

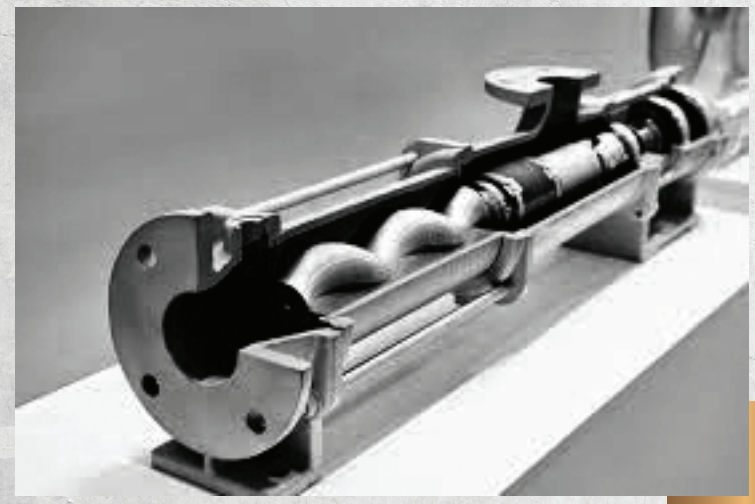

business fields



ENVIRONMENT AND ENERGY

Waste water treatment, agriculture , construction industry, mining and smelting works ,renewable energies , waste water and drinking water purification.



CHEMICAL , PULP & PAPER

Building material ,biofuel ,chemical and biochemical , paint and varnish , wood processing, ceramics and glass ,leather/ tanneires , paper and pulp , textiles and similar.



FOOD AND PHARMACEUTICAL

Sugar and starch , wine , brewries , distlleries, fruit processing ,beverages , pharmaceutical and cosmetic products , bakery products and meat processing and similar.



VEGETABLE OIL & REFINERY

Oil Transfer , Gums , Wax , Acid Oil , Lecithin transfer , Noodles Transfer , and Refineries reinjection and similar.



Dosing Technology

Cars, trains , planes and ship construction , food electrical, renewable energies , pharmacy , bonding and sealing and similar.



OIL & GAS

Upstream
On and Offshore oil production
Downstream
Oil transfer , petrochemical and reinjection and similar.



NAMKEEN MANUFACTURING

For making of various types Bhujia , Soya Sticks, Papdi, Ghatiya , Bhawnagri, Peanuts, Roasted matar , Chana dal and simliar.

CHARACTERISTICS

Gajanan Make single screw pumps are utilized in various industries to convey many types of fluids in a continuous,low pulsating manner while maintainng an accurate flow.

- Positive Displacement-Head developed is independent of speed and capacity is approximately proportional to speed.
- Self PRIMING-inherently self priming. Can work on snore i.e. handle high percentage of air with liquid.
- Low NPSH (R) - suction capacity upto 8.4 meters.
- Uniform flow-Metered uniform flow with minimal pulsation, avoid risk of damage, to delicate shear sensitive products.
- Non Clogging-Handles solids in suspension of mixtures containing high percentage of solids.
- Reversible-suction and delivery ends can be interchanged by merely changing direction of rotation of the prime mover.
- Low Internal Velocity-Negligible turbulence or agitation. Exceptionally low internal velocity reduces wear due to erosion and corrosion.
- Simplicity- SIngle rotating element, no valves or gearing, only one gland usually arranged on suction side easy maintainance by semiskilled labour.

Shaft Sealings

Stuffing box type shaft sealing is coaxially tightened between flange of the pump body and Pump housing flange enabling longer life of Gland Packing.

Mechanical seal type sealing is coaxially tightened between flange of the Pump Body and Pump Housing Flange . This type of sealing ensures zero leakage and longer life of the pump body with maximum efficiency of the pump.

Pump Performance


Capacity	**From a few ml to 350m^3 /h**
Number of stages	**From 1 to 8**
Pressure	**From 6 to 60 bar**
Viscosity	**1cst – 3 million cst**
Solid Content	**Maximum particle size 25 mm**
Temperature	**4^0 C to 110^0 C**

Selection of Pump

Table

VELOCITY	ABRASIVE	VISCOSITY	MEDIUM TYPES
ZONE 1- 3m/sec to 4 m/sec	Nil	0-2500 CST	Watery, lubricating media, thin oils, milk,clear acids and alkaies, alcohols etc.
Zone 2- 1.5 m/sec to 3m/sec Zone 3- 1m/sec to 1.5 m/sec	Light Medium	250-1000 CST 1000-	Dirty water , molasses, paints, Beer, Bentonite, Bilge water, Amla pulp etc. Sewage sludges, Mash, Ice-cream, Plastic dispersions, Ceramic slurry, Glues, Soft, Yoghurt etc.
Zone 4- 0.25 to 1m/sec	Heavy	50000-100000 CST	White wash , ceramic sludge, Honey, Cottage cheese, Grease ointment, Dry fruit mashes, Whole cherries unstoned plums, Spent malt , Almost dru filter cakes, Paste paints, Centrifugal discharge

Graph

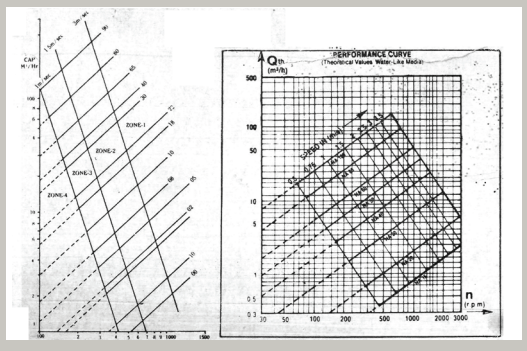


Wide Range of Applications




- High Solid Contents or free of solids
- Low to high viscosity
- Thixotropic and dilatant (pumping fluid with changing viscosities)
- Shear Sensitive
- Abrasive
- Lubricating and Non lubricating
- Aggressive(ph 0-14)
- Adhesive
- Toxic

Gajanan Makes Progressive Cavity Pumps

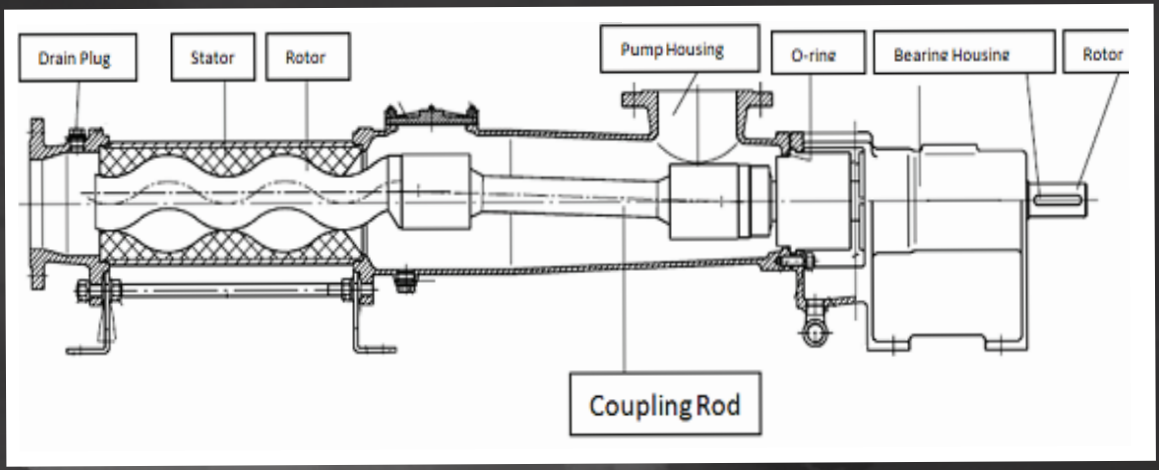


Cardinal joint

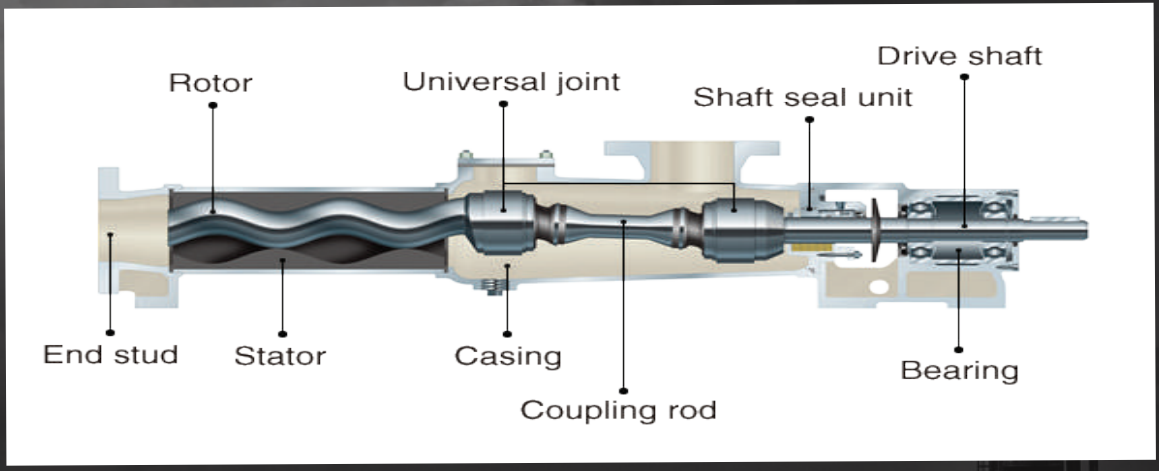

- Cardon joint allows greater contact between load bearing parts resulting in reduction of wear components. Greater freedom of angular movement allows compact pump design. Maintenance fitment or removal of joints is easy.

- Double articulated sealed, pin & bush joints ensures smooth power transmission & longer service life of critical components resistant to the lubricating media & the pumping media. Simple to maintain and economical too.

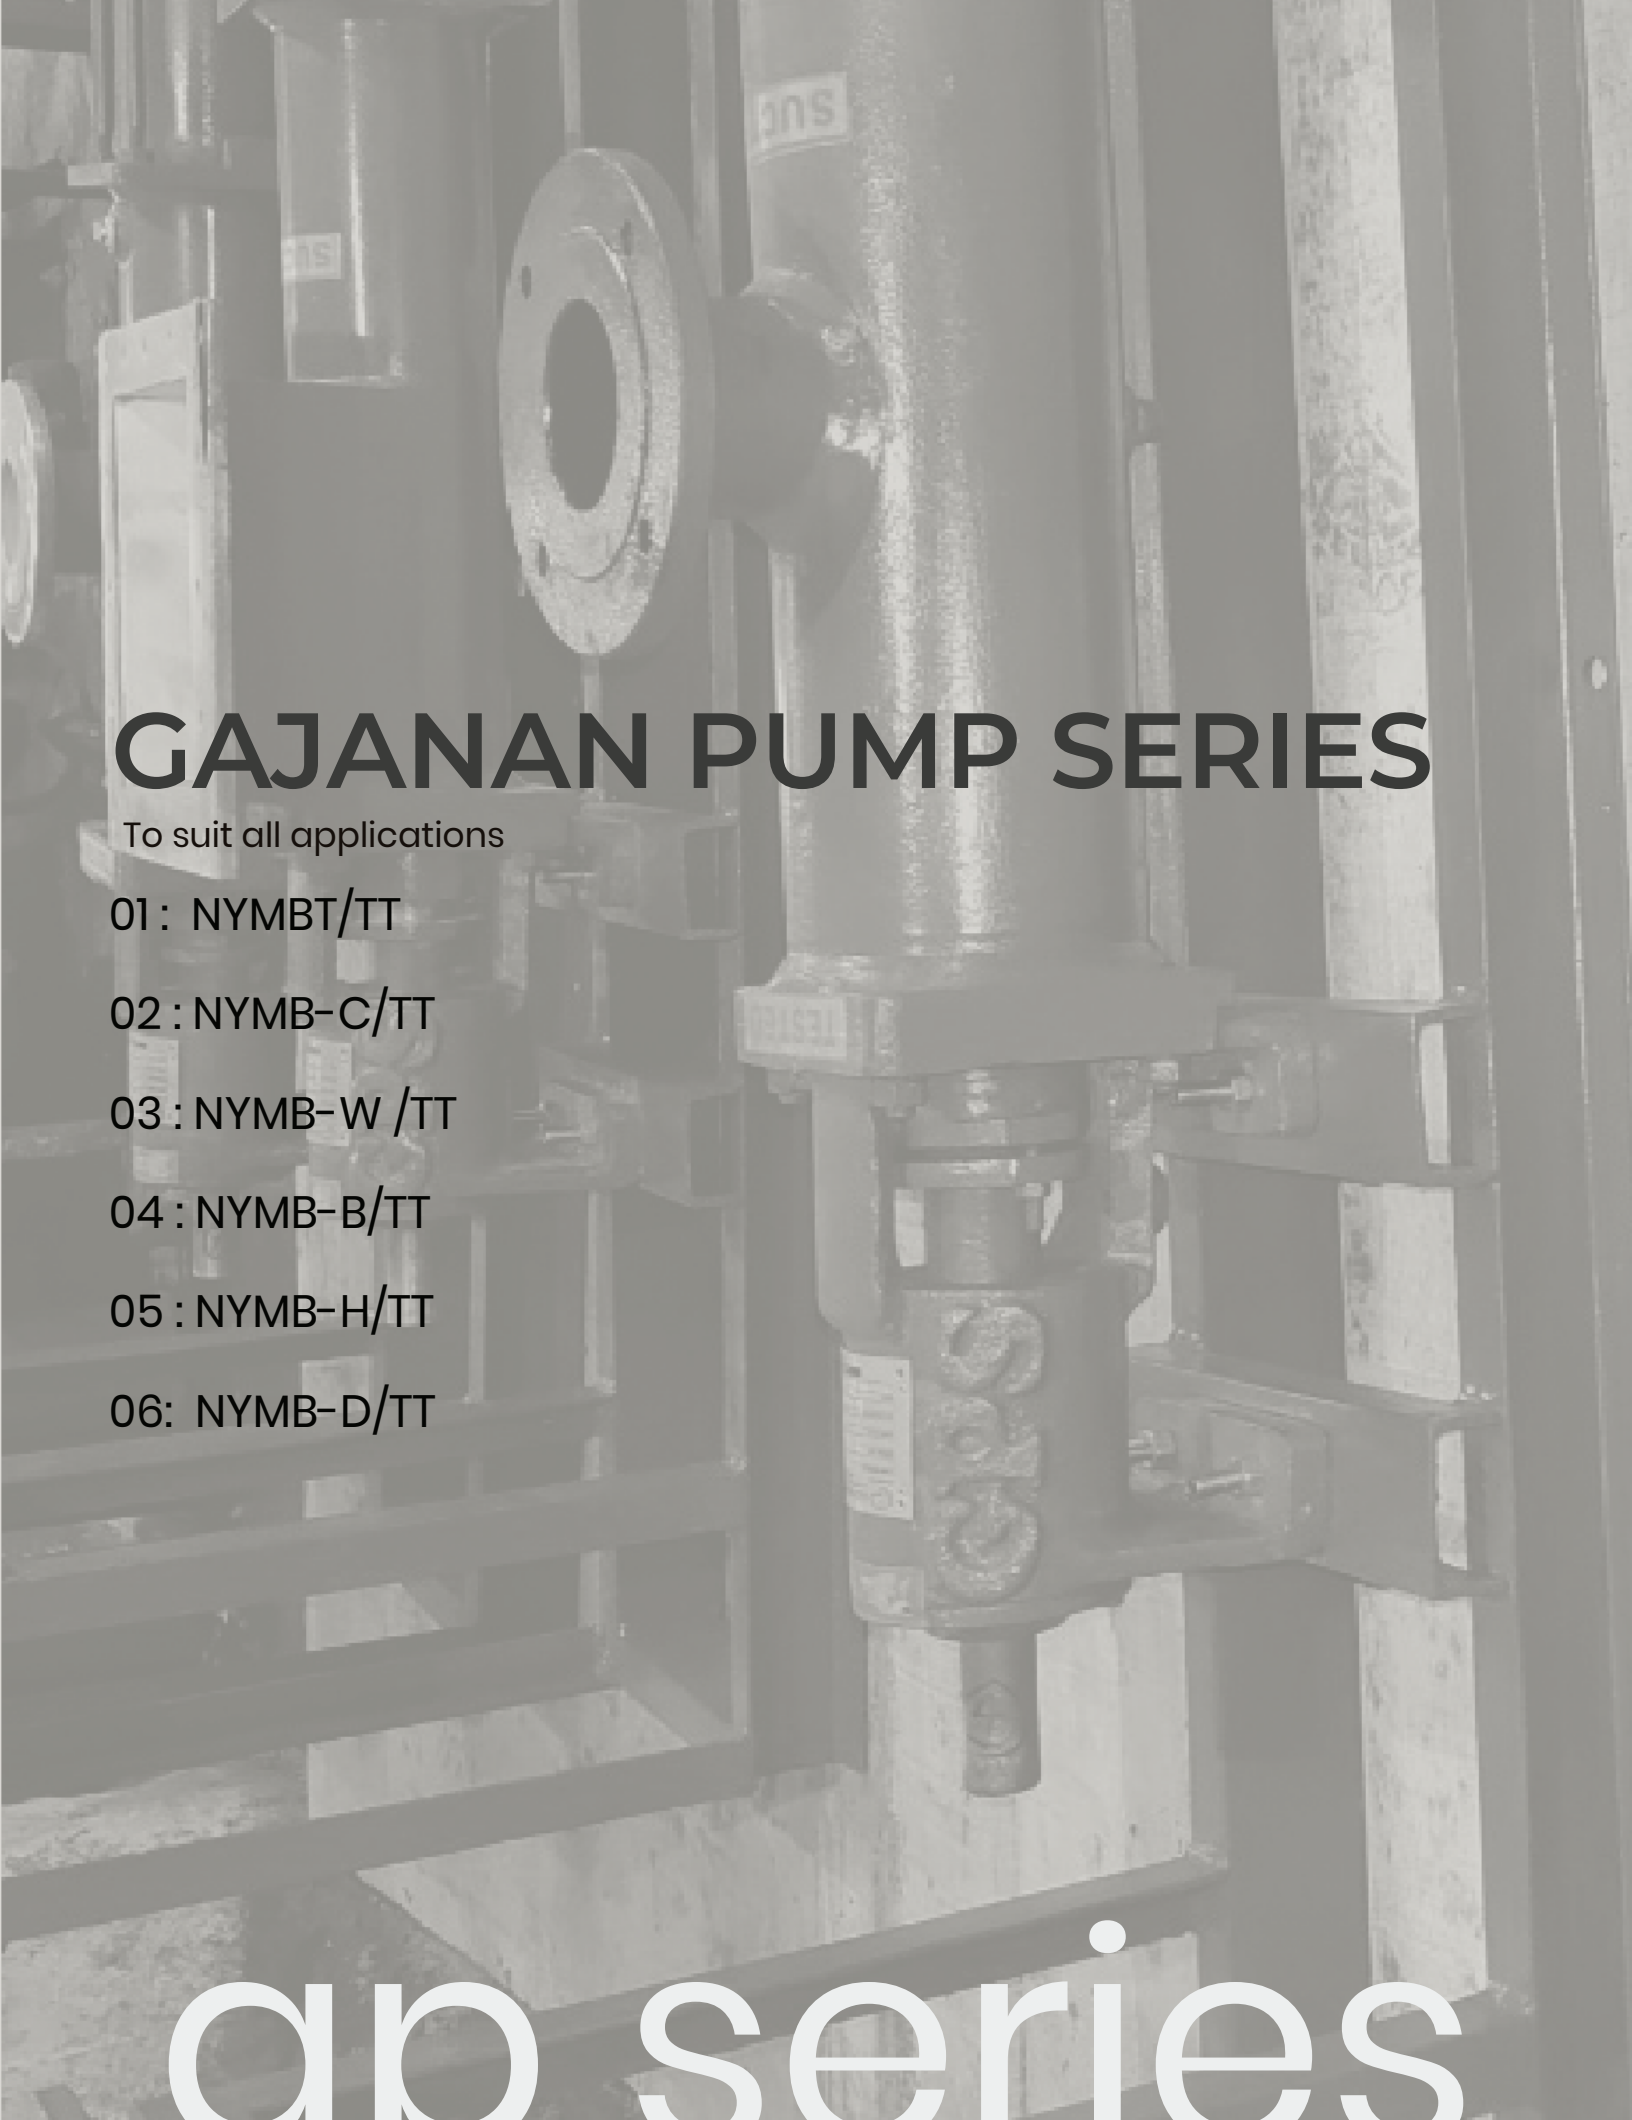

GAJANAN PUMP SERIES

To suit all applications

01 : NYMBT/TT

02 : NYMB-C/TT

03 : NYMB-W /TT

04 : NYMB-B/TT


05 : NYMB-H/TT

06: NYMB-D/TT

ap series

01 : NYMBT/TT Series

NYMB series pumps are of Cast Iron construction . The internal rotating parts are either made of alloy steel or stainless steel , depending on the fluid being handled. They have a wettable housing and rotating parts of SS-304/316. For highly corrosive fluids , the pump housing can be C .I. ebonite / FRP lined while rotating parts can be Alloy 20/Monel/Hastle alloy. For specialized applications, the resilient material used for manufacturing the stator can be slected from a wide range of polymer viz Natural, Nitrile, Neoprene, Hypalon, Silicon , Butyol or Viton depending on the compatibility of fluid being pumped.

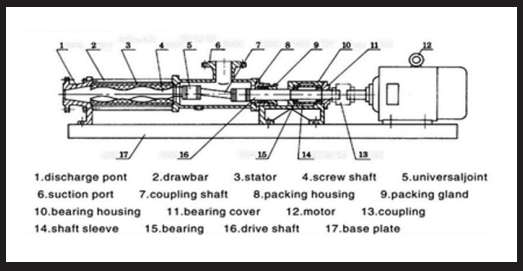

PERFORMANCE

capacity up to 350 m3 /h
pressure up to 60 bar
temperature up to 110 C
Viscosity up to 30000cst

- Available in variety of drive options including directly coupled to Geared motor, gear boxes and gear box directly coupled to motor .
- L and overhead Base plates V belts and Pulley arrangements
- Available in both Mechanical Seal and Stuffing Box Gland type shaft sealing's.


APPLICATION

Brewery and Distilleries , Cosmetic , Ceramics , Chemical, Dye stuff, Edible Oil refineries , Electronics and Engineering, Effluent and Sewage, Fertilizer, Food and Beverage, Marine, Mining, Man Made Fibre, Pharmaceutical, Paper, Paint, Sewage Treatment, Soaps and Detergents, Sugar, Textile.

Fluids Handled


Acidic and Alkaline Slurry, Alum, Bentonite slurry, Black Liqour, Casein Slurry, Ceramic Slurry, Clay Molasses, Coating mix, Detergent slurry, Electroplating solution, emulsions, Ferrite Slurry, Fuel oil Sludge, Glue, Grout Mix, Lube oil, Molasses, Paint, Paper Pulp, Printing Ink, Resins,Sewage SLudge, Soap Stock, Sodium Silicate, Sulphinated Sugar juice, Varnish , Vegetable Oil, Gum Sludge, Viscose, Yeast, Petroleum Jelly.

NYMBT/TT

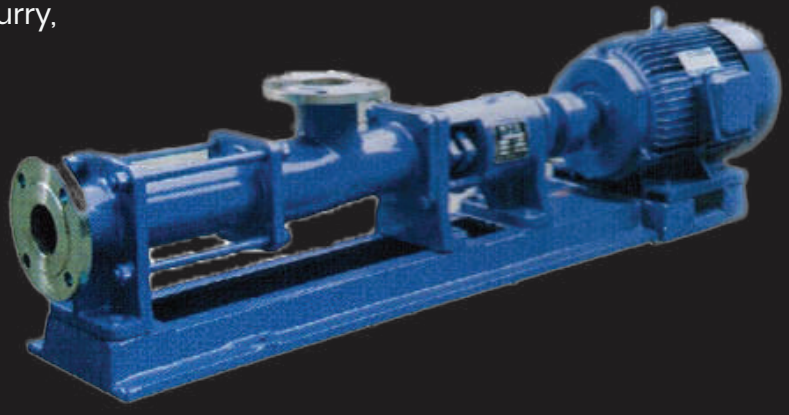

02 : NYMB-C/TT Series

NYMB series pumps are of Cast Iron construction . The internal rotating parts are either made of alloy steel or stainless steel , depending on the fluid being handled. They have a wettable housing and rotating parts of SS-304/316. For highly corrosive fluids , the pump housing can be C .I. ebonite / FRP lined while rotating parts can be Alloy 20/Monel/Hastle alloy. For specialized applications, the resilient material used for manufacturing the stator can be slected from a wide range of polymer viz Natural, Nitrile, Neoprene, Hypalon, Silicon , Butyol or Viton depending on the compatibility of fluid being pumped. These pumps include flat shaft and rotor head with cardinal joints.

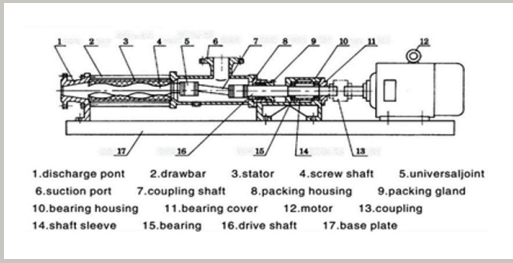

PERFORMANCE

capacity up to 350 m3 /h
pressure up to 60 bar
temperature up to 110^{0}C
Viscosity up to 30000cst

- Available in variety of drive options including directly coupled to Geared motor, gear boxes and gear box directly coupled to motor.
- L and overhead Base plates V belts and Pulley arrangements.
- Available in both Mechanical Seal and Stuffing Box Gland type shaft sealing's.


APPLICATION

Sugar, Distilleries ,Ceramics , Chemical, Insulators and Tiles ,Edible Oil refineries, Cosmetic, Detergents, Effluent, Fertilizer ,Food and beverage, Mining, Pharmaceutical, Paper, Paint, Sewage Treatment, Soap, Textile, Marine, Dye Stuff.

Fluids Handled

Acidic and Alkaline Slurry, Alum, Bentonite slurry, Black Liqour, Casein Slurry, Ceramic Slurry, Clay Molasses, Coating mix, Detergent slurry, Electroplating solution, Emulsions, Ferrite Slurry ,Fuel oil Sludge, Glue , Grout Mix, Lube oil, Molasses, Paint, Paper Pulp, Printing Ink, Resins ,Sewage SLudge, Soap Stock, Sodium Silicate, Sulphinated Sugar juice, Varnish , Vegetable Oil, Gum Sludge, Viscose, Yeast, Petroleum Jelly

NYMB-C/TT

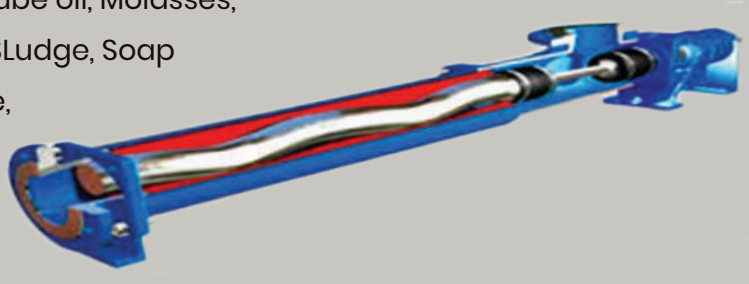


03: NYMB-W/TT Series

In this series pumps are designed for non corrosive duties are constructed with Cast Iron bearing housing, MS Fabricated hopper and Alloy Steel rotating parts , while for corrosive applications all SS304/316 construction pumps are available. For severe abrasive applications, Tool Steel hardened Chrome Plated rotor is used .Stator can be selected from a wide range of polymers depending on their compatibility with the fluid being handled. For hygienic applications, All stainless steel construction pumps are provided with a special non contamination stator and I.D.F. or S.M.S. connections. These pumps are specially designed to avoid pro product retaining pockets, thereby eliminating any bacteriological or chemical contamination..

PERFORMANCE

capacity up to 200 m3 /h
pressure up to 24 bar
temperature up to 110^{0}C
viscosity up to 300000 cst

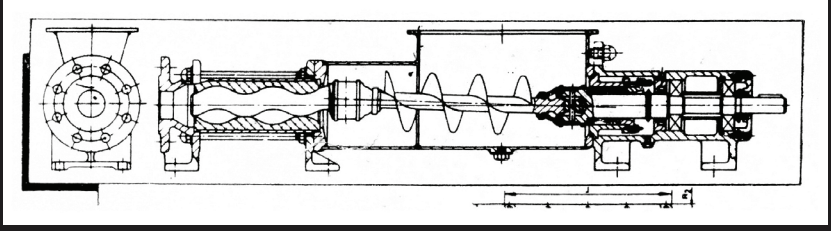


- Available in variety of drive options including directly coupled to Geared motor, gear boxes and gear box directly coupled to motor .
- L and overhead Base plates V belts and Pulley arrangements
- Available in both Mechanical Seal and Stuffing Box Gland type shaft sealing's

APPLICATION

Bakery , Confectionary, Construction, Chemicals, Dairy, Edible Oil, Explosives Fruit Processing, Malt and Cocoa , Mining , Meat Processing, Paper and Pulp, Paint and Varnish, Petrochemicals and Refineries, Printing Inks, Pharmaceuticals, Pickles, Sewage, Soap and Detergents, Starch, Winery and for mterial regarded as un-pumpable.

Fluids Handled


Aluminium / Magnesium, Hydroxide paste, Butter , Cake Mix, Chocolate mix, Clay Slurry, Explosive Slurry, Formic acid Slurry, Fruit or vegetable mash, Ghee , Grease, Green asbestos Slurry, Grout Mix, High consistency paper pulp , Lecithin Lithophone paste, Malt Mix, Minced Meat , Mashed Grapes, Oil Paste, Paint, Premix Pickle mix, Pigmental Varnish, Putty Starch Slurry, Thick coal Slurry, Undiluted Sludge, Yoghurt

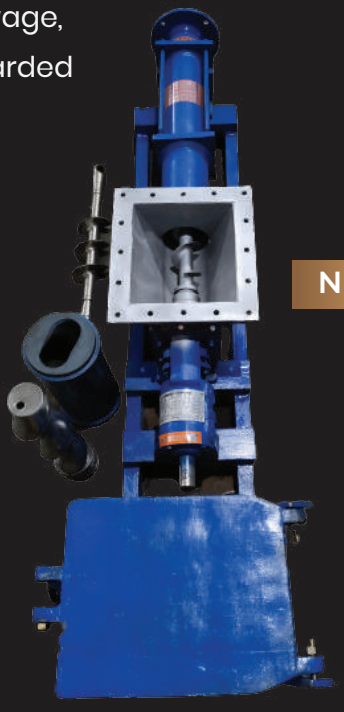

NYMB-W/TT

04: NYMB-B/TT Series

This series of pumps are of steel construction with internal rotating parts of alloy construction. For corrosive applications the pumps are made of complete stainless steel construction. For special applications pumps in PVC construction with internal rotating parts of stainless steel are also available. The resilient material used for manufacturing the stator can be slected from a wide range of polymer viz Natural, Nitrile, Neoprene, Hypalon, Silicon , Butyol or Viton depending on the compatibility of fluid being pumped.

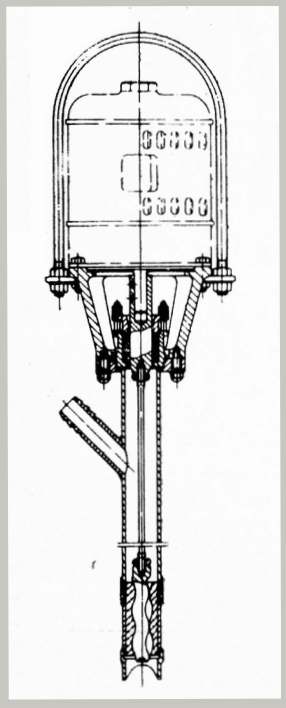

PERFORMANCE

capacity up to 100 m3 /h
pressure up to 12 bar
temperature up to 110^{0}C
viscosity up to 10000 cst

- Available in variety of drive options including directly coupled to Geared motor, gear boxes and gear box directly coupled to motor .
- Available in both Mechanical Seal and Stuffing Box Gland type shaft sealing's.

APPLICATION

Chemicals, Brewery, Electrical, Mining , Oil, Paint and Varnish, Ink, Pharmaceutical, Power etc.

Fluids Handled

Acids,
Beer,
Diesel Oil ,
Lubricant Oil,
Furnance Oil,
Varnish,
Chemical Soutions




NYMB-B/TT

05: NYMB-H/TT Series

Pumps in this series are designed specifically to meet modern requirements for maximum hygiene with simplicity and speed in cleaning . All metallic arts in contact with the product are fabricated in smooth finish Stainless Steel while the stator is of special non contaminating resilient polymer r esistant to il and fats . The bearings are isolated from the ump housing thus eliminating any possible grease contamination. This series have open universal joints as most of the fluids in Food and Allied Industries have good lubricating properties. For fluids with poor lubricating like aerated or demineralised water , the pumps are supplied with fail safe double sealed universal joints packed with non toxic lubricant.

PERFORMANCE

capacity up to 100 m3 /h
pressure up to 12 bar
temperature up to 110^{0}C
viscosity up to 50000 cst

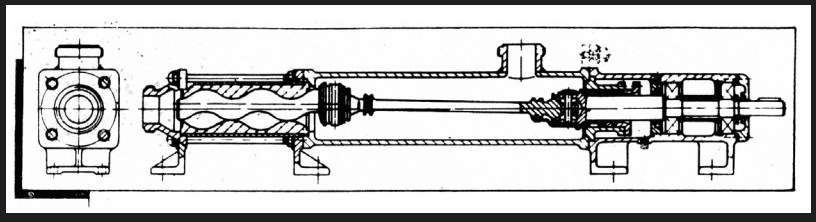

- Available in variety of drive options including directly coupled to Geared motor, gear boxes and gear box directly coupled to motor .
- L and overhead Base plates V belts and Pulley arrangements
- Available in both Mechanical Seal and Stuffing Box Gland type shaft sealing's


APPLICATION

Beverages, Brewery, Confectionary, Cosmetics, Dairy , Distillery , Food processing, Fruit Processing ,Ice Cream, Malt and Cocoa, Pharmaceuticals, Winery etc.

Fluids Handled

Amla Pulp , Beer , Beveraged , Butter oil, Cream, Curd, Demieralised water, Diced Vegetables, Edible gelatine, Fruit jiuce, Fruit Pulp and cubes, Glucose , IceCream mix , Jams,latex, Liqour, Lotions and creams, Malt Extract, Medical Formulations, Milk , Squashes, Sugar Syrups, Tamarind Extract, Tooth Paste, Tomato Paste, Vegetable Refined oil, Wine, Yeast etc.

NYMB-H/TT

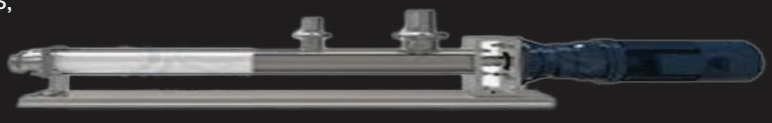

06: NYMB-D/TT Series

This series include pumps of compact design with material of construction being stainless steel, Alloy 20 /Monel/Hatelloy,easy installation and low maintenance cost. It is designed to inject a chemical or another substance into a flow of water, gas, or steam. Dosing pumps, which are typically small, provide an extremely precise flow rate at maximum control.

PERFORMANCE

capacity up to 10 l /h
pressure up to 12 bar
temperature up to 110 ^{0}C
viscosity up to 10000 cst

- Available in direct drive options including directly coupled to Geared motor.
- Available in both Mechanical Seal and Stuffing Box Gland type shaft sealing's.

APPLICATION

Chemical, Edible Oil refineries, Cosmetics, Detergents, Fertilizer ,Food and Beverage, Pharmaceutical, Paper, Paint , Textile , Dye Stuff, Bakery , Confectionary.

.

.

NYMB-D/TT



Extruder

Compact design with trolley mounted base frame with extruder attachments of different designs and size for extruding variou kinds of namkeen products.

PERFORMANCE

capacity up to 15 m3 /h
pressure up to 6 bar
Viscosity up to - 300000cst

- Available in variety of drive options including directly coupled to Geared motor, gear boxes and gear box directly coupled to motor .
- Available in Stuffing Box Gland type shaft sealing's.

APPLICATION

For making of various types Bhujia,
Soya sticks,
Papdi,
Ghatiya,
Bhawnagri,
Peanuts,
Roasted matar,
Chana daL and simliar.

EXTRUDER



GAJANAN PUMPS

MOVING FLUIDS POSITIVELY

Address : 41 Utpron Estate Panki Site 1, Kanpur, Pincode - 208022 ,
Uttar Pradesh, India

Contact @ : +91- 8299106938, +91- 8874973572, +91- 7355220108, +91- 9838070132

Email : contact@gajananpumps.com, Web visit @ : www.gajananpumps.com