CS 332
Computer Networks
Internet Routing & Multicast

Professor Szajda

Last Time

- Link State (LS) versus Distance Vector (DV) algorithms:
  - What are some of the differences?
- What is an AS?
  - Why do they exist?

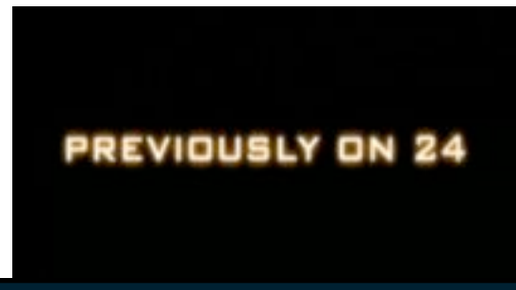

Chapter 4: Network Layer

- 4. 1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
  - Datagram format
  - IPv4 addressing
  - ICMP
  - IPv6
- 4.5 Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- 4.6 Routing in the Internet
  - RIP
  - OSPF
  - BGP
- 4.7 Broadcast and multicast routing

Intra-AS Routing

- Also known as Interior Gateway Protocols (IGP)
- Most common Intra-AS routing protocols:
  - RIP: Routing Information Protocol
  - OSPF: Open Shortest Path First
  - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

Chapter 4: Network Layer

- 4. 1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
  - Datagram format
  - IPv4 addressing
  - ICMP
  - IPv6
- 4.5 Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- 4.6 Routing in the Internet
  - RIP
  - OSPF
  - BGP
- 4.7 Broadcast and multicast routing

RIP (Routing Information Protocol)

- Distance vector algorithm
- Included in BSD-UNIX Distribution in 1982
- Distance metric: # of hops (max = 15 hops)

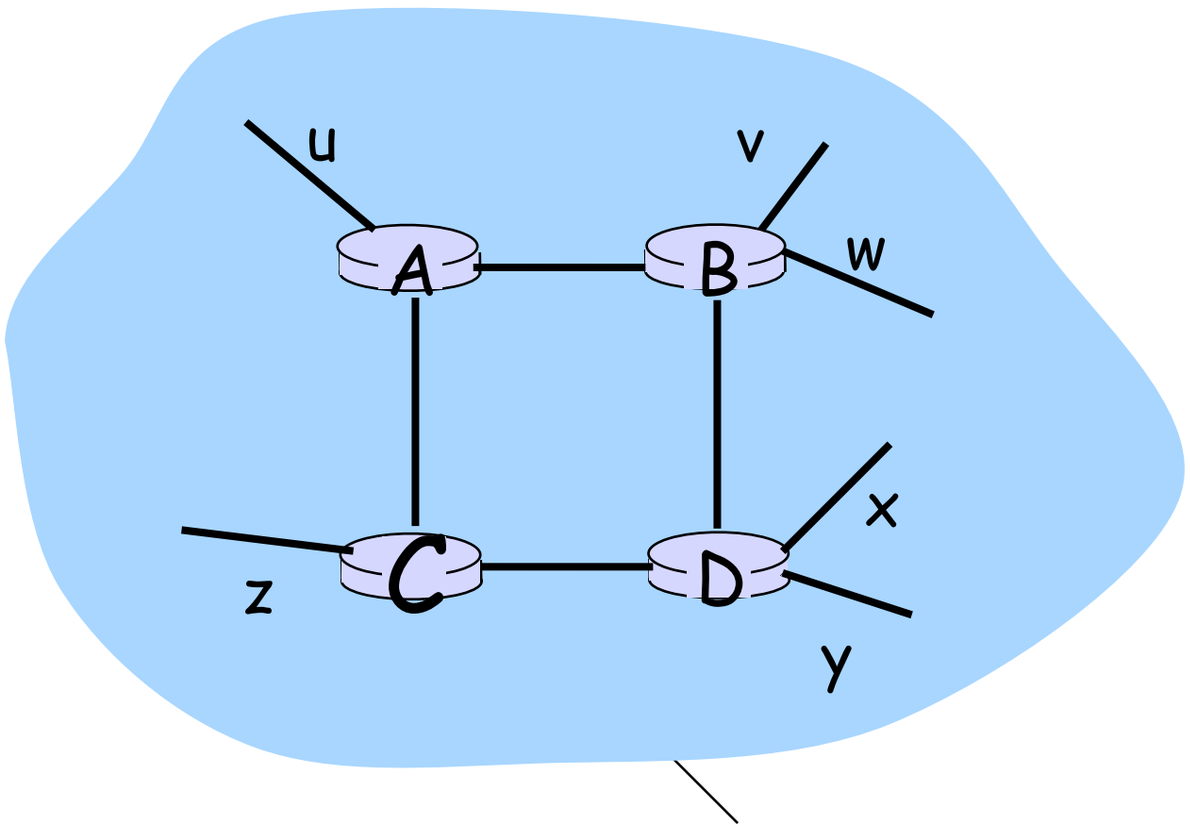

From router A to subnets:

destination	hops
u	1
v	2
w	2
x	3
y	3
z	2

RIP advertisements

- Distance vectors: exchanged among neighbors every 30 sec via RIP Response Message (also called advertisement)
- Each advertisement: list of up to 25 destination nets within AS

RIP: Example

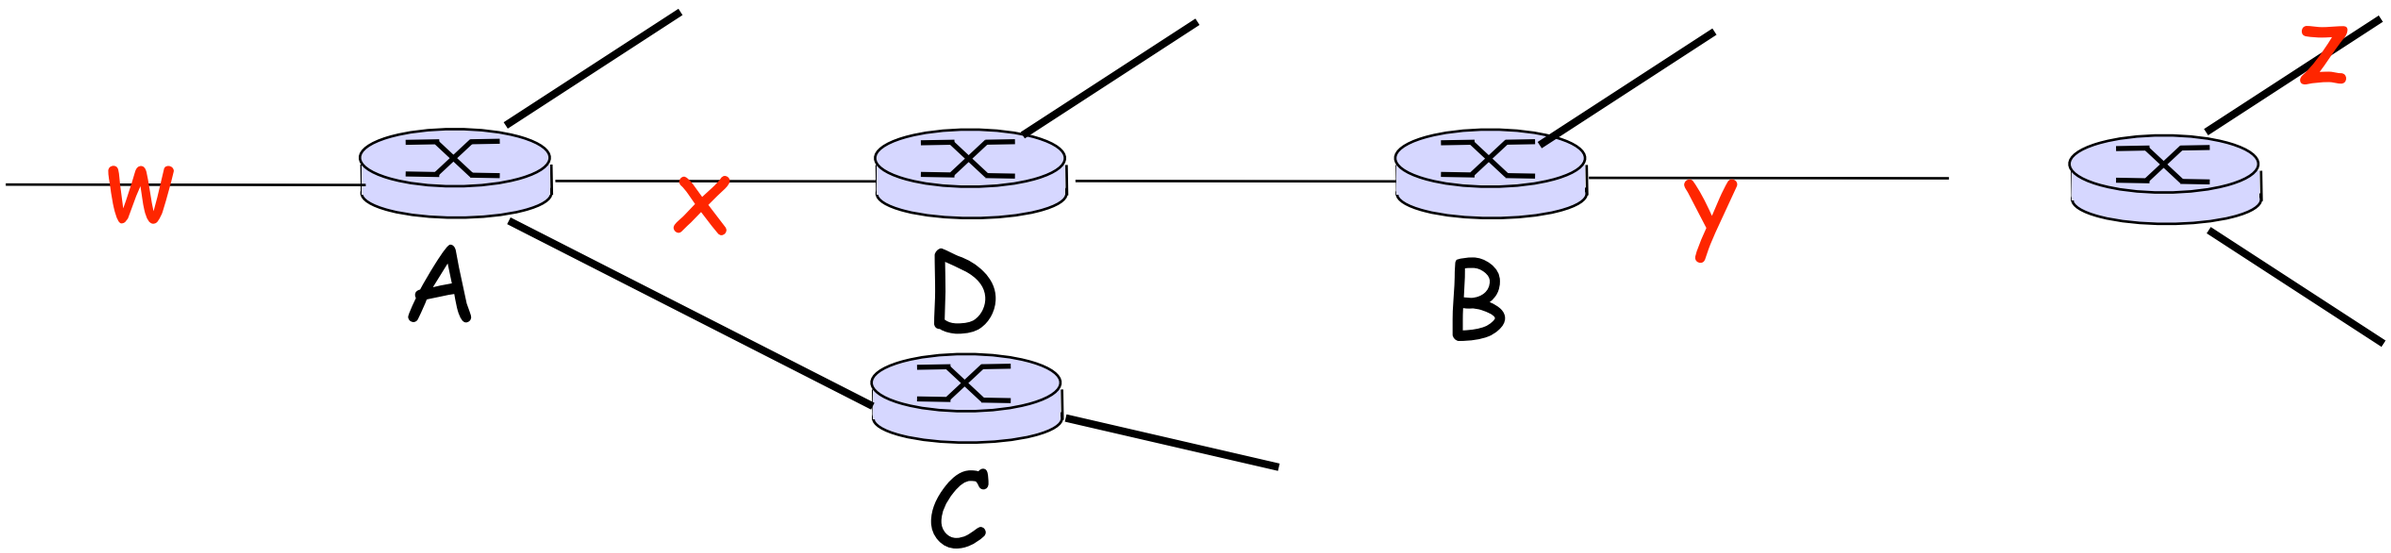

Routing table in D

Destination Network	Next Router	Num. of hops to dest.
w	A	2
y	B	2
z	B	7
x	---	1
...	...	...

RIP: Example

Dest	Next	hops
w	–	1
x	–	1
z	–	4
...	...	...

Advertisement from A to D

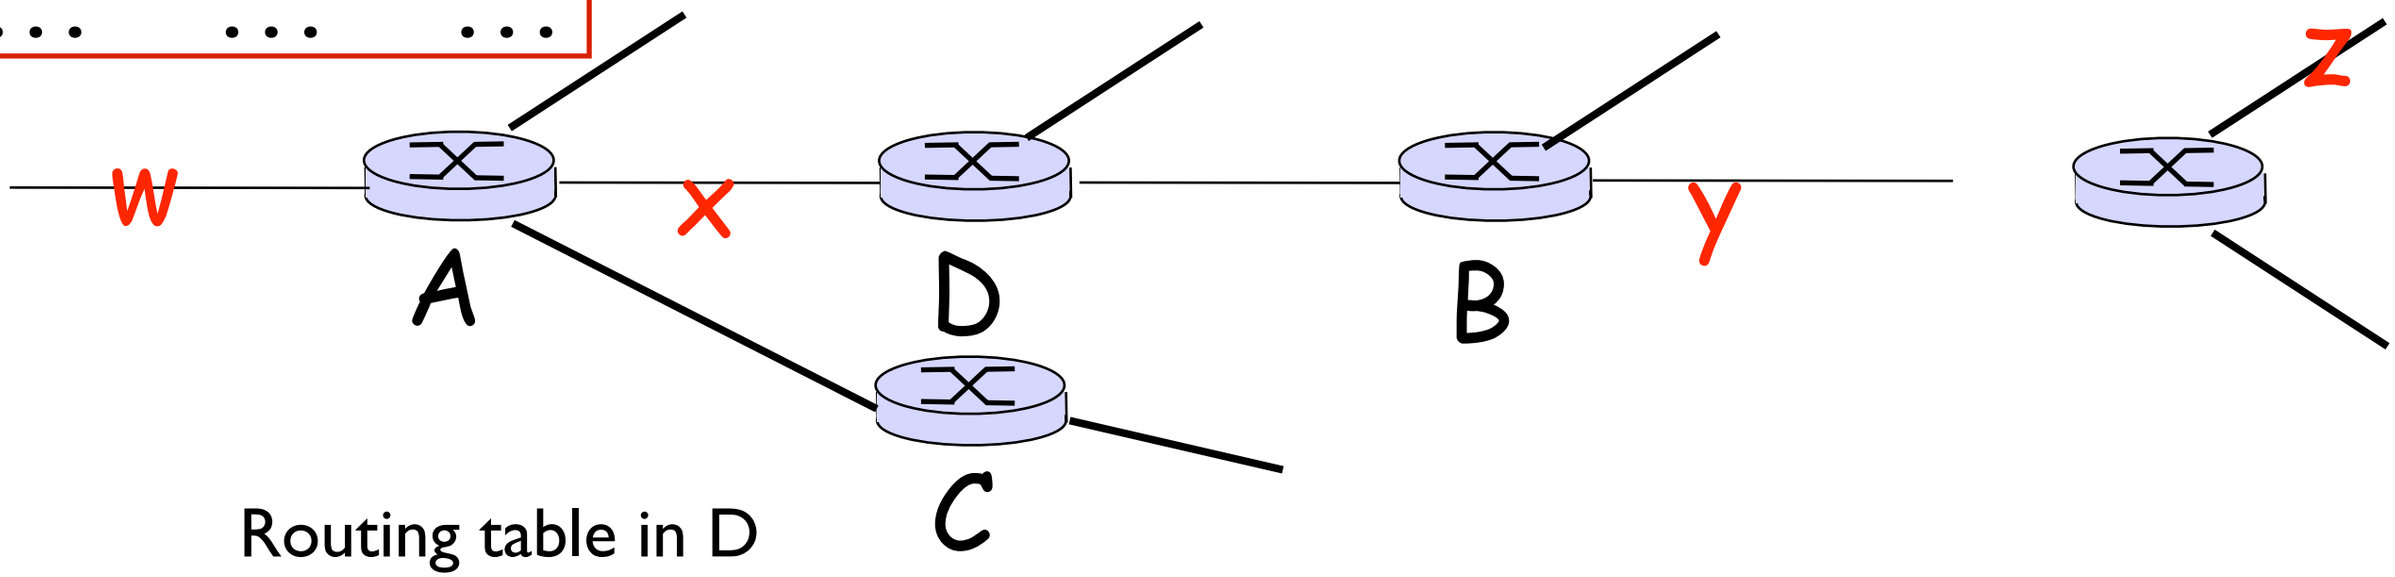

Routing table in D

Destination Network	Next Router	Num. of hops to dest.
w	A	2
y	B	2
z	~~B~~A	~~7~~5
x	---	1
...	...	...

RIP: Link Failure and Recovery

If no advertisement heard after 180 sec --> neighbor/link declared dead

- routes via neighbor invalidated
- new advertisements sent to neighbors
- neighbors in turn send out new advertisements (if tables changed)
- link failure info quickly (?) propagates to entire net
- poison reverse used to prevent ping-pong loops (infinite distance = 16 hops)

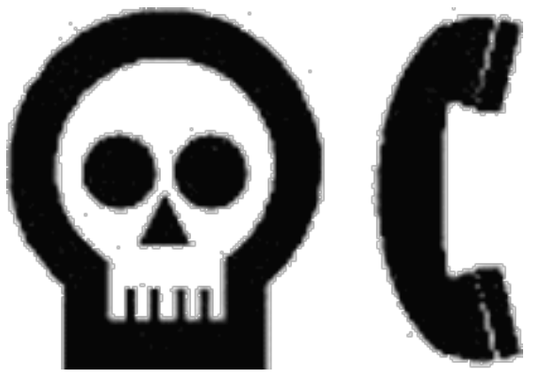

RIP Table processing

- RIP routing tables managed by application-level process called route-d (daemon)
- advertisements sent in UDP packets, periodically repeated

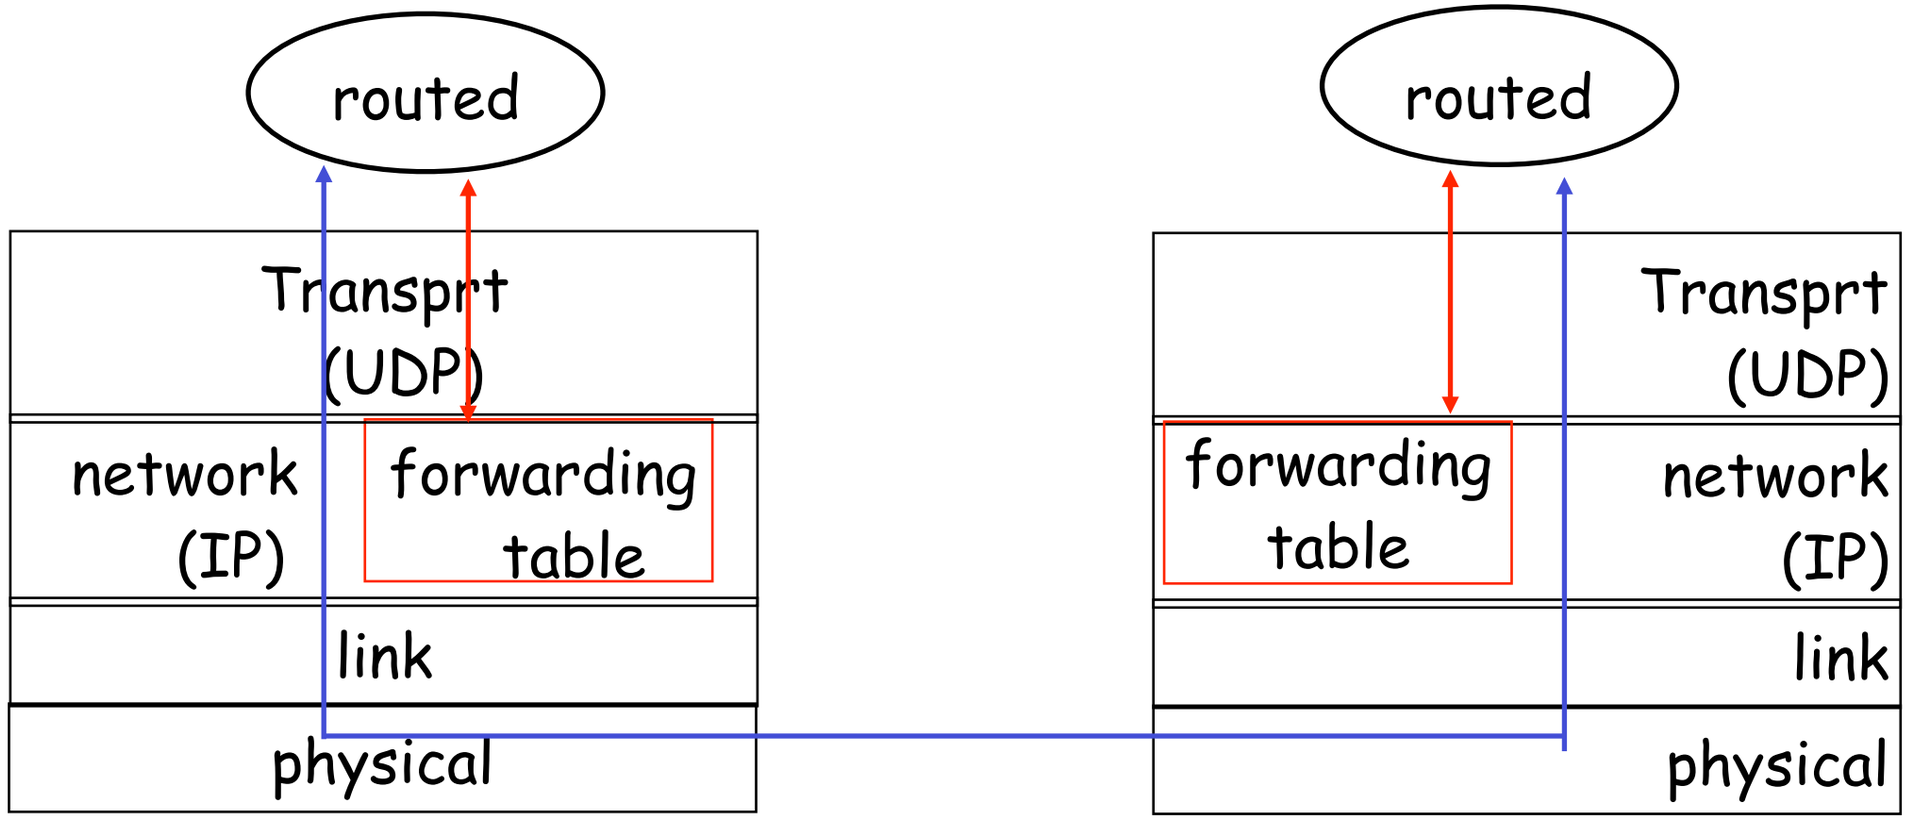

Chapter 4: Network Layer

- 4. 1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
  - Datagram format
  - IPv4 addressing
  - ICMP
  - IPv6
- 4.5 Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- 4.6 Routing in the Internet
  - RIP
  - OSPF
  - BGP
- 4.7 Broadcast and multicast routing

OSPF (Open Shortest Path First)

- "open": publicly available
- Uses Link State algorithm
  - LS packet dissemination
  - Topology map at each node
  - Route computation using Dijkstra's algorithm

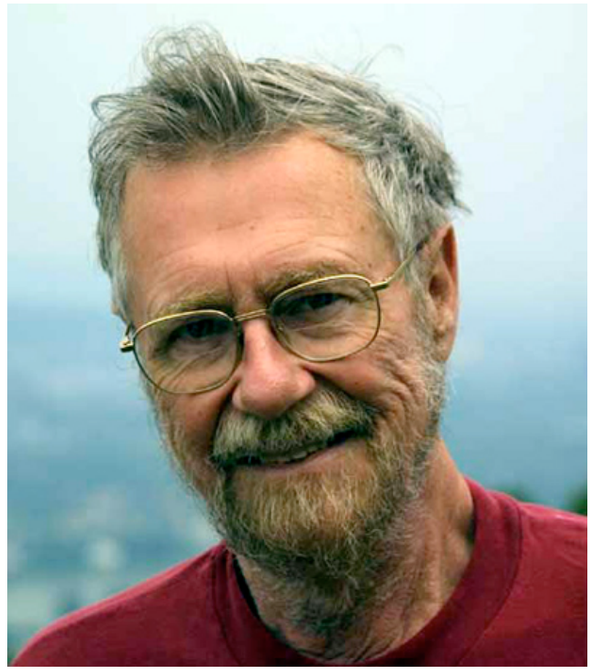

- OSPF advertisement carries one entry per neighbor router
- Advertisements disseminated to entire AS (via flooding)
  - Carried in OSPF messages directly over IP (rather than TCP or UDP)

OSPF (Open Shortest Path First)

- "open": publicly available
- Uses Link State algorithm
  - LS packet dissemination
  - Topology map at each node
  - Route computation using Dijkstra's algorithm

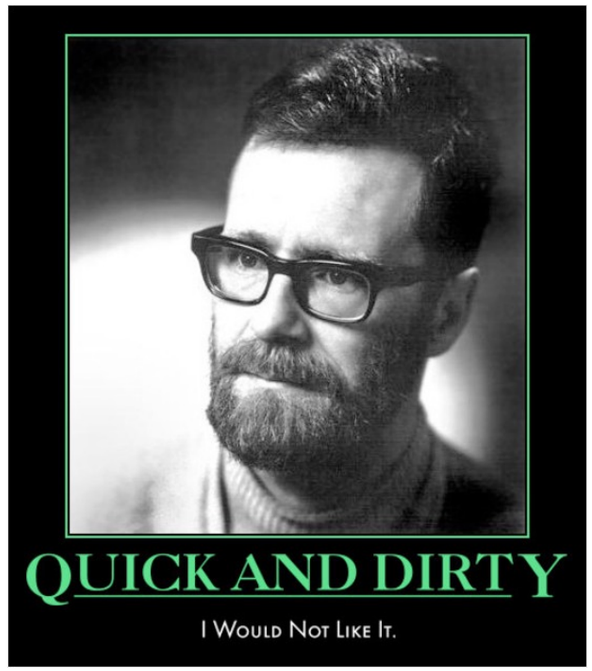

- OSPF advertisement carries one entry per neighbor router
- Advertisements disseminated to entire AS (via flooding)
  - Carried in OSPF messages directly over IP (rather than TCP or UDP)

OSPF "advanced" features (not in RIP)

- Security: all OSPF messages authenticated (to prevent malicious intrusion)
- Multiple same-cost paths allowed (only one path in RIP)
- For each link, multiple cost metrics for different TOS (e.g., satellite link cost set "low" for best effort; high for real time)
- Integrated uni- and multicast support:
  - Multicast OSPF (MOSPF) uses same topology data base as OSPF
- Hierarchical OSPF in large domains.

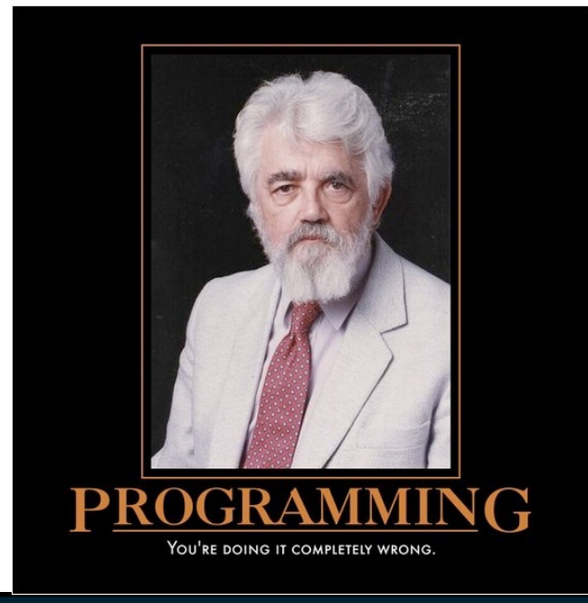

Hierarchical OSPF

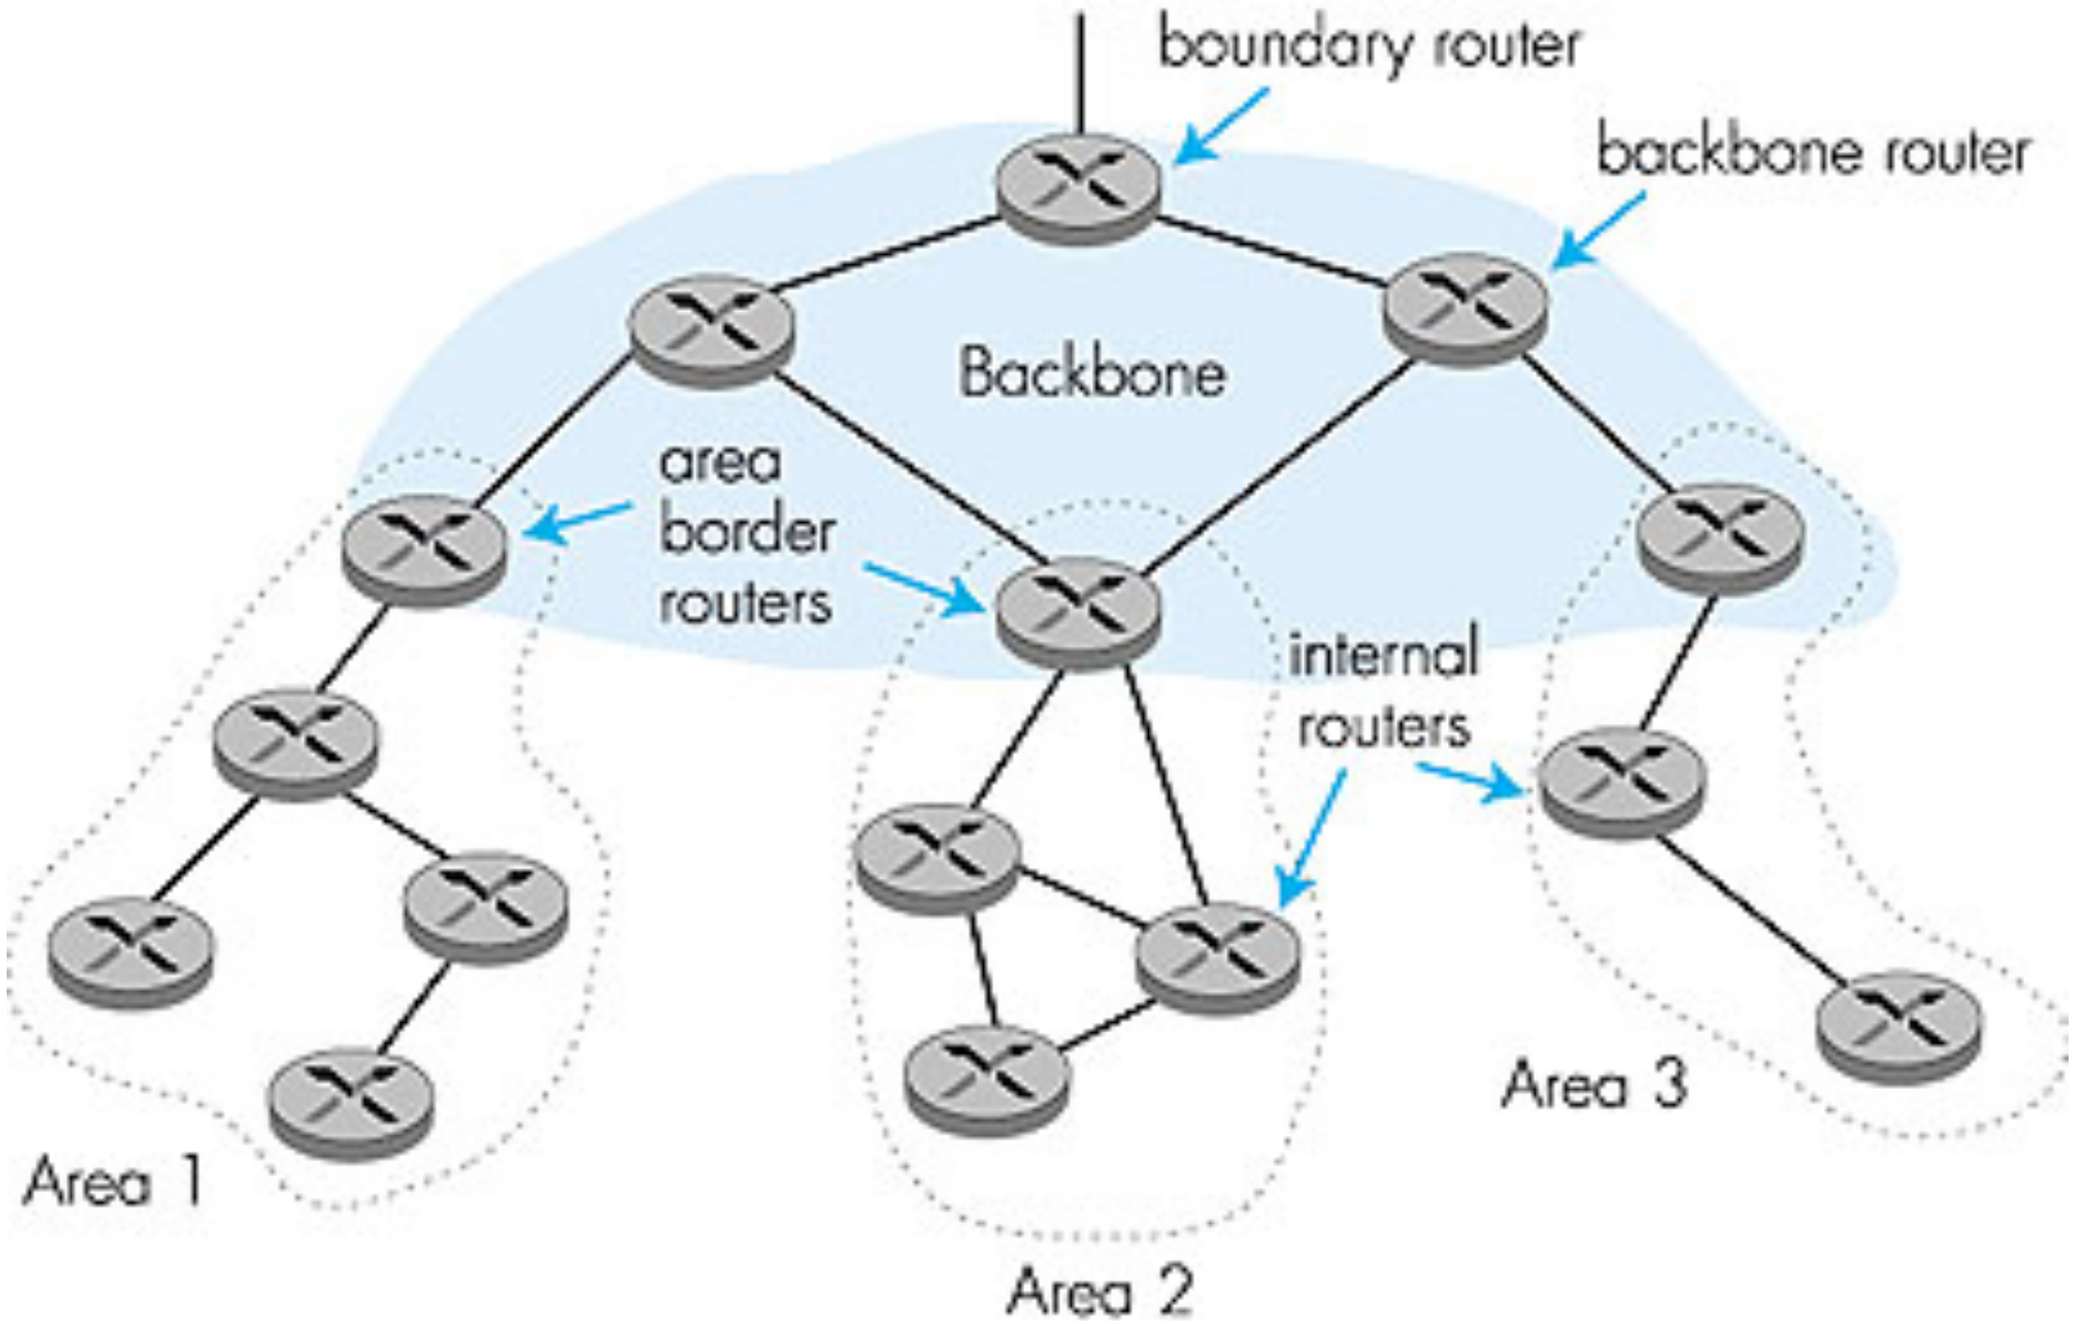

Hierarchical OSPF

- Two-level hierarchy: local area, backbone.
  - Link-state advertisements only in area
  - each nodes has detailed area topology; only know direction (shortest path) to nets in other areas.
- Area border routers: "summarize" distances to nets in own area, advertise to other Area Border routers.
- Backbone routers: run OSPF routing limited to backbone.
- Boundary routers: connect to other AS's.

Chapter 4: Network Layer

- 4. 1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
  - Datagram format
  - IPv4 addressing
  - ICMP
  - IPv6
- 4.5 Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- 4.6 Routing in the Internet
  - RIP
  - OSPF
  - BGP
- 4.7 Broadcast and multicast routing

Internet inter-AS routing: BGP

- BGP (Border Gateway Protocol): the de facto standard
- BGP provides each AS a means to:
  1. Obtain subnet reachability information from neighboring ASs.
  2. Propagate reachability information to all AS-internal routers.
  3. Determine "good" routes to subnets based on reachability information and policy.
- allows subnet to advertise its existence to rest of Internet: "I am here"

BGP basics

- Pairs of routers (BGP peers) exchange routing info over semi-permanent TCP connections: BGP sessions
  - BGP sessions need not correspond to physical links.
- When `AS2` advertises a prefix to `AS1`, `AS2` is promising it will forward any datagrams destined to that prefix towards the prefix.
  - `AS2` can aggregate prefixes in its advertisement

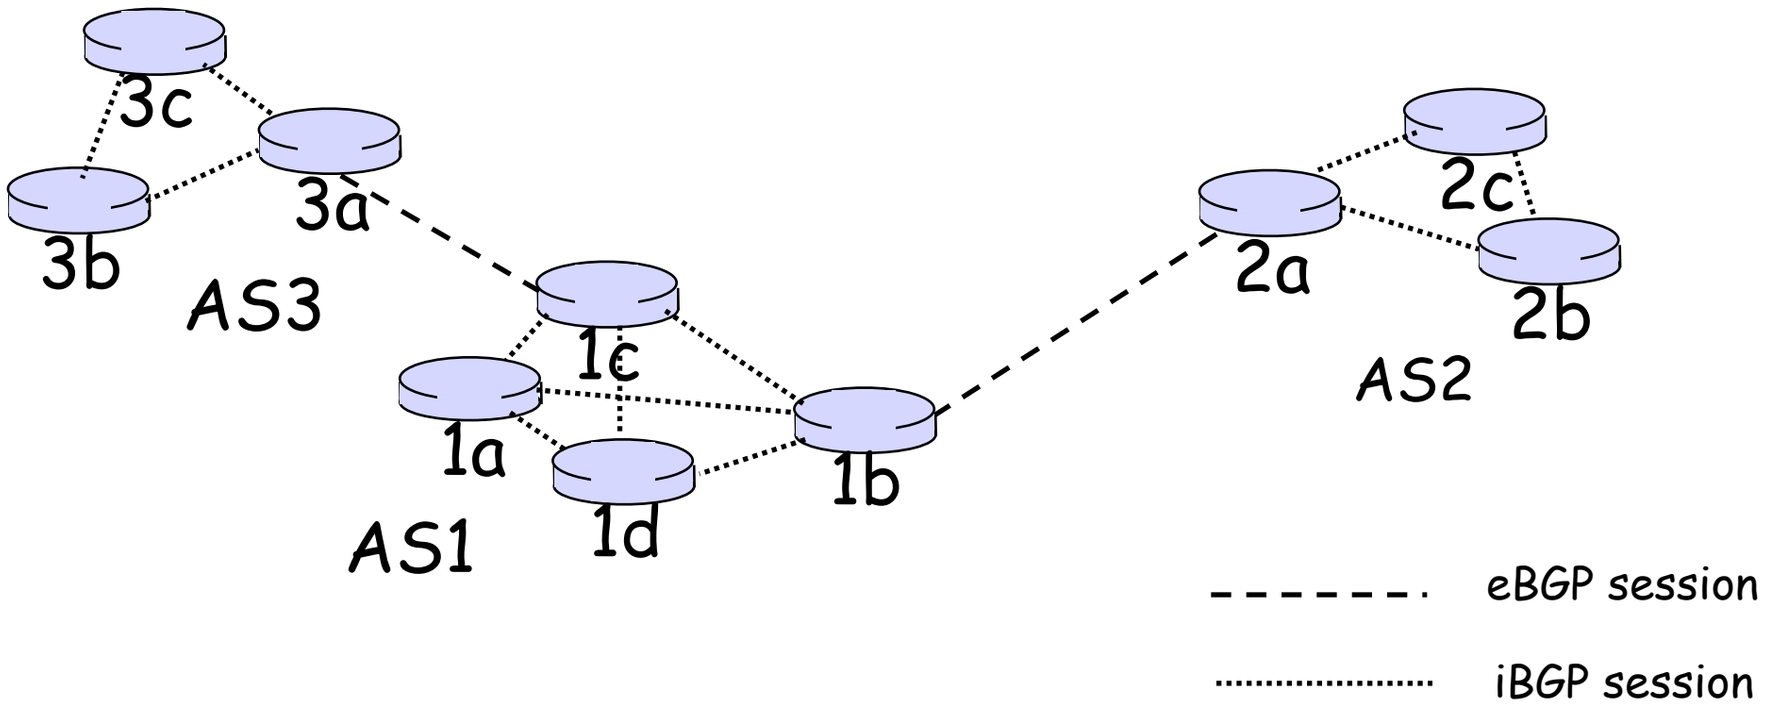

Distributing reachability info

- With eBGP session between `3a` and `1c`, `AS3` sends prefix reachability info to `AS1`.
- `1c` can then use iBGP do distribute this new prefix reach info to all routers in `AS1`
- `1b` can then re-advertise new reachability info to `AS2` over `1b`-to-`2a` eBGP session
- When router learns of new prefix, creates entry for prefix in its forwarding table.

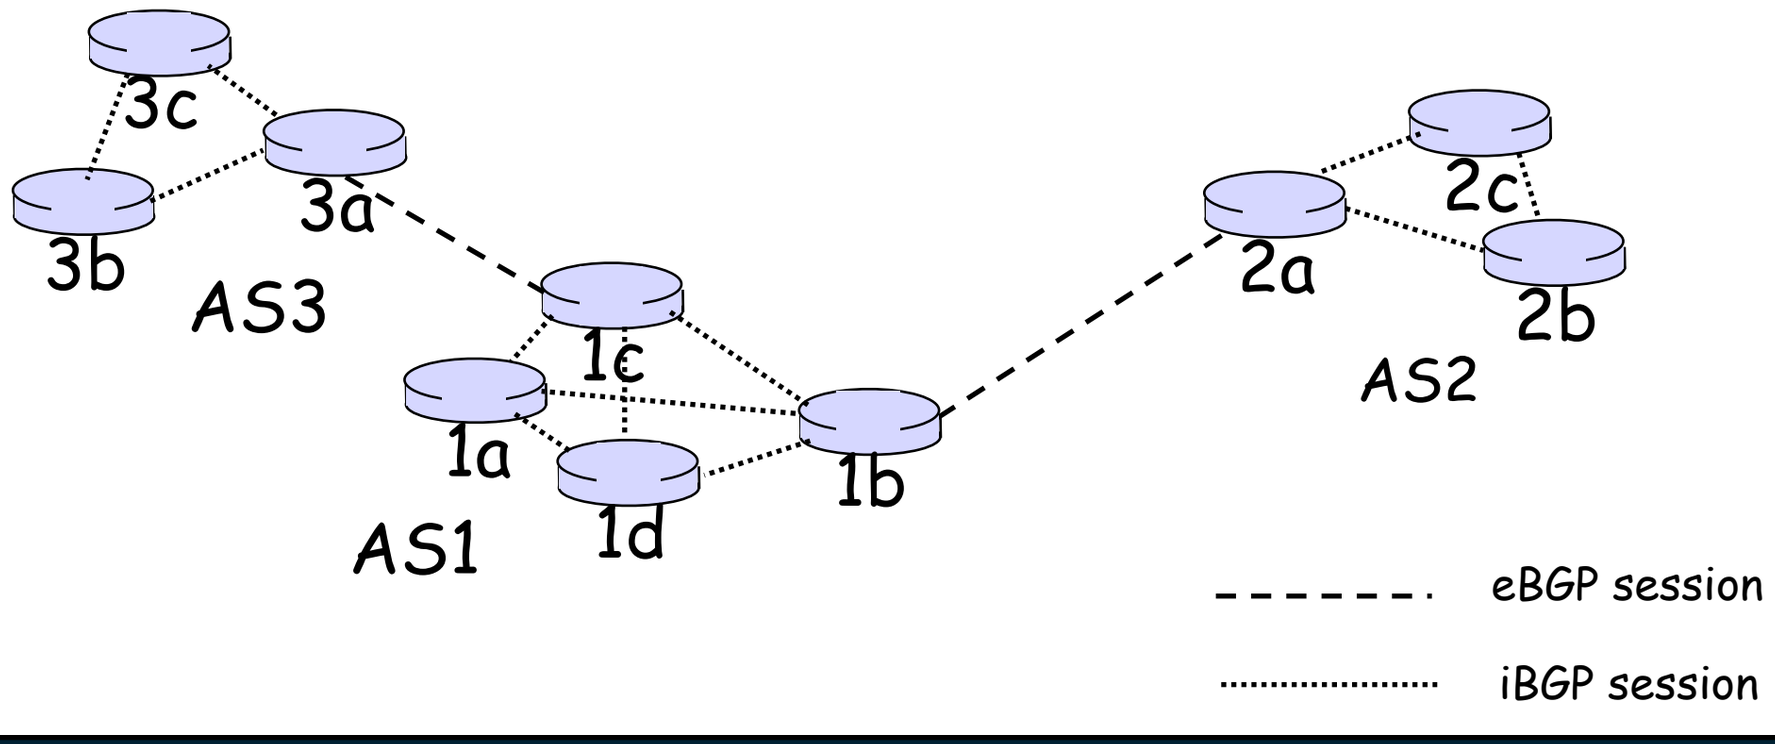

Path attributes & BGP routes

- When advertising a prefix, advert includes BGP attributes.
  - prefix + attributes = "route"
- Two important attributes:
  - AS-PATH: contains ASs through which prefix advertisement has passed: AS 67 AS 17
  - NEXT-HOP: Indicates specific internal-AS router to next-hop AS. (There may be multiple links from current AS to next-hop-AS.)
- When gateway router receives route advertisement, uses import policy to accept/decline.

BGP route selection

- Router may learn about more than 1 route to some prefix. Router must select route.
- Elimination rules:

1. Local preference value attribute: policy decision
2. Shortest AS-PATH
3. Closest NEXT-HOP router: hot potato routing
4. Additional criteria

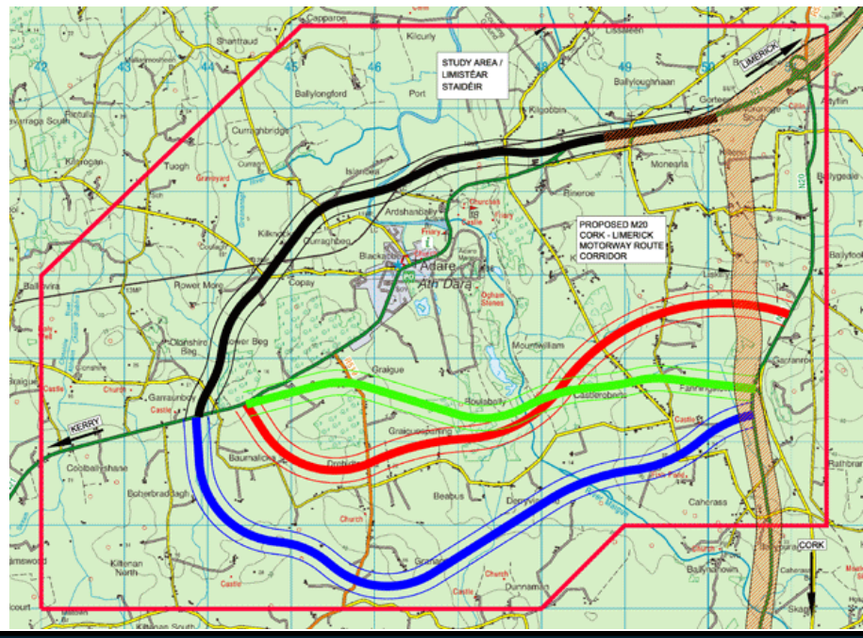

BGP messages

- BGP messages exchanged using TCP.
- BGP messages:
  - OPEN: opens TCP connection to peer and authenticates sender
  - UPDATE: advertises new path (or withdraws old)
  - KEEPALIVE keeps connection alive in absence of UPDATES; also ACKs OPEN request
  - NOTIFICATION: reports errors in previous msg; also used to close connection

BGP routing policy

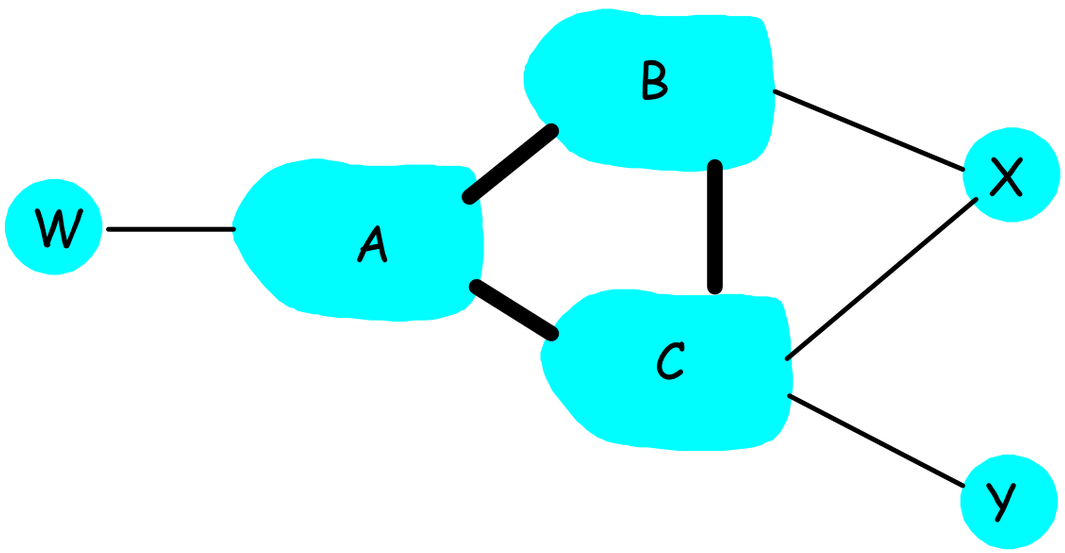

legend:

provider network

customer network:

- A,B,C are provider networks
- X,W,Y are customer (of provider networks)
- X is multi-homed: attached to two networks
  - X does not want to route from B via X to C
  - .. so X will not advertise to B a route to C

BGP routing policy (2)

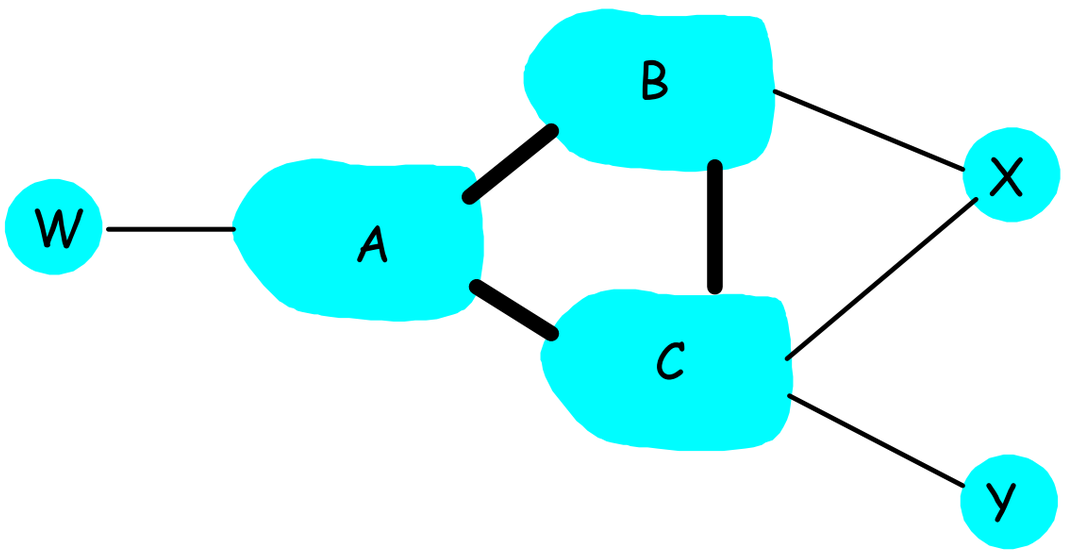

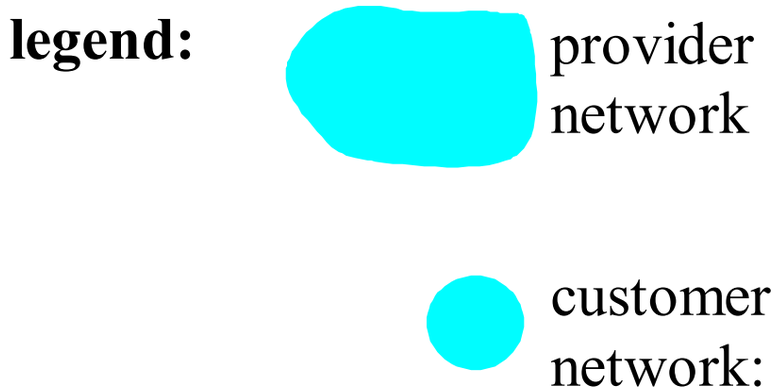

- A advertises to B the path AW
- B advertises to X the path BAW
- Should B advertise to C the path BAW?
  - No way! B gets no "revenue" for routing CBAW since neither W nor C are B's customers
  - B wants to force C to route to w via A
  - B wants to route only to/from its customers!

Why different Intra- and Inter-AS routing ?

Policy:

- Inter-AS: admin wants control over how its traffic routed, who routes through its net.
- Intra-AS: single admin, so no policy decisions needed

Scale:

- hierarchical routing saves table size, reduced update traffic

Performance:

- Intra-AS: can focus on performance
- Inter-AS: policy may dominate over performance

Chapter 4: Network Layer

- 4. 1 Introduction
- 4.2 Virtual circuit and datagram networks
- 4.3 What's inside a router
- 4.4 IP: Internet Protocol
  - Datagram format
  - IPv4 addressing
  - ICMP
  - IPv6
- 4.5 Routing algorithms
  - Link state
  - Distance Vector
  - Hierarchical routing
- 4.6 Routing in the Internet
  - RIP
  - OSPF
  - BGP
- 4.7 Broadcast and multicast routing

Broadcast Routing

- Deliver packets from source to all other nodes
- Source duplication is inefficient:

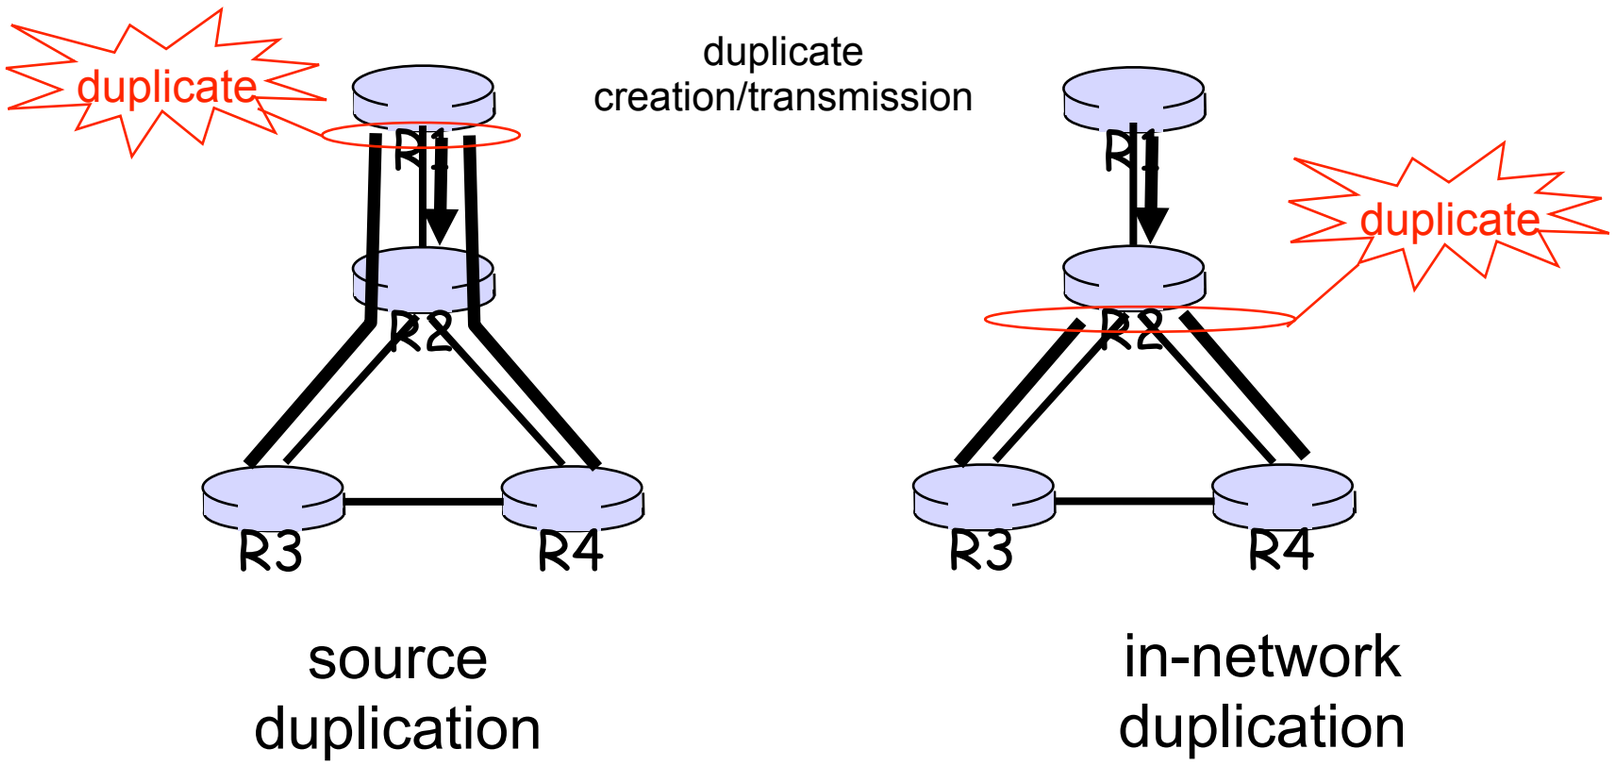

- Source duplication: how does source determine recipient addresses?

Multicast

- Challenge: You wish to deliver the exact same message to multiple (n) clients.
  - Not *one* or *all*, not *anycast*

- Constraint: Sending the same packet n times is wasteful.

- *Multicast* allows a sender to transmit a single message and have the network deliver it to multiple hosts.
  - How is this done?