


Documentación:

C3 : <https://docs.espressif.com/projects/esp-dev-kits/en/latest/esp32c3/images/esp32-c3-devkitc-02-v1-pinout.png>

Clásico: <https://wiki.elegoo.com/oshw-getting-started-kits/first-look-esp32>

ESP32-C3-DevKitC-02

ESPRESSIF

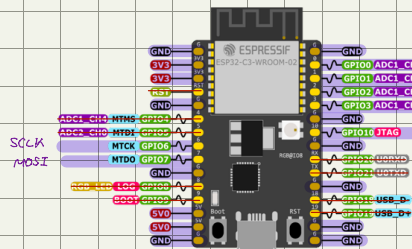

ESP32-C3 Specs

32-bit RISC-V single-core @160MHz
Wi-Fi IEEE 802.11 b/g/n 2.4GHz
Bluetooth LE 5
400 KB SRAM (16 KB for cache)
384 KB ROM
22 GPIOs, 3x SPI, 2x UART, I2C,
I2S, RMT, LED PWM, USB Serial/JTAG,
GDMA, TWAI®, 12-bit ADC

ESP32-C3-DevKitC-02 Pin Functions

- Miscellaneous/Secondary Functions
- General Purpose Input and Output
- Other Special Functions
- JTAG for Debugging and/or USB
- Analog-to-Digital Converter
- Serial for Debug/Programming
- Ground Plane
- Power Rails (3V3 and 5V)
- Strapping Pin Functions

