

# Flight Loads: DroneVLA aircraft



**Pierluigi Della Vecchia and Claudio Mirabella**

Design of Aircraft and Flight Technologies, DAF

30-Jan-2022

# Table of Contents

<a href="#">Chapter 1. Introduction</a>	1
<a href="#">Chapter 2. References</a>	2
<a href="#">Chapter 3. List of Abbreviations</a>	3
<a href="#">Chapter 4. Aircraft data</a>	4
<a href="#">4.1. Geometry</a>	4
<a href="#">4.2. Masses and inertia</a>	7
<a href="#">4.3. Aerodynamic</a>	8
<a href="#">Chapter 5. Design Airspeeds</a>	9
<a href="#">5.1. Maximum speed in level flight <math>V_H</math></a>	9
<a href="#">5.2. Stall speeds <math>V_S</math>, <math>V_{S0}</math>, <math>V_{S1}</math></a>	9
<a href="#">5.3. Design manoeuvring speed <math>V_A</math></a>	9
<a href="#">5.4. Flaps maximum operating speed <math>V_F</math></a>	10
<a href="#">5.5. Flaps maximum extension speed <math>V_{FE}</math></a>	10
<a href="#">5.6. Design cruising speed <math>V_C</math></a>	10
<a href="#">5.7. Design dive speed <math>V_D</math></a>	10
<a href="#">5.8. Demonstrated dive speed <math>V_{DF}</math></a>	11
<a href="#">5.9. Never exceed speed <math>V_{NE}</math></a>	11
<a href="#">5.10. Design Airspeeds summary</a>	11
<a href="#">Chapter 6. Altitude</a>	12
<a href="#">Chapter 7. Manoeuvring and Gust load factors <math>n</math></a>	13
<a href="#">7.1. Gust envelope</a>	13
<a href="#">Chapter 8. V-n Envelope</a>	16
<a href="#">Chapter 9. Loads on the aeroplane</a>	18
<a href="#">9.1. Reference axes and sign convention</a>	18
<a href="#">9.1.1. aaaaa</a>	18
<a href="#">9.2. Symmetrical flight conditions</a>	18
<a href="#">9.3. Aerodynamic centre</a>	18
<a href="#">9.4. Pitching moment of the wing</a>	18
<a href="#">Chapter 10. Loads on the wing</a>	20
<a href="#">10.1. Influence of the fuselage</a>	20
<a href="#">10.2. Forces and moments acting on the wings</a>	20
<a href="#">10.2.1. SpanWise Airloads Distribution</a>	20
<a href="#">10.2.2. Normal and parallel component</a>	22
<a href="#">10.2.3. Shear, Bending and Torsion</a>	22
<a href="#">10.2.4. Critical load condition</a>	25
<a href="#">10.3. Unsymmetrical loads</a>	27
<a href="#">10.3.1. Rolling condition</a>	27
<a href="#">10.3.2. Effect of aileron displacement on the wing torsion</a>	29
<a href="#">Chapter 11. Loads on the horizontal tail</a>	31
<a href="#">11.1. Balancing loads</a>	31
<a href="#">11.2. Manoeuvring loads</a>	31
<a href="#">11.2.1. Unchecked manoeuvre</a>	31
<a href="#">11.2.2. Checked manoeuvre</a>	32

11.2.3. Gust loads.....	33
11.3. Horizontal tail loads summary.....	33
11.4. Unsymmetrical loads.....	33
Chapter 12. Loads on the vertical tail.....	35
12.1. Manoeuvring load .....	35
12.1.1. CSVLA 441(a)(1) .....	35
12.1.2. CSVLA 441(a)(2) .....	35
12.1.3. CSVLA 441(a)(3) .....	36
12.2. Manoeuvring and gust envelope .....	36
12.3. Vertical tail loads summary.....	37
12.4. Combined loads.....	37
Chapter 13. Loads on the wing flaps.....	38
13.1. Manoeuvring load .....	38
13.1.1. Takeoff .....	38
13.1.2. Landing .....	40
13.1.3. Summary of flaps load.....	42
Chapter 14. Loads on the control surfaces.....	43
14.1. Ailerons.....	43
14.2. Elevator.....	43
14.3. Rudder .....	43
Chapter 15. Power plant .....	44
15.1. Engine torque .....	44
15.2. Side load on engine mount.....	44
15.3. Inertia load on engine mount .....	44
15.4. Gyroscopic loads.....	44

# List of Figures

<a href="#">Figure 7.1. V-n diagram</a>	14
<a href="#">Figure 7.2. Gust diagram</a>	15
<a href="#">Figure 8.1. Maneuver and Gust load factors and diagram</a>	16
<a href="#">Figure 8.2. Maneuver and Gust load factors and diagram</a>	17
<a href="#">Figure 9.1. Wing airloads</a>	18
<a href="#">Figure 9.2. Balancing loads</a>	19
<a href="#">Figure 10.1. Wing lift coefficient spanwise distribution</a>	20
<a href="#">Figure 10.2. Wing drag coefficient spanwise distribution</a>	21
<a href="#">Figure 10.3. Wing pitching moment coefficient (0.25mac) spanwise distribution</a>	21
<a href="#">Figure 10.4. Shear, Bending and Torsion due to airloads - POINT A</a>	22
<a href="#">Figure 10.5. Shear, Bending and Torsion due to airloads - POINT C</a>	23
<a href="#">Figure 10.6. Shear, Bending and Torsion due to airloads - POINT D</a>	24
<a href="#">Figure 10.7. Shear comparison</a>	25
<a href="#">Figure 10.8. Bending comparison</a>	26
<a href="#">Figure 10.9. Torsion comparison</a>	26
<a href="#">Figure 10.10. Pitching moment coefficient - POINT A</a>	27
<a href="#">Figure 10.11. Pitching moment coefficient - POINT C</a>	28
<a href="#">Figure 10.12. Pitching moment coefficient - POINT D</a>	28
<a href="#">Figure 10.13. Torsion distribution full loads - POINT A</a>	29
<a href="#">Figure 10.14. Torsion distribution full loads - POINT C</a>	30
<a href="#">Figure 10.15. Torsion distribution full loads - POINT D</a>	30
<a href="#">Figure 11.1. Balancing loads</a>	31
<a href="#">Figure 13.1. Flaps V-n diagram. Takeoff</a>	38
<a href="#">Figure 13.2. Flaps gust envelope diagram. Takeoff</a>	39
<a href="#">Figure 13.3. Flaps final envelope diagram. Takeoff</a>	39
<a href="#">Figure 13.4. Flaps V-n diagram. Landing</a>	40
<a href="#">Figure 13.5. Flaps gust envelope diagram. Landing</a>	41
<a href="#">Figure 13.6. Flaps final envelope diagram. Landing</a>	41
<a href="#">Figure 13.7. Summary of flaps flight load</a>	42

## List of Tables

<a href="#">Table 4.1. Wing parameters</a> .....	4
<a href="#">Table 4.2. Horizontal Tail parameters</a> .....	5
<a href="#">Table 4.3. Vertical Tail parameters</a> .....	5
<a href="#">Table 4.4. Fuselage parameters</a> .....	6
<a href="#">Table 4.5. Elevator parameters</a> .....	6
<a href="#">Table 4.6. Rudder parameters</a> .....	6
<a href="#">Table 4.7. Aileron parameters</a> .....	7
<a href="#">Table 4.8. Weight parameters</a> .....	7
<a href="#">Table 5.1. Design airspeeds</a> .....	11
<a href="#">Table 7.1. Gust load factor, different Speeds and Altitude</a> .....	14

---

## Chapter 1. Introduction

This document defines the SUBPART C - Structure - Flight Loads of the:DroneVLA.The boundaries of the flight envelope will be defined within this document. All speeds are calibrated airspeeds (CAS) (requirement 4.4 [1])and given in knots if not stated otherwise.All other units used are metric (SI units).The weights are given in mass units (kg) but the formulas require force units as input,therefore these are calculated in place wherever they are used.Note: The speeds defined within this document should be used for the placards,speed markings, aeroplane flight manual (limitations), load calculations and need to be verified by flight test.

---

## Chapter 2. References

1. ASTM F2245-12d," ASTM."ASTM F2245-12d, ASTM.
2. ABCD-FL-57-00 Wing Load Calculation, EASA.
3. ISO 2533:1975, International Standardization Organization, 1975.
4. CS-LSA Certification Specifications and Acceptable Means of Compliance, Amnd.1 29.Jul.2013, EASA, 2013.
5. "ABCD-FTR-01-00 Flight Test Report," EASA.
6. L. Smith, "NACA technical note 1945, 'Aerodynamic characteristics of 15 NACA airfoil sections at seven Reynolds numbers from  $0.7 \times 10^6$  to  $9 \times 10^6$ ," 1949.
7. ABCD-WB-08-00 Weight and Balance Report, EASA.

HERE BELOW AN EXAMPLE OF REFERENCES TO BE EDITED

---

## Chapter 3. List of Abbreviations

- CL = lift coefficient
- CD....
- ...
- ...
- ...
- ...
- ...

ADD HERE list of abbreviations as a formatted table....to be created



---

## Chapter 4. Aircraft data

The aircraft geometrical, masses, inertial and aerodynamic data, useful for flight loads estimation are summarized in this chapter.

### 4.1. Geometry

The aircraft reference geometrical characteristics are summarized in the following tables.[Wing parameters](#)

**Table 4.1. Wing parameters**

Wing parameters	Value	Measure unit
b	5.2	m
S	2.589	m <sup>2</sup>
AR	10.446	-
taper	NaN	-
sweep	0	deg
sweep_location	0	percentage
secondary_sweep_location	0	percentage
croot	0.498	m
ctip	0.498	m
xle	1.638	m
yle	0	m
zle	0.165	m
xtip_le	NaN	% fuselage length
dihedral	0	deg
mac	0.498	m
xmac	NaN	% fuselage length
ymac	NaN	% semispan
ypos	NaN	% semispan
zpos	NaN	% fuselage diameter
camberloc	0.15	Percentage
thickchord	0.18	Percentage
type	Rectangular	flag
twist_angle	3	deg
chord_kink_one	0.498	m
chord_kink_two	0.498	m
panel_span1	0.33	Semispan percentage
panel_span2	0.33	Semispan percentage

Wing parameters	Value	Measure unit
panel_span3	0.33	Semispan percentage
mgc	0.49788	m
taper_ratio	1	Non dimensional

**Table 4.2. Horizontal Tail parameters**

Horizontal parameters	Value	Measure unit
S	0.529	m <sup>2</sup>
l	1.492	m
camber	0	percentage
camberloc	NaN	percentage
thickchord	0.12	percentage
twist	0	deg
twistloc	0.25	percentage
xloc0	1.49	m
xloc	3.128	m
yloc	0	m
zloc	0.15	m
xrot	0	m
yrot	0	m
zrot	0	m
b	1.496	m
ctip	0.3136	m
croot	0.3929	m
sweep	15	deg
sweeploc	0	percentage
secsweeploc	1	percentage
dihedral	0	deg
location_of_camber	0.2	percentage
secondary_sweep_location	1	percentage
ce_c_root	0.34	Non dimensional
ce_c_tip	0.36	Non dimensional

**Table 4.3. Vertical Tail parameters**

Vertical parameters	Value	Measure unit
xle	0.95	% of fuselage length
croot	0.3136	m
ctip	0.15347	m

Vertical parameters	Value	Measure unit
x <sub>tip_le</sub>	1	% of fuselage length
b	0.4375	m
z <sub>pos</sub>	1	% of df
S	0.1022	m <sup>2</sup>
chord	0.3136	m
MAC	0.23354	m
l <sub>vt</sub>	1.65	m
empennage_flag	Double fin	NaN

**Table 4.4. Fuselage parameters**

Fuselage parameters	Value	Measure unit
length	3.64	Non dimensional
diameter	0.42	Non dimensional
Non_dim_radius_of_gyration	0.34	Non dimensional
Radius_of_gyration	NaN	m

**Table 4.5. Elevator parameters**

Elevator parameters	Value	Measure unit
S	0.14749	m <sup>2</sup>
chord	0.12324	m
chord_ratio_ce_c	0.35	Non dimensional
overhang	0.12	Non dimensional
span_ratio	0.8	Non dimensional
S <sub>hinge</sub>	0.126	m <sup>2</sup>
eta <sub>inner</sub>	0.1	percentage
eta <sub>outer</sub>	0.9	percentage
cf <sub>c_inner</sub>	0.3	percentage
cf <sub>c_outer</sub>	0.3	percentage
y <sub>inner</sub>	0.0748	m
y <sub>outer</sub>	0.6732	m
cf	0.10845	m
moment_arm	0.016021	m

**Table 4.6. Rudder parameters**

Rudder parameters	Value	Measure unit
S	0.019062	m <sup>2</sup>
chord	0.10893	m

Rudder parameters	Value	Measure unit
chord_ratio_cf_c	0.35	Non dimensional
overhang	0.12	Non dimensional
span_ratio	0.8	Non dimensional
cr_c_root	0.45	Non dimensional
cr_c_tip	0.5	Non dimensional
eta_inner	0.1	Non dimensional
eta_outer	0.9	Non dimensional
croot	0.14112	m
ctip	0.076735	m
y_inner	0.021875	m
y_outer	0.19688	m
moment_arm	0.014161	m

**Table 4.7. Aileron parameters**

Aileron parameters	Value	Measure unit
S	0.14018	m <sup>2</sup>
b	0.908	m
ca	0.15438	m
cb	0.019	m
y_inner	1.63	m
y_outer	2.538	m
eta_inner	0.627	Non dimensional
eta_outer	0.976	Non dimensional
ca_c_inner	0.31	Non dimensional
ca_c_outer	0.31	Non dimensional
croot	0.15438	m
ctip	0.15438	m
cf	0.13538	m
moment_arm	0.016928	m

## 4.2. Masses and inertia

The aircraft reference masses and inertia are summarized in this subsection

The Aircraft masses and inertia are summarized in Table: [Weight parameters](#)

**Table 4.8. Weight parameters**

Weight	Value	Measure unit
W_maxTakeOff	100	kg

Weight	Value	Measure unit
W_OperativeEmpty	NaN	kg
W_Payload	NaN	kg
W_Fuel	NaN	kg
W_Crew	NaN	kg
IY	100	kg * m^2

### 4.3. Aerodynamic

The aircraft reference aerodynamic is in figure: [Wing-Body reference Aerodynamics](#)

---

## Chapter 5. Design Airspeeds

This chapter defines the operating and design airspeeds as required for certification-CSVLA

### 5.1. Maximum speed in level flight VH

Data not yet available...to be added Available and Required Power.

### 5.2. Stall speeds VS, VS0, VS1

These speeds will be verified by flight test according to certification requirements. In order to calculate the stall speed, the maximum lift coefficient of the aeroplane as a whole is determined first. The maximum lift coefficient of the aeroplane has been calculated from high fidelity CFD. In landing configuration computed with full flap,  $CL_{MAX\text{ landing}} = 2.1$  in take-off configuration leading to  $CL_{MAX\text{ takeoff}} = 1.9$ , and in clean configuration, leading to  $CL_{MAX\text{ clean}} = 1.58$ , also considering the horizontal tail balancing force.

Flaps retracted(clean configuration):

$$V_S = \sqrt{\frac{2 W_{MTOM}}{\rho_0 C_{L_{MAX\text{Clean}}} S}} = \sqrt{\frac{2 * 981}{1.225 * 1.58 * 2.589}} = 19.7839 m/s$$

Flaps extended(Landing configuration):

$$V_{S_0} = \sqrt{\frac{2 W_{MTOM}}{\rho_0 C_{L_{MAX\text{Landing}}} S}} = \sqrt{\frac{2 * 981}{1.225 * 2.1 * 2.589}} = 17.1606 m/s$$

Flaps extended(Take-off configuration):

$$V_{S_1} = \sqrt{\frac{2 W_{MTOM}}{\rho_0 C_{L_{MAX\text{Takeoff}}} S}} = \sqrt{\frac{2 * 981}{1.225 * 1.9 * 2.589}} = 18.0412 m/s$$

Add here comments if necessary

Note: These speeds are estimates. The methods for the estimation can be various. It is important that these estimations are as precise as possible. Flight tests will be used to validate the stall speeds. In case the flight tests show different values, this might have an impact on the speeds used for design and ultimately might impair the compliance to the CSVLA

### 5.3. Design manoeuvring speed VA

According to requirement-CSVLA-335,

the maneuvering speed VA cannot be less than:

$$V_A \geq V_S \sqrt{n_{max}} = 19.7839 * \sqrt{3.8} = 38.566m/s$$

Add here comments if necessary

#### 5.4. Flaps maximum operating speed VF

According to requirement-CSVLA -345,

such speed shall be not less than the greater of 1.4VS and 1.8VS0

The speed has been selected as the greater between 1.4VS =27.6975m/s and 1.8 VSF =24.0248m/s, where VSF is the computed stalling speed with flaps fully extended at the design weight.

The flaps operating speeds is:

$$V_F = 27.6975m/s$$

#### 5.5. Flaps maximum extension speed VFE

On this aeroplane the maximum flap extension speed is identical to the flap operating speed VF. This speed is the maximum speed for flaps in take-off and landing configuration.

$$V_{FE} = 27.6975m/s$$

#### 5.6. Design cruising speed VC

According to requirement-CSVLA-335.

- VC (in m/s) may not be less than -

$$2.4 \sqrt{\frac{Mg}{S}} \left( V_C(kt) = 4.7 \sqrt{\frac{Mg}{S}} \right) \rightarrow 2.4 * \sqrt{\frac{100 * 9.8066}{2.589}} = 46.7095m/s$$

where M/S is the wing loading in kg/m2 and g is the acceleration due to gravity in m/s2.

- VC need not be more than 0.9 VH at sea level.

VH must be available. Otherwise previous value is considered!!!

$$V_C = 46.7095m/s$$

#### 5.7. Design dive speed VD

According to requirement-CSVLA-335.

(1) VD may not be less than 1.25 VC; and (2) with VCmin, the required minimum design cruising speed, VD may not be less than 1.40 VCmin.

$$(1) 1.25VC = 58.3869m/s$$

(2)  $1.4V_{Cmin} = 40\text{m/s}$

$$V_C = 1.25 * 46.7095 = 58.3869\text{m/s}$$

### 5.8. Demonstrated dive speed VDF

VDF is not a design airspeeds for this category.

### 5.9. Never exceed speed VNE

VNE is not a design airspeeds. It must be checked into sec. CS-VLA 1505 Airspeed limitations.

### 5.10. Design Airspeeds summary

Design airspeeds summary is resumed in Table: [Design airspeeds](#)

**Table 5.1. Design airspeeds**

Design airspeeds	Value	Measure unit
VS	19.78	m/s
VS0	17.16	m/s
VS1	18.04	m/s
VA	38.57	m/s
VC	46.71	m/s
VD	58.39	m/s
VE	58.39	m/s
VG	30.46	m/s
VS_inv	24.87	m/s
VF	30.89	m/s



---

## Chapter 6. Altitude

The maximum permissible operational altitude for the aircraft is 1300m. Despite the CSVLA requirements do not require to account for the effects of altitude, such effects have been considered up to 1300m. In fact the gust load factor have been calculated at such altitude. This is considered acceptable since it covers the operational range within which the aeroplane will fly most of the time.

(Note: the CSVLA requirement does not require to account for the effects of altitude. Calculating the loads at sea level would be acceptable. In this case, the choice to consider such effect up to 1300m is a decision of a designer, which would be accepted by the team.)

---

## Chapter 7. Manoeuvring and Gust load factors n

According to CSVLA 337(a) , the positive limit manoeuvring load factor n may not be less than 3.8, while according to CSVLA 337(b) , the negative limit manoeuvring load factor may not be less than -1.5.

The following value will be considered:

1.  $n_{max} = 3.8$
2.  $n_{min} = -1.5$

### 7.1. Gust envelope

Gust load factors need to be considered because they can exceed the prescribed maximum load factors at different weights and altitudes. Since gust loads depend on air density and aircraft mass they will be calculated for Compliance with the flight load requirements of this subpart to show:

- (1) At each critical altitude within the range in which the aeroplane may be expected to operate from sea level up to maximum operative altitude equal to: 1300 m
- (2) At each practicable combination of weight and disposable load within the operating limitations specified in the Flight Manual according to requirement CSVLA 321 and fully extended (requirement CSVLA 345(b) at VF).

The calculation is based on CSVLA 341 . To calculate the gust loads at altitudes other than at sea level the following equation is altered to include the density at any altitude.

$$n = 1 + \frac{1/2 \rho_0 V a K_g U_{de}}{Mg/S}$$

where:

- $K_g = \frac{0.88\mu_g}{5.3 + \mu_g}$
- $\mu_g = \frac{2(M/S)}{\rho \bar{C} a}$
- $U_{de}$  = derived gust velocities referred to in CSVLA 333(c) (m/s)
- $\rho_0$  = density of air at sea level (kg/m<sup>3</sup>)
- $\rho$  = density of air (kg/m<sup>3</sup>)
- $M/S$  = wing loading (kg/m<sup>2</sup>)
- $\bar{c}$  = mean geometric chord (m);  $g$  = acceleration due to gravity (m/s<sup>2</sup>);
- $a$  = slope of the aeroplane normal force coefficient curve C<sub>N</sub> per radian

Since the gust loads on the wing and tail have been chosen to be treated together,  $a$  is the slope of the lift-curve of the aeroplane is equal to  $a = 5.2341/\text{rad}$  and  $0.09131/\text{deg}$ .

The gust speed at VC is equal to: 15.24m/s

The gust speed at VD is equal to: 7.62m/s

**TABLE TO BE CHECKED!!!**

**Table 7.1. Gust load factor, different Speeds and Altitude**

ID	V(m/s)	M(kg)	M/S(kg/m <sup>2</sup> )	Altitude(m)	rho(kg/m <sup>3</sup> )	mug	Kg	Ude(m/s)	n
1	46.71	100	38.62	1300	1.079	27.47	0.7377	15.24	5.444

(Note: the applicant should provide the method for the calculation of the slope of the lift-curve of the aeroplane)



Figure 7.1. V-n diagram



Figure 7.2. Gust diagram

## Chapter 8. V-n Envelope



Figure 8.1. Maneuver and Gust load factors and diagram



Figure 8.2. Maneuver and Gust load factors and diagram

ADD HERE V-n Envelope

---

## Chapter 9. Loads on the aeroplane

ADD HERE details for balancing Equation

ADD HERE details for balancing Equation

### 9.1. Reference axes and sign convention

#### 9.1.1. aaaaa

ADD HERE details for balancing Equation

### 9.2. Symmetrical flight conditions

ADD HERE details for balancing Equation

### 9.3. Aerodynamic centre

ADD HERE details for balancing Equation

### 9.4. Pitching moment of the wing

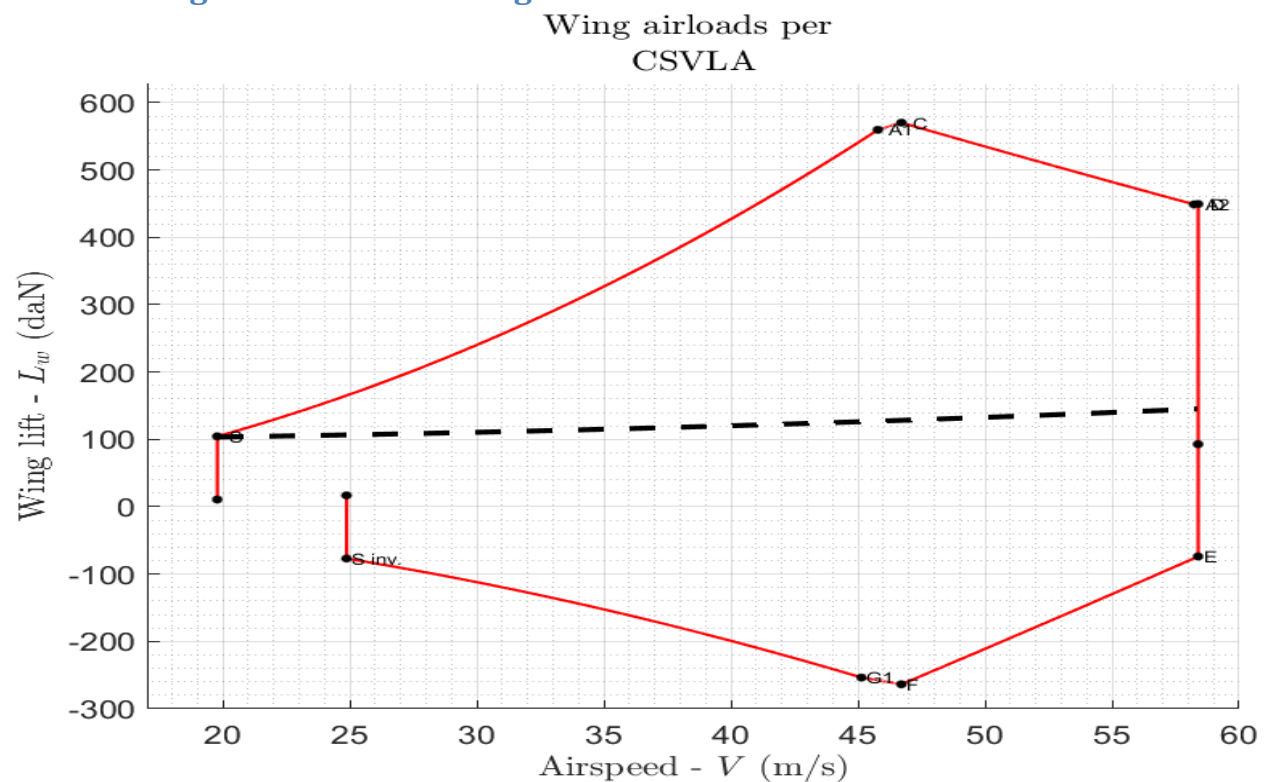


Figure 9.1. Wing airloads

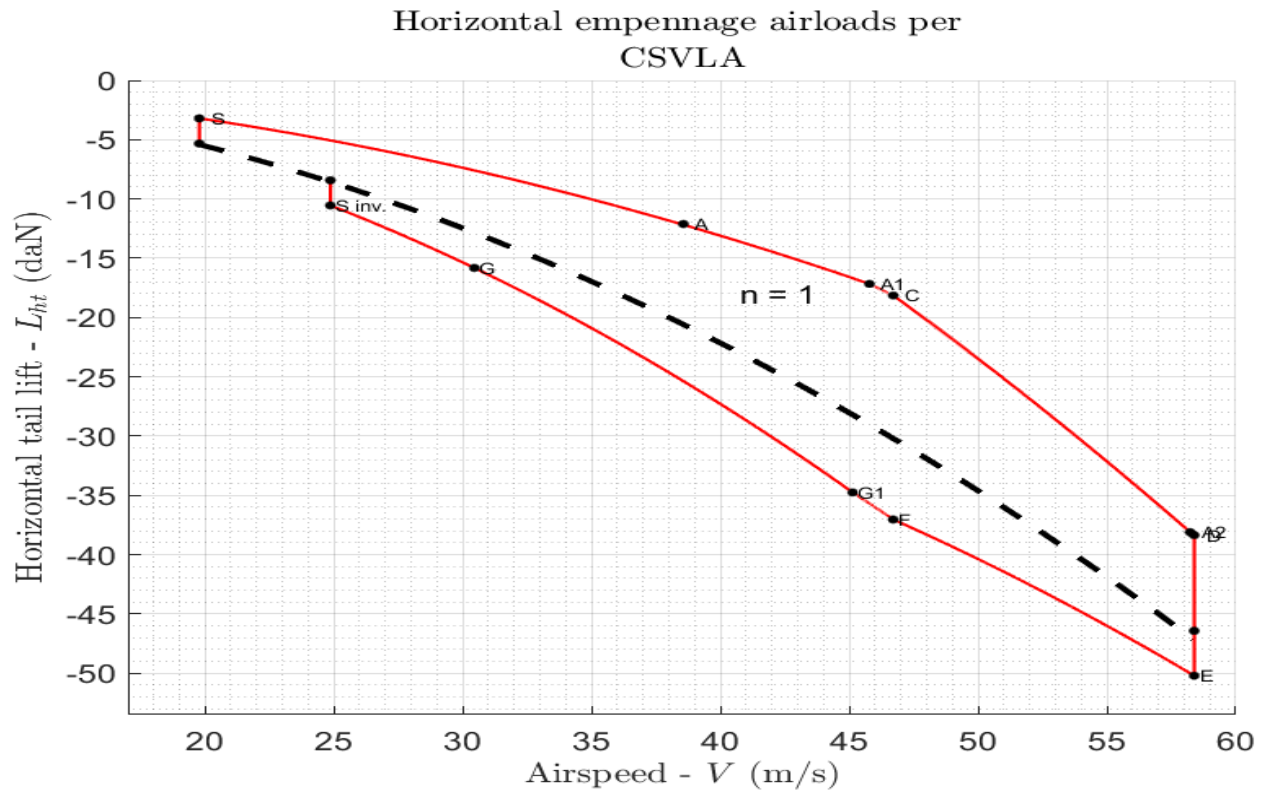


Figure 9.2. Balancing loads



---

## Chapter 10. Loads on the wing

In this section will be shown all the resulting internal forces acting on the wing structural elements; having calculated lift, drag and pitching moment coefficient distribution on the wing with a panel method and the geometrical chord distribution, it is possible to evaluate normal and shear forces and pitching moment distributions along the wing span.

### 10.1. Influence of the fuselage

The effects of the fuselage on the wing span lift distribution cause a reduction of lift at stations near the wing root; this lift reduction can be discounted because is often negligible, leading to a more conservative design loads. On the other hand, its influence on the aeroplane equilibrium is accounted for, in particular on the pitching moment distribution.

ADD HERE details for balancing Equation

### 10.2. Forces and moments acting on the wings

#### 10.2.1. SpanWise Airloads Distribution

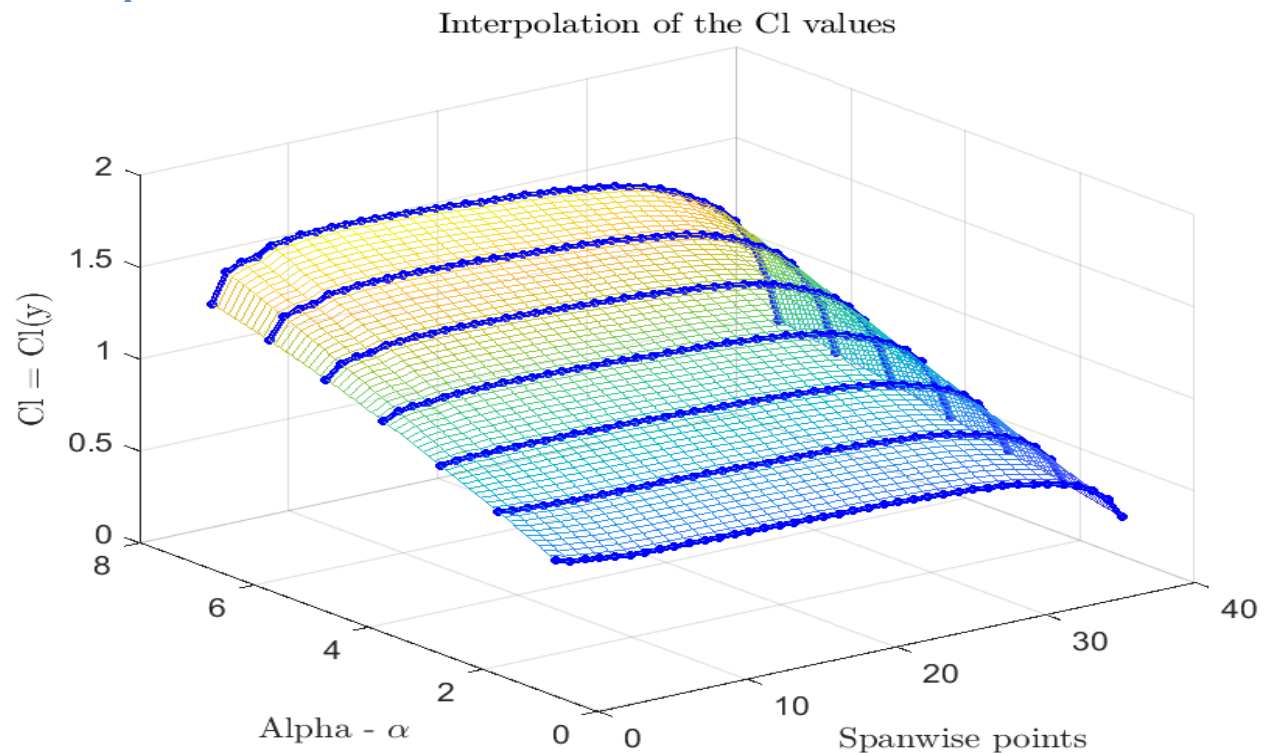


Figure 10.1. Wing lift coefficient spanwise distribution

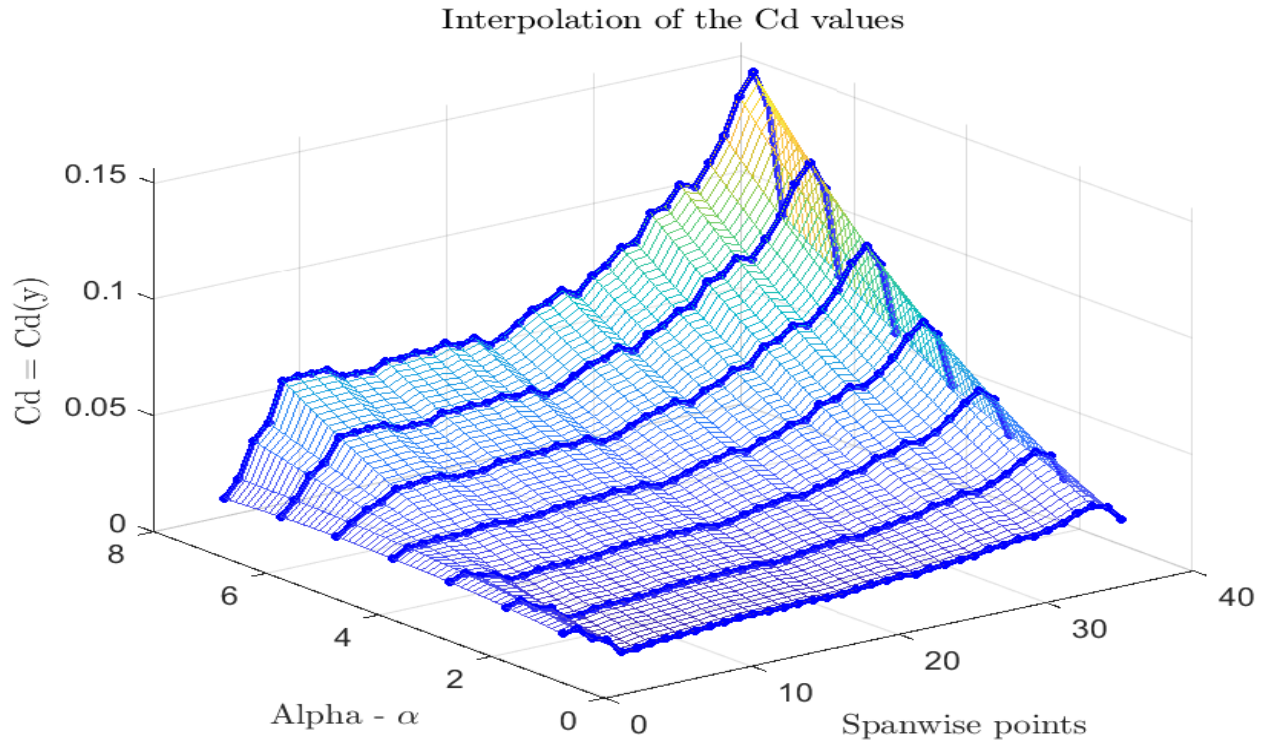


Figure 10.2. Wing drag coefficient spanwise distribution

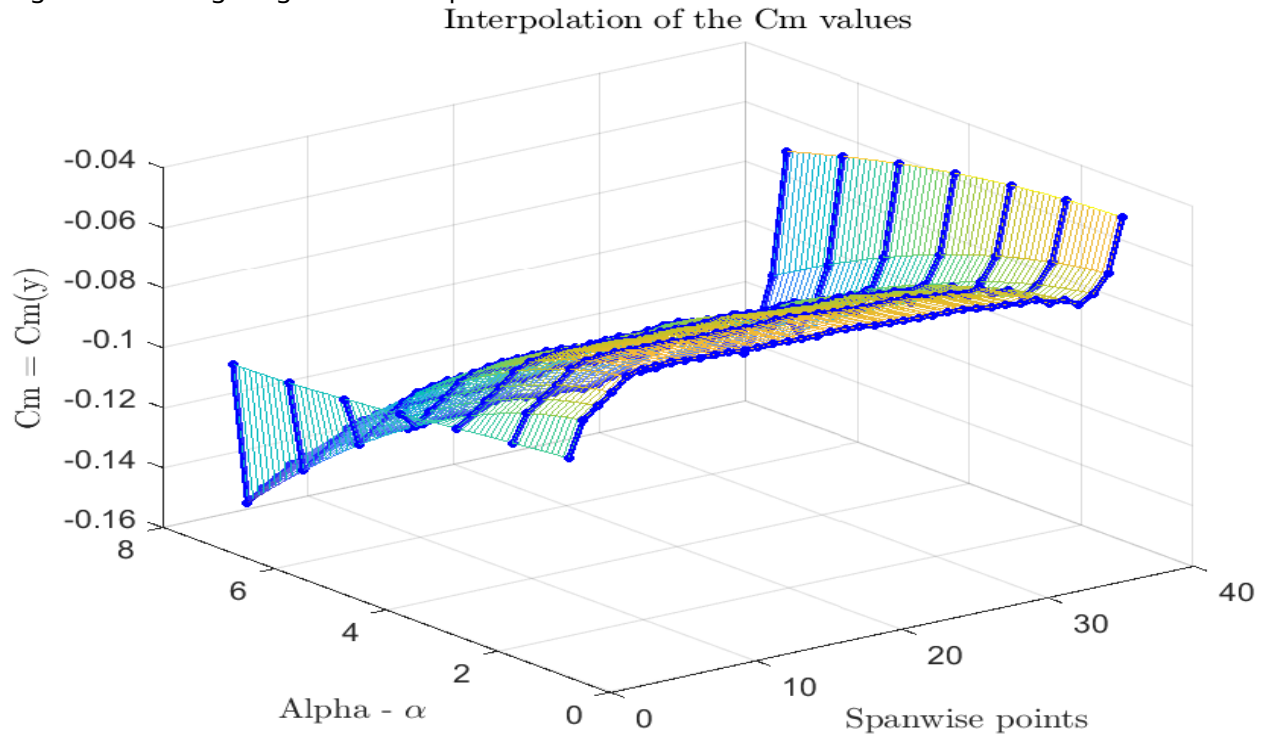


Figure 10.3. Wing pitching moment coefficient (0.25mac) spanwise distribution

### 10.2.2. Normal and parallel component

### 10.2.3. Shear, Bending and Torsion

## Point A

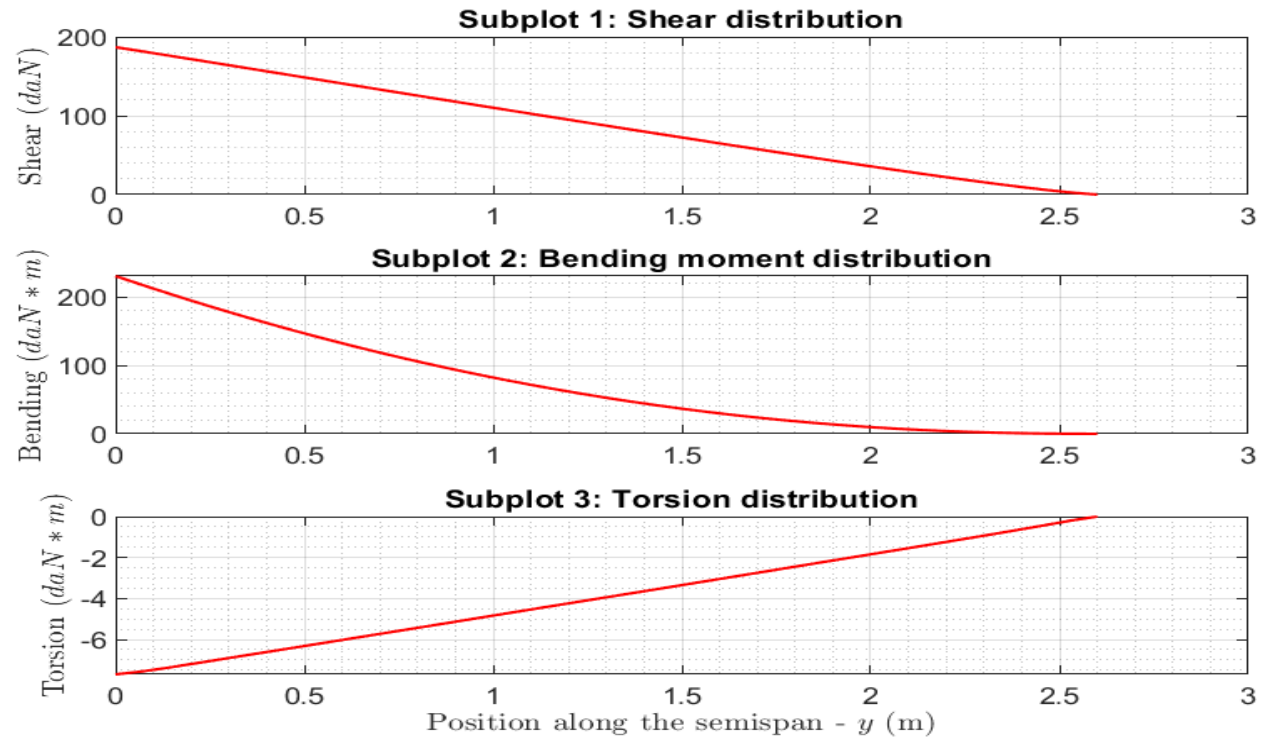


Figure 10.4. Shear, Bending and Torsion due to airloads - POINT A

## Point C

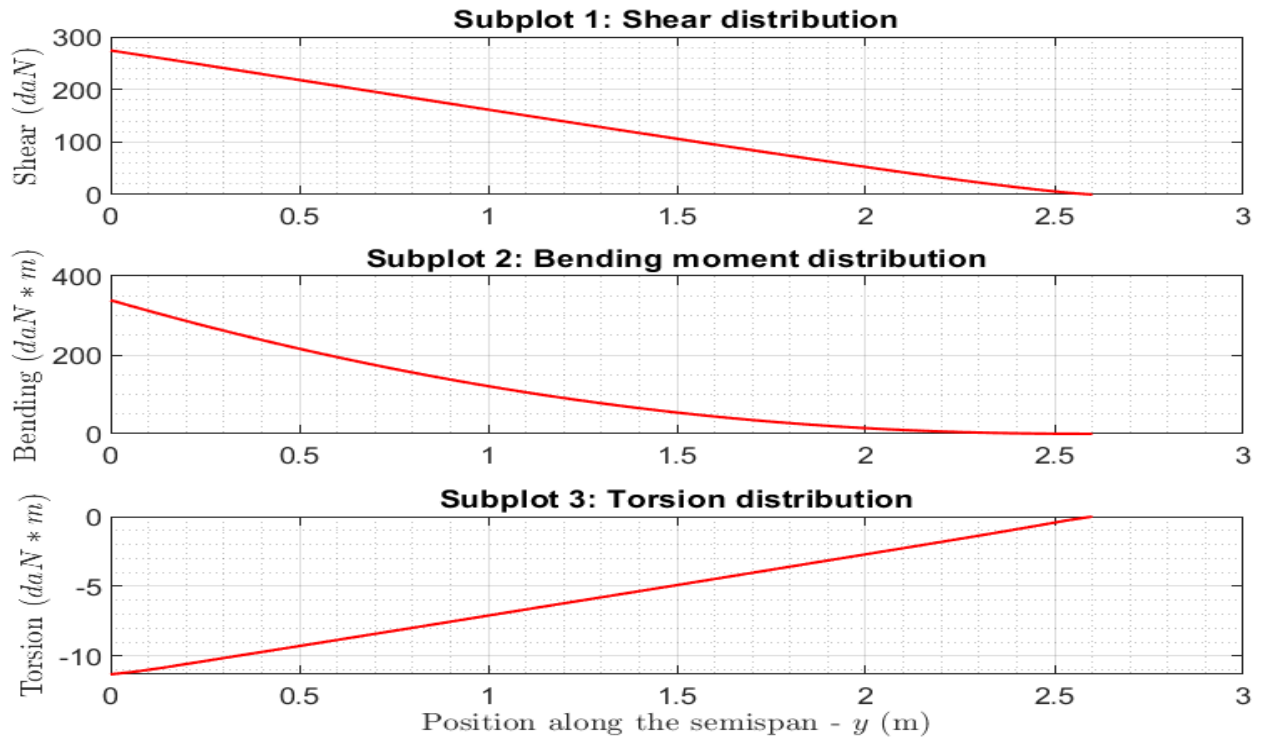


Figure 10.5. Shear, Bending and Torsion due to airloads - POINT C

## Point D

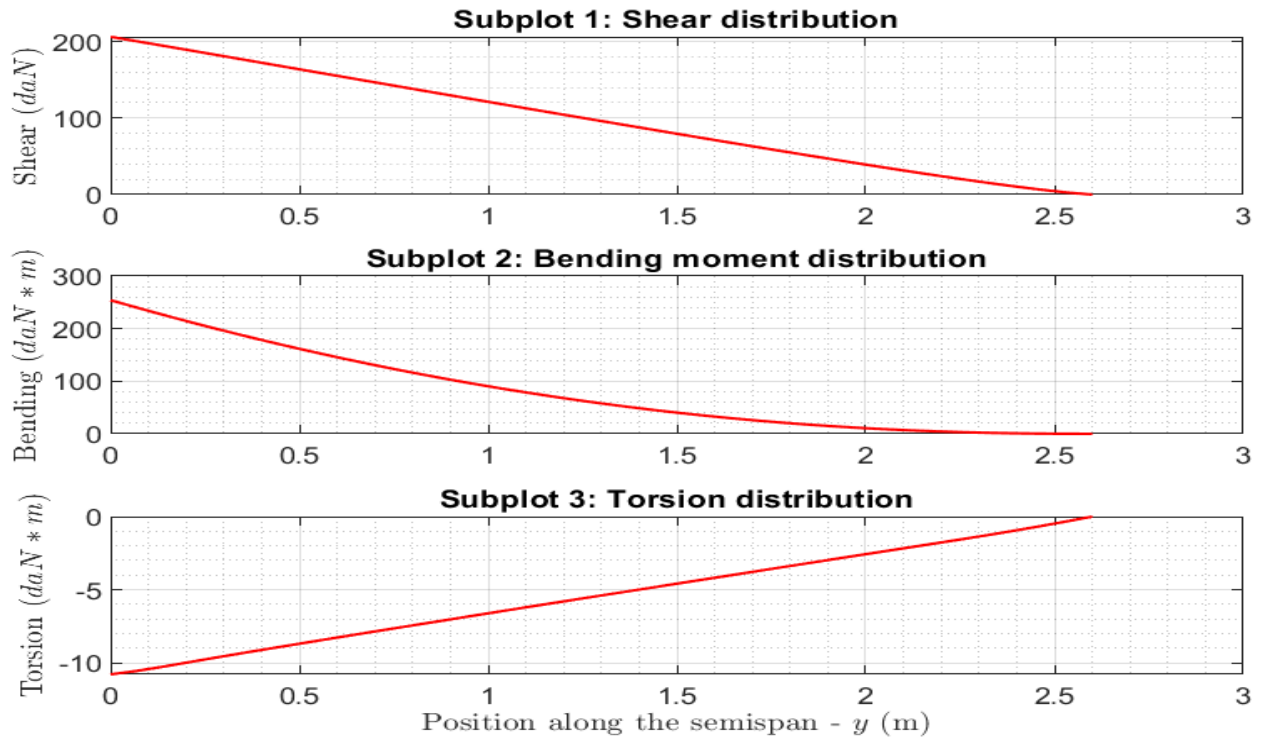


Figure 10.6. Shear, Bending and Torsion due to airloads - POINT D

## 10.2.4. Critical load condition

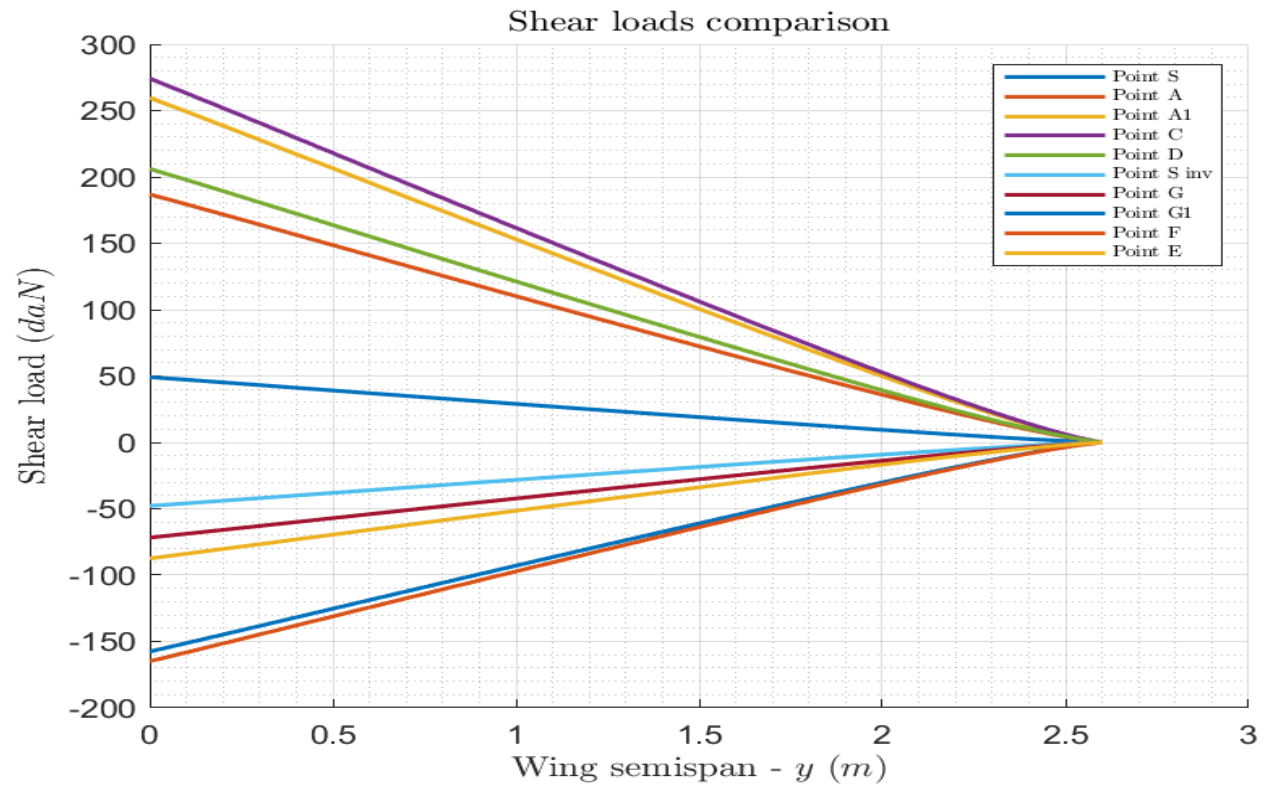


Figure 10.7. Shear comparison

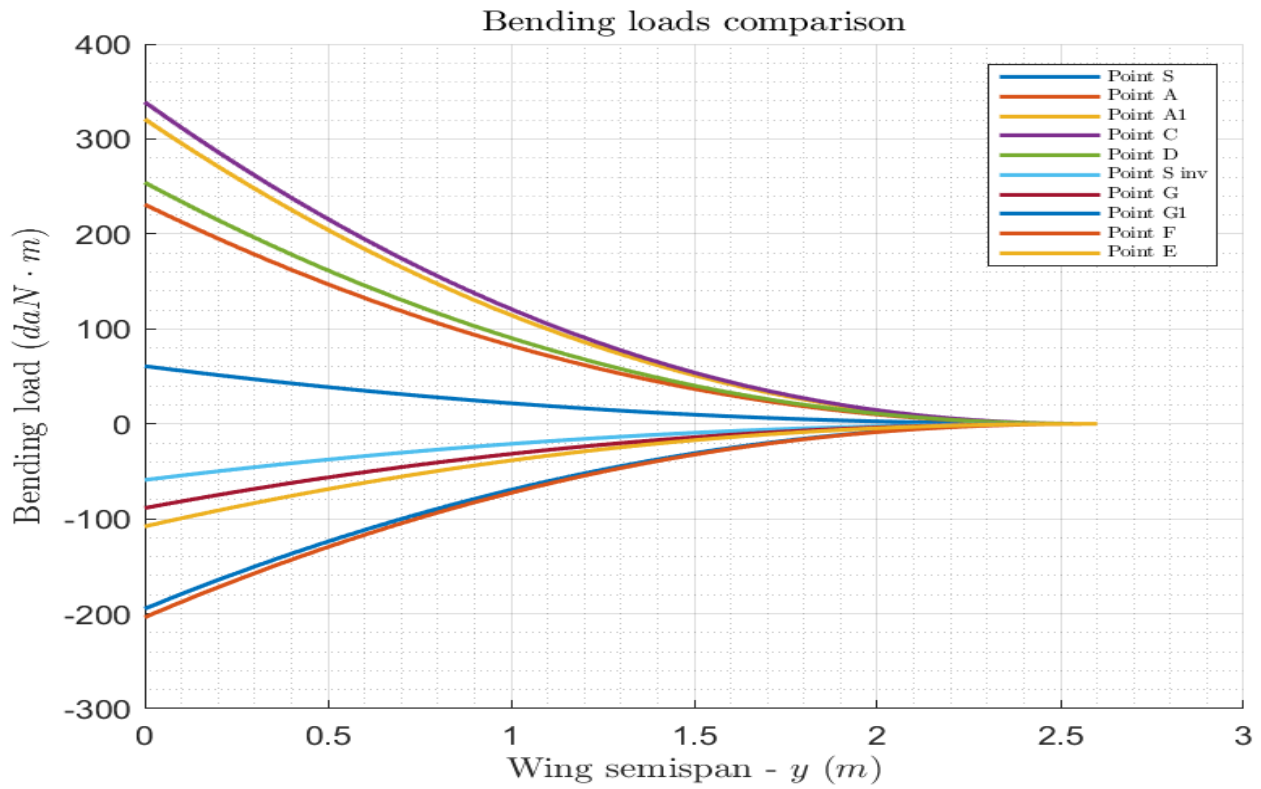


Figure 10.8. Bending comparison

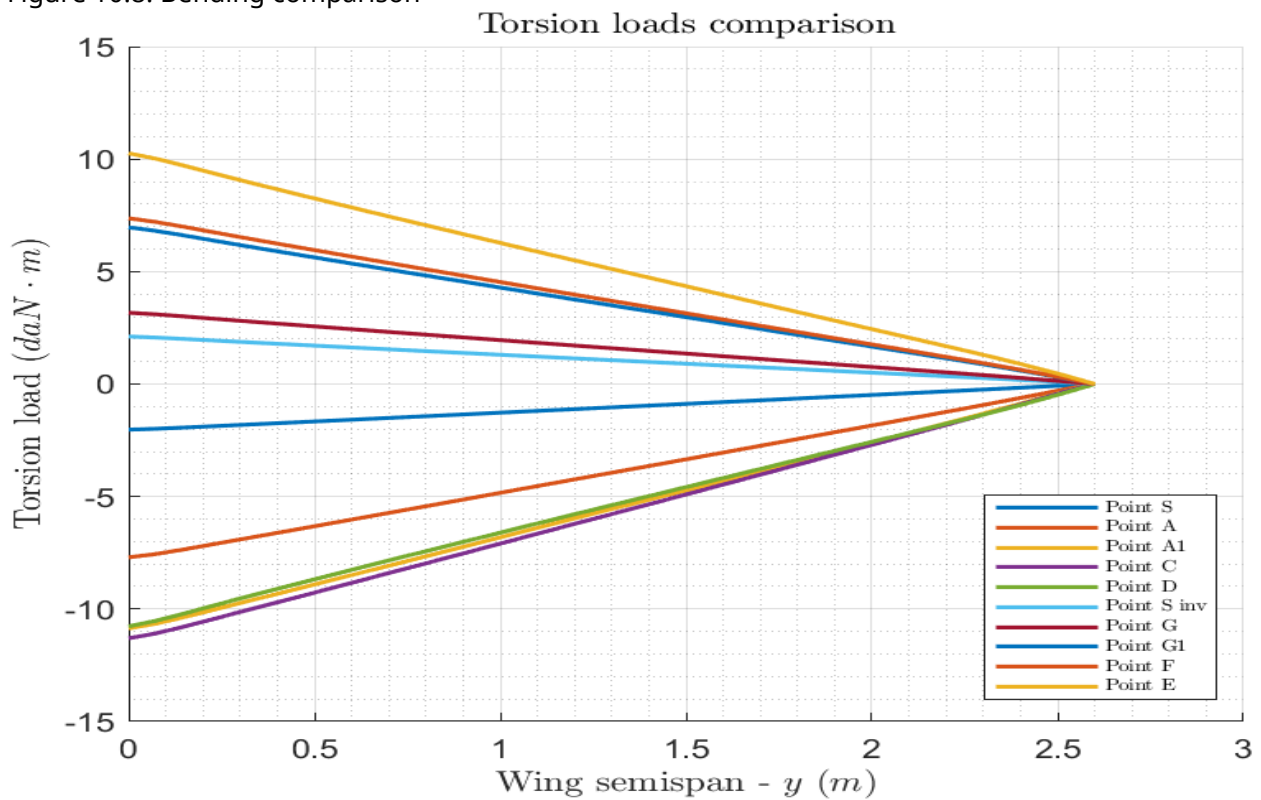


Figure 10.9. Torsion comparison

### 10.3. Unsymmetrical loads

According to CSVLA 455 , the wing and wing bracing must be designed for the following loading conditions:

1. Unsymmetrical wing loads. Unless the following values result in unrealistic loads, the rolling accelerations may be obtained by modifying the symmetrical flight conditions in CSVLA 333(d) follows: in condition A, assume that 100% of the semispan wing airload acts on one side of the aeroplane and 70% of this load acts on the other side.
2. the loads resulting from the aileron deflections and speeds specified in CSVLA 455 , in combination with an aeroplane load factor of at least two thirds of the positive manoeuvring load factor used for design. Unless the following values result in unrealistic loads, the effect of aileron displacement on wing torsion may be accounted for by adding the following increment to the basic aerofoil moment coefficient over the aileron portion of the span in the critical condition determined in CSVLA 333(d) .

#### 10.3.1. Rolling condition

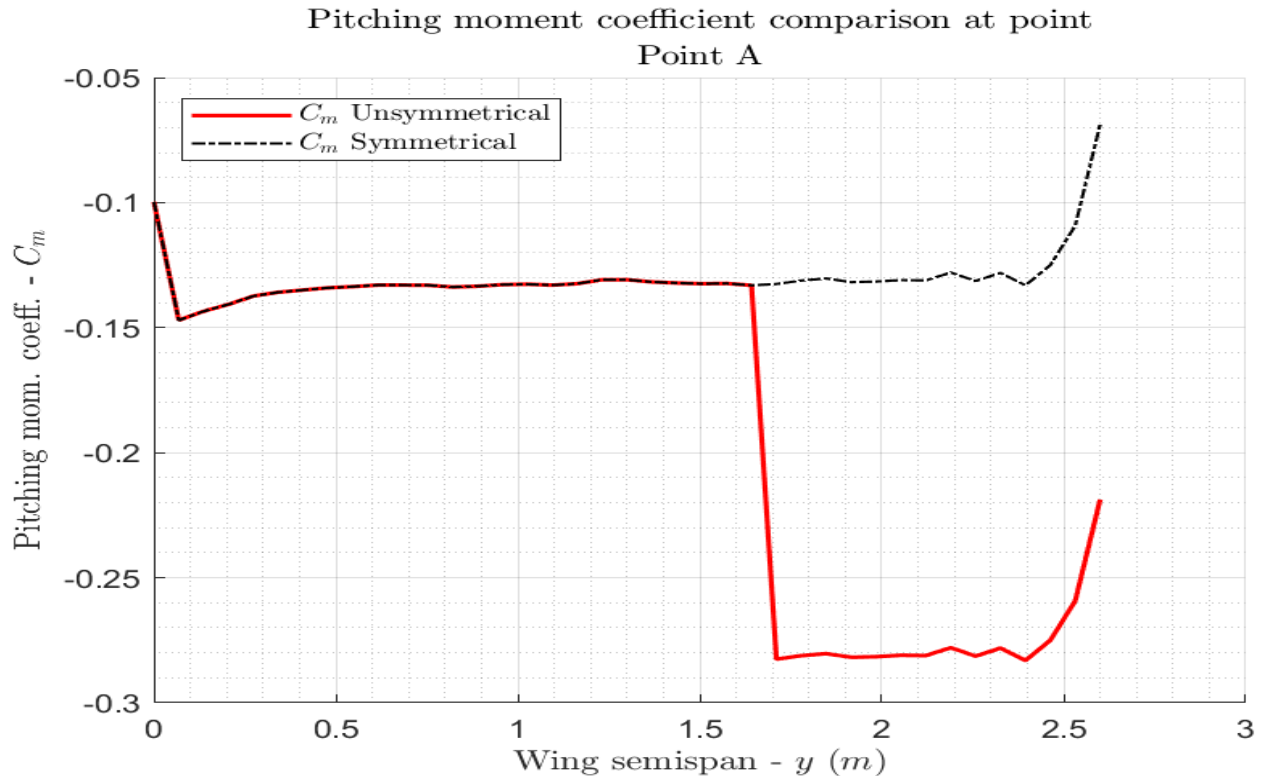


Figure 10.10. Pitching moment coefficient - POINT A



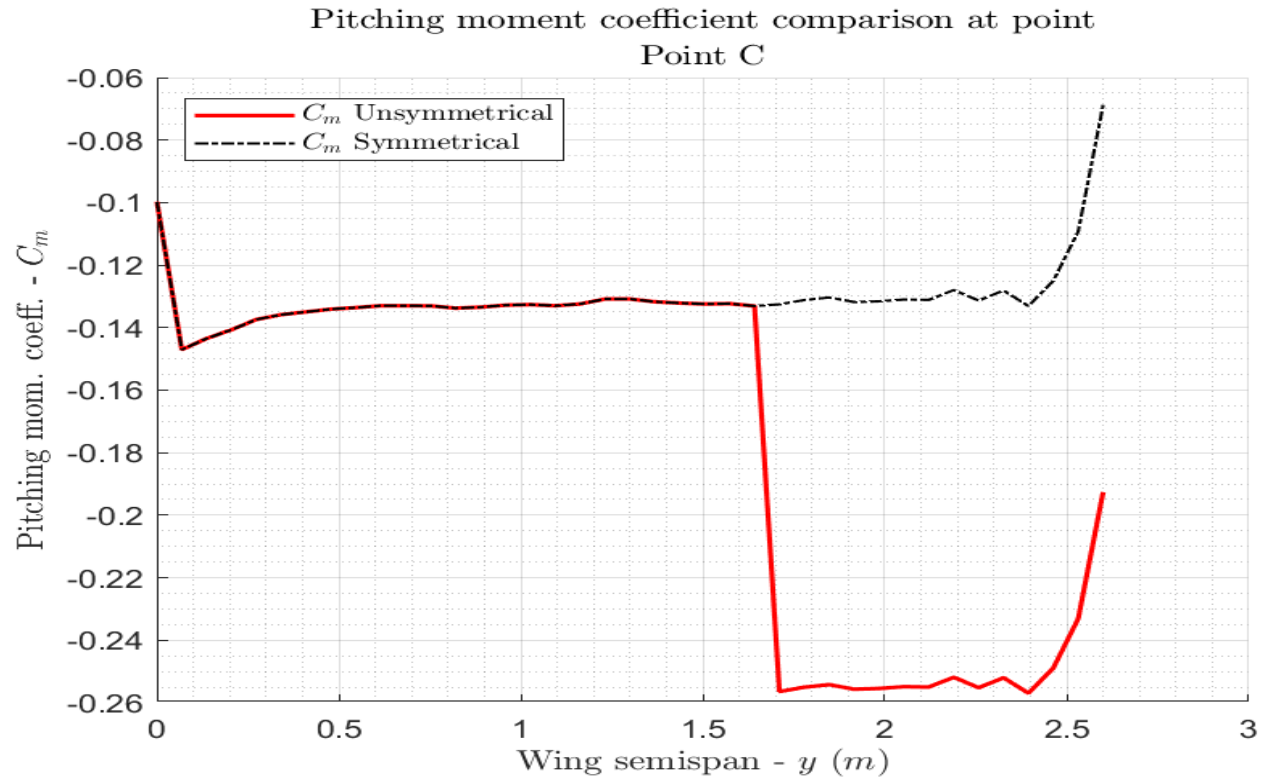


Figure 10.11. Pitching moment coefficient - POINT C

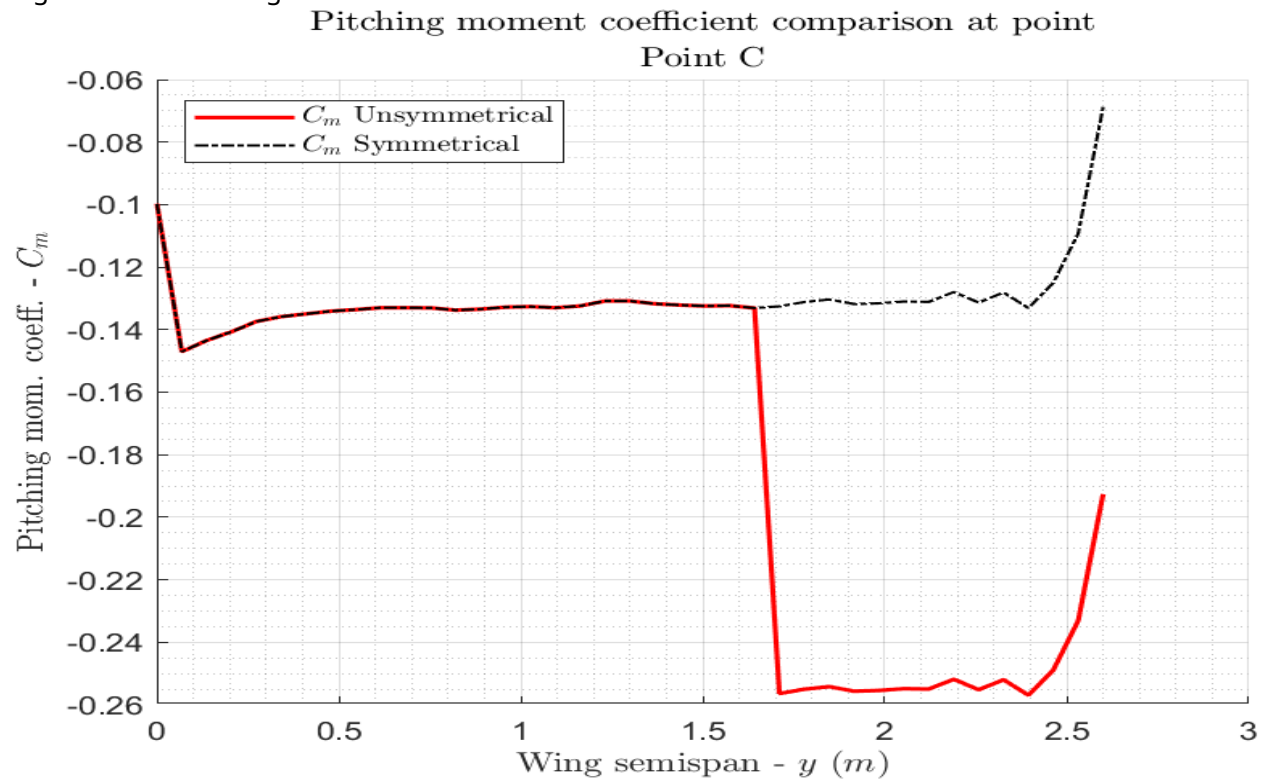


Figure 10.12. Pitching moment coefficient - POINT D

**10.3.2. Effect of aileron displacement on the wing torsion**

Unsymmetrical Torsion load due to aileron deflection at  
Point A

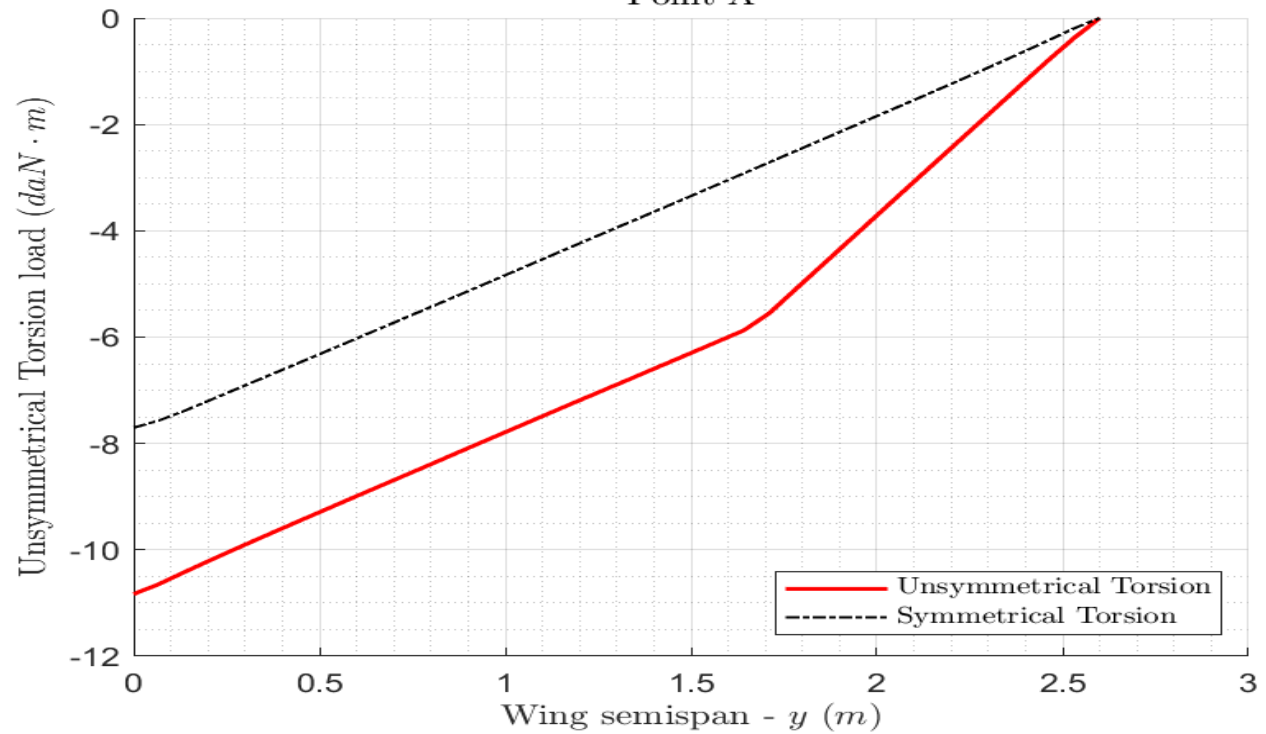


Figure 10.13. Torsion distribution full loads - POINT A

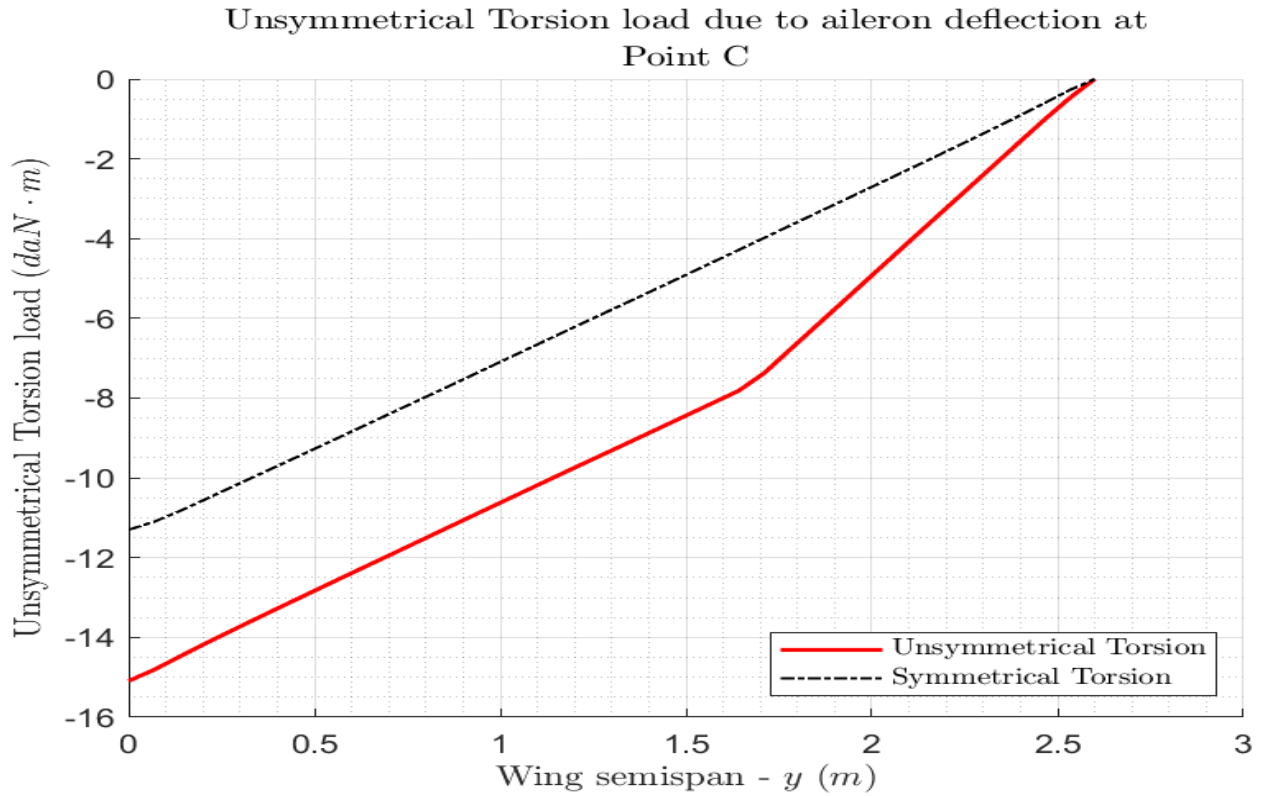


Figure 10.14. Torsion distribution full loads - POINT C

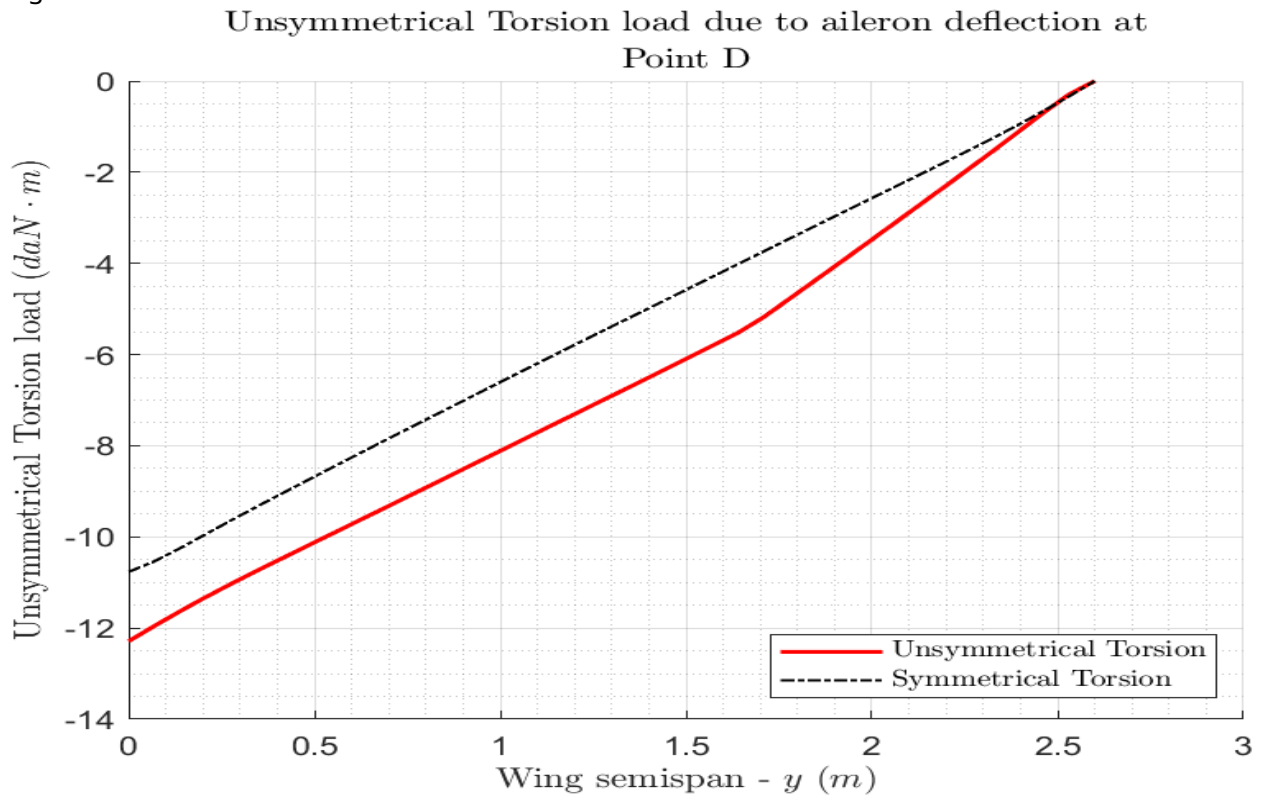


Figure 10.15. Torsion distribution full loads - POINT D

---

## Chapter 11. Loads on the horizontal tail

ADD HERE details

### 11.1. Balancing loads

According to CSVLA 421 , a horizontal tail balancing load is a load necessary to maintain equilibrium in any specified flight condition with no pitching acceleration. Horizontal tail surfaces must also be designed for the balancing loads occurring at any point on the limit manoeuvring envelope and in the flap conditions specified in CSVLA 345. The distribution in figure B6 of Appendix B may be used.

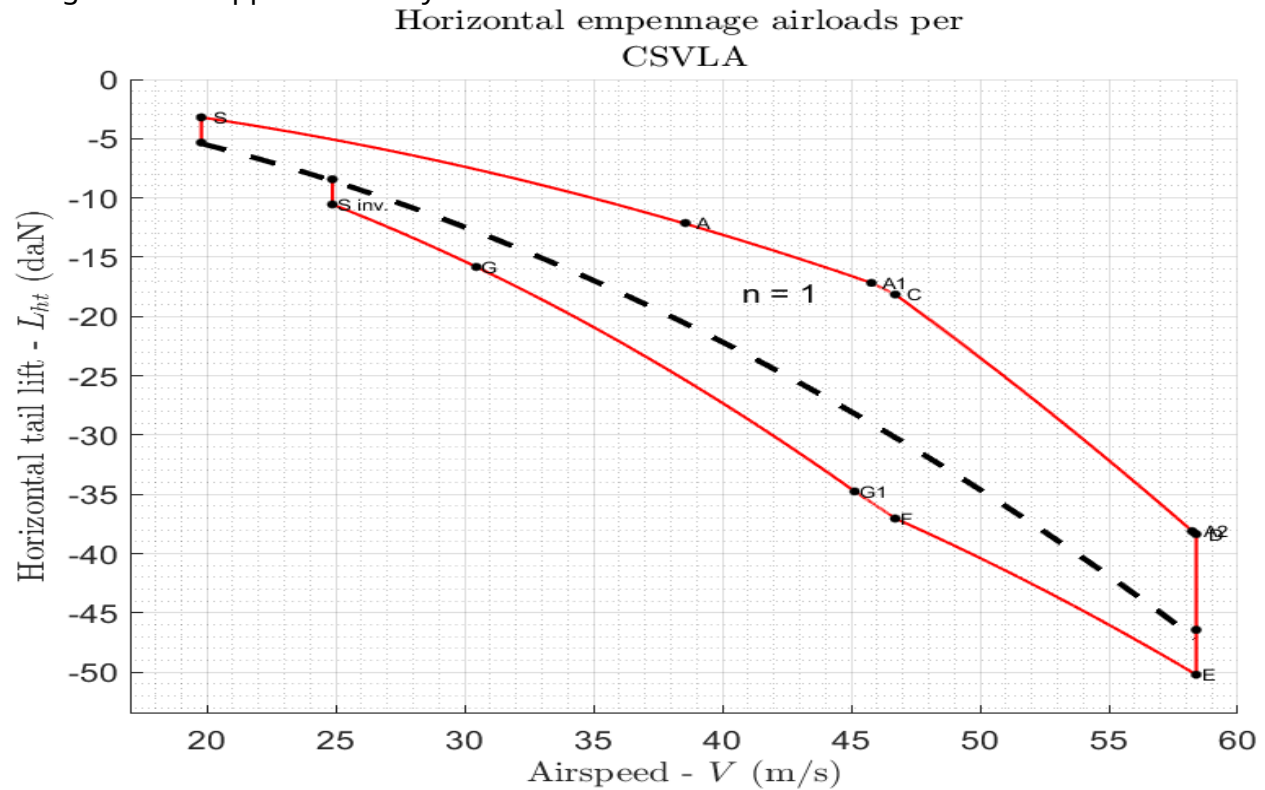


Figure 11.1. Balancing loads

### 11.2. Manoeuvring loads

According to CSVLA 423, each horizontal tail surface must be designed for manoeuvring loads imposed by one of the cited load conditions.

#### 11.2.1. Unchecked manoeuvre

At speed  $V_A$  the pitching control is suddenly displaced to the maximum deflection as limited by the control stops. The control stops are 25 deg pitch up and 25 deg pitch down. Assuming a linear increment of deflection angle, the tail lift and its moment about the center of gravity pitching axis grow accordingly. The aircraft angular pitching acceleration is the consequence, which, at the tail station, leads to a tangential acceleration nearly

normal to tail plane. In the time interval  $\Delta t$  a relative speed  $\Delta v$  develops, which, in composition with the aircraft speed  $V_A$  causes a decrement of the tail incidence angle equal to the  $\Delta v$  divided by  $V_A$ . This damping effect is the major relevant fact of the control finite time and its consequence is a less unchecked manoeuvring load. Taking into account the drag forces, which are opposed to the body rotation, and other minus occurrences, a conservative damping reduction factor of about 0.3 is introduced. This is a standard assumption for the sudden manoeuvring deflection from neutral position to stops. Assuming the direction and the intensity of airspeed at the center of gravity constant during the control time, the differential equation representing the motion is:

$$\frac{d^2\theta}{dt^2} = \frac{q * S_{tail} * a_{tail} * d}{I_y} * \left( \omega * dt - \frac{\Delta v}{V_A} * DF \right)$$

where:

- $\theta$  = rotation pitching angle
- $q$  = dynamic pressure (Pa)
- $S_{tail}$  = horizontal tail area (m<sup>2</sup>)
- $d$  = C.G. – tail – A.C. distance (m) with  $x_{C.G.} = 0.25 * MAC$
- $a_{tail}$  = tail lift curve slope (1/deg);
- $I_y$  = airplane pitching inertia moment (kg \* m<sup>2</sup>)
- $\omega$  = control angular speed of plane deflection (1/sec)
- $\frac{\Delta v}{V_A}$  = damping angle
- $DF$  = damping effect reduction factor = 0.3

It is possible to solve this equation using simple and reliable numerical methods. According to CSVLA 423(a), the following results are presented:

1. a pitch up case where the resultant tailplane angle of attack is -9.437 deg and a corresponding limit tail load of -37.75 daN;
2. a pitch down case where the resultant tailplane angle of attack is 11.8 deg and a corresponding limit tail load of 47.19 daN.

### 11.2.2. Checked manoeuvre

According to CSVLA 423(b) a sudden upward deflection of the elevator must be studied, at speeds above  $V_A$ , followed by a downward deflection of the elevator, resulting in specified combinations of normal and angular acceleration. The airplane pitching inertia moment is estimated equal to 100 kg \* m<sup>2</sup> at maximum takeoff weight and center of gravity at 25% of the mean aerodynamic chord. The maximum limit load in the checked manoeuvre is -91.38 daN.

### 11.2.3. Gust loads

According to CSVLA 425 , each horizontal tail surface must be designed for loads resulting during steady, unaccelerated flight at different speeds (VF, VC, VD). The incremental tail load resulting from the gusts must be added to the initial balancing tailload to obtain the total tail load. According to CSVLA 425(d) , in the absence of a more rational analysis, the incremental tail load due to the gust, must be computed as follows:

$$\Delta L_{ht} = \frac{1}{2} * \left[ K_g * \rho_0 * U_{de} * V * a_{ht} * S_{ht} \left( 1 - \frac{d \epsilon}{d \alpha} \right) \right]$$

where:

- $\rho_0$  = density of air at sea level (kg/m<sup>3</sup>);
- $K_g$  = gust alleviation factor at MTOW;
- $U_{de}$  = derived gust speed (m/s);
- $V$  = aircraft equivalent speed (m/s);
- $a_{ht}$  = tail lift curve slope (1/rad);
- $S_{ht}$  = horizontal tail area (m<sup>2</sup>);
- $\left( 1 - \frac{d \epsilon}{d \alpha} \right)$  = downwash factor.

Results can be summarized as follow:

1. at VF, the incremental tail load is 29.37 daN and the resulting total load is -7.664 daN when the incremental tail load is summed and -66.4 daN when the incremental tail load is subtracted;
2. at VC, the incremental tail load is 58.58 daN and the resulting total load is 40.44 daN when the incremental tail load is summed and -76.72 daN when the incremental tail load is subtracted;
3. at VD, the incremental tail load is 36.71 daN and the resulting total load is -1.638 daN when the incremental tail load is summed and -75.05 daN when the incremental tail load is subtracted.

ADD HERE details

### 11.3. Horizontal tail loads summary

### 11.4. Unsymmetrical loads

According to CSVLA 427 , in the absence of more rational data for conventional aircraft must be applied (1) 100% of the maximum loading from the symmetrical flight conditions on the surface on one side of the plane of symmetry and (2) the following percentage of that loading to the opposite side:

$$\% = 100 - 10 * (n - 1) = \left(\frac{1}{100}\right) * [100 - 10 * (3.8 - 1)] = 0.72$$

The critical manoeuvre load is -92.2 daN; the unsymmetrical loads will be:

- load on one side:  $-92.2 * 0.5 = -46.1$  daN;
- load on the opposite side:  $-92.2 * 0.72 = -66.38$ .

---

## Chapter 12. Loads on the vertical tail

According to CSVLA the vertical tail must withstand several manoeuvring loads. In this chapter, all these load case will be illustrated.

### 12.1. Manoeuvring load

At speeds up to  $V_A$ , the vertical tail surfaces must be designed to withstand the following condition. In computing the tail loads, the yawing velocity may be assumed to be zero.

#### 12.1.1. CSVLA 441(a)(1)

With the aeroplane in unaccelerated flight at zero yaw, it is assumed that the rudder control is suddenly displaced to the maximum deflection, as limited by the control stops or by limit pilot forces. The control stops are  $\pm 30$  deg. The lateral force coefficient acting on the rudder when at maximum deflection angle is given by the following simple equation:

$$C_Y = C_{Y,0} + \frac{d C_Y}{d \delta_r} * \delta_{r,max}$$

where:

- $C_Y$  = lateral force coefficient;
- $C_{Y,0}$  = lateral force coefficient at  $\beta = \delta = 0$ , equal to zero for symmetrical airfoil;
- $\frac{d C_Y}{d \delta_r}$  = lateral force curve slope per deg of rudder deflection;
- $\delta_{r,max}$  = rudder control stop.

Assuming no deflection of the control cable, the maximum value of the lateral force coefficient is:

$$(C_Y)_{\delta_r = 30} = 0.000644 * 30 = 0.019356$$

The lateral force is calculated as follow:

$$Y = \frac{1}{10} * q_A * S_{vertical} * \frac{(C_Y)_{\delta_r = 30}}{S_{ratio}} = (1/10) * 911 * 0.2044 * 0.01936 / 0.03947 = 9.131 \text{ daN}$$

The lateral force acting on a single fin of the vertical tail plain is  $9.131/2 = 4.565$  daN.

#### 12.1.2. CSVLA 441(a)(2)

With the rudder deflected as specified in sub-paragraph CSVLA 441(a)(1) of this paragraph, it is assumed that the aeroplane yaws to the resulting sideslip angle. In lieu of a rational analysis, an overswing angle equal to 1.3 times the static sideslip angle of sub-paragraph CSVLA 441(a)(3) of this paragraph may be assumed. The overswing sideslip angle is  $1.3 * 15 = 19.5$  deg. The total lateral force acting on the vertical tail in this case is:



$$Y = \frac{1}{10} * q_A * S_{vertical} * \frac{C_Y}{S_{ratio}} = (1/10) * 911 * 0.2044 * 0.0245/0.03947 = 5.778 \text{ daN}$$

The lateral force acting on a single fin of the vertical tail plain is  $5.778/2 = 2.889 \text{ daN}$ .

### 12.1.3. CSVLA 441(a)(3)

A yaw angle of 15 degrees with the rudder control maintained in the neutral position (except as limited by pilot strength). The total lateral force in this case is:

$$Y = \frac{1}{10} * q_A * S_{vertical} * \frac{C_Y}{S_{ratio}} = (1/10) * 911 * 0.2044 * 0.0233/0.03947 = 5.495 \text{ daN}$$

The lateral force acting on a single fin of the vertical tail plain is  $5.495/2 = 2.748 \text{ daN}$ .

## 12.2. Manoeuvring and gust envelope

According to CSVLA 443 in the absence of a more rational analysis, the gust load must be computed as follows:

$$L_{vt} = \frac{K_{gt} * U_{de} * V * a_{vt} * S_{vt}}{16.3}$$

where:

- $U_{de}$  = derived gust velocity (m/s);
- $L_{vt}$  = vertical tail load (daN)
- $K_{gt} = \frac{0.88 * \mu_{gt}}{5.3 + \mu_{gt}}$  = gust alleviation factor;
- $\mu_{gt} = \frac{2 * M}{\rho * \bar{c}_t * g * a_{vt} * S_{vt}} * \frac{K^2}{l_t^2}$  = lateral mass ratio;
- $M$  = aeroplane mass (kg);
- $\rho$  = air density ( $kg/m^3$ );
- $l_t$  = aeroplane c.g. – to – lift – centre of vertical surface distance (m);
- $S_{vt}$  = area of vertical tail ( $m^2$ );
- $a_{vt}$  = lift curve slope of vertical tail (1/rad);
- $V$  = aeroplane equivalent speed (m/s);
- $K$  = radius of gyration in yaw (m);
- $g$  = acceleration due to gravity ( $m/s^2$ );

These calculations must be performed at VC and VD; the results are the following:

1. Gust load at VC: 8.8395 daN
2. Gust load at VD: 5.5247 daN

The critical gust load is 8.8395 daN at VC.

### **12.3. Vertical tail loads summary**

### **12.4. Combined loads**

According to CSVLA 447 the following two additional condition must be verified:

1. With the aeroplane in a loading condition correspondent to point A or point D in the V - n diagram (whichever condition leads to the higher balance load) the loads on the horizontal tail must be combined with those on the vertical tail as specified in CSVLA 441 ; this prescription results in a combined load equal to 20.02 daN;
2. 75 % of the loads according to CSVLA 423 for the horizontal tail and CSVLA 441 for the vertical tail must be assumed acting simultaneously; this prescription results in a combined load equal to 69.39 daN.

The critical combined load is 69.3881 daN.

## Chapter 13. Loads on the wing flaps

According to CSVLA 345(a) , if flaps or similar high lift devices to be used for take-off, approach or landing are installed, the aeroplane, with the flaps fully deflected at VF, is assumed to be subjected to symmetrical manoeuvres and gusts resulting in limit load factors within the range determined by (1) Manoeuvring to a positive limit load factor of 2.0 (2) Positive and negative gust of 7.62 m/s acting normal to the flight path in level flight.

### 13.1. Manoeuvring load

According to CSVLA 347 , the wing flaps, their operating mechanisms and their supporting structure will be analyzed at two deflection angle, namely takeoff and landing position.

#### 13.1.1. Takeoff

The flaps V-n diagram relative to the takeoff configuration is shown in this subsection; the estimated maximum lift coefficient in this configuration is 1.9 corresponding to a stall speed equal to 18.04 m/s.

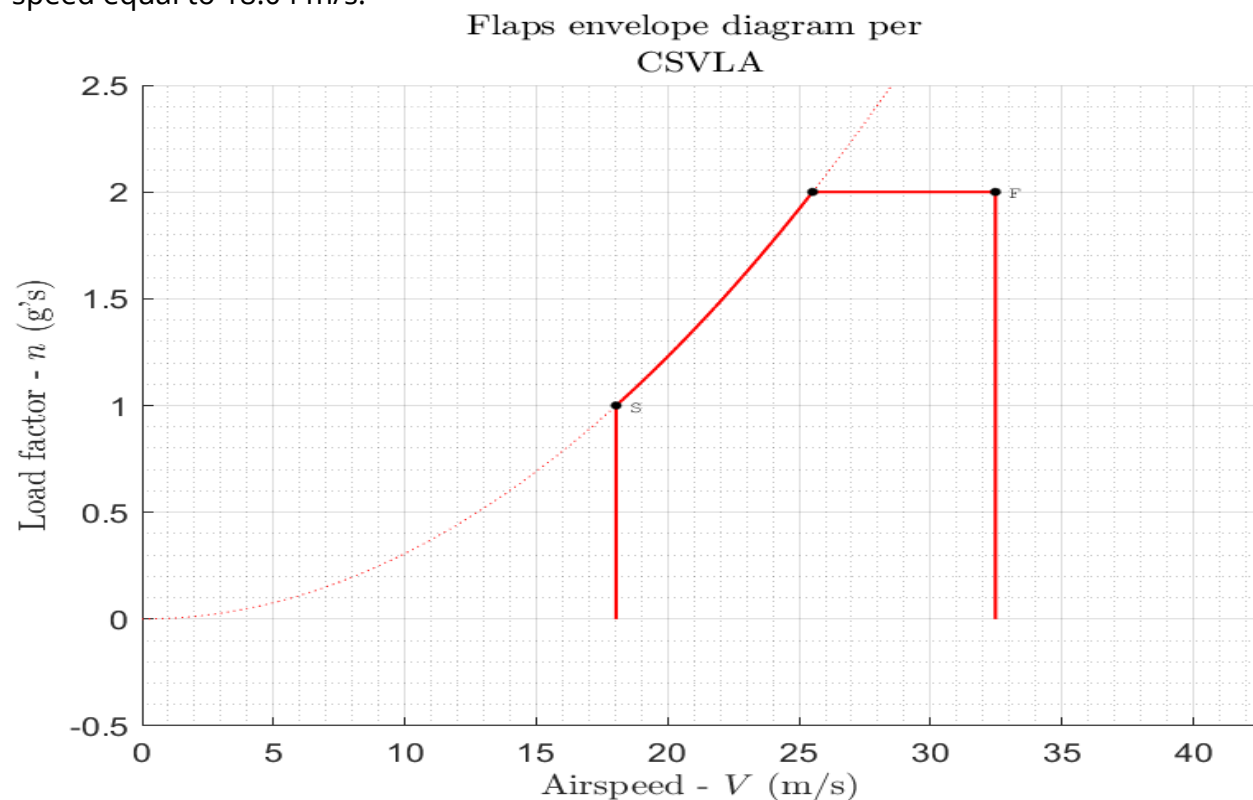


Figure 13.1. Flaps V-n diagram. Takeoff.

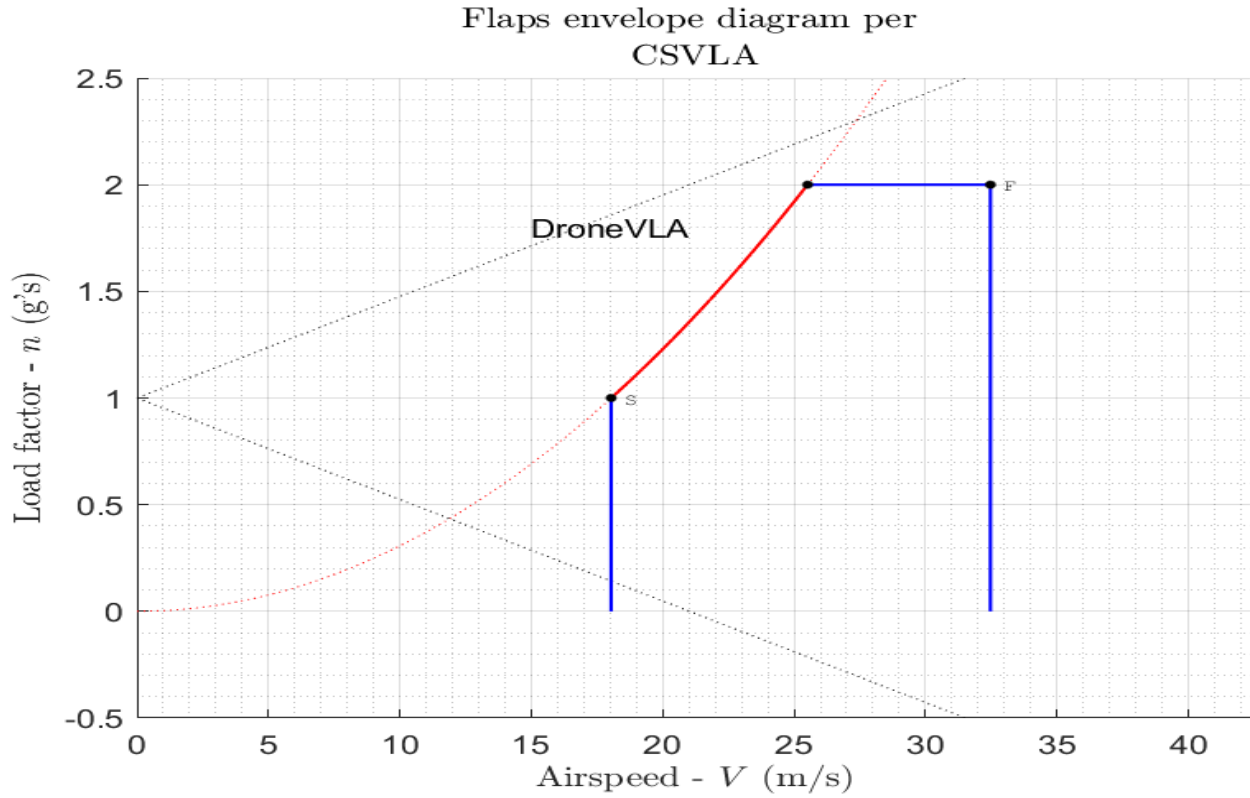


Figure 13.2. Flaps gust envelope diagram. Takeoff.

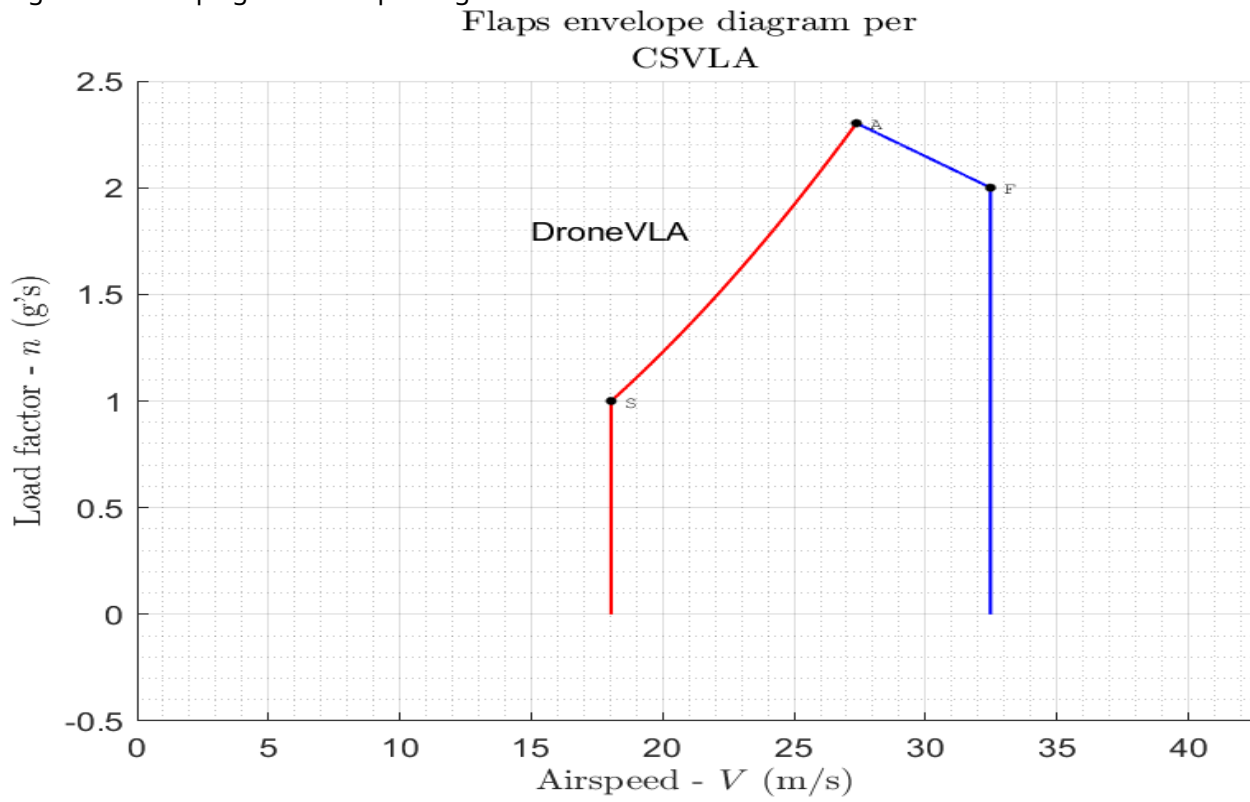


Figure 13.3. Flaps final envelope diagram. Takeoff.

### 13.1.2. Landing

The flaps V-n diagram relative to the landing configuration is shown in this subsection; the estimated maximum lift coefficient in this configuration is 1.9 corresponding to a stall speed equal to 18.04 m/s.

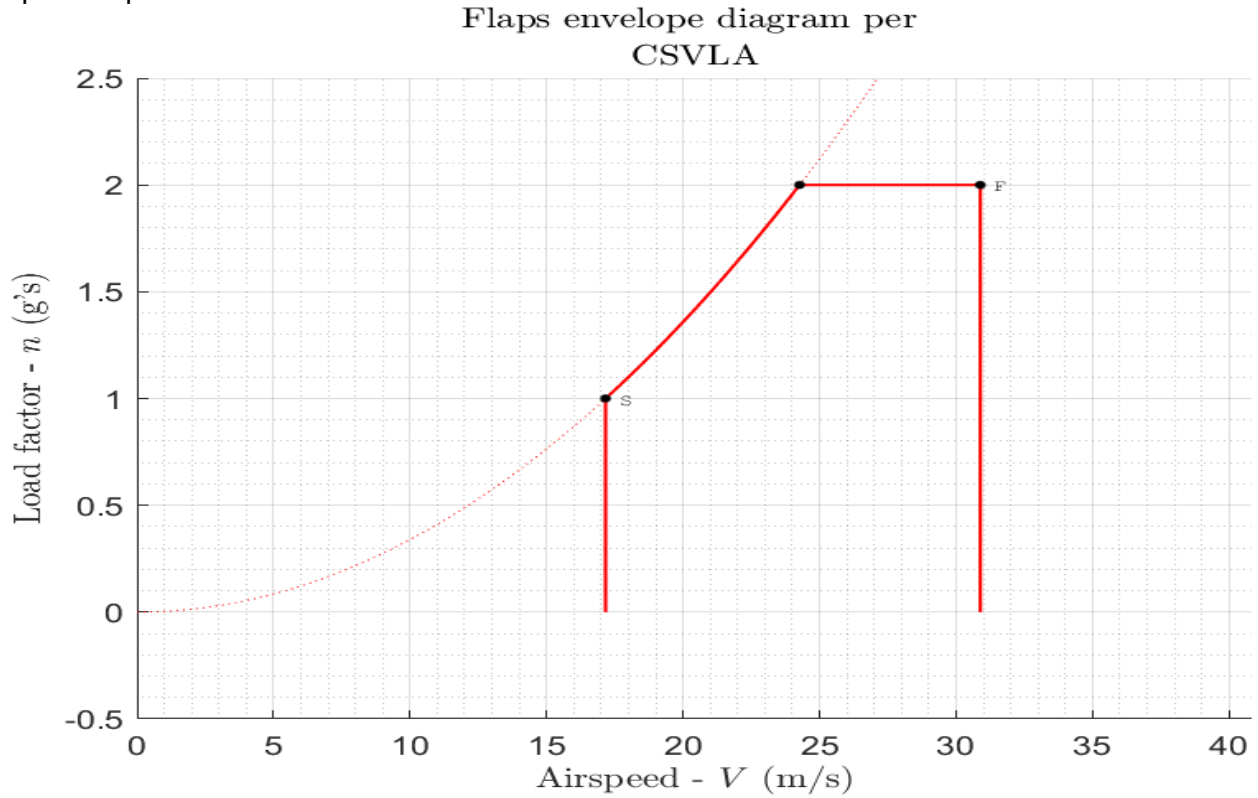


Figure 13.4. Flaps V-n diagram. Landing.

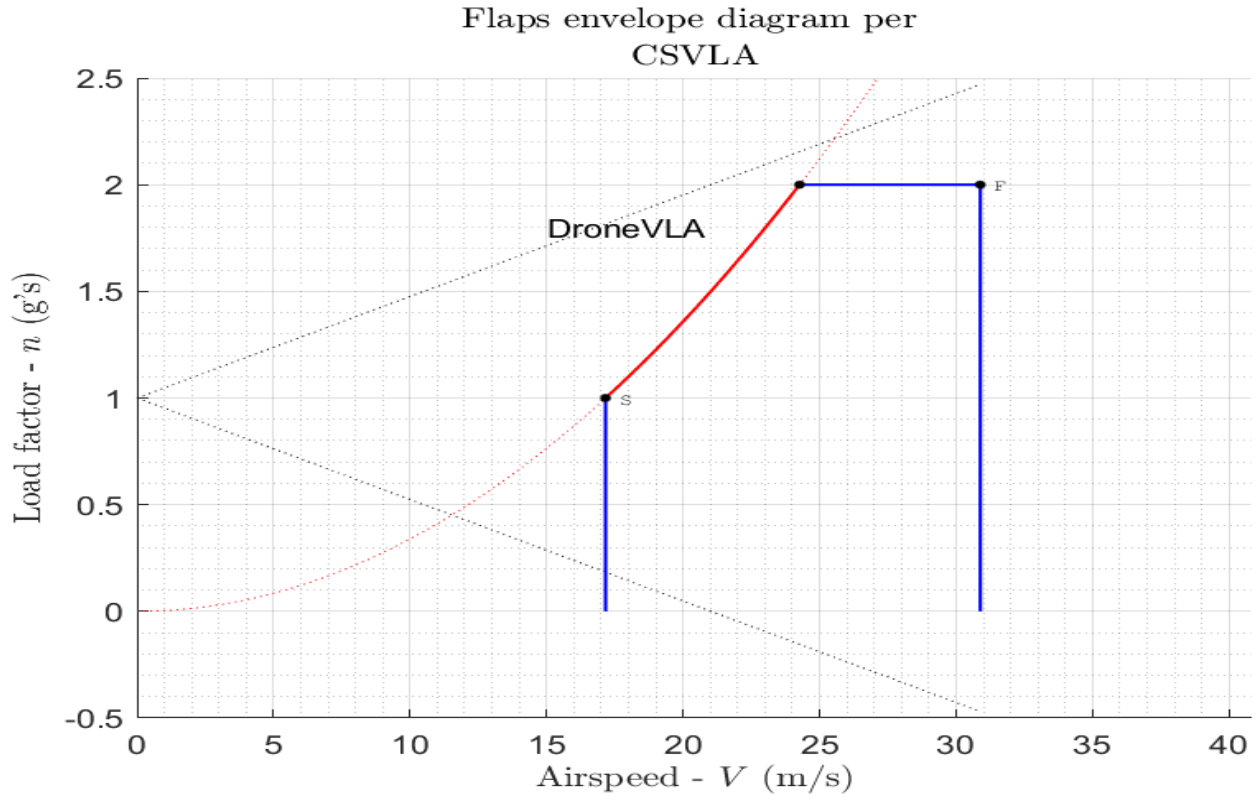


Figure 13.5. Flaps gust envelope diagram. Landing.

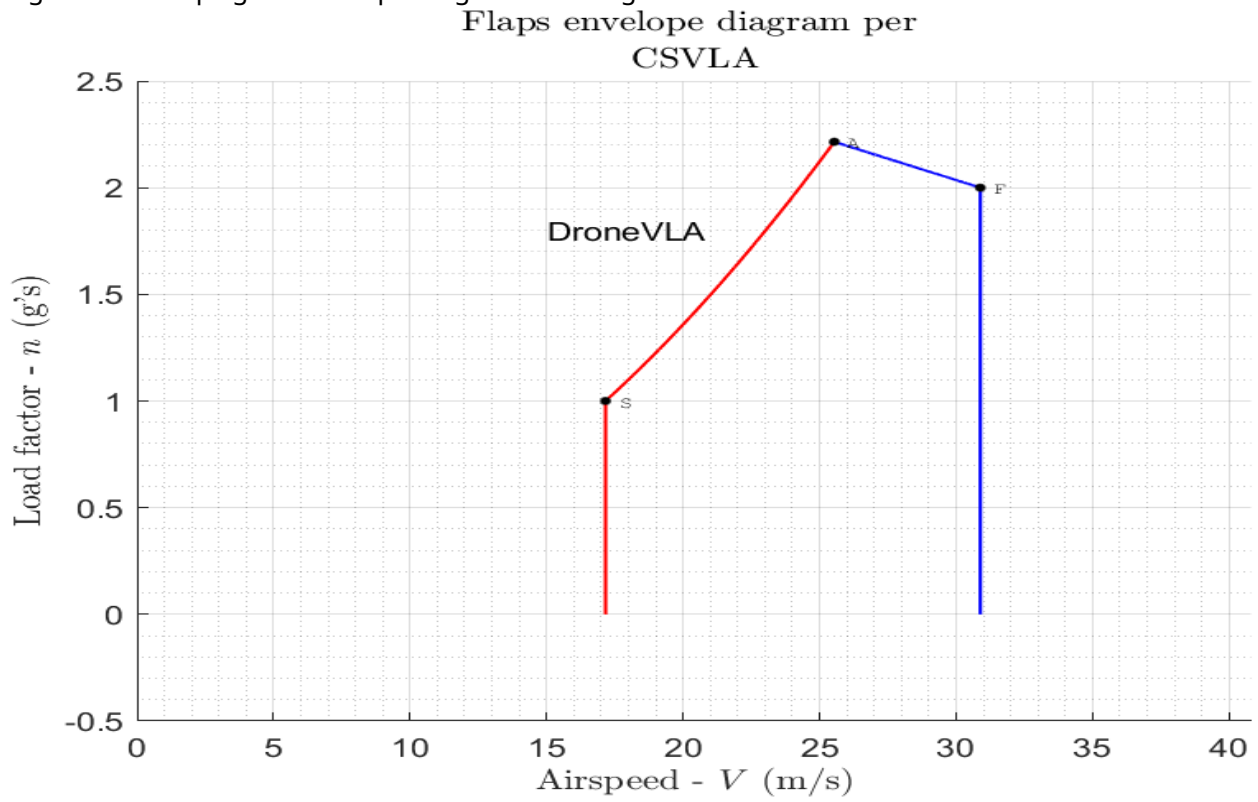


Figure 13.6. Flaps final envelope diagram. Landing.

### 13.1.3. Summary of flaps load

A diagram of the flaps load calculations is shown. The clean positive attitude flight envelope of the aircraft is also represented for reference.

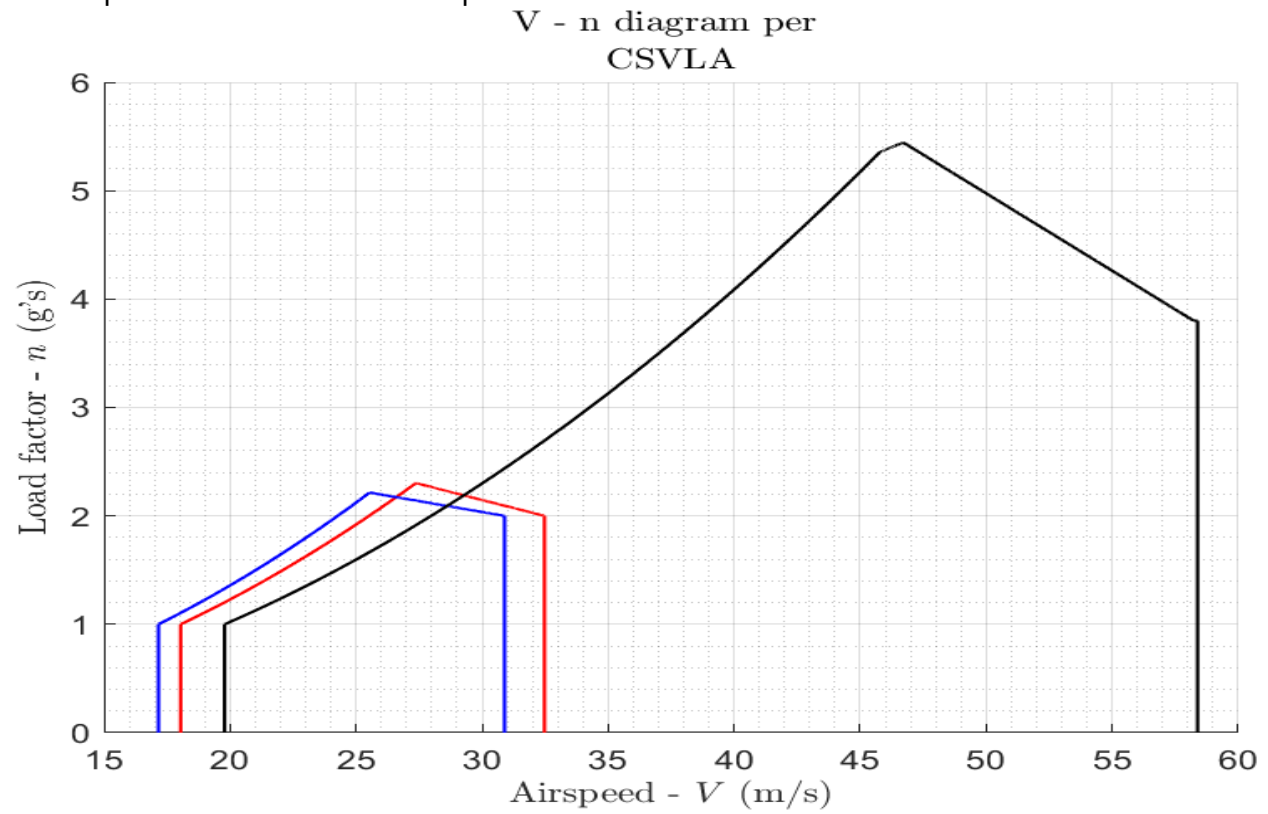


Figure 13.7. Summary of flaps flight load.

---

## Chapter 14. Loads on the control surfaces

According to CSVLA 395 , the flight control system and its supporting structure must be designed for loads corresponding to 125 % of the computed hinge moments of the movable control surface.

### 14.1. Ailerons

According to CSVLA 395 , the total aileron load is equal to -991.5 N . The hinge moment is calculated by the following equation

$$H_{aileron} = q * S_{aileron} * c_f * C_{h_{total}} = -0.3883 * 911 * 0.1402 * 0.1354 = -6.714 \text{ N} * m$$

where:

- $H_{aileron}$  = aileron hinge moment ( $N * m$ ) ;
- $q$  = dynamic pressure at point A ( $Pa$ ) ;
- $S_{aileron}$  = aileron surface ( $m^2$ ) ;
- $c_f$  = reference chord ( $m$ ) ;
- $C_{h_{total}}$  = total hinge moment coefficient.

This is the formula used in all the following calculations. The total hinge moment that must be considered in structural calculations is the following:

$$H_{aileron_{total}} = 2 * 1.25 * H_{aileron} = 2 * 1.25 * (-6.714) = -16.78 \text{ N} * m$$

### 14.2. Elevator

According to CSVLA 395 , the total elevator load is equal to -531.9 N. The hinge moment is

$$H_{elevator} = q * S_{elevator} * c_f * C_{h_{total}} = -0.2339 * 911 * 0.1475 * 0.1085 = -3.409 \text{ N} * m$$

The total hinge moment that must be considered in structural calculations is the following:

$$H_{elevator_{total}} = 2 * 1.25 * H_{elevator} = 2 * 1.25 * (-3.409) = -8.522 \text{ N} * m$$

### 14.3. Rudder

According to CSVLA 395 , the total rudder load is equal to -66.13 N. The hinge moment is

$$H_{rudder} = q * (2 * S_{rudder}) * c_f * C_{h_{total}} = -0.00792 * 911 * (2 * 0.01906) * 0.1085 = -0.7491 \text{ N} * m$$

where the surface is related to the double fin geometrical arrangement. The total hinge moment that must be considered in structural calculations is the following:

$$H_{rudder_{total}} = 1.25 * H_{rudder} = 1.25 * (-0.7491) = -0.9364 \text{ N} * m$$



---

## Chapter 15. Power plant

### 15.1. Engine torque

The engine takeoff power is 11.19 kW at 5800 RPM. The rotational speed of the propeller is  $5800/2.429 = 2388$  RPM. The maximum continuous power is 9.321 kW. The mean engine torque is  $44.73 \text{ N} \cdot \text{m}$ . Using a factor of 2 for a four cylinder engine, the limit torque will be  $89.45 \text{ N} \cdot \text{m}$ . This limit torque acts simultaneously with the 75 % of the inertia limit load. The mean engine torque at max continuous power is  $39.3 \text{ N} \cdot \text{m}$ . Using a factor of 2 for a four cylinder engine, the limit torque will be  $78.61 \text{ N} \cdot \text{m}$  which acts simultaneously with the 100 % of the inertia limit load.

$$MT_{continuous} = P_{continuous} * \frac{1000}{\frac{2\pi * RPM_{prop}}{60}} = 9.321 * \frac{1000}{\frac{2 * 3.14 * 2388}{60}} = 39.3042 \text{ N} \cdot \text{m}$$

$$LT_{continuous} = RR_{prop} * MT_{continuous} = 2.429 * 39.3 = 78.6084 \text{ N} \cdot \text{m}$$

$$MT_{takeoff} = P_{takeoff} * \frac{1000}{\frac{2\pi * RPM_{prop}}{60}} = 11.19 * \frac{1000}{\frac{2 * 3.14 * 2388}{60}} = 44.7255 \text{ N} \cdot \text{m}$$

$$LT_{takeoff} = RR_{prop} * MT_{takeoff} = 2.429 * 44.73 = 89.4509 \text{ N} \cdot \text{m}$$

- $MT_{takeoff}$  = mean torque at takeoff power ( $\text{N} \cdot \text{m}$ ); and
- $LT_{takeoff}$  = limit torque at takeoff power ( $\text{N} \cdot \text{m}$ ); and
- $MT_{continuous}$  = mean torque at max continuous power ( $\text{N} \cdot \text{m}$ ); and
- $LT_{continuous}$  = limit torque at max continuous power ( $\text{N} \cdot \text{m}$ ).

### 15.2. Side load on engine mount

The limit load factor in a lateral direction is 1.33. The mass of the engine group is 24.4 kg. The side load results is  $1.33 * 24.4 * 9.807 * (1/10) = 31.82 \text{ daN}$

### 15.3. Inertia load on engine mount

The inertia load is equal to the maximum limit load factor times the engine group weight:  $5.357 * 24.4 * 9.807 * (1/10) = 170.5 \text{ daN}$

### 15.4. Gyroscopic loads

According to AMC 23.371(a) , for a two blade propeller, the maximum gyroscopic couple is given by:

$$2 * I_p * \omega_1 * \omega_2$$

Where:

- $I_p$  = polar moment of inertia of the propeller ( $\text{kg} \cdot \text{m}^2$ ); and
- $\omega_1$  = propeller rotation speed (rad / sec); and
- $\omega_2$  = rate of pitch or yaw (rad / sec).

The asymmetric flow through the propeller disc is discounted because the propeller diameter is less than 2.74 m as established by AMC 23.371(a). The polar moment of inertia of the propeller is  $0.37 \text{ kg} \cdot \text{m}^2$ . The rate of pitch or yaw is established as 1.0 rad/sec and 2.5 rad/sec respectively, the load factor is 2.5 and the power condition is max continuous power as prescribed in AMC 23.371(a). Therefore, the inertial load is equal to  $2.5 \cdot 24.4 = 61 \text{ daN}$ . The rotation of the propeller at maximum continuous power is  $5500/2.4286 = 2264.6792$ . The gyroscopic couple is:

1. Yaw case:  $2 \cdot 0.37 \cdot 2.5 \cdot (2 \cdot 3.14/60) \cdot 2264.6792 = 69.8276 \text{ daN} \cdot \text{m}$
2. Pitch case:  $2 \cdot 0.37 \cdot 1.0 \cdot (2 \cdot 3.14/60) \cdot 2264.6792 = 27.931 \text{ daN} \cdot \text{m}$