


Flight Loads: DroneVLA aircraft

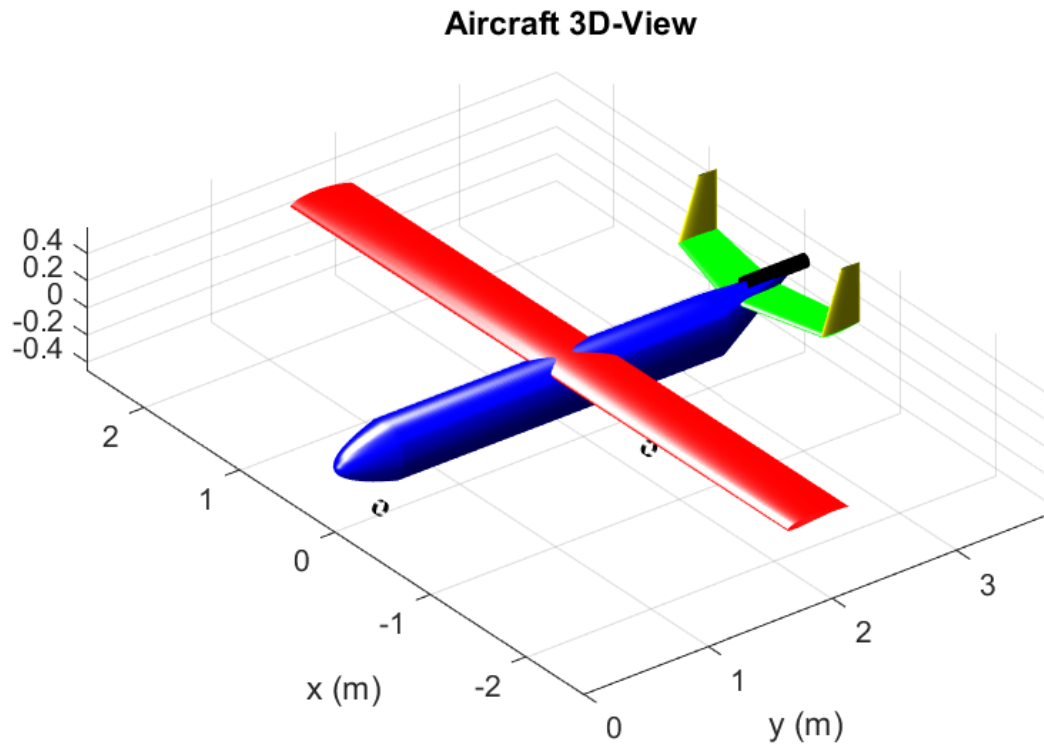

Pierluigi Della Vecchia and Claudio Mirabella

Design of Aircraft and Flight Technologies, DAF

18-Feb-2022

Table of Contents

Chapter 1. Introduction	1
Chapter 2. References	2
Chapter 3. List of Abbreviations	3
Chapter 4. Aircraft data	4
4.1. Geometry	4
4.2. Masses and inertia	8
4.3. Aerodynamic	9
Chapter 5. Design Airspeeds	11
5.1. Maximum speed in level flight V_H	11
5.2. Stall speeds V_S, V_{S0}, V_{S1}	11
5.3. Design manoeuvring speed V_A	11
5.4. Flaps maximum operating speed V_F	12
5.5. Flaps maximum extension speed V_{FE}	12
5.6. Design cruising speed V_C	12
5.7. Design dive speed V_D	12
5.8. Demonstrated dive speed V_{DF}	12
5.9. Never exceed speed V_{NE}	13
5.10. Design Airspeeds summary	13
Chapter 6. Altitude	14
Chapter 7. Manoeuvring and Gust load factors n	15
7.1. Gust envelope	15
Chapter 8. V-n Envelope	18
Chapter 9. Loads on the aeroplane	20
9.1. Reference axes and sign convention	20
9.1.1. Sign conventions and symbols	21
9.2. Symmetrical flight conditions	21
9.3. Aerodynamic centre	22
9.4. Pitching moment of the wing-body	22
9.5. Wing airloads	24
9.6. Complete aircraft balancing loads	25
Chapter 10. Loads on the wing	26
10.1. Influence of the fuselage	26
10.2. Forces and moments acting on the wings	26
10.2.1. SpanWise Airloads Distribution	26
10.2.2. Normal and parallel component	28
10.2.3. Shear, Bending and Torsion	29
10.2.4. Critical load condition	31
10.3. Unsymmetrical loads	34
10.3.1. Rolling condition	34
10.3.2. Effect of aileron displacement on the wing torsion	37
Chapter 11. Loads on the horizontal tail	40
11.1. Balancing loads	40
11.2. Manoeuvring loads	41

11.2.1. Unchecked manoeuvre	41
11.2.2. Checked manoeuvre	43
11.2.3. Gust loads	43
11.3. Horizontal tail loads summary	44
11.4. Unsymmetrical loads	44
Chapter 12. Loads on the vertical tail	45
12.1. Manoeuvring load	45
12.1.1. CSVLA 441(a)(1)	45
12.1.2. CSVLA 441(a)(2)	46
12.1.3. CSVLA 441(a)(3)	46
12.2. Manoeuvring and gust envelope	46
12.3. Vertical tail loads summary	47
12.3.1. Critical manoeuvring loads	47
12.3.2. Critical gust loads	47
12.4. Combined loads	48
Chapter 13. Loads on the wing flaps	49
13.1. Manoeuvring load	49
13.1.1. Takeoff	49
13.1.2. Landing	51
13.1.3. Summary of flaps load	53
Chapter 14. Loads on the control surfaces	55
14.1. Ailerons	55
14.2. Elevator	56
14.3. Rudder	57
Chapter 15. Power plant	59
15.1. Engine torque	61
15.2. Side load on engine mount	61
15.3. Inertia load on engine mount	61
15.4. Gyroscopic loads	61

List of Figures

Figure 4.1. Lift, Drag and pitching moment coefficient of the 3D wing-body configuration.	9
Figure 7.1. V-n diagram	16
Figure 7.2. Gust diagram	17
Figure 8.1. Maneuver and Gust load factors diagram	18
Figure 9.1. Reference axis	20
Figure 9.2. Simplified equilibrium of the aircraft	21
Figure 9.3. Wing-body pitching moment coefficient.	23
Figure 9.4. Wing airloads	23
Figure 9.5. Balancing loads	24
Figure 9.6. Aircraft 3D sideview.	25
Figure 10.1. Wing, top view.	26
Figure 10.2. Wing lift coefficient spanwise distribution	27
Figure 10.3. Wing drag coefficient spanwise distribution	27
Figure 10.4. Wing pitching moment coefficient ($0.25m_{ac}$) spanwise distribution	28
Figure 10.5. Normal and axial forces decomposition.	28
Figure 10.6. Shear, Bending and Torsion due to airloads - POINT A.	29
Figure 10.7. Shear, Bending and Torsion due to airloads - POINT C.	30
Figure 10.8. Shear, Bending and Torsion due to airloads - POINT D	30
Figure 10.9. Shear comparison	32
Figure 10.10. Bending comparison	33
Figure 10.11. Torsion comparison	33
Figure 10.12. Pitching moment coefficient - POINT A.	35
Figure 10.13. Pitching moment coefficient - POINT C	36
Figure 10.14. Pitching moment coefficient - POINT D	36
Figure 10.15. Torsion distribution full loads - POINT A.	38
Figure 10.16. Torsion distribution full loads - POINT C	38
Figure 10.17. Torsion distribution full loads - POINT D.	39
Figure 11.1. Balancing loads	41
Figure 12.1. Vertical fin, side view.	45
Figure 12.2. Combined load figurative representation.	48
Figure 13.1. Flaps V-n diagram. Takeoff.	49
Figure 13.2. Flaps gust envelope diagram. Takeoff.	50
Figure 13.3. Flaps final envelope diagram. Takeoff.	50
Figure 13.4. Flaps V-n diagram. Landing.	51
Figure 13.5. Flaps gust envelope diagram. Landing.	52
Figure 13.6. Flaps final envelope diagram. Landing.	52
Figure 13.7. Summary of flaps flight load.	53
Figure 14.1. Aileron, top view.	55
Figure 14.2. Elevator, top view.	56
Figure 14.3. Vertical fin, side view.	57
Figure 15.1. Engine, front view.	59
Figure 15.2. Engine, side view.	59
Figure 15.3. Engine, top view.	60

List of Tables

Table 4.1. Wing parameters.....	4
Table 4.2. Horizontal Tail parameters	5
Table 4.3. Vertical Tail parameters.....	6
Table 4.4. Fuselage parameters	6
Table 4.5. Elevator parameters	6
Table 4.6. Rudder parameters.....	7
Table 4.7. Aileron parameters	7
Table 4.8. Flaps parameters.....	8
Table 4.9. Weight parameters	8
Table 4.10. Aerodynamic reference values.....	9
Table 5.1. Design airspeeds.....	13
Table 6.1. Sea level reference values	14
Table 6.2. Operative reference values	14
Table 6.3. Theoretical ceiling reference values	14
Table 7.1. Gust load factor, different Speeds and Altitude.....	16
Table 8.1. Final envelope points.....	19
Table 9.1. Balance parameters.....	22
Table 9.2. Flight envelope points.	25
Table 10.1. Shear, bending and torsion distribution along the semi-span.	31
Table 10.2. Critical shear, bending and torsion.	32
Table 10.3. Unsymmetrical flight conditions. Pitching moment at various flight conditions.	34
Table 10.4. Unsymmetrical flight conditions. Full and partial torsion at various flight conditions.	37
Table 11.1. Unchecked manoeuvre. Pitch down case calculations.....	42
Table 11.2. Unchecked manoeuvre. Pitch up case calculations.....	43
Table 13.1. Flaps envelope points summary at takeoff.....	53
Table 13.2. Flaps envelope points summary at landing.....	53
Table 14.1. Aileron. Hinge moments coefficients.	55
Table 14.2. Elevator. Hinge moments coefficients.	56
Table 14.3. Rudder. Hinge moments coefficients.....	57

Chapter 1. Introduction

This document defines the SUBPART C - Structure - Flight Loads of the:DroneVLA. The boundaries of the flight envelope will be defined within this document. All speeds are calibrated airspeeds (CAS) (requirement 4.4 [1]) and given in knots if not stated otherwise. All other units used are metric (SI units). The weights are given in mass units (kg) but the formulas require force units as input, therefore these are calculated in place wherever they are used. Note: The speeds defined within this document should be used for the placards, speed markings, aeroplane flight manual (limitations), load calculations and need to be verified by flight test.

Chapter 2. References

1. ASTM F2245-12d," ASTM."ASTM F2245-12d, ASTM.
2. ABCD-FL-57-00 Wing Load Calculation, EASA.
3. ISO 2533:1975, International Standardization Organization, 1975.
4. CS-LSA Certification Specifications and Acceptable Means of Compliance, Amnd.1 29.Jul.2013, EASA, 2013.
5. "ABCD-FTR-01-00 Flight Test Report," EASA.
6. L. Smith, "NACA technical note 1945, 'Aerodynamic characteristics of 15 NACA airfoil sections at seven Reynolds numbers from 0.7×10^6 to 9×10^6 ," 1949.
7. ABCD-WB-08-00 Weight and Balance Report, EASA.
8. Schrenk, Technical Memorandum 948 - A SIMPLE APPROXIMATION METHOD FOR OBTAINING THE SPANWISE LIFT DISTRIBUTION NACA, 1940
9. NACA Report No.824, Summary of Airfoil Data, NACA, 1945
10. Report 751 - The Mean Aerodynamic Chord and the Aerodynamic Center of a Tapered Wing, NACA, 1942.

HERE BELOW AN EXAMPLE OF REFERENCES TO BE EDITED

Chapter 3. List of Abbreviations

- **c.g.** = centre of gravity;
- **l.e.** = leading edge;
- **i.s.a.** = international standard atmosphere;
- **keas** = knots equivalent speed;
- **mtow** = maximum takeoff weight;
- **m.a.c.** = mean aerodynamic chord;
- α = angle of attack of the wing;
- α_i = local angle of attack of the station i ;
- α_0 = wing zero lift angle of attack;
- C_{L_α} = lift curve slope [1/deg]
- AR = wing aspect ratio
- b = wing span
- b = wing span

ADD HERE list of abbreviations as a formatted table....to be created

Chapter 4. Aircraft data

The aircraft geometrical, masses, inertial and aerodynamic data, useful for flight loads estimation are summarized in this chapter.

4.1. Geometry

The aircraft reference geometrical characteristics are summarized in the following tables.[Wing parameters](#)

Table 4.1. Wing parameters

Wing parameters	Value	Measure unit
b	5.2	m
S	2.589	m ²
AR	10.446	-
taper	NaN	-
sweep_first	0	deg
sweep_second	0	deg
sweep_third	0	deg
sweep_location	0	percentage
secondary_sweep_location	0	percentage
croot	0.498	m
ctip	0.498	m
xle	1.638	m
yle	0	m
zle	0.165	m
xtip_le	NaN	% fuselage length
dihedral_first	0	deg
dihedral_second	0	deg
dihedral_third	0	deg
mac	0.498	m
xmac	NaN	% fuselage length
ymac	NaN	% semispan
ypos	NaN	% semispan
zpos	NaN	% fuselage diameter
camberloc	0.15	percentage
thickchord	0.18	percentage
type	Rectangular	flag
twist_angle_first	0	deg

Wing parameters	Value	Measure unit
twist_angle_second	0	deg
twist_angle_third	0	deg
twist_angle_fourth	0	deg
sweep	0	deg
dihedral	0	deg
chord_kink_one	0.498	m
chord_kink_two	0.498	m
panel_span1	0.33	Semispan percentage
panel_span2	0.33	Semispan percentage
panel_span3	0.33	Semispan percentage
twist_angle	0	deg
mgc	0.49788	m
taper_ratio	1	Non dimensional

Table 4.2. Horizontal Tail parameters

Horizontal parameters	Value	Measure unit
S	0.529	m ²
l	1.492	m
camber	0	percentage
camberloc	NaN	percentage
thickchord	0.12	percentage
twist	0	deg
twistloc	0.25	percentage
xloc0	1.49	m
xloc	3.128	m
yloc	0	m
zloc	0.15	m
xrot	0	m
yrot	0	m
zrot	0	m
b	1.496	m
ctip	0.3136	m
croot	0.3929	m
sweep	15	deg
sweeploc	0	percentage
secsweeploc	1	percentage
dihedral	0	deg

Horizontal parameters	Value	Measure unit
location_of_camber	0.2	percentage
secondary_sweep_location	1	percentage

Table 4.3. Vertical Tail parameters

Vertical parameters	Value	Measure unit
xle	0.95	fus length percentage
croot	0.3136	m
ctip	0.15347	m
xtip_le	1	fus length percentage
b	0.4375	m
zpos	1	fus diameter percentage
S	0.1022	m ²
chord	0.3136	m
sweep	20	deg
sweeploc	0	percentage
secsweeploc	1	percentage
dihedral	0	deg
twist	0	deg
twistloc	0	percentage
MAC	0.23354	m
l_vt	1.65	m
empennage_flag	Double fin	NaN

Table 4.4. Fuselage parameters

Fuselage parameters	Value	Measure unit
length	3.64	Non dimensional
diameter	0.42	Non dimensional
Non_dim_radius_of_gyration	0.34	Non dimensional
Radius_of_gyration	NaN	m

Table 4.5. Elevator parameters

Elevator parameters	Value	Measure unit
S	0.14749	m ²
chord	0.12324	m
chord_ratio_ce_c	0.35	Non dimensional
overhang	0.12	Non dimensional
span_ratio	0.8	Non dimensional

Elevator parameters	Value	Measure unit
S_hinge	0.126	m ²
eta_inner	0.1	percentage
eta_outer	0.9	percentage
cf_c_inner	0.3	percentage
cf_c_outer	0.3	percentage
y_inner	0.0748	m
y_outer	0.6732	m
cf	0.10845	m
moment_arm	0.016021	m
ce_c_root	0.34	Non dimensional
ce_c_tip	0.36	Non dimensional

Table 4.6. Rudder parameters

Rudder parameters	Value	Measure unit
S	0.019063	m ²
chord	0.10893	m
chord_ratio_cf_c	0.35	Non dimensional
overhang	0.12	Non dimensional
span_ratio	0.8	Non dimensional
cr_c_root	0.45	Non dimensional
cr_c_tip	0.5	Non dimensional
eta_inner	0.1	Non dimensional
eta_outer	0.9	Non dimensional
croot	0.14112	m
ctip	0.076736	m
y_inner	0.021875	m
y_outer	0.19688	m
moment_arm	0.014161	m

Table 4.7. Aileron parameters

Aileron parameters	Value	Measure unit
S	0.14018	m ²
b	0.908	m
ca	0.15438	m
cb	0.019	m
y_inner	1.63	m
y_outer	2.538	m

Aileron parameters	Value	Measure unit
eta_inner	0.627	Non dimensional
eta_outer	0.976	Non dimensional
ca_c_root	0.31	Non dimensional
ca_c_tip	0.31	Non dimensional
croot	0.15438	m
ctip	0.15438	m
cf	0.13538	m
moment_arm	0.016928	m

Table 4.8. Flaps parameters

Flaps parameters	Value	Measure unit
S	0.21073	m ²
b	1.365	m
ca	NaN	m
cb	NaN	m
y_inner	0.26	m
y_outer	1.625	m
eta_inner	0.1	Non dimensional
eta_outer	0.625	Non dimensional
cf_c_root	0.31	Non dimensional
cf_c_tip	0.31	Non dimensional
croot	0.15438	m
ctip	0.15438	m
cf	0.15438	m

4.2. Masses and inertia

The aircraft reference masses and inertia are summarized in this subsection

The Aircraft masses and inertia are summarized in Table: [Weight parameters](#)

Table 4.9. Weight parameters

Weight	Value	Measure unit
W_maxTakeOff	100	kg
W_OperativeEmpty	NaN	kg
W_Payload	NaN	kg
W_Fuel	NaN	kg
W_Crew	NaN	kg
IY	100	kg * m ²

TABLE TO BE CHECKED!!!

4.3. Aerodynamic

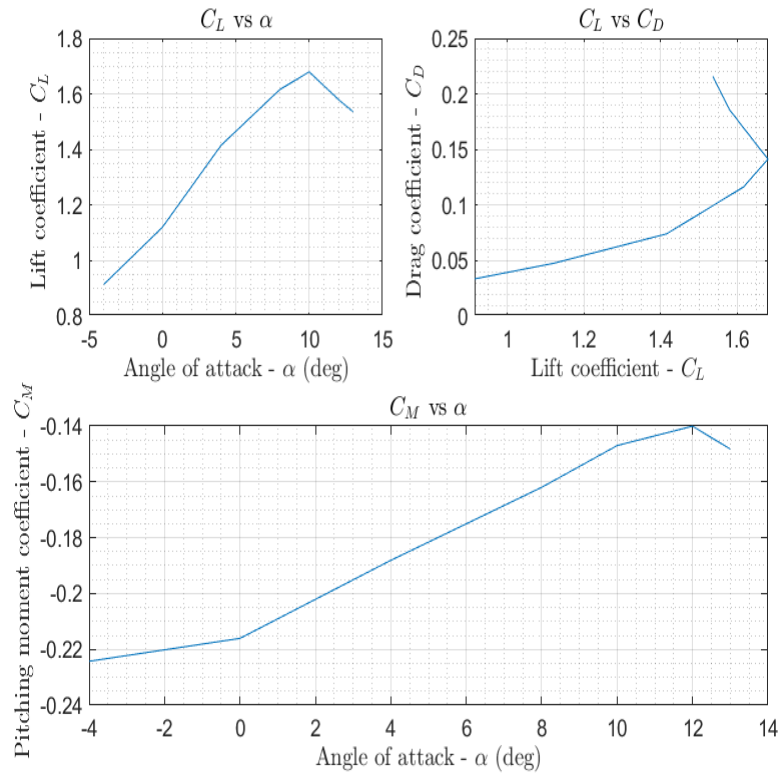


Figure 4.1. Lift, Drag and pitching moment coefficient of the 3D wing-body configuration.

The aircraft reference aerodynamic is shown in figure: [Wing-Body reference Aerodynamics](#)

Table 4.10. Aerodynamic reference values.

Quantity	Value	Units
CLMAX	1.588	Non dimensional
CLMAX inverted	-1	Non dimensional
CLMAX takeoff	1.9	Non dimensional
CLMAX landing	2.1	Non dimensional
CL0 wb	0.822	Non dimensional
CLALFA wb (rad)	5.234	1/rad
CLALFA wb (deg)	0.0913	1/deg
CD0	0.05	Non dimensional
CD wb landing gear	0.004	Non dimensional
CM0 wb	-0.2615	Non dimensional
CM wb landing gear	0	Non dimensional
CMCL wb	0.066	Non dimensional

Chapter 4. Aircraft data

Quantity	Value	Units
Alfa wb zero lift	-9.003	deg
e	0.8	Non dimensional

Chapter 5. Design Airspeeds

This chapter defines the operating and design airspeed as required for certification CSVLA.

5.1. Maximum speed in level flight VH

Data not yet available...to be added Available and Required Power.

5.2. Stall speeds VS, VS0, VS1

These speeds will be verified by flight test according to certification requirements. In order to calculate the stall speed, the maximum lift coefficient of the aeroplane as a whole is determined first. The maximum lift coefficient of the aeroplane has been calculated from high fidelity CFD. In landing configuration computed with full flap, $CL_{MAX\text{ landing}} = 2.1$ in take-off configuration leading to $CL_{MAX\text{ takeoff}} = 1.9$, and in clean configuration, leading to $CL_{MAX\text{ clean}} = 1.5883$, also considering the horizontal tail balancing force.

Flaps retracted(clean configuration):

$$V_S = \sqrt{\frac{2 W_{MTOM}}{\rho_0 C_{L_{MAX\text{Clean}}} S}} = \sqrt{\frac{2 * 981}{1.225 * 1.5883 * 2.589}} = 19.7322 m/s$$

Flaps extended(Landing configuration):

$$V_{S_0} = \sqrt{\frac{2 W_{MTOM}}{\rho_0 C_{L_{MAX\text{Landing}}} S}} = \sqrt{\frac{2 * 981}{1.225 * 2.1 * 2.589}} = 17.1606 m/s$$

Flaps extended(Take-off configuration):

$$V_{S_1} = \sqrt{\frac{2 W_{MTOM}}{\rho_0 C_{L_{MAX\text{Takeoff}}} S}} = \sqrt{\frac{2 * 981}{1.225 * 1.9 * 2.589}} = 18.0412 m/s$$

Add here comments if necessary

Note: These speeds are estimates. The methods for the estimation can be various. It is important that these estimations are as precise as possible. Flight tests will be used to validate the stall speeds. In case the flight tests show different values, this might have an impact on the speeds used for design and ultimately might impair the compliance to the CSVLA

5.3. Design manoeuvring speed VA

According to CSVLA 335, the manoeuvring speed V_A cannot be less than:

$$V_A \geq V_S \sqrt{n_{max}} = 19.7322 * \sqrt{3.8} = 38.4651 m/s$$

Add here comments if necessary

5.4. Flaps maximum operating speed VF

According to CSVLA 345, such speed shall be not less than the greater of $1.4 \cdot V_S$ and $1.8 \cdot V_{S0}$.

The speed has been selected as the greater between $1.4 V_S = 27.625 \text{ m/s}$ and $1.8 V_{SF} = 24.0248 \text{ m/s}$, where V_{SF} is the computed stalling speed with flaps fully extended at the design weight.

The flaps operating speeds is:

$$V_F = 27.625 \text{ m/s}$$

5.5. Flaps maximum extension speed VFE

On this aeroplane the maximum flap extension speed is identical to the flap operating speed VF. This speed is the maximum speed for flaps in take-off and landing configuration.

$$V_{FE} = 27.625 \text{ m/s}$$

5.6. Design cruising speed VC

According to CSVLA 335, VC (in m/s) may not be less than

$$2.4 \sqrt{\frac{Mg}{S}} \left(V_C(kt) = 4.7 \sqrt{\frac{Mg}{S}} \right) \rightarrow 2.4 * \sqrt{\frac{100 * 9.8066}{2.589}} = 46.7095 \text{ m/s}$$

where M/S is the wing loading in kg/m^2 and g is the acceleration due to gravity in m/s^2 .

VC need not be more than $0.9 \cdot V_H$ at sea level.

V_H must be available. Otherwise previous value is considered!!!

$$V_C = 46.7095 \text{ m/s}$$

5.7. Design dive speed VD

According to CSVLA 335

(1) VD may not be less than $1.25 \cdot V_C$; and (2) with V_{Cmin} , the required minimum design cruising speed, VD may not be less than $1.40 \cdot V_{Cmin}$.

$$(1) 1.25 \cdot V_C = 58.3869 \text{ m/s}$$

$$(2) 1.4 V_{Cmin} = 40 \text{ m/s}$$

$$V_C = 1.25 * 46.7095 = 58.3869 \text{ m/s}$$

5.8. Demonstrated dive speed VDF

VDF is not a design airspeeds for this category.

5.9. Never exceed speed VNE

VNE is not a design airspeeds. According to CSVLA 1505, it must be established so that it not less than 0.9 times the minimum value of VD allowed under CSVLA 335 and not more than the lesser of $0.9 \cdot VD$ established under CSVLA 335 or 0.9 times the maximum speed shown under CSVLA 251.

5.10. Design Airspeeds summary

Design airspeeds summary is resumed in Table: [Design airspeeds](#)

Table 5.1. Design airspeeds

Design airspeeds	Value	Measure unit
VS	19.73	m/s
VS0	17.16	m/s
VS1	18.04	m/s
VA	38.47	m/s
VC	46.71	m/s
VD	58.39	m/s
VE	58.39	m/s
VG	30.46	m/s
VS_inv	24.87	m/s
VF	30.89	m/s

Chapter 6. Altitude

The maximum permissible operational altitude for the aircraft is 1300m. Despite the CSVLA requirements do not require to account for the effects of altitude, such effects have been considered up to 1300m. In fact the gust load factor have been calculated at such altitude. This is considered acceptable since it covers the operational range within which the aeroplane will fly most of the time.

(Note: the CSVLA requirement does not require to account for the effects of altitude. Calculating the loads at sea level would be acceptable. In this case, the choice to consider such effect up to 1300m is a decision of a designer, which would be accepted by the team.)

TABLE TO BE CHECKED!!!

Table 6.1. Sea level reference values

$\rho(\text{kg/m}^3)$	$h(\text{m})$	$T(\text{Kelvin})$	$p(\text{Pa})$	$a(\text{m/s})$
1.225	0	288.1	101325.0	340.3

Table 6.2. Operative reference values

$\rho(\text{kg/m}^3)$	$h(\text{m})$	$T(\text{Kelvin})$	$p(\text{Pa})$	$a(\text{m/s})$
1.079	1300	279.7	86651.9	335.3

Table 6.3. Theoretical ceiling reference values

$\rho(\text{kg/m}^3)$	$h(\text{m})$	$T(\text{Kelvin})$	$p(\text{Pa})$	$a(\text{m/s})$
0.8632	3500	265.4	65764.1	326.6

Chapter 7. Manoeuvring and Gust load factors n

According to CSVLA 337(a) , the positive limit manoeuvring load factor n may not be less than 3.8, while according to CSVLA 337(b) , the negative limit manoeuvring load factor may not be less than -1.5.

The following value will be considered:

1. $n_{max} = 3.8$
2. $n_{min} = -1.5$

7.1. Gust envelope

Gust load factors need to be considered because they can exceed the prescribed maximum load factors at different weights and altitudes. Since gust loads depend on air density and aircraft mass they will be calculated for Compliance with the flight load requirements of this subpart to show:

(1) At each critical altitude within the range in which the aeroplane may be expected to operate from sea level up to maximum operative altitude equal to: 1300 m.

(2) At each practicable combination of weight and disposable load within the operating limitations specified in the Flight Manual according to requirement CSVLA 321 and fully extended (requirement CSVLA 345(b) at VF).

The calculation is based on CSVLA 341 . To calculate the gust loads at altitudes other than at sea level the following equation is altered to include the density at any altitude.

$$n = 1 + \frac{1/2 \rho_0 V a K_g U_{de}}{Mg/S}$$

where:

- $K_g = \frac{0.88\mu_g}{5.3 + \mu_g}$
- $\mu_g = \frac{2(M/S)}{\rho \bar{C} a}$
- U_{de} = derived gust velocities referred to in CSVLA 333(c) (m/s)
- ρ_0 = density of air at sea level (kg/m³)
- ρ = density of air (kg/m³)
- M/S = wing loading (kg/m²)
- \bar{C} = mean geometric chord (m); g = acceleration due to gravity (m/s²);
- a = slope of the aeroplane normal force coefficient curve C_N per radian

Since the gust loads on the wing and tail have been chosen to be treated together, a is the slope of the lift-curve of the aeroplane is equal to $a = 5.2341/\text{rad}$ and $0.09131/\text{deg}$.

The gust speed at VC is equal to: 15.24m/s

The gust speed at VD is equal to: 7.62m/s

TABLE TO BE CHECKED!!!

Table 7.1. Gust load factor, different Speeds and Altitude

ID	V(m/s)	M(kg)	M/S(kg/m ²)	Altitude(m)	rho(kg/m ³)	mug	Kg	Ude(m/s)	n
A	45.59	100	38.62	1300	1.079	27.47	0.7377	15.24	5.337
C	46.71	100	38.62	1300	1.079	27.47	0.7377	15.24	5.444
D	58.39	100	38.62	1300	1.079	27.47	0.7377	7.62	3.778
G	30.46	100	38.62	1300	1.079	27.47	0.7377	15.24	-1.5
F	46.71	100	38.62	1300	1.079	27.47	0.7377	15.24	-3.444
E	58.39	100	38.62	1300	1.079	27.47	0.7377	7.62	-1.778

(Note: the applicant should provide the method for the calculation of the slope of the lift-curve of the aeroplane)

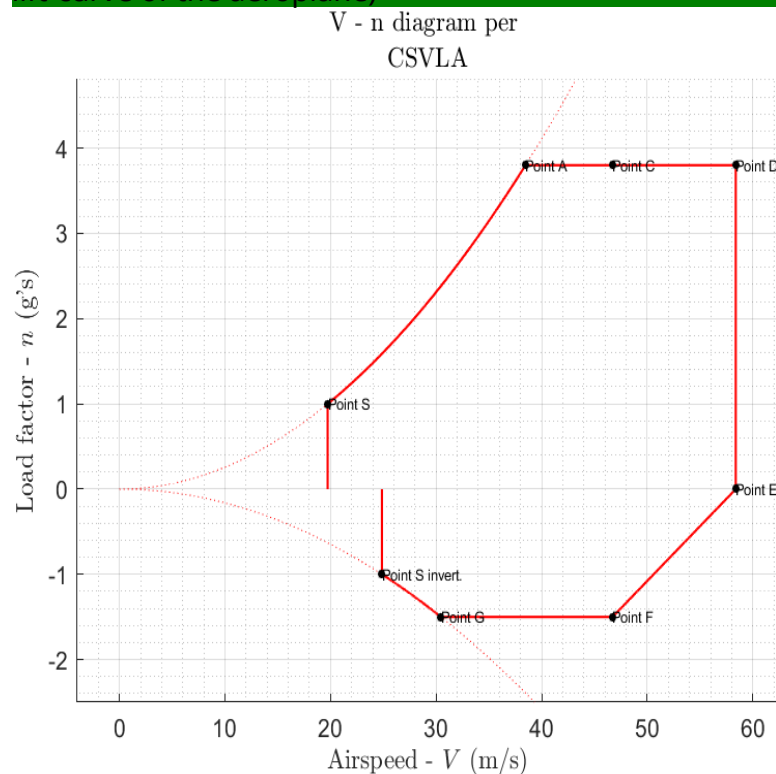


Figure 7.1. V-n diagram

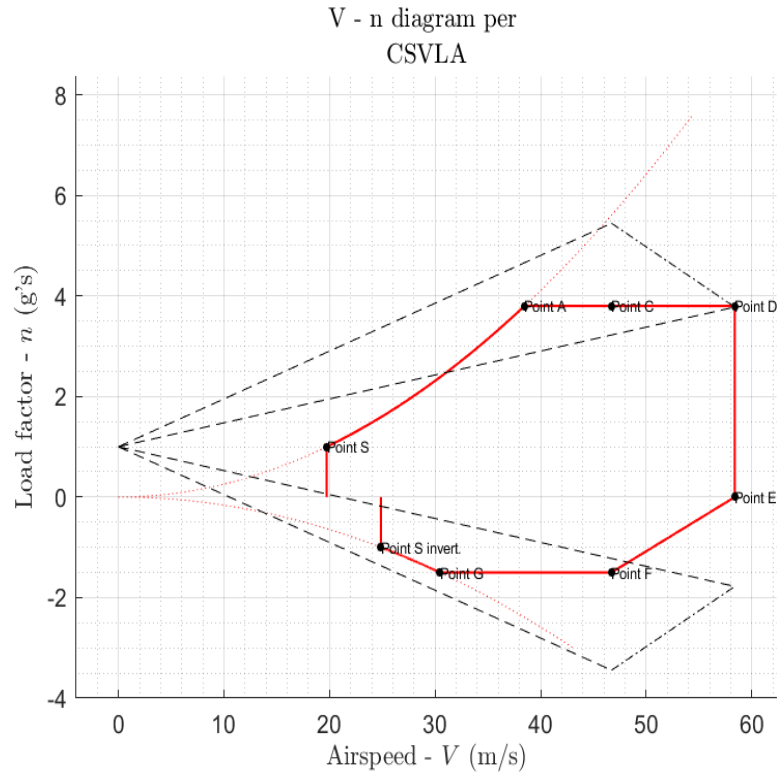


Figure 7.2. Gust diagram

In the last figure, it is possible to observe the gust load factor varying linearly along the flight envelope airspeed; the maximum and minimum gust load factor are, respectively, 5.444 and -3.444.

Chapter 8. V-n Envelope

The final flight envelope diagram showed in the above figure was drawn considering limit load factor values related to the maximum wing stress condition. The diagram is referred to sea level density and the airworthiness rules applied are relative to CSVLA. The selected operational altitude is 1300 m. According to CSVLA 321, each critical altitude expected during normal operations and each critical weight and centre of gravity positions has been examined.

(Note: the CSVLA requirement does not impose to take into account for altitude changes. Calculating the loads at sea level would be acceptable.

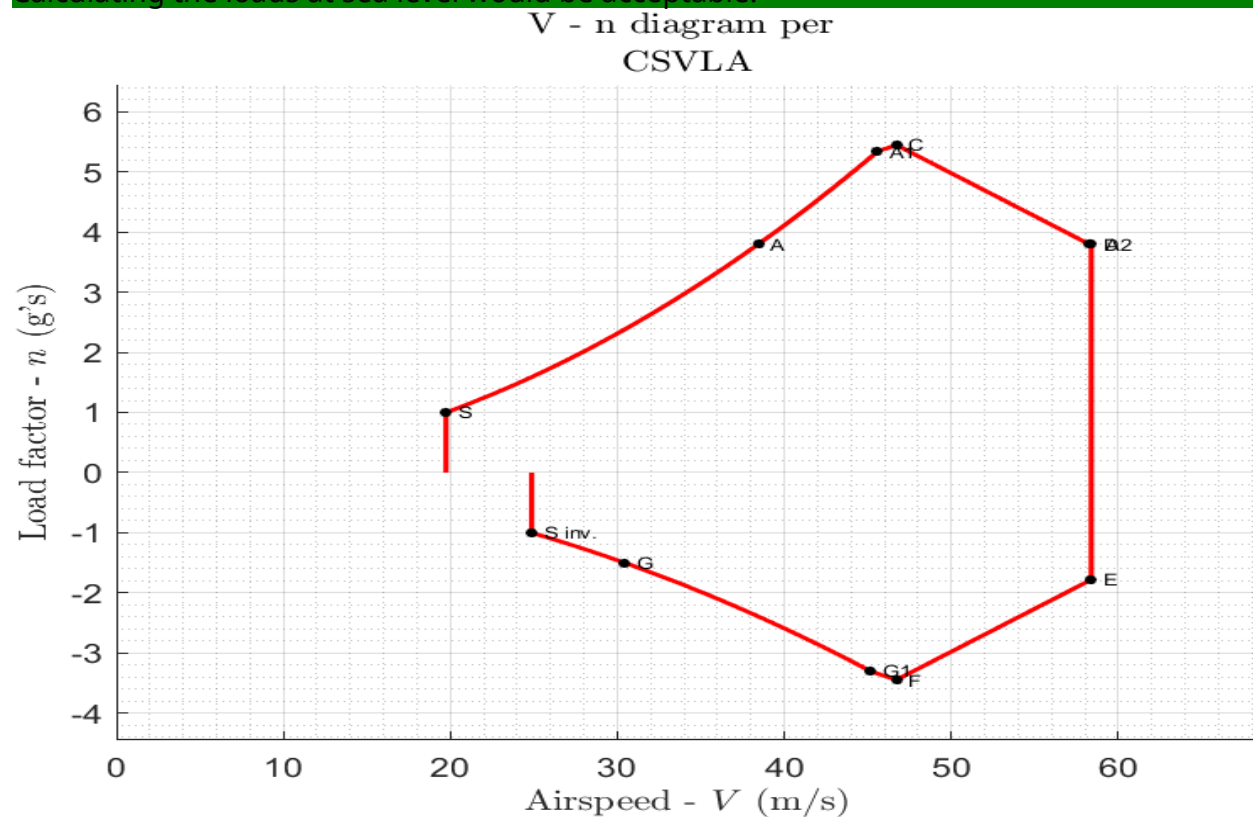


Figure 8.1. Maneuver and Gust load factors diagram

The figure shows the final flight envelope, resulting from superposition of manoeuvring and gust loads, according to CSVLA 333(d), obtaining the limit combined loads diagram. For the calculation of structural design speeds, the stalling speeds V_{s0} and V_{s1} should be taken to be the 1-g stalling speeds in the appropriate flap configuration.

According to CSVLA, the load factor n varies linearly from points at cruise speed V_C (or V_F for inverted flight) to points at dive speed V_D (or E for inverted flight) as shown in figure.

TABLE TO BE CHECKED!!!

Table 8.1. Final envelope points

ID	V(m/s)	n
S	19.73	1
A	45.59	5.337
C	46.71	5.444
D	58.39	3.8
S_inv	24.87	-1
G	30.46	-1.5
F	46.71	-3.444
E	58.39	-1.778

Chapter 9. Loads on the aeroplane

Strength requirements are specified in terms of limit loads (the maximum loads to be expected in service) and ultimate loads (limit loads multiplied by prescribed factors of safety). Unless otherwise provided, prescribed loads are limit loads. Unless otherwise provided, the air, ground, and water loads must be placed in equilibrium with inertia forces, considering each item of mass in the aeroplane. These loads must be distributed to conservatively approximate or closely represent actual conditions.

9.1. Reference axes and sign convention

In the figure is represented the reference frame used to project forces and moment acting on the aircraft structures. The origin is located at the airplane axis of symmetry (x axis) with the y axis passing through the leading edge of the mean aerodynamic chord section of the wing.

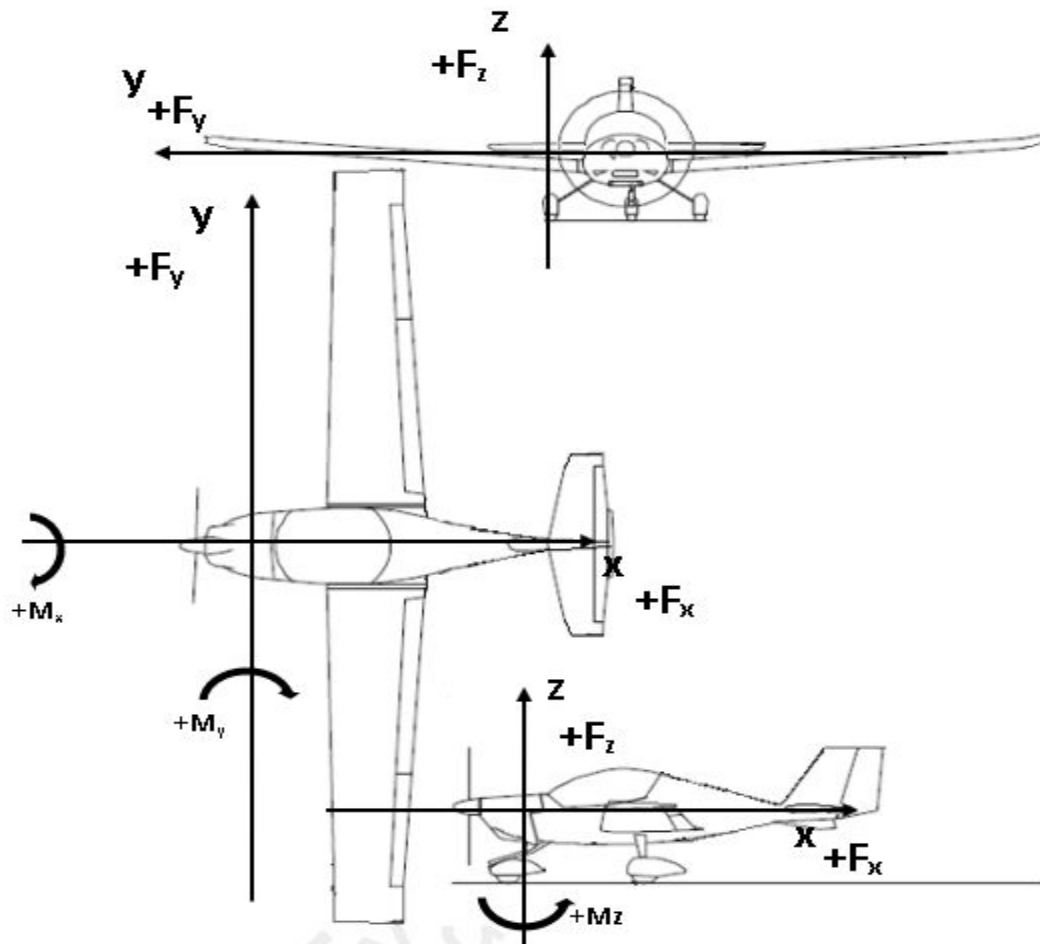


Figure 9.1. Reference axis

9.1.1. Sign conventions and symbols

Sign conventions and symbols used are summarized as follows:

- x = longitudinal axis of the aircraft;
- y = lateral axis of the aircraft;
- z = vertical axis of the aircraft;
- M_x = total rolling moment;
- M_y = total pitching moment;
- M_z = total yawing moment;
- F_x = total axial force;
- F_y = total lateral force;
- F_z = total normal force;

9.2. Symmetrical flight conditions

The external forces and moments acting on the aeroplane in a balanced flight condition have been determined. The simplified scheme in figure is considered. The aeroplane is reduced to the wing and the horizontal tail. The symbols used are:

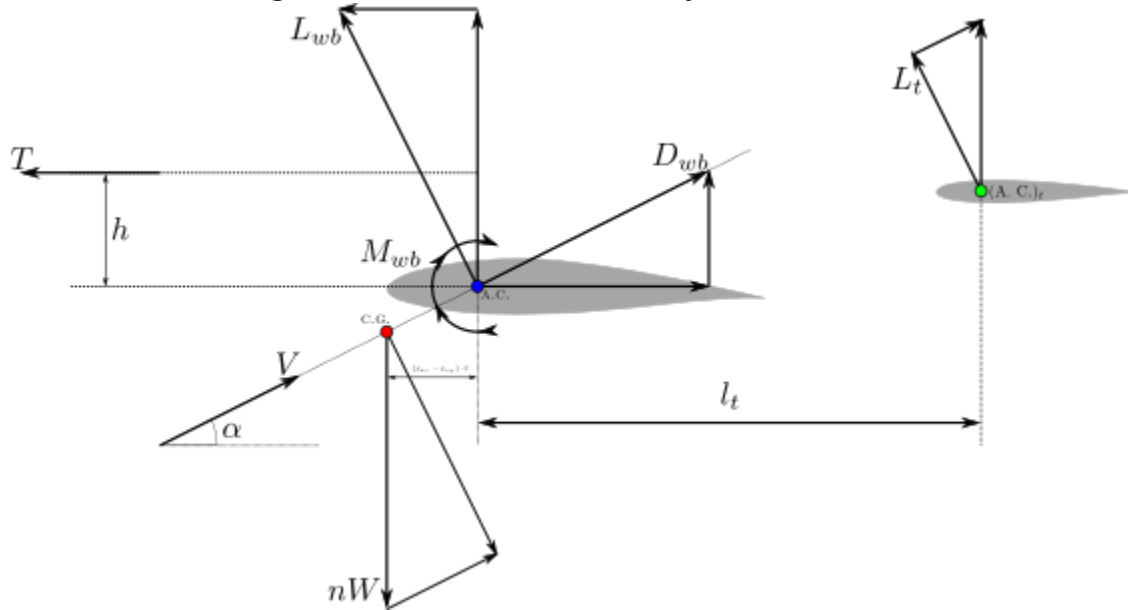


Figure 9.2. Simplified equilibrium of the aircraft

- x_{CG} = distance to aircraft centre of gravity;
- $x_{AC_{f+w}}$ = distance to wing fuselage combination aerodynamic centre;
- $x_{P_{f+w}}$ = distance to wing fuselage combination centre of pressure;
- nW = aircraft total weight force;

- x_{HT} = distance to HT quarter chord line;

Assuming positive forces and moment as depicted in the figures and remembering that equilibrium along x and y axes are automatically fulfilled, it is possible to write the following equilibrium equations:

$$\text{X equilibrium : } T = L_{wb} \cdot \sin \alpha - D_{wb} \cdot \cos \alpha$$

$$\text{Z equilibrium : } L_{wb} \cdot \cos \alpha + D_{wb} \cdot \sin \alpha + \frac{L_t}{\cos \alpha} - nW \cdot \cos \alpha = 0$$

Rotation about Y :

$$\begin{aligned} & [-L_{wb} \cdot \cos \alpha \cdot (x_{AC} - x_{CG}) - L_{wb} \cdot \sin \alpha \cdot z_{CG}] + [D_{wb} \cdot \cos \alpha \cdot z_{CG} - D_{wb} \cdot \sin \alpha \cdot m_{gc} \cdot (x_{AC} - x_{CG})] \\ & + \left[-\frac{L_t}{\cos \alpha} \cdot (l_t + m_{gc} \cdot (x_{AC} - x_{CG})) \right] - T \cdot h + M_{wb} = 0 \end{aligned}$$

Table 9.1. Balance parameters.

Parameter	Value	Unit of measure
xcg	2.884	m
xcg/MAC	0.25	% MAC
xac/MAC	0.25	Non dimensional
xht	1.492	m
zcg	0.33	m
h	0	m
m _{gc}	0.4979	m

9.3. Aerodynamic centre

The aerodynamic centre of the wing-body aircraft was fixed at 25% of the mean aerodynamic chord. This assumption is used in all calculations relative to forces and moments. Also, the maximum takeoff weight of the aircraft has been assumed.

9.4. Pitching moment of the wing-body

The pitching moment coefficient of the wing-body aircraft was determined by high fidelity computational fluidynamics. The results are depicted in the following figure.

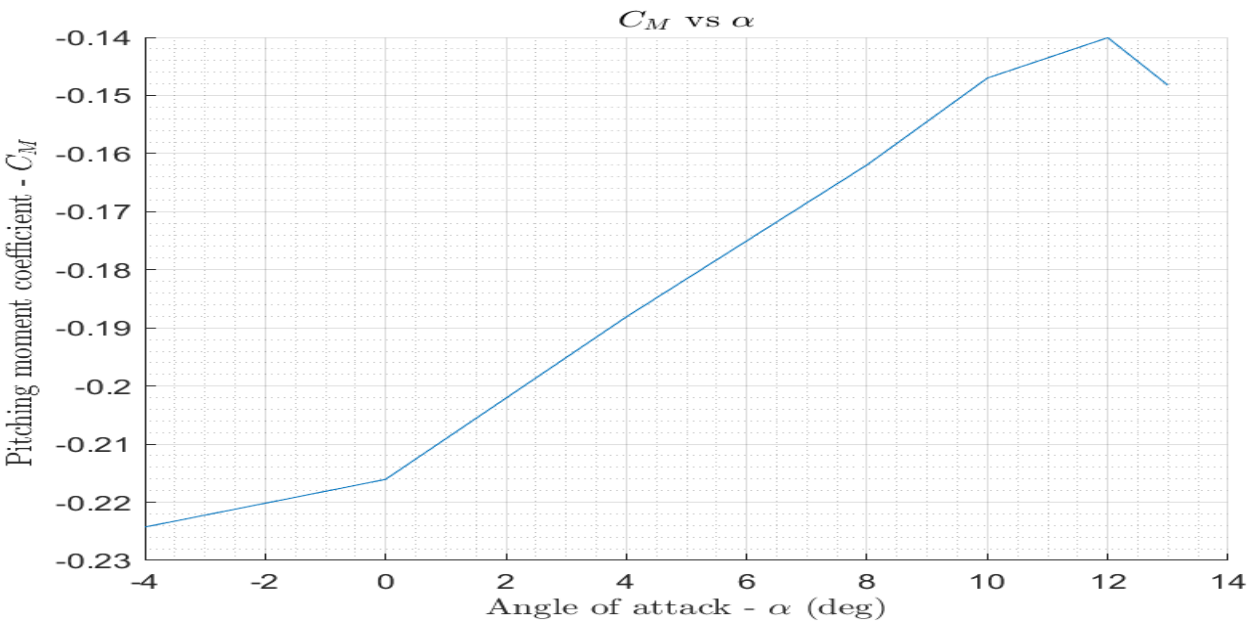


Figure 9.3. Wing-body pitching moment coefficient.

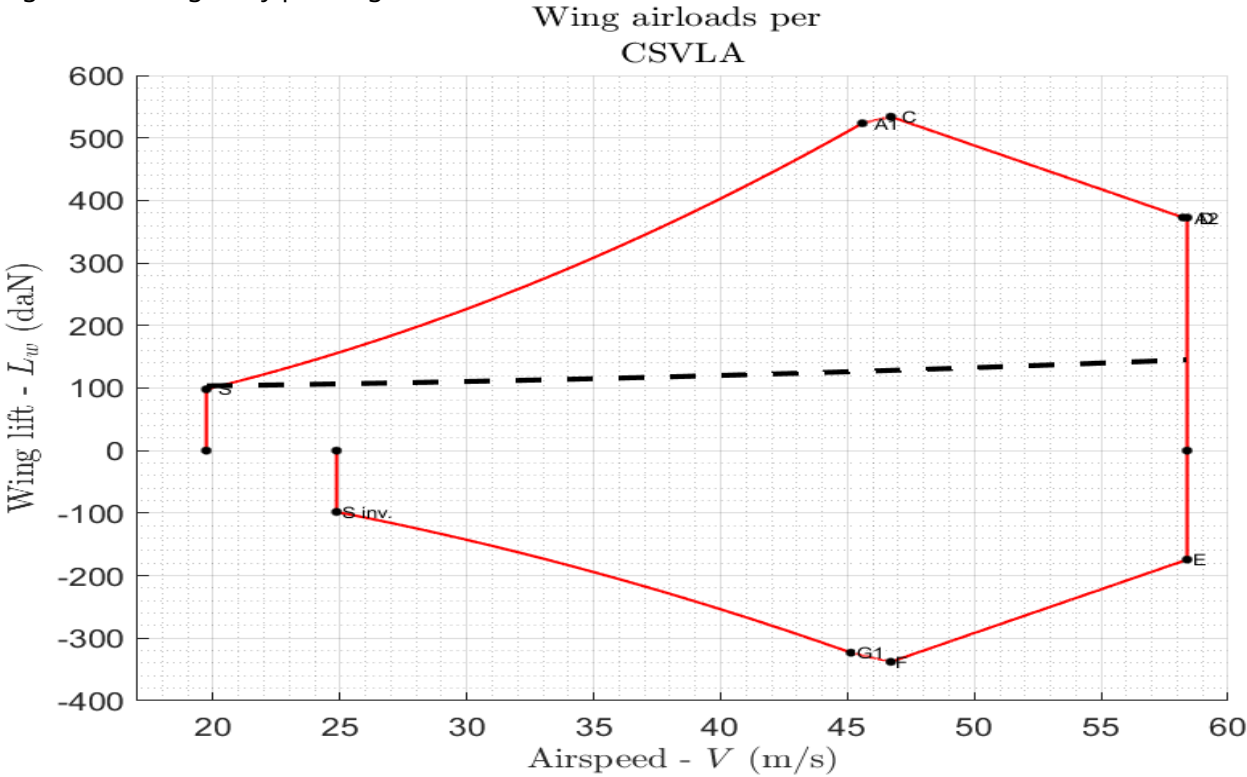


Figure 9.4. Wing airloads

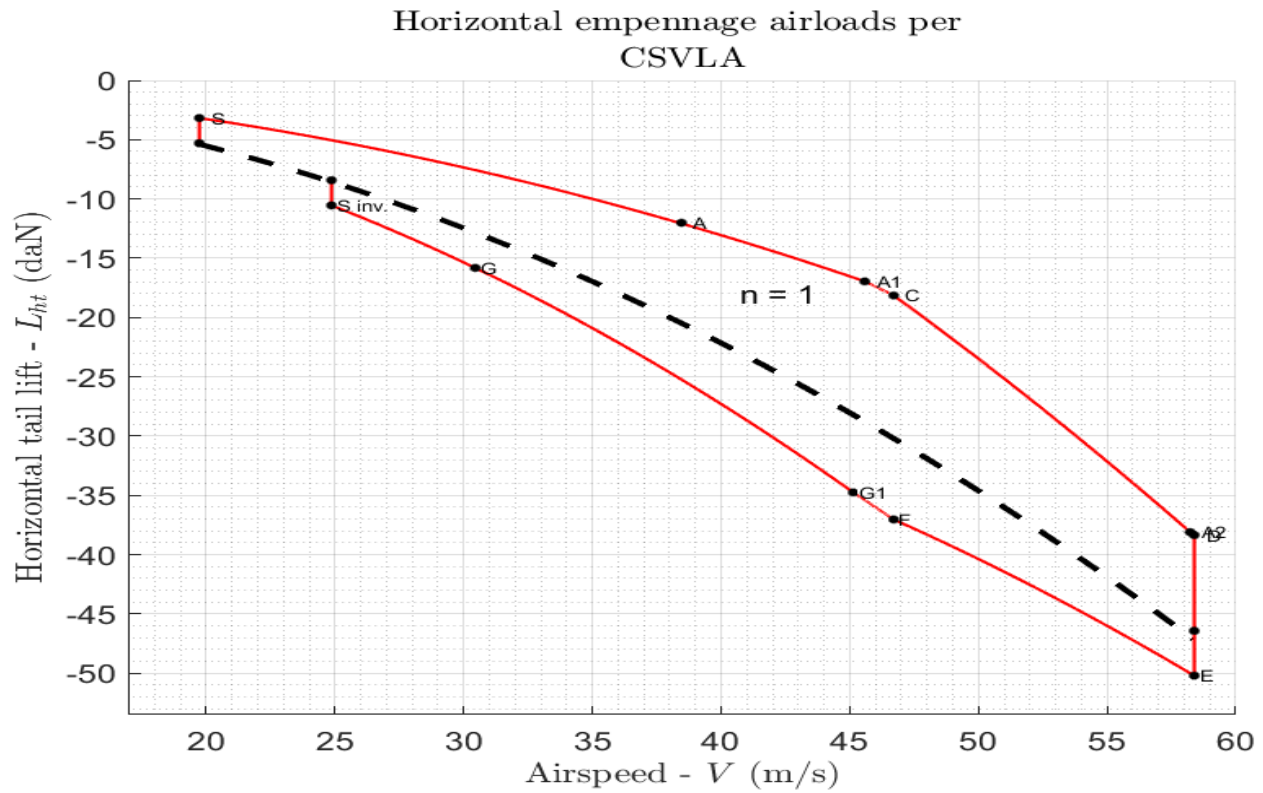


Figure 9.5. Balancing loads

9.5. Wing airloads

Wing airloads are depicted in figure; these are the airloads necessary to size wing structures and they come from the equilibrium equations applied on the full aircraft. Mainly, these loads come from lift, during a symmetric, straight, non-accelerated flight condition, including lift that results from horizontal tail negative lift.

9.6. Complete aircraft balancing loads

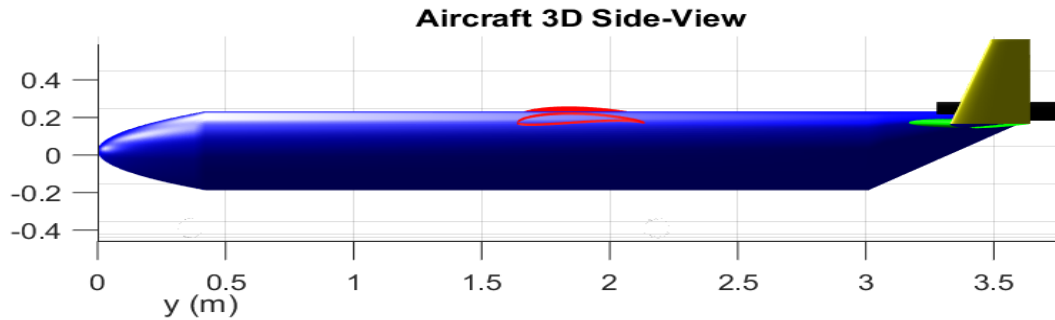


Figure 9.6. Aircraft 3D sideview.

Here, the aircraft balancing loads are collected inside a table. A horizontal surface balancing load is a load necessary to maintain equilibrium in any condition with no pitching acceleration. Determination of the balancing loads is necessary both for the calculation of the wing loads and of the balancing loads acting on the horizontal tail surface itself.

Table 9.2. Flight envelope points.

Point	V (m/s)	n (g's)	alfa (deg)	CL	CL wb	CL tail	L (daN)	L wb (daN)	L tail (daN)
Point S	19.73	1	6.857	1.588	1.64	-0.05145	98.07	101.2	-3.177
Point A	38.47	3.8	6.857	1.588	1.639	-0.05117	372.7	384.7	-12.01
Point C	46.71	5.444	6.113	1.543	1.596	-0.05243	533.9	540.4	-18.14
Point D	58.39	3.8	-7.249	0.6893	0.7603	-0.07093	372.7	411	-38.35
Point Sinv	24.87	-1	-24.69	-1	-0.8925	-0.1075	-98.07	-87.52	-10.55
Point G	30.46	-1.5	-24.69	-1	-0.8925	-0.1075	-147.1	-131.3	-15.82
Point F	46.71	-3.444	-24.31	-0.9762	-0.8692	-0.107	337.8	-300.7	-37.03
Point E	58.39	-1.778	-14.08	-0.3225	-0.2296	-0.09286	174.3	-124.1	-50.2

Chapter 10. Loads on the wing

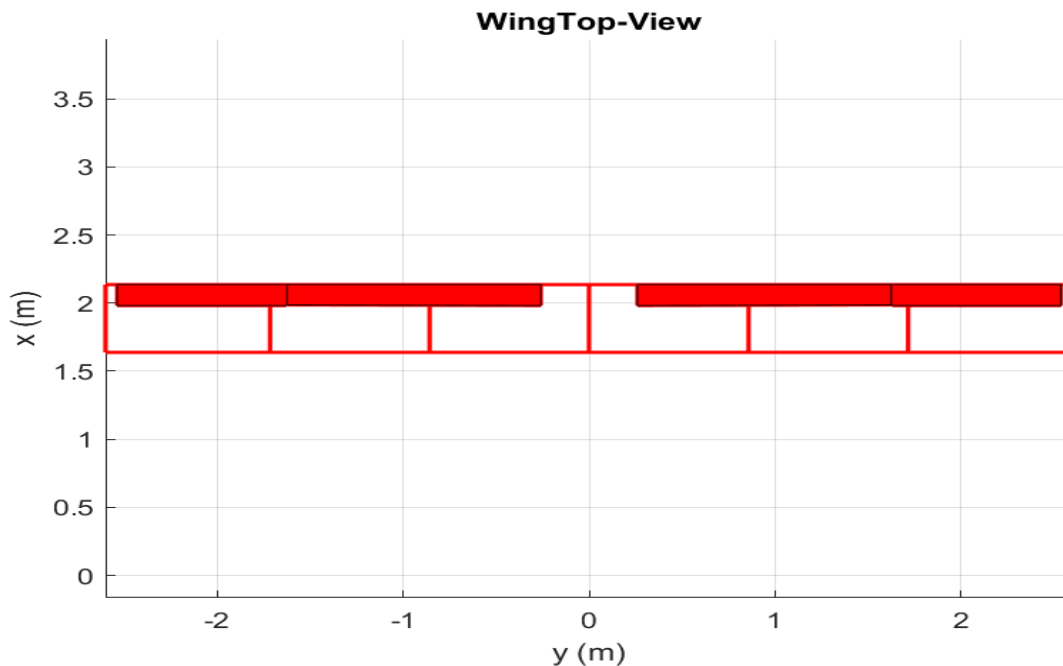


Figure 10.1. Wing, top view.

In this section will be shown all the resulting internal forces acting on the wing structural elements; having calculated lift, drag and pitching moment coefficient distribution on the wing with a panel method and the geometrical chord distribution, it is possible to evaluate normal and shear forces and pitching moment distributions along the wing span.

10.1. Influence of the fuselage

The effects of the fuselage on the wing span lift distribution cause a reduction of lift at stations near the wing root; this lift reduction can be discounted because is often negligible, leading to a more conservative design loads. On the other hand, its influence on the aeroplane equilibrium is accounted for, in particular on the pitching moment distribution.

10.2. Forces and moments acting on the wings

Numerical and graphical results from internal forces and moments calculations will be shown in this section.

10.2.1. SpanWise Airloads Distribution

Spanwise airloads distributions along the wing semi-span are obtained from a panel method; then, an interpolation through all the values of the angle of attack is performed. Results are represented in the following figures.

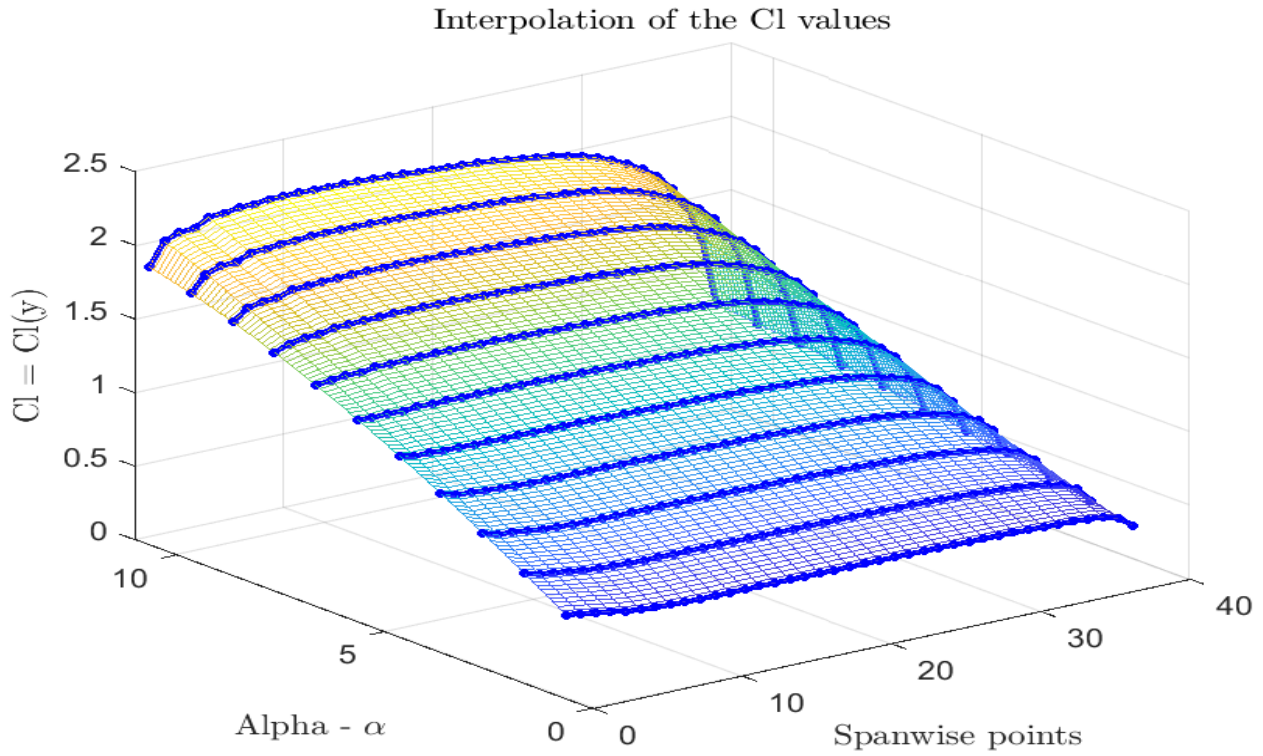


Figure 10.2. Wing lift coefficient spanwise distribution

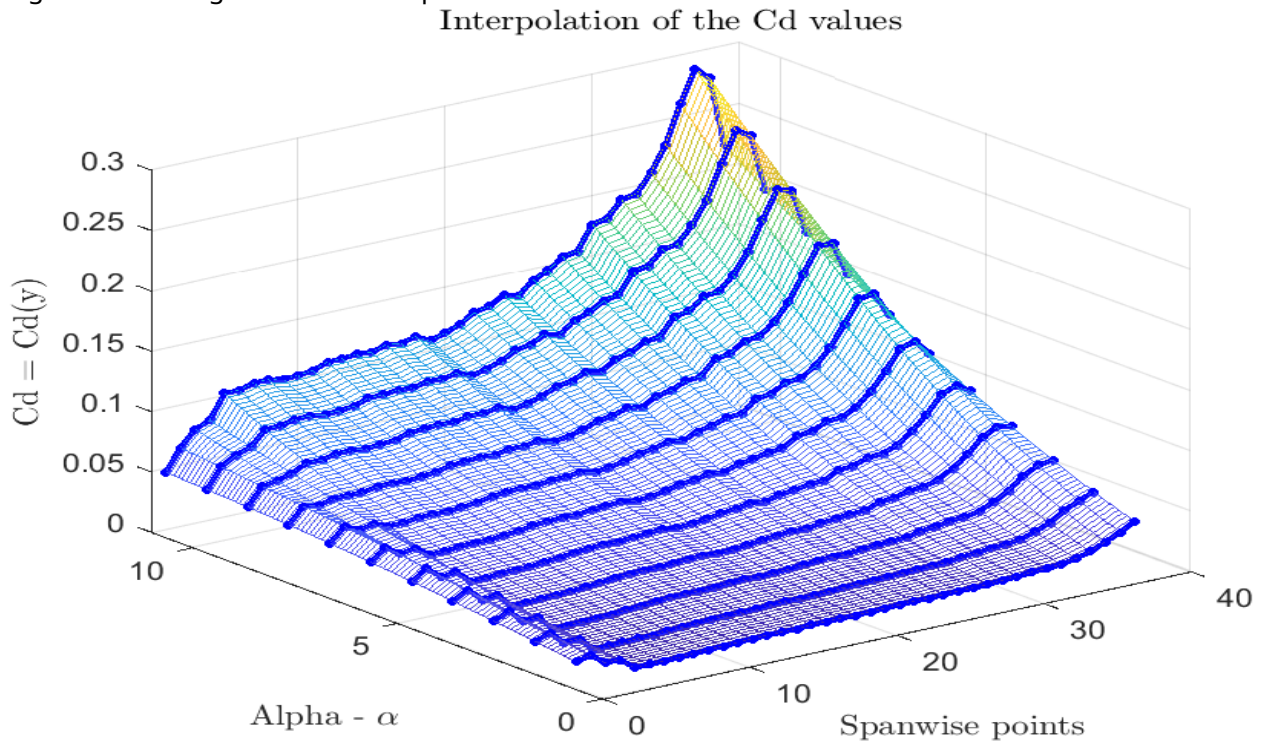


Figure 10.3. Wing drag coefficient spanwise distribution

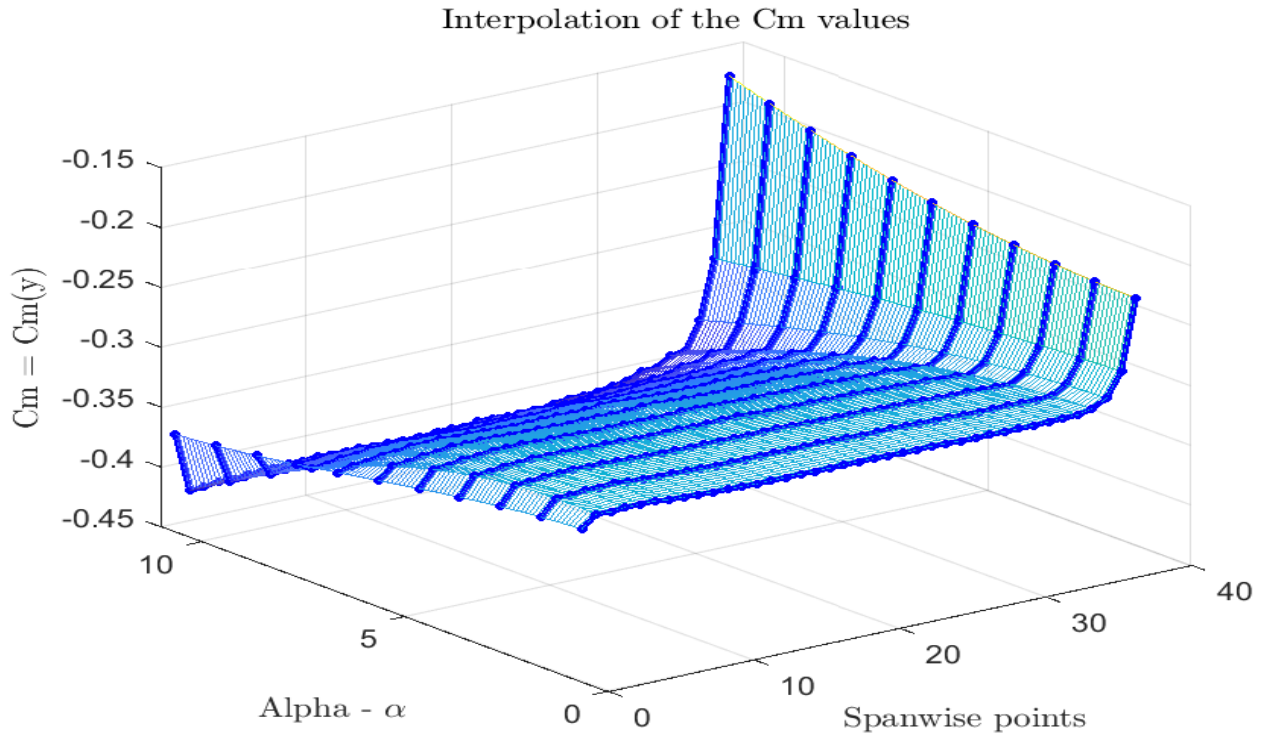


Figure 10.4. Wing pitching moment coefficient ($0.25mac$) spanwise distribution

10.2.2. Normal and parallel component

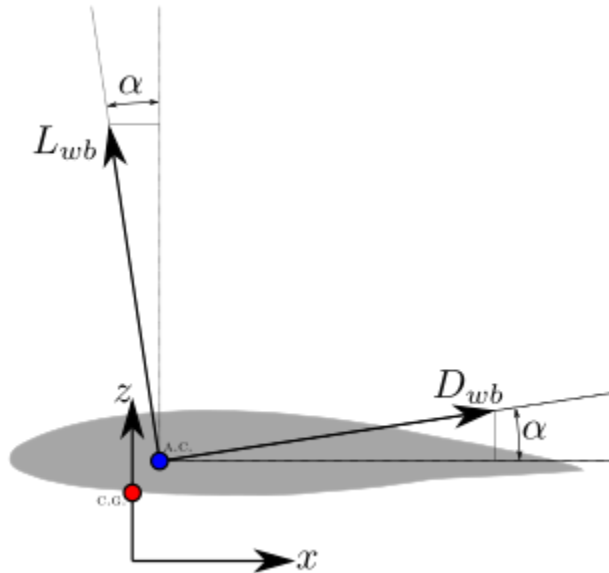


Figure 10.5. Normal and axial forces decomposition.

In order to determine the wing structural loads, the aerodynamic forces, Lift and Drag, are divided into their Normal and Parallel components in respect of reference longitudinal axis, as depicted in the figure. The wing spars and all structural component are normal or parallel to this axes which the wing angle of attack is referred too.

Normal and Axial decomposition :

$$N_{wb} = L \cdot \cos \alpha + D \cdot \sin \alpha$$

$$A_{wb} = D \cdot \cos \alpha - L \cdot \sin \alpha$$

In non dimensionalized form, the decomposition become the following:

$$C_N = C_L \cdot \cos \alpha + C_D \cdot \sin \alpha$$

$$C_A = C_D \cdot \cos \alpha - C_L \cdot \sin \alpha$$

10.2.3. Shear, Bending and Torsion

Shear, bending and torsion along the wing semi-span are shown in the following figures; these distributions are also reported inside a table, for each flight condition.

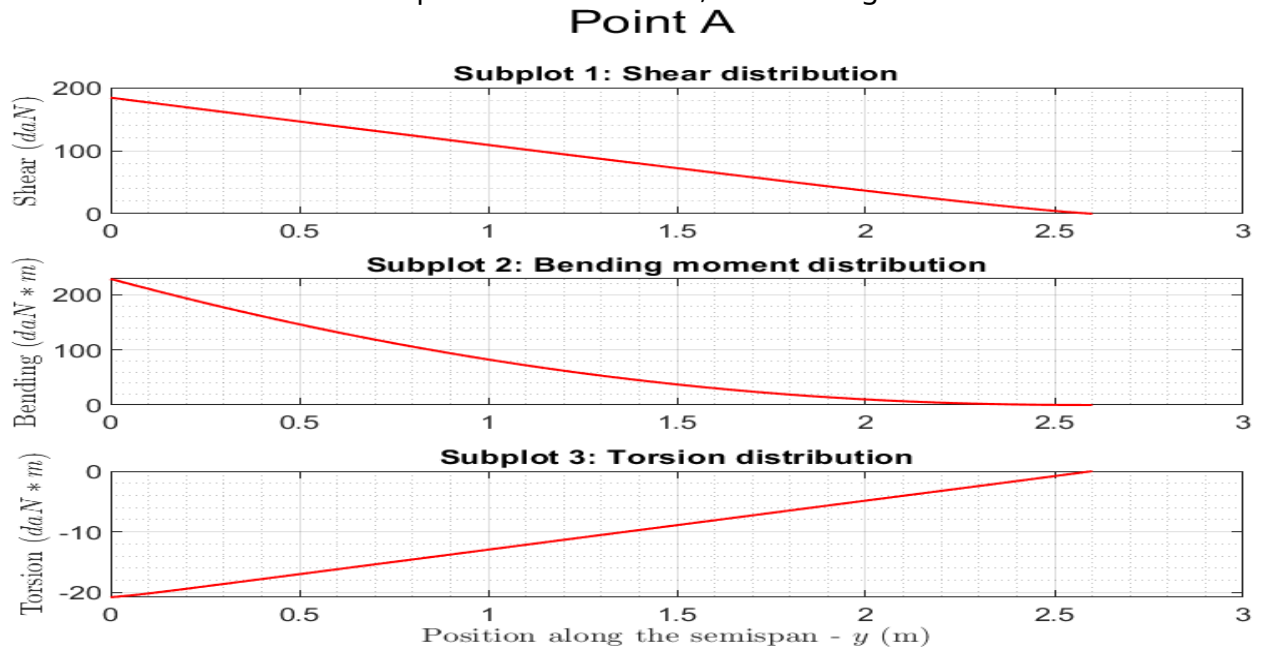


Figure 10.6. Shear, Bending and Torsion due to airloads - POINT A

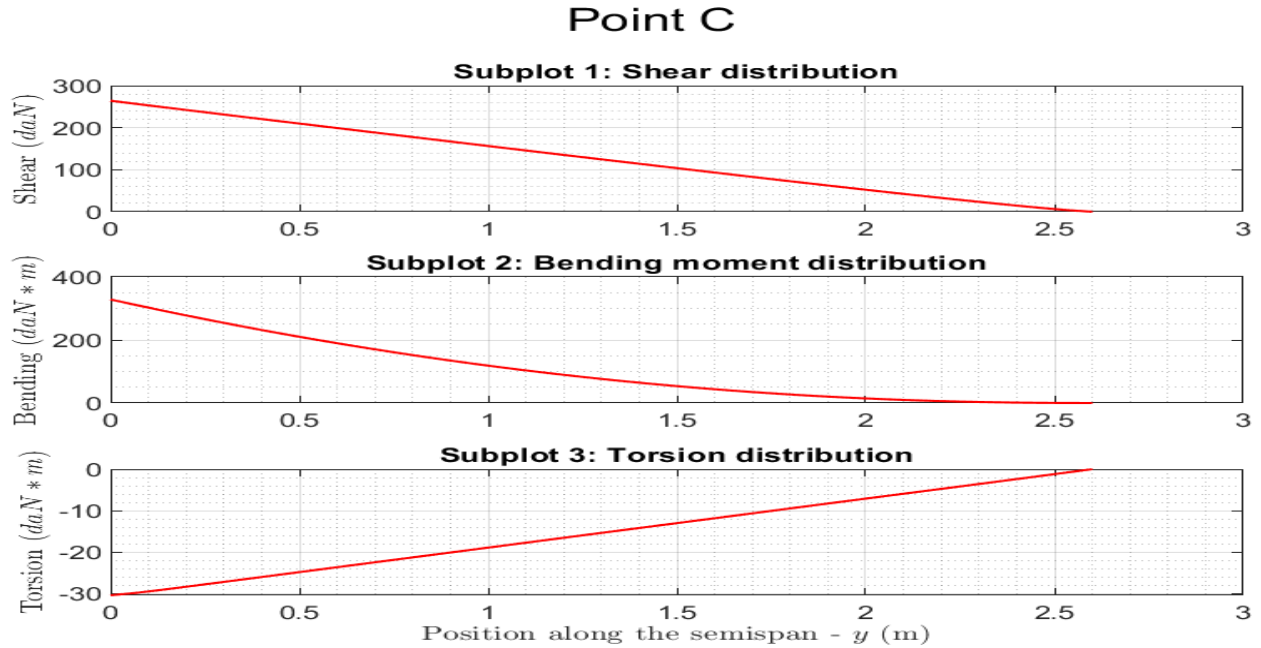


Figure 10.7. Shear, Bending and Torsion due to airloads - POINT C

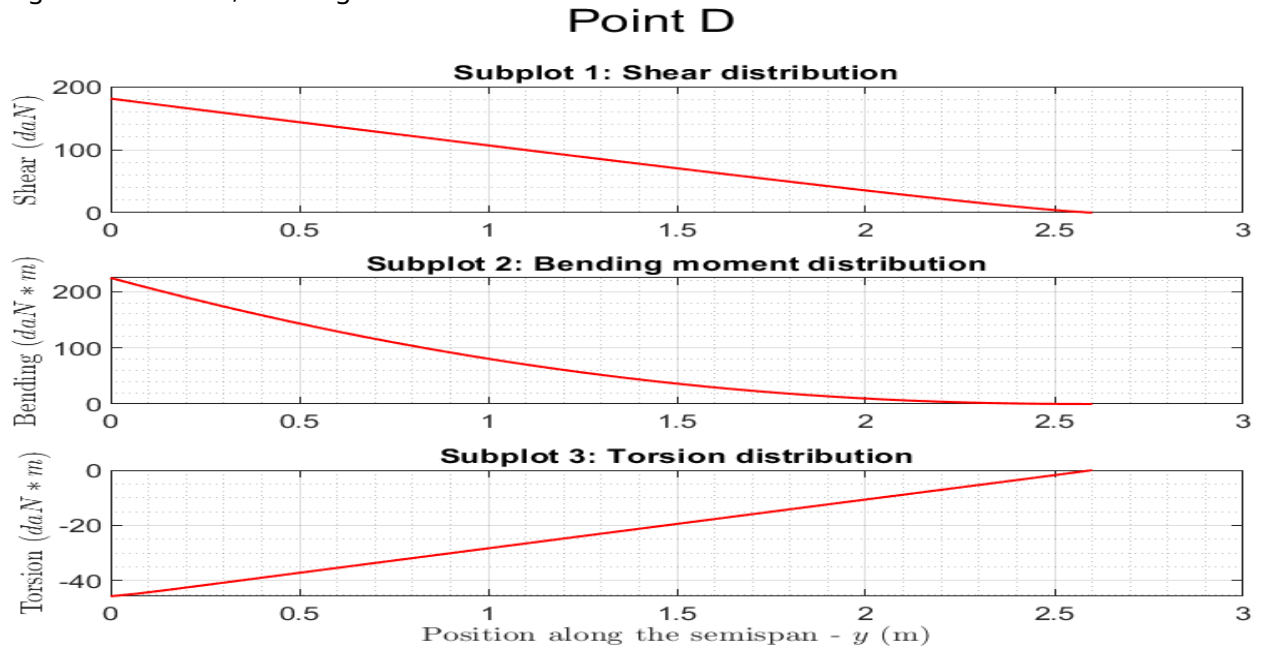


Figure 10.8. Shear, Bending and Torsion due to airloads - POINT D

To evaluate the internal forces needed to the structural sizing of the aircraft wing, a summation along the wing semi span is performed. First, axial and normal components of the aerodynamic forces are calculated from the semi-span distributions of lift and drag coefficients, which are used to evaluate shear, bending and torsion dimensional distributions.

$$S_i = S_{i-1} + s$$

where

$$s = \frac{1}{2} \cdot (N_{i-1} + N_i) \cdot (y_{i-1} - y_i)$$

where N is the normal force acting on the wing at the span station y. For the bending moment distribution, the calculations are very similar: Torsion is calculated via the same summation, but with torsion couple along the wing semi-span:

$$BM_i = BM_{i-1} + b$$

$$b = \frac{1}{2} \cdot (S_{i-1} + S_i) \cdot (y_{i-1} - y_i)$$

Torsion is calculated via the same summation, but with torsion couple along the wing semi-span:

$$M_{y_i} = C_{M_i} \cdot q \cdot (c_{y_i})^2$$

where the chords are evaluated at every semi-span station. The summation is performed in the same way as did with shear and bending distributions.

Table 10.1. Shear, bending and torsion distribution along the semi-span.

Point	V (m/s)	n (g's)	S (daN)	M (daN*m)	T (daN*m)
Point S	19.73	1	48.46	60.29	-5.478
Point A	38.47	3.8	184.2	229.1	-20.82
Point C	46.71	5.444	264	328.4	-30.47
Point D	58.39	3.8	181	224.2	-45.73
Point Sinv	24.87	-1	-46.95	-59.24	10.06
Point G	30.46	-1.5	61.85	75.45	15.09
Point F	46.71	-3.444	142.4	173.6	35.48
Point E	58.39	-1.778	78.27	95.43	48.52

From the table is evident that Point A is critical for shear and bending, while torsion is critical at points D and E.

10.2.4. Critical load condition

Critical values of internal forces and moments are relative to the root station of the wing.

- The critical shear is at point C and is equal to 264 daN.
- The critical bending is at point C and is equal to 328.4 daN*m.
- The critical torsion is at point E and is equal to 48.52 daN*m.

Table 10.2. Critical shear, bending and torsion.

Point	Value	Units	Load
Point C	264	daN	Shear
Point C	328.4	daN*m	Bending
Point E	48.52	daN*m	Torsion

In the table these values are summarized, for convenience.

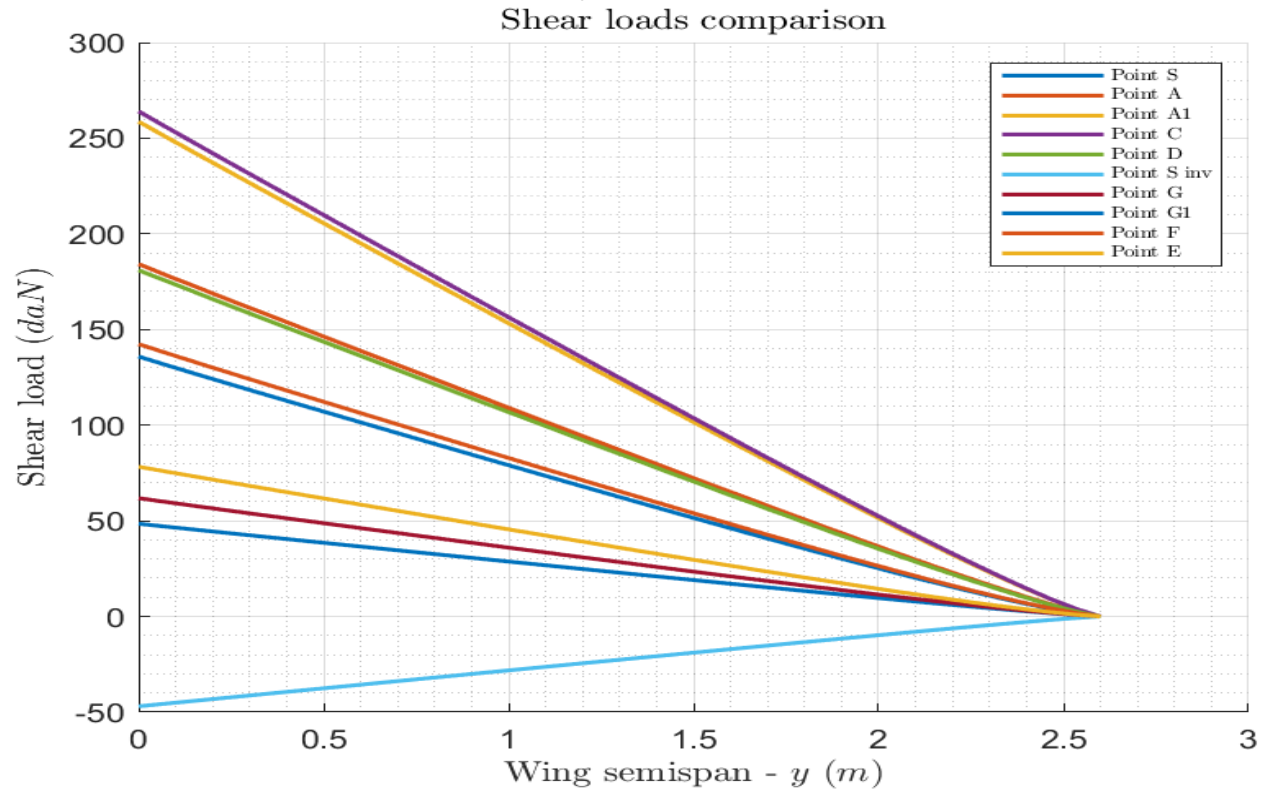


Figure 10.9. Shear comparison

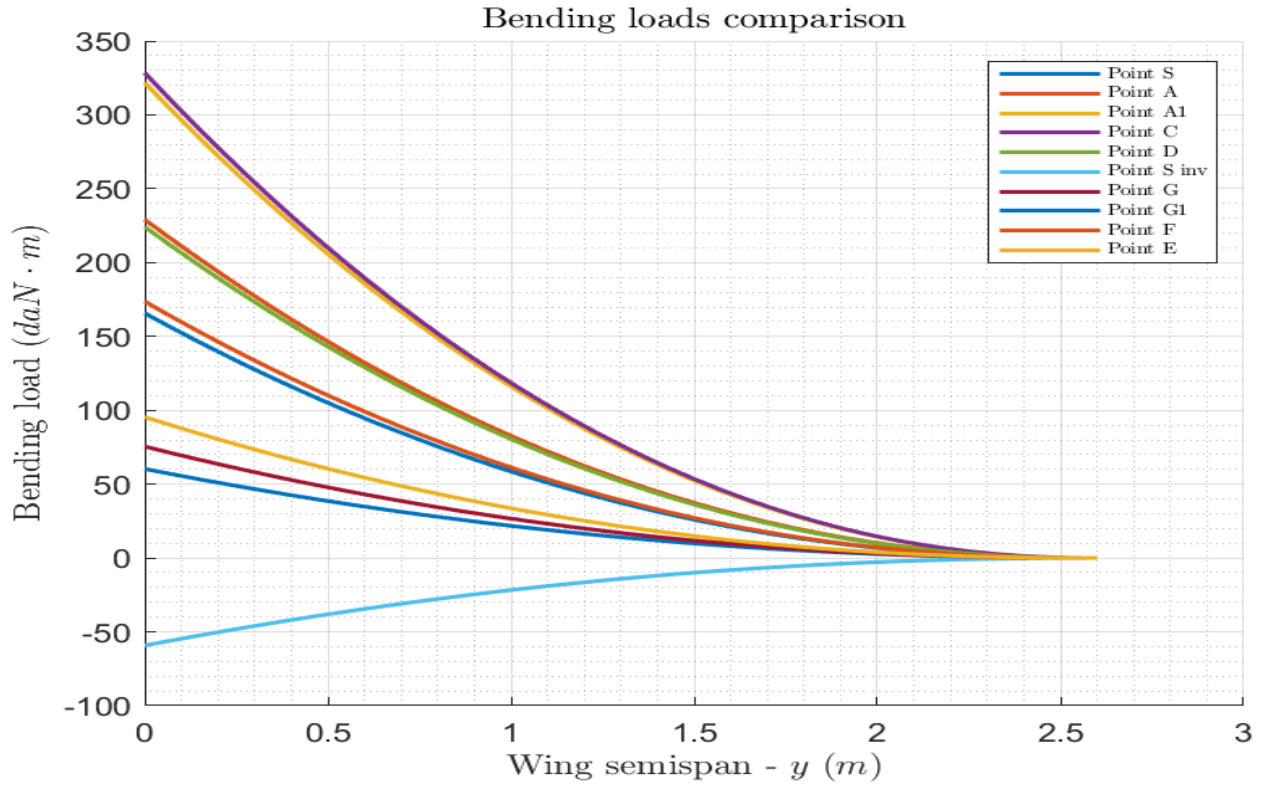


Figure 10.10. Bending comparison

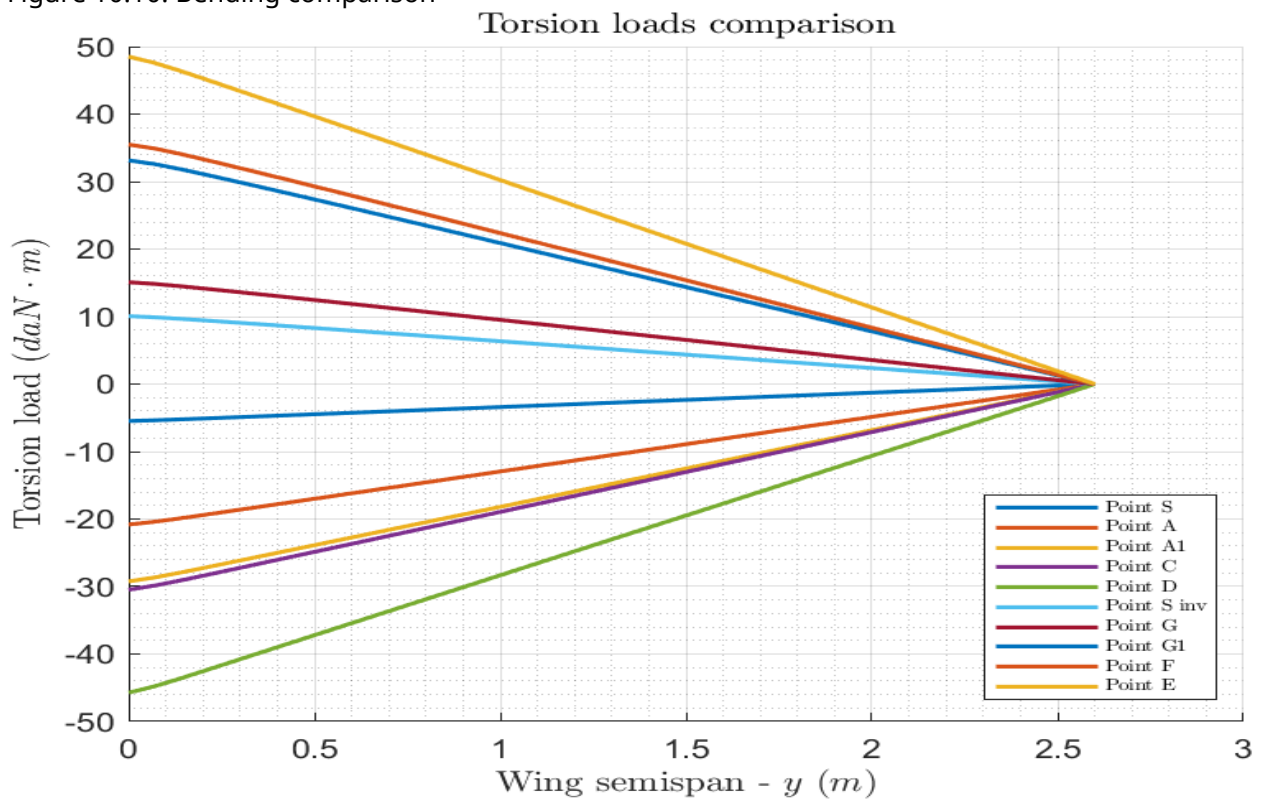


Figure 10.11. Torsion comparison

10.3. Unsymmetrical loads

According to CSVLA 455 , the wing and wing bracing must be designed for the following loading conditions:

1. Unsymmetrical wing loads. Unless the following values result in unrealistic loads, the rolling accelerations may be obtained by modifying the symmetrical flight conditions in CSVLA 333(d) follows: in condition A, assume that 100% of the semispan wing airload acts on one side of the aeroplane and 70% of this load acts on the other side.
2. Aileron deflection. The loads resulting from the aileron deflections and speeds specified in CSVLA 455 , in combination with an aeroplane load factor of at least two thirds of the positive manoeuvring load factor used for design. Unless the following values result in unrealistic loads, the effect of aileron displacement on wing torsion may be accounted for by adding the following increment to the basic aerofoil moment coefficient over the aileron portion of the span in the critical condition determined in CSVLA 333(d) .

10.3.1. Rolling condition

According to CSVLA 349 , the aileron displacement cause a significant change of pitching moment distribution along the wing span; these changes are shown in the following diagrams for different flight condition in red. Unless the following values result in unrealistic loads, the effect of aileron displacement on wing torsion may be accounted for by adding the following increment to the basic aerofoil moment coefficient over the aileron portion of the span in the critical condition determined in CSVLA 333(d) :

$$\Delta C_m = (-0.01) * \delta_{aileron}$$

where:

- ΔC_m = pitching moment coefficient increment;
- $\delta_{aileron}$ = down aileron deflection in degrees at critical condition.

The aileron deflection at critical condition must be given in degrees.

Table 10.3. Unsymmetrical flight conditions. Pitching moment at various flight conditions.

y(m)	cmA	cmC	cmD
0	-0.3614	-0.3603	-0.3534
0.2053	-0.3613	-0.3583	-0.3425
0.4105	-0.359	-0.356	-0.3403
0.6158	-0.3594	-0.3564	-0.3407
0.8211	-0.3609	-0.3578	-0.3421

y(m)	cmA	cmC	cmD
1.026	-0.3601	-0.3571	-0.3416
1.232	-0.3587	-0.3558	-0.3407
1.437	-0.3604	-0.3575	-0.3424
1.642	-0.3609	-0.358	-0.343
1.847	-0.5094	-0.4803	-0.3755
2.053	-0.5099	-0.4808	-0.3767
2.258	-0.5092	-0.4804	-0.3775
2.463	-0.4947	-0.4667	-0.3677

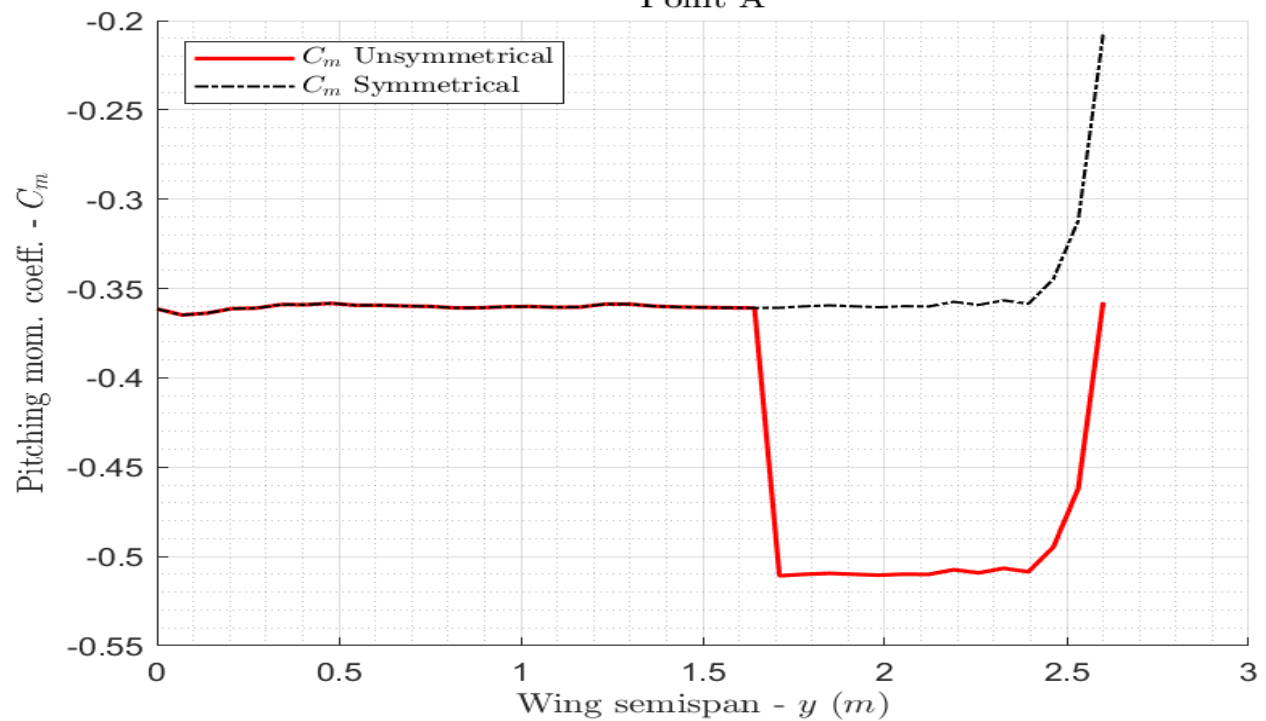
Pitching moment coefficient comparison at point
Point A

Figure 10.12. Pitching moment coefficient - POINT A

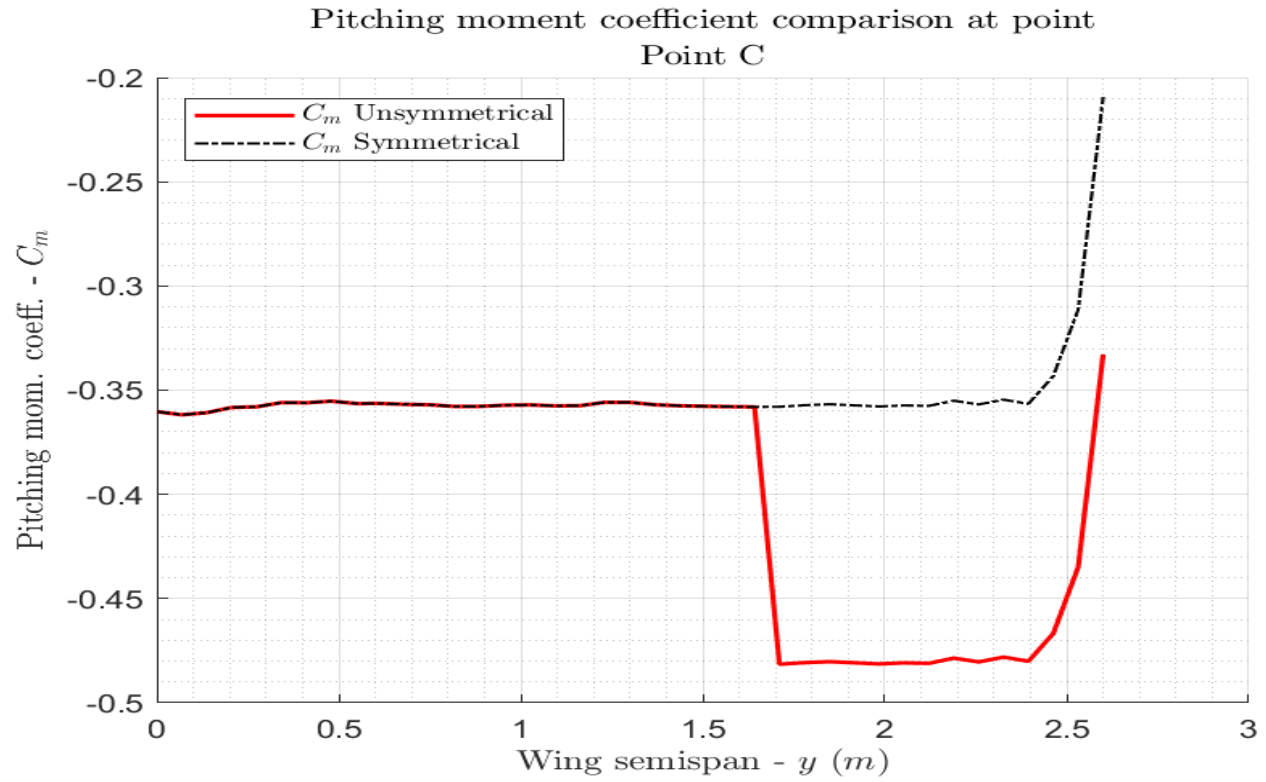


Figure 10.13. Pitching moment coefficient - POINT C

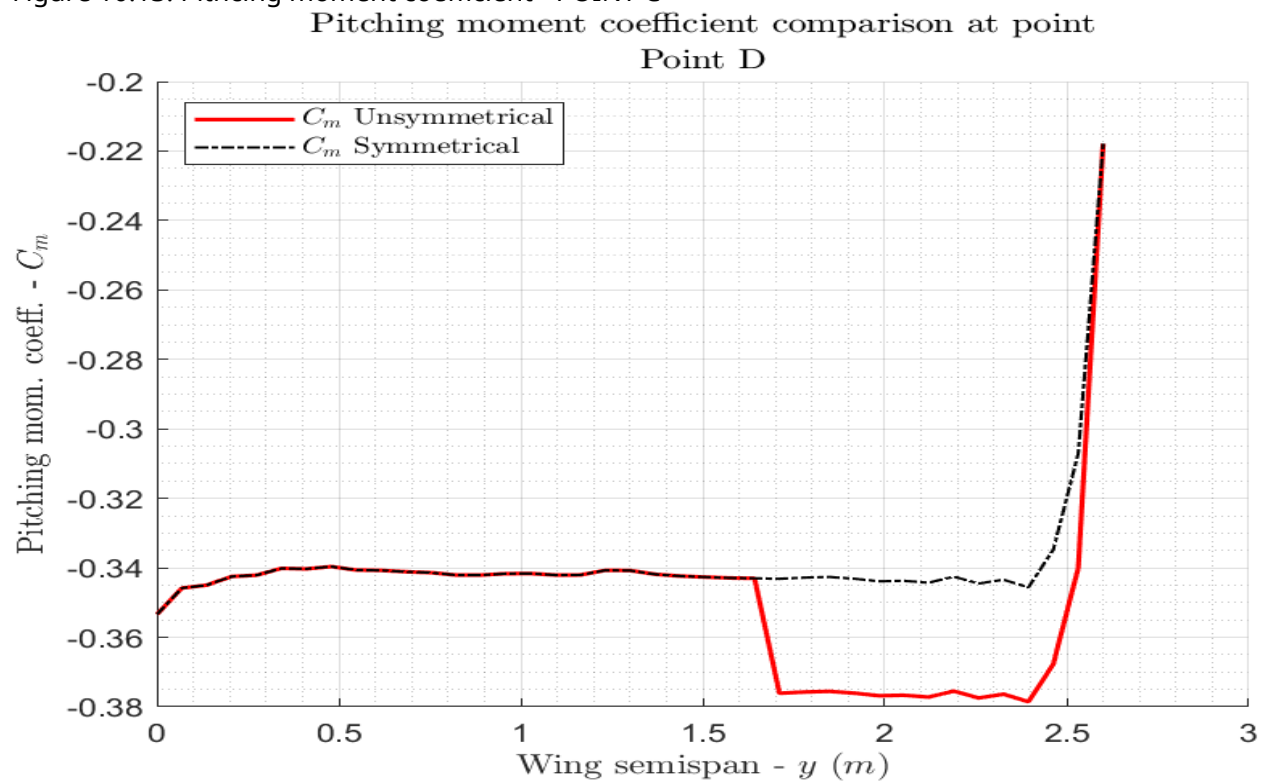


Figure 10.14. Pitching moment coefficient - POINT D

10.3.2. Effect of aileron displacement on the wing torsion

According to CSVLA 349 , the aileron displacement cause a significant change of applied wing torsion. The following diagram show this increment in red.

Table 10.4. Unsymmetrical flight conditions. Full and partial torsion at various flight conditions.

y(m)	A_100(daN*m)	A_70(daN*m)	C_100(daN*m)	C_70(daN*m)	D_100(daN*m)	D_70(daN*m)
0	0	0	0	0	0	0
0.2053	-2.136	-1.495	-2.965	-2.075	-3.562	-2.494
0.4105	-4.478	-3.135	-6.223	-4.356	-7.567	-5.297
0.6158	-6.828	-4.78	-9.491	-6.644	-11.57	-8.098
0.8211	-9.18	-6.426	-12.76	-8.932	-15.56	-10.89
1.026	-11.19	-7.832	-15.61	-10.93	-19.38	-13.57
1.232	-12.85	-8.995	-18.04	-12.63	-23.02	-16.11
1.437	-14.51	-10.15	-20.47	-14.33	-26.65	-18.65
1.642	-16.17	-11.32	-22.9	-16.03	-30.28	-21.19
1.847	-17.83	-12.48	-25.33	-17.73	-33.91	-23.74
2.053	-19.49	-13.64	-27.75	-19.43	-37.53	-26.27
2.258	-21.14	-14.8	-30.17	-21.12	-41.15	-28.8
2.463	-22.81	-15.97	-32.61	-22.83	-44.78	-31.35

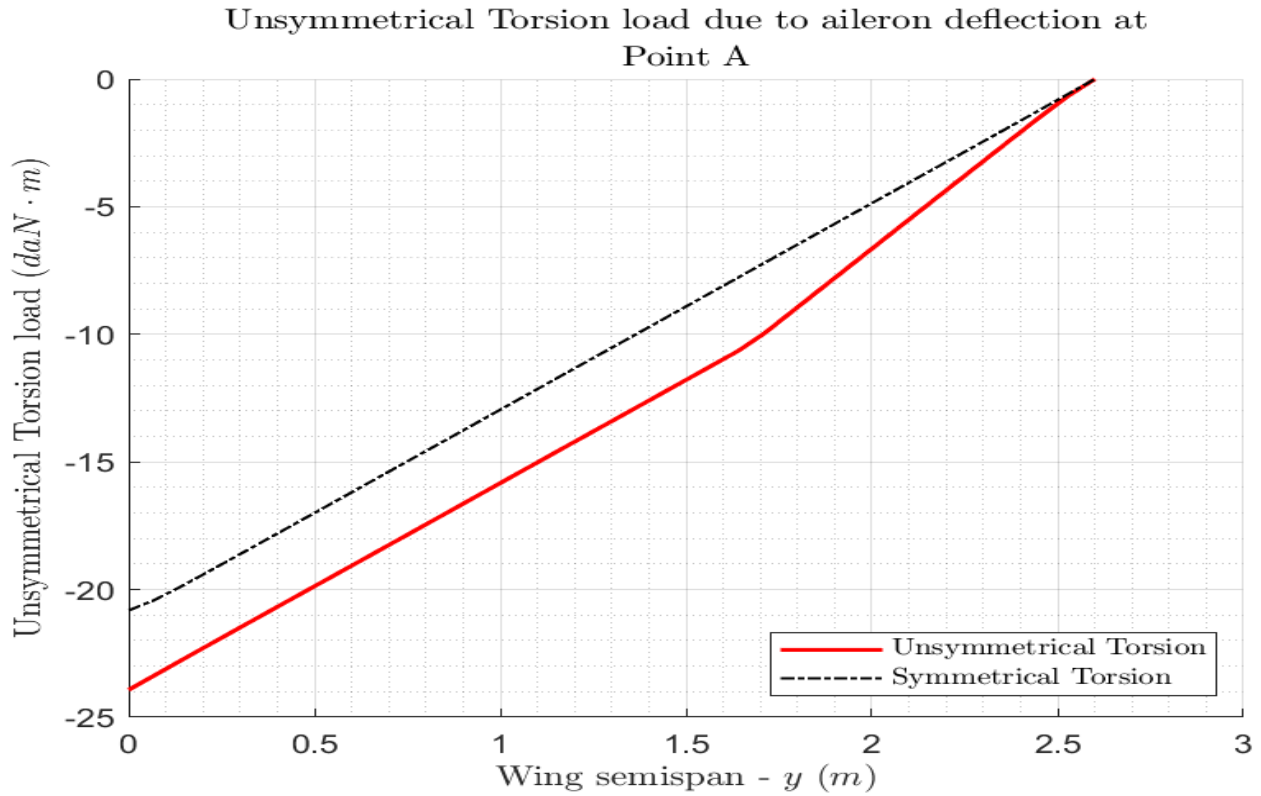


Figure 10.15. Torsion distribution full loads - POINT A

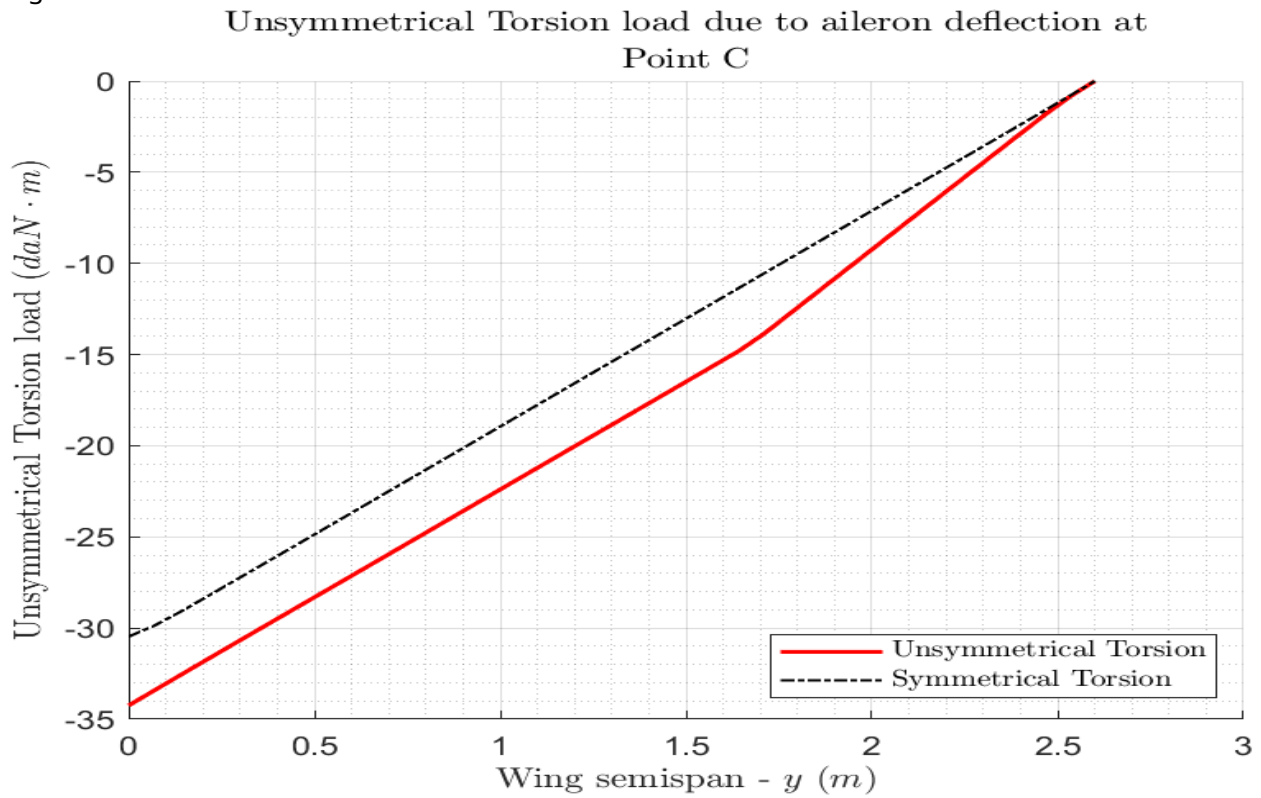


Figure 10.16. Torsion distribution full loads - POINT C

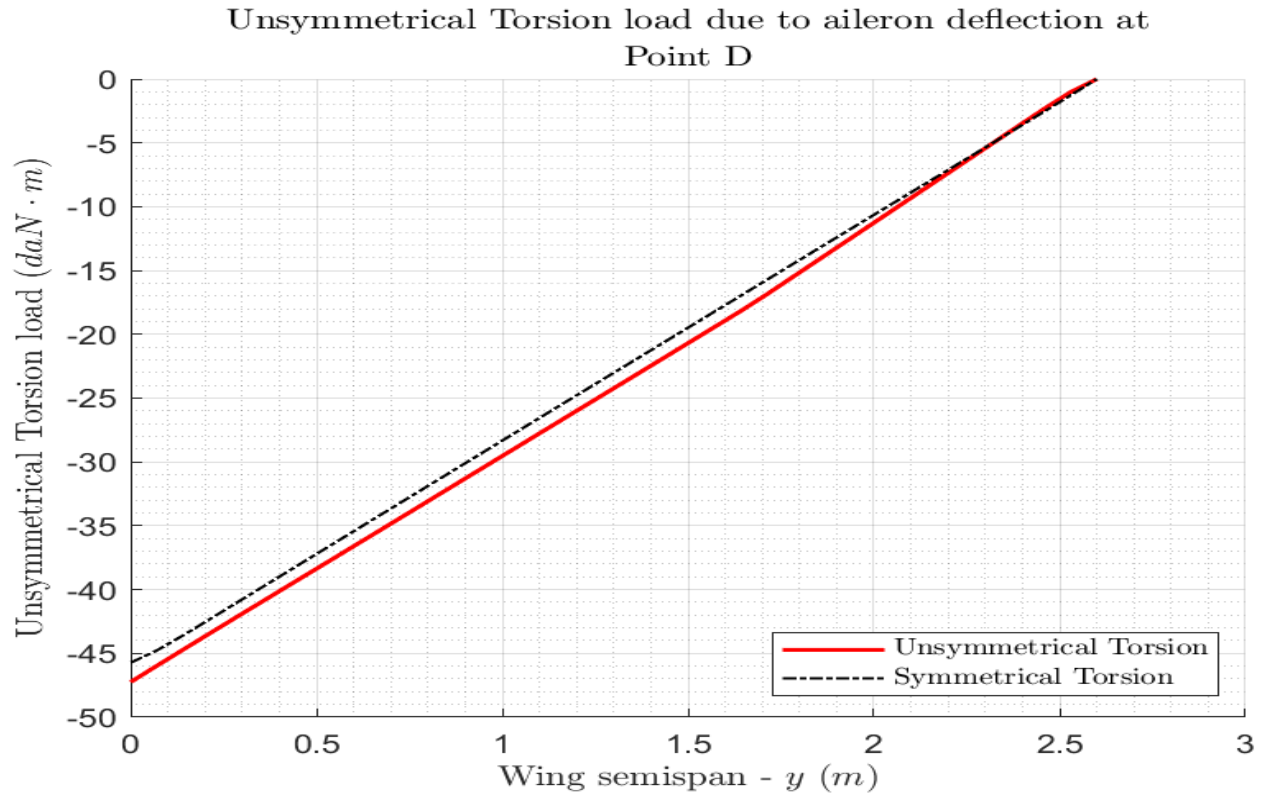


Figure 10.17. Torsion distribution full loads - POINT D

Chapter 11. Loads on the horizontal tail

According to CSVLA 421 , a horizontal tail balancing load is a load necessary to maintain equilibrium in any specified flight condition with no pitching acceleration. Horizontal tail surfaces must also be designed for the balancing loads occurring at any point on the limit manoeuvring envelope and in the flap conditions specified in CSVLA 345. The distribution in figure B6 of Appendix B may be used.

11.1. Balancing loads

The following forces are considered and placed in equilibrium:

- lift on the wing;
- horizontal tail balancing load;
- weight of the aircraft;
- for the calculation of the equilibrium, the z axis of aircraft is assumed aligned with the direction of the gravity. In a second stage, once the forces are calculated, the corresponding angle of attack will be considered for the calculation of the correct direction of the forces on the wing;
- influence of thrust and drag (of the total airplane) are considered negligible at this stage of calculation of the vertical forces. The effect of the drag will be considered in a second stage on the wing only;
- the wing lift is assumed to act on the aerodynamic centre of the wing as a starting point. The contribution of the fuselage is accounted for as a shift of the point of aerodynamic centre;
- the horizontal tail lift is applied at 25% of the chord;
- no aeroelastic deformation will be considered;

These approximations are by no means mandatory and can be discounted if more reliable data about the aircraft aerodynamics or more accurate calculations are necessary.

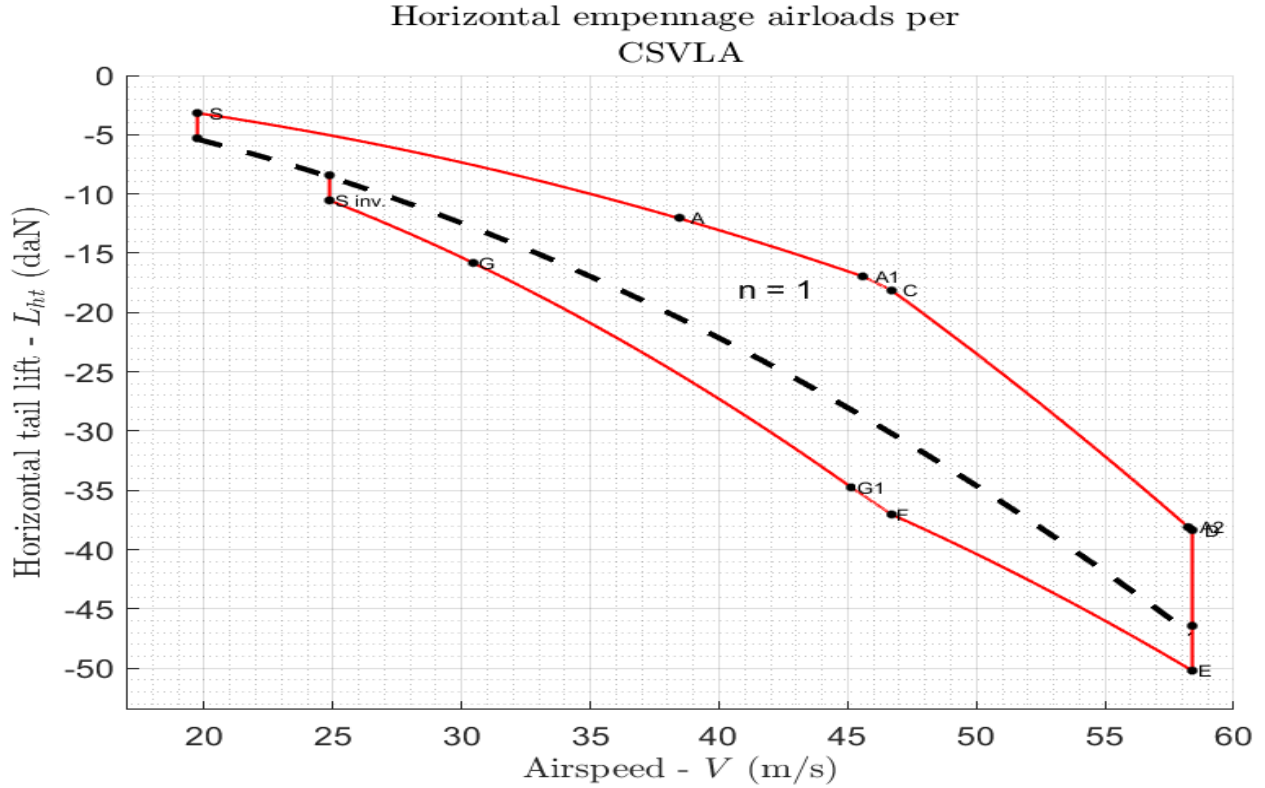


Figure 11.1. Balancing loads

11.2. Manoeuvring loads

According to CSVLA 423, each horizontal tail surface must be designed for manoeuvring loads imposed by one of the cited load conditions.

11.2.1. Unchecked manoeuvre

At speed V_A the pitching control is suddenly displaced to the maximum deflection as limited by the control stops. The control stops are 25 deg pitch up and 25 deg pitch down. Assuming a linear increment of deflection angle, the tail lift and its moment about the center of gravity pitching axis grow accordingly. The aircraft angular pitching acceleration is the consequence, which, at the tail station, leads to a tangential acceleration nearly normal to tail plane. In the time interval Δt a relative speed Δv develops, which, in composition with the aircraft speed V_A causes a decrement of the tail incidence angle equal to the Δv divided by V_A . This damping effect is the major relevant fact of the control finite time and its consequence is a less unchecked manoeuvring load. Taking into account the drag forces, which are opposed to the body rotation, and other minus occurrences, a conservative damping reduction factor of about 0.3 is introduced. This is a standard assumption for the sudden manoeuvring deflection from neutral position to stops. Assuming the direction and the intensity of airspeed at the center of gravity constant during the control time, the differential equation representing the motion is:

$$\frac{d^2\theta}{dt^2} = \frac{q * S_{tail} * a_{tail} * d}{I_y} * \left(\omega * dt - \frac{\Delta v}{V_A} * DF \right)$$

where:

- θ = rotation pitching angle
- q = dynamic pressure (Pa)
- S_{tail} = horizontal tail area (m²)
- d = C.G. – tail – A.C. distance (m) with $x_{C.G.} = 0.25 * MAC$
- a_{tail} = tail lift curve slope (1/deg);
- I_y = airplane pitching inertia moment (kg * m²)
- $\omega = \frac{\delta_{e,max} * \tau}{t_{deflection}} = \text{control angular speed of plane deflection (rad/sec)}$
- $\tau = 0.5$ = elevator efficiency factor;
- $t_{deflection}$ = total time required to full stop;
- $\delta_{e,max}$ = maximum elevator deflection;
- $\frac{\Delta v}{V_A}$ = damping angle
- DF = damping effect reduction factor = 0.3

The angular speed is defined from total elevator deflection, elevator efficiency factor and total deflection time.

It is possible to solve this equation using simple and reliable numerical methods. According to CSVLA 423(a) , the following results are presented:

1. a pitch up case where the resultant tailplane angle of attack is -9.439 deg and a corresponding limit tail load of -37.56 daN;
2. a pitch down case where the resultant tailplane angle of attack is 11.8 deg and a corresponding limit tail load of 46.95 daN.

TABLE TO BE CHECKED!!!

Table 11.1. Unchecked manoeuvre. Pitch down case calculations.

d2theta(rad/sec^2)	dtheta(rad/s)	alfa ht(deg)	delta theta(rad)	delta v(m/s)	alfa new ht(deg)
0	0	0	0	0	0
0.7544	0.01133	1.276	0.0001319	0.01691	1.268
1.5	0.04517	2.551	0.0005256	0.06739	2.521
2.237	0.1012	3.827	0.001178	0.1511	3.759
2.965	0.1793	5.102	0.002086	0.2675	4.983
3.684	0.279	6.378	0.003247	0.4163	6.192
4.395	0.4003	7.653	0.004658	0.5972	7.386
5.098	0.5427	8.929	0.006315	0.8097	8.567

d2theta(rad/sec^2)	dtheta(rad/s)	alfa ht(deg)	delta theta(rad)	delta v(m/s)	alfa new ht(deg)
5.792	0.706	10.2	0.008216	1.053	9.733
6.478	0.8901	11.48	0.01036	1.328	10.89

TABLE TO BE CHECKED!!!

Table 11.2. Unchecked manoeuvre. Pitch up case calculations.

d2theta(rad/sec^2)	dtheta(rad/s)	alfa ht(deg)	delta theta(rad)	delta v(m/s)	alfa new ht(deg)
0	0	0	0	0	0
0.7544	0.01133	1.276	0.0001319	0.01691	1.268
1.5	0.04517	2.551	0.0005256	0.06739	2.521
2.237	0.1012	3.827	0.001178	0.1511	3.759
2.965	0.1793	5.102	0.002086	0.2675	4.983
3.684	0.279	6.378	0.003247	0.4163	6.192
4.395	0.4003	7.653	0.004658	0.5972	7.386
5.098	0.5427	8.929	0.006315	0.8097	8.567
5.792	0.706	10.2	0.008216	1.053	9.733
6.478	0.8901	11.48	0.01036	1.328	10.89

11.2.2. Checked manoeuvre

According to CSVLA 423(b) a sudden upward deflection of the elevator must be studied, at speeds above V_A , followed by a downward deflection of the elevator, resulting in specified combinations of normal and angular acceleration. The airplane pitching inertia moment is estimated equal to $100 \text{ kg} \cdot \text{m}^2$ at maximum takeoff weight and center of gravity at 25% of the mean aerodynamic chord. The maximum limit load in the checked manoeuvre is -91.31 daN.

11.2.3. Gust loads

According to CSVLA 425, each horizontal tail surface must be designed for loads resulting during steady, unaccelerated flight at different speeds (V_F , V_C , V_D). The incremental tail load resulting from the gusts must be added to the initial balancing tailload to obtain the total tail load. According to CSVLA 425(d), in the absence of a more rational analysis, the incremental tail load due to the gust, must be computed as follows:

$$\Delta L_{ht} = \frac{1}{2} * \left[K_g * \rho_0 * U_{de} * V * a_{ht} * S_{ht} \left(1 - \frac{d \epsilon}{d \alpha} \right) \right]$$

where:

- ρ_0 = density of air at sea level (kg/m^3);
- K_g = gust alleviation factor at MTOW;
- U_{de} = derived gust speed (m/s);

- V = aircraft equivalent speed (m/s);
- a_{ht} = tail lift curve slope (1/rad);
- S_{ht} = horizontal tail area (m²);
- $\left(1 - \frac{d\epsilon}{d\alpha}\right)$ = downwash factor.

Results can be summarized as follow:

1. at VF, the incremental tail load is 29.37 daN and the resulting total load is -7.664 daN when the incremental tail load is summed and -66.4 daN when the incremental tail load is subtracted;
2. at VC, the incremental tail load is 58.58 daN and the resulting total load is 40.44 daN when the incremental tail load is summed and -76.72 daN when the incremental tail load is subtracted;
3. at VF, the incremental tail load is 36.71 daN and the resulting total load is -1.638 daN when the incremental tail load is summed and -75.05 daN when the incremental tail load is subtracted.

11.3. Horizontal tail loads summary

In this section all the maximum manoeuvring limit loads are summarized

1. Case (a): 34.94 daN;
2. Case (b): -91.31 daN;
3. Case (a) + (b): -49.56 daN;
4. Case (c): -82.19 daN;
5. Case (d): -92.2 daN.

11.4. Unsymmetrical loads

According to CSVLA 427 , in the absence of more rational data for conventional aircraft must be applied (1) 100% of the maximum loading from the symmetrical flight conditions on the surface on one side of the plane of symmetry and (2) the following percentage of that loading to the opposite side:

$$\% = 100 - 10 * (n - 1) = \frac{1}{100} * [100 - 10 * (3.8 - 1)] = 0.72$$

The critical manoeuvre load is -92.2 daN; the unsymmetrical loads will be:

- load on one side: $-92.2 * 0.5 = -46.1$ daN;
- load on the opposite side: $-92.2 * 0.72 = -66.38$ daN.

Chapter 12. Loads on the vertical tail

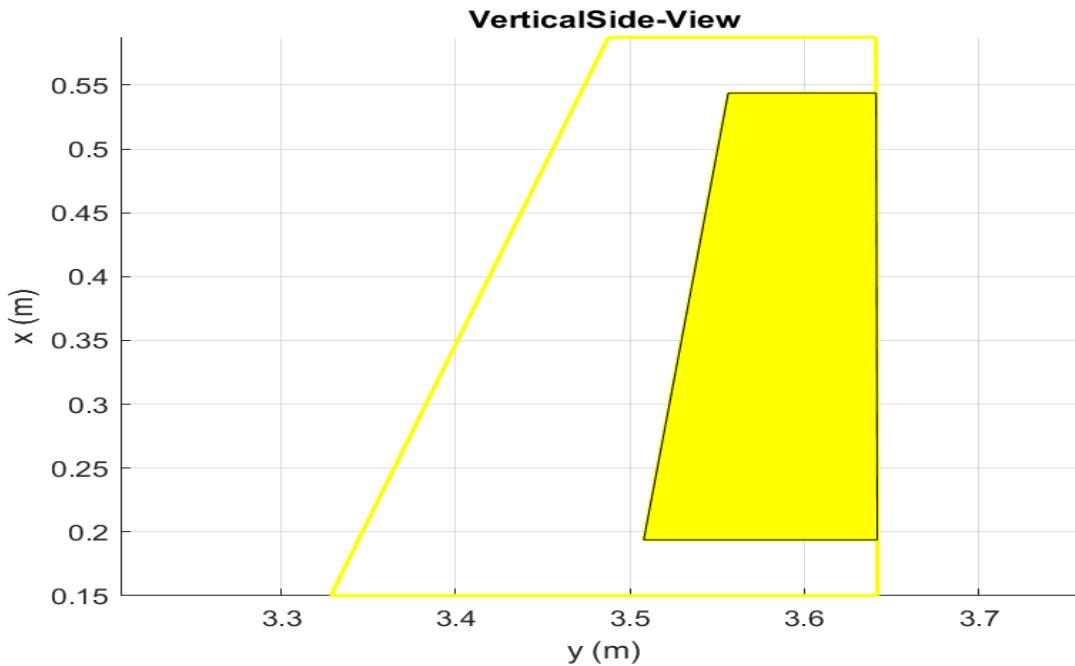


Figure 12.1. Vertical fin, side view.

According to CSVLA the vertical tail must withstand several manoeuvring loads. In this chapter, all these load case will be illustrated.

12.1. Manoeuvring load

At speeds up to V_A , the vertical tail surfaces must be designed to withstand the following condition. In computing the tail loads, the yawing velocity may be assumed to be zero.

12.1.1. CSVLA 441(a)(1)

With the aeroplane in unaccelerated flight at zero yaw, it is assumed that the rudder control is suddenly displaced to the maximum deflection, as limited by the control stops or by limit pilot forces. The control stops are ± 30 deg. The lateral force coefficient acting on the rudder when at maximum deflection angle is given by the following simple equation:

$$C_Y = C_{Y,0} + \frac{d C_Y}{d \delta_r} * \delta_{r,max}$$

where:

- C_Y = lateral force coefficient;
- $C_{Y,0}$ = lateral force coefficient at $\beta = \delta = 0$, equal to zero for symmetrical airfoil;
- $\frac{d C_Y}{d \delta_r}$ = lateral force curve slope per deg of rudder deflection;

- $\delta_{r, max} =$ rudder control stop.

Assuming no deflection of the control cable, the maximum value of the lateral force coefficient is:

$$(C_Y)_{\delta_r = 30} = 0.000644 * 30 = 0.019356$$

The lateral force is calculated as follow:

$$Y = \frac{1}{10} * q_A * S_{vertical} * \frac{S_{wing}}{S_{vertical}} * (C_Y)_{\delta_r = 30} = \frac{1}{10} * 906.2 * 0.2044 * \frac{2.589}{0.2044} * 0.01936 = 9.083 \text{ daN}$$

The lateral force acting on a single fin of the vertical tail plain is $9.083/2 = 4.541 \text{ daN}$.

12.1.2. CSVLA 441(a)(2)

With the rudder deflected as specified in sub-paragraph CSVLA 441(a)(1) of this paragraph, it is assumed that the aeroplane yaws to the resulting sideslip angle. In lieu of a rational analysis, an overswing angle equal to 1.3 times the static sideslip angle of sub-paragraph CSVLA 441(a)(3) of this paragraph may be assumed. The overswing sideslip angle is $1.3 * 15 = 19.5 \text{ deg}$. The total lateral force acting on the vertical tail in this case is:

$$Y = \frac{1}{10} * q_A * S_{vertical} * \frac{S_{wing}}{S_{vertical}} * C_Y = \frac{1}{10} * 906.2 * 0.2044 * \frac{2.589}{0.2044} * 0.0245 = 5.748 \text{ daN}$$

The lateral force acting on a single fin of the vertical tail plain is $5.748/2 = 2.874 \text{ daN}$.

12.1.3. CSVLA 441(a)(3)

A yaw angle of 15 degrees with the rudder control maintained in the neutral position (except as limited by pilot strength). The total lateral force in this case is:

$$Y = \frac{1}{10} * q_A * S_{vertical} * \frac{S_{wing}}{S_{vertical}} * C_Y = \frac{1}{10} * 906.2 * 0.2044 * \frac{2.589}{0.2044} * 0.0233 = 5.467 \text{ daN}$$

The lateral force acting on a single fin of the vertical tail plain is $5.467/2 = 2.733 \text{ daN}$.

12.2. Manoeuvring and gust envelope

According to CSVLA 443 in the absence of a more rational analysis, the gust load must be computed as follows:

$$L_{vt} = \frac{K_{gt} * U_{de} * V * a_{vt} * S_{vt}}{16.3}$$

where:

- $U_{de} =$ derived gust velocity (m/s);
- $L_{vt} =$ vertical tail load (daN)
- $K_{gt} = \frac{0.88 * \mu_{gt}}{5.3 + \mu_{gt}} =$ gust alleviation factor;

- $\mu_{gt} = \frac{2 * M}{\rho * \bar{c}_t * g * a_{vt} * S_{vt}} * \frac{K^2}{l_t^2} = \text{lateral mass ratio};$
- $M = \text{aeroplane mass (kg)};$
- $\rho = \text{air density (kg/m}^3\text{)};$
- $l_t = \text{aeroplane c.g. - to - lift - centre of vertical surface distance (m)};$
- $S_{vt} = \text{area of vertical tail (m}^2\text{)};$
- $a_{vt} = \text{lift curve slope of vertical tail (1/rad)};$
- $V = \text{aeroplane equivalent speed (m/s)};$
- $K = \text{radius of gyration in yaw (m)};$
- $g = \text{acceleration due to gravity (m/s}^2\text{)};$

These calculations must be performed at VC and VD; the results are the following:

1. Gust load at VC: 9.0142 daN
2. Gust load at VD: 5.6338 daN

The critical gust load is 9.0142 daN at VC.

12.3. Vertical tail loads summary

12.3.1. Critical manoeuvring loads

The critical manoeuvring loads are summarized here.

1. CSVLA 441(a)(1) : 4.541 daN;
2. CSVLA 441(a)(2) : 2.874 daN;
3. CSVLA 441(a)(3) : 2.733 daN.

12.3.2. Critical gust loads

The critical gust load is 9.0142 daN at VC.

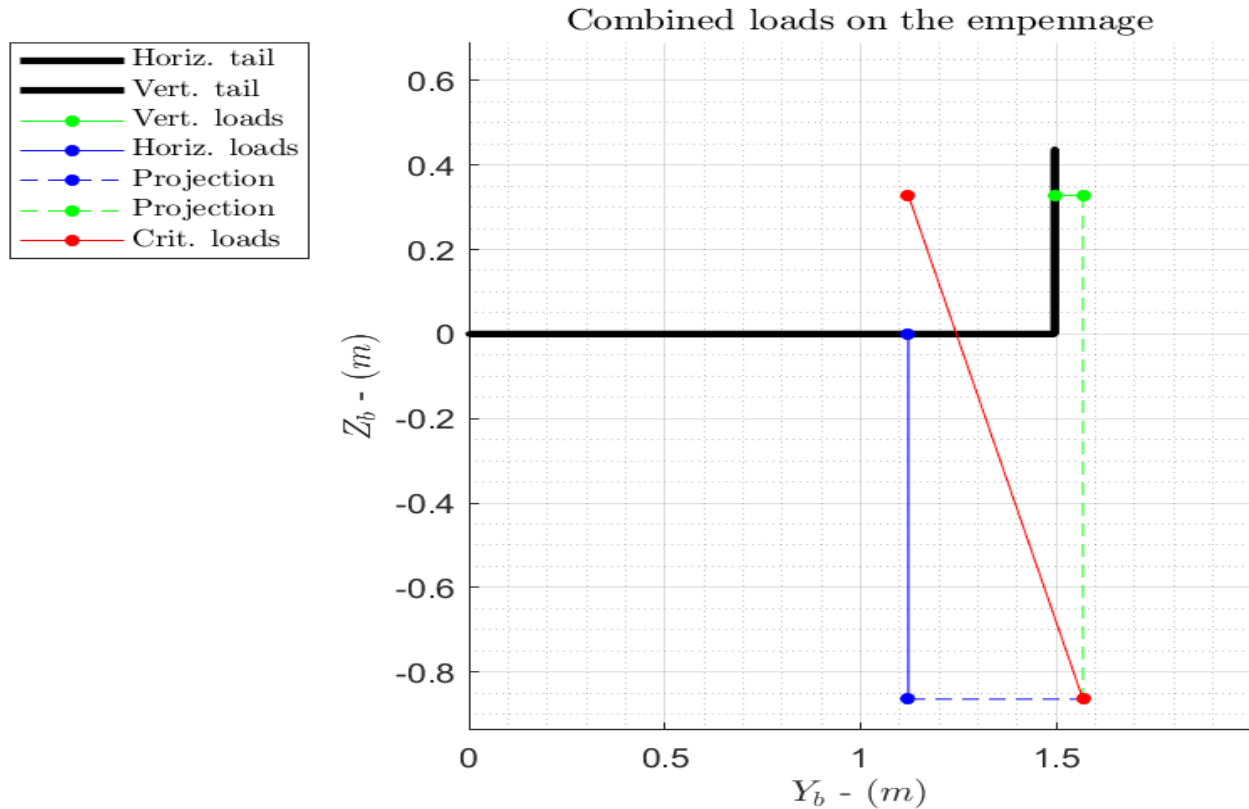


Figure 12.2. Combined load figurative representation.

12.4. Combined loads

According to CSVLA 447 the following two additional condition must be verified:

1. With the aeroplane in a loading condition correspondent to point A or point D in the V - n diagram (whichever condition leads to the higher balance load) the loads on the horizontal tail must be combined with those on the vertical tail as specified in CSVLA 441 ; this prescription results in a combined load equal to 20.02 daN;
2. 75 % of the loads according to CSVLA 423 for the horizontal tail and CSVLA 441 for the vertical tail must be assumed acting simultaneously; this prescription results in a combined load equal to 69.39 daN.

The critical combined load is 69.3856 daN.

Chapter 13. Loads on the wing flaps

According to CSVLA 345(a) , if flaps or similar high lift devices to be used for take-off, approach or landing are installed, the aeroplane, with the flaps fully deflected at VF, is assumed to be subjected to symmetrical manoeuvres and gusts resulting in limit load factors within the range determined by (1) Manoeuvring to a positive limit load factor of 2.0 (2) Positive and negative gust of 7.62 m/s acting normal to the flight path in level flight.

13.1. Manoeuvring load

According to CSVLA 347 , the wing flaps, their operating mechanisms and their supporting structure will be analyzed at two deflection angle, namely takeoff and landing position.

13.1.1. Takeoff

The flaps V-n diagram relative to the takeoff configuration is shown in this subsection; the estimated maximum lift coefficient in this configuration is 1.9 corresponding to a stall speed equal to 18.04 m/s.

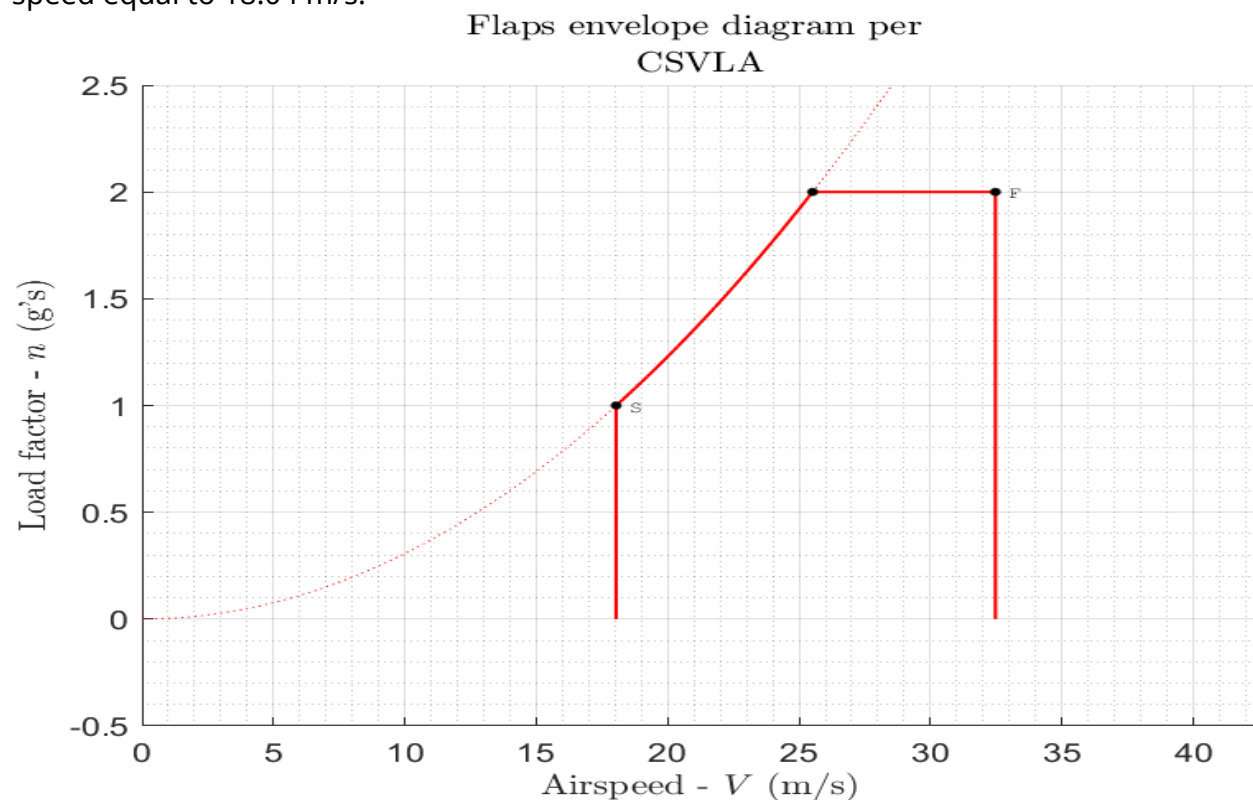


Figure 13.1. Flaps V-n diagram. Takeoff.

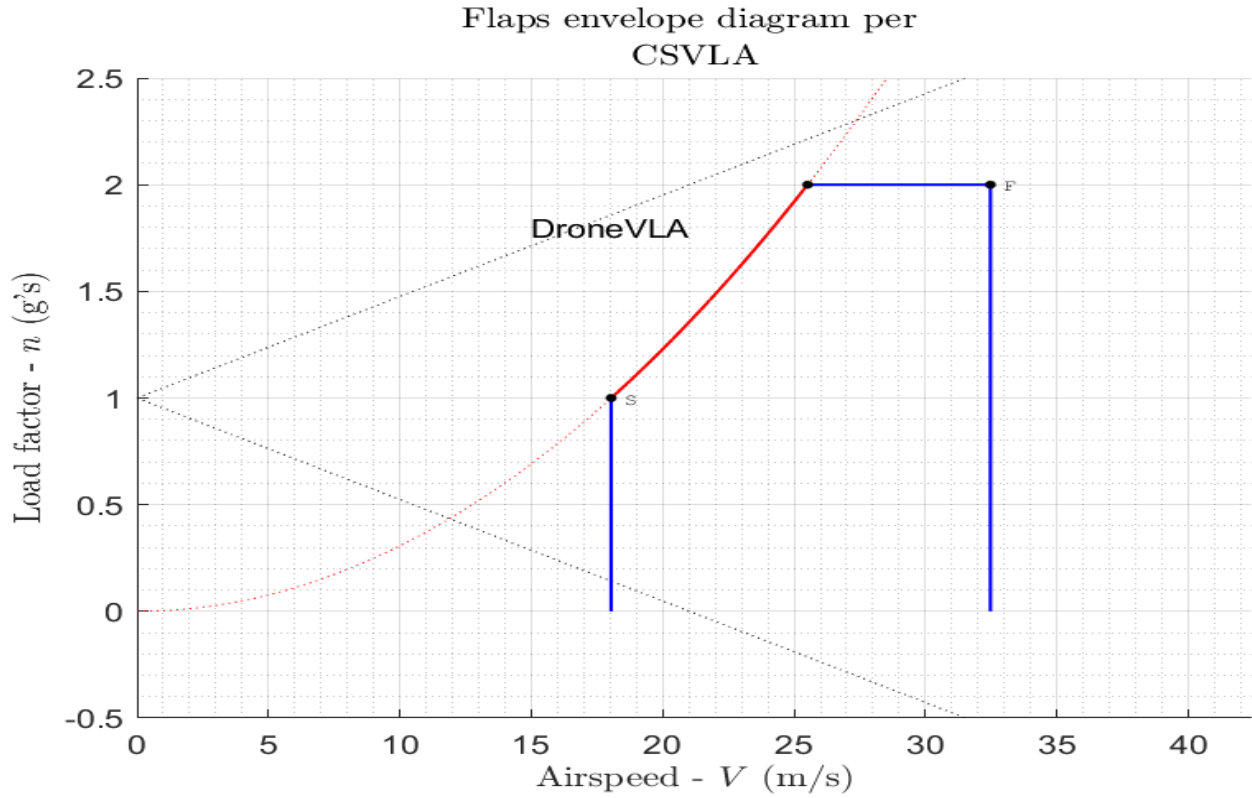


Figure 13.2. Flaps gust envelope diagram. Takeoff.

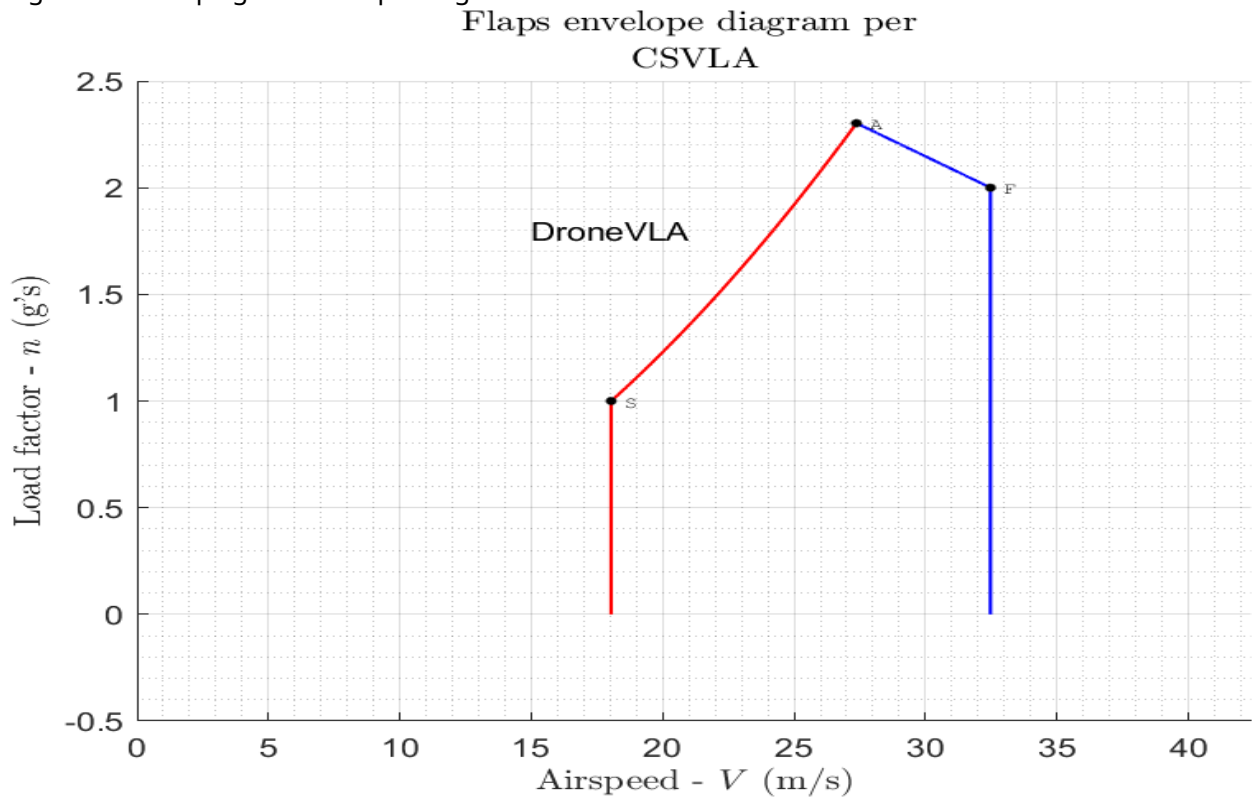


Figure 13.3. Flaps final envelope diagram. Takeoff.

13.1.2. Landing

The flaps V-n diagram relative to the landing configuration is shown in this subsection; the estimated maximum lift coefficient in this configuration is 1.9 corresponding to a stall speed equal to 18.04 m/s.

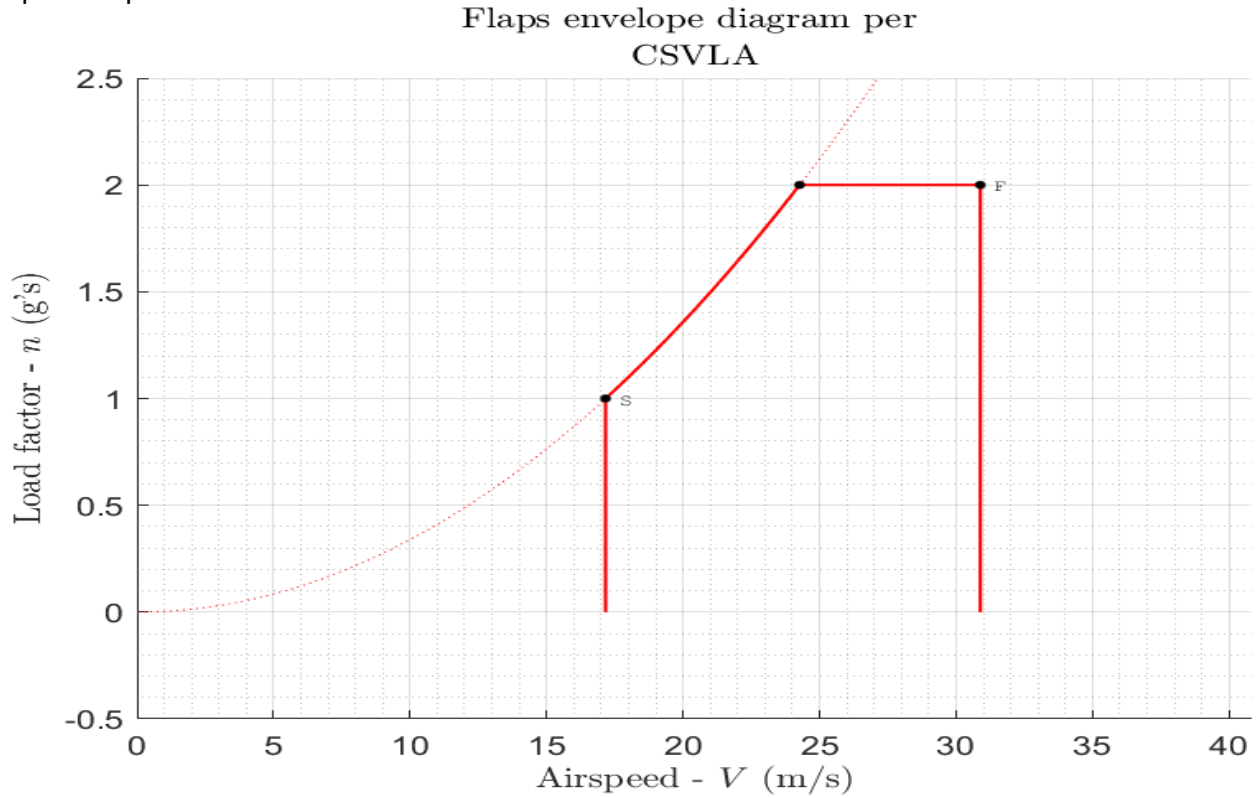


Figure 13.4. Flaps V-n diagram. Landing.

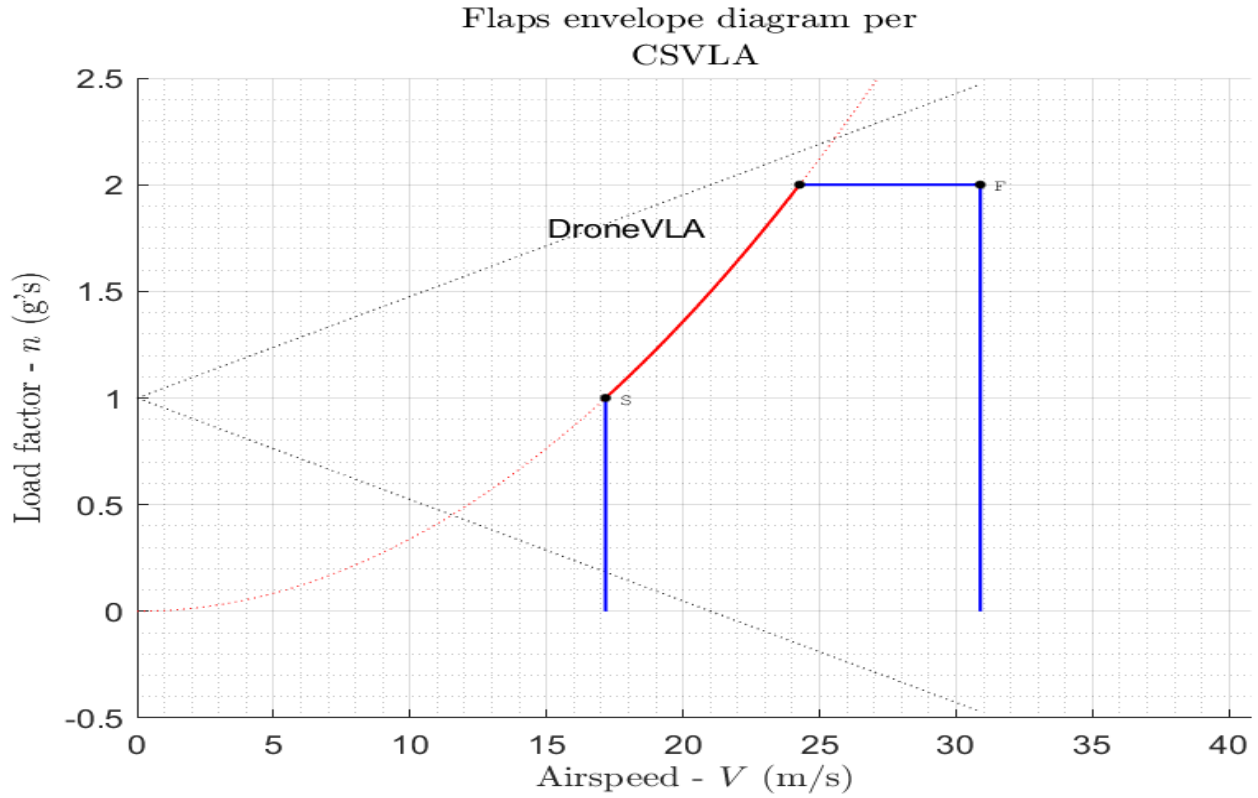


Figure 13.5. Flaps gust envelope diagram. Landing.

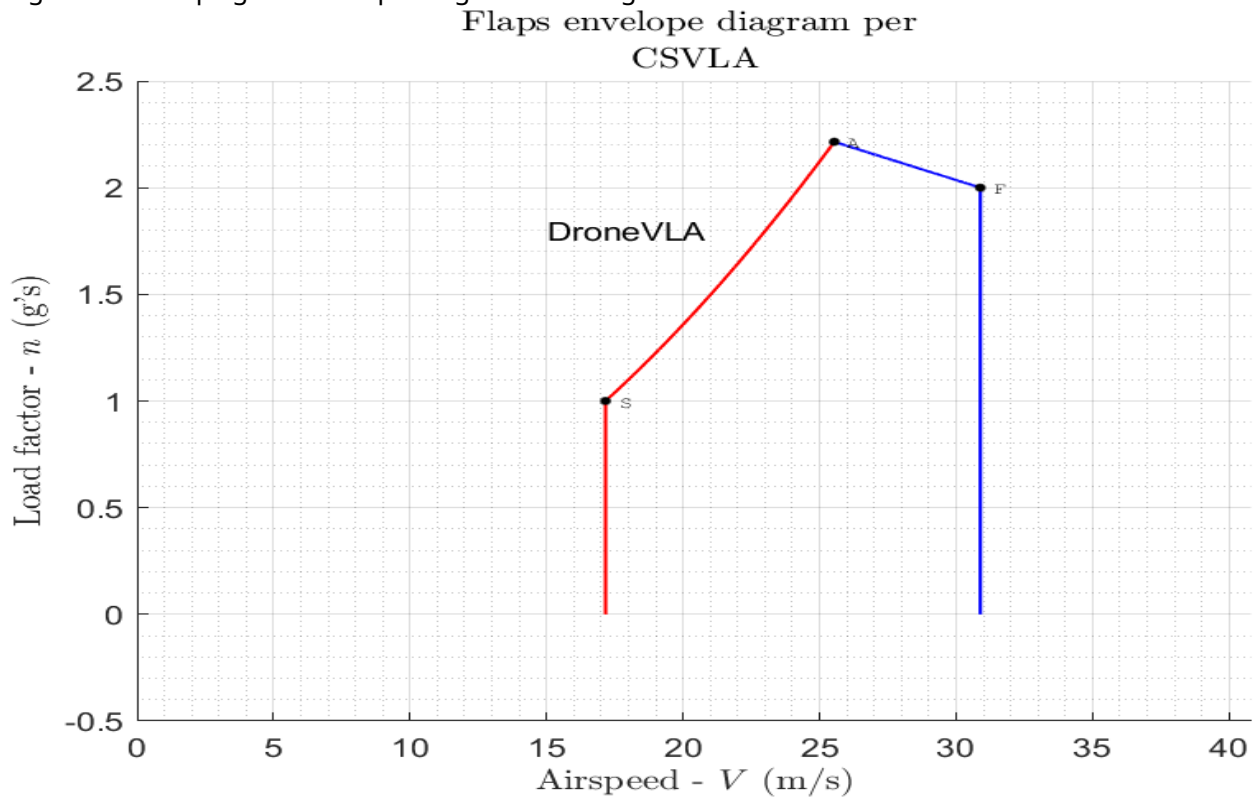


Figure 13.6. Flaps final envelope diagram. Landing.

13.1.3. Summary of flaps load

A diagram of the flaps load calculations is shown. The clean positive attitude flight envelope of the aircraft is also represented for reference. The data relative to these calculations are summarized in table form, for takeoff and landing configurations, respectively.

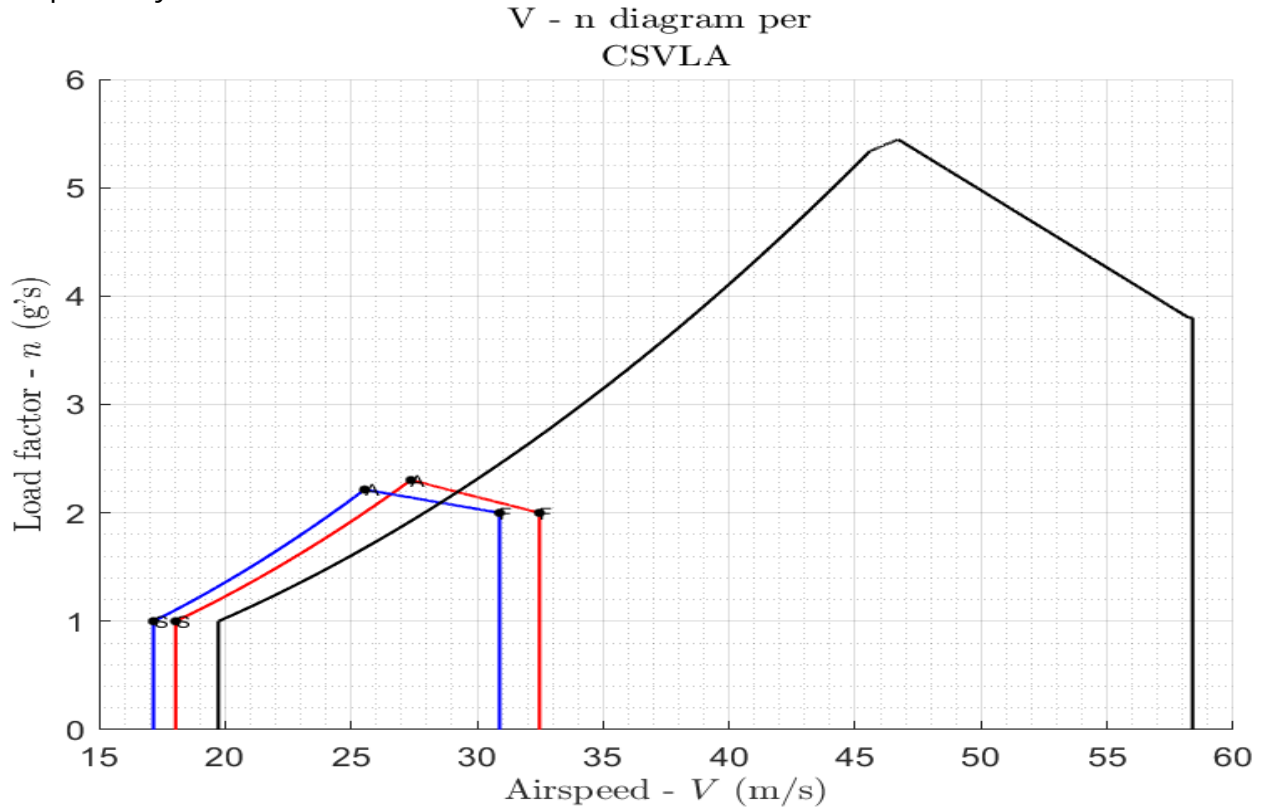


Figure 13.7. Summary of flaps flight load.

TABLE TO BE CHECKED!!!

Table 13.1. Flaps envelope points summary at takeoff.

ID	V(m/s)	M(kg)	M/S(kg/m ²)	Altitude(m)	rho(kg/m ³)	mug	Kg	Ude(m/s)	n
Point S	18.04	100	38.62	1300	1.079	27.47	0.7377	7.62	1
Point A	27.37	100	38.62	1300	1.079	27.47	0.7377	7.62	2.302
Point F	32.47	100	38.62	1300	1.079	27.47	0.7377	7.62	2

TABLE TO BE CHECKED!!!

Table 13.2. Flaps envelope points summary at landing.

ID	V(m/s)	M(kg)	M/S(kg/m ²)	Altitude(m)	rho(kg/m ³)	mug	Kg	Ude(m/s)	n
Point S	17.16	100	38.62	1300	1.079	27.47	0.7377	7.62	1
Point A	25.54	100	38.62	1300	1.079	27.47	0.7377	7.62	2.215

Chapter 13. Loads on the wing flaps

ID	V(m/s)	M(kg)	M/S(kg/m^2)	Altitude(m)	rho(kg/m^3)	mug	Kg	Ude(m/s)	n
Point F	30.89	100	38.62	1300	1.079	27.47	0.7377	7.62	2

Chapter 14. Loads on the control surfaces

According to CSVLA 395 , the flight control system and its supporting structure must be designed for loads corresponding to 125 % of the computed hinge moments of the movable control surface.

TABLE TO BE CHECKED!!!

14.1. Ailerons

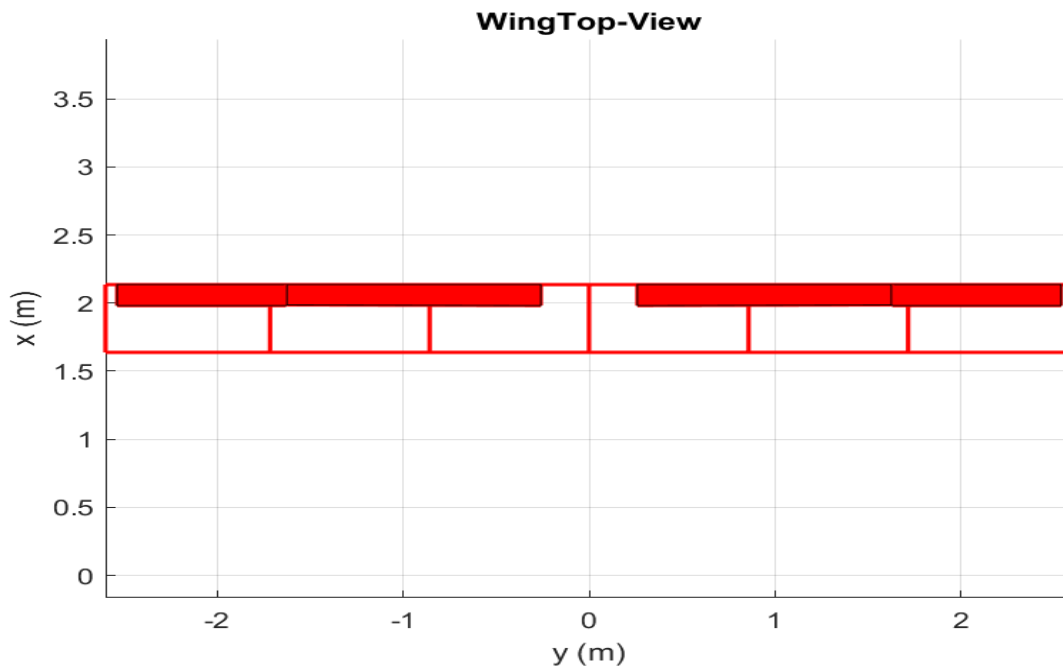


Figure 14.1. Aileron, top view.

Table 14.1. Aileron. Hinge moments coefficients.

Quantity	Value	Units
CH delta	-0.6056	1/rad
CH delta	-0.01057	1/deg
CH alfa	-0.4094	1/rad
CH alfa	-0.007145	1/deg
CH total	-0.006389	1/rad
CH total	-0.3661	1/deg

According to CSVLA 395 , the total aileron load is equal to -929.8 N . The hinge moment is calculated by the following equation

$$H_{aileron} = q * S_{aileron} * c_f * C_{h_{total}} = 906.2 * 0.1402 * 0.1354 * -0.3661 = -6.296 \text{ N} * m$$

where:

- $H_{aileron}$ = aileron hinge moment ($N * m$) ;
- q = dynamic pressure at point A (Pa) ;
- $S_{aileron}$ = aileron surface (m^2) ;
- c_f = reference chord (m) ;
- $C_{h_{total}}$ = total hinge moment coefficient.

This is the formula used in all the following calculations. The total hinge moment that must be considered in structural calculations is the following:

$$H_{aileron_{total}} = 2 * 1.25 * H_{aileron} = 2 * 1.25 * (-6.296) = -15.74 N * m$$

TABLE TO BE CHECKED!!!

14.2. Elevator

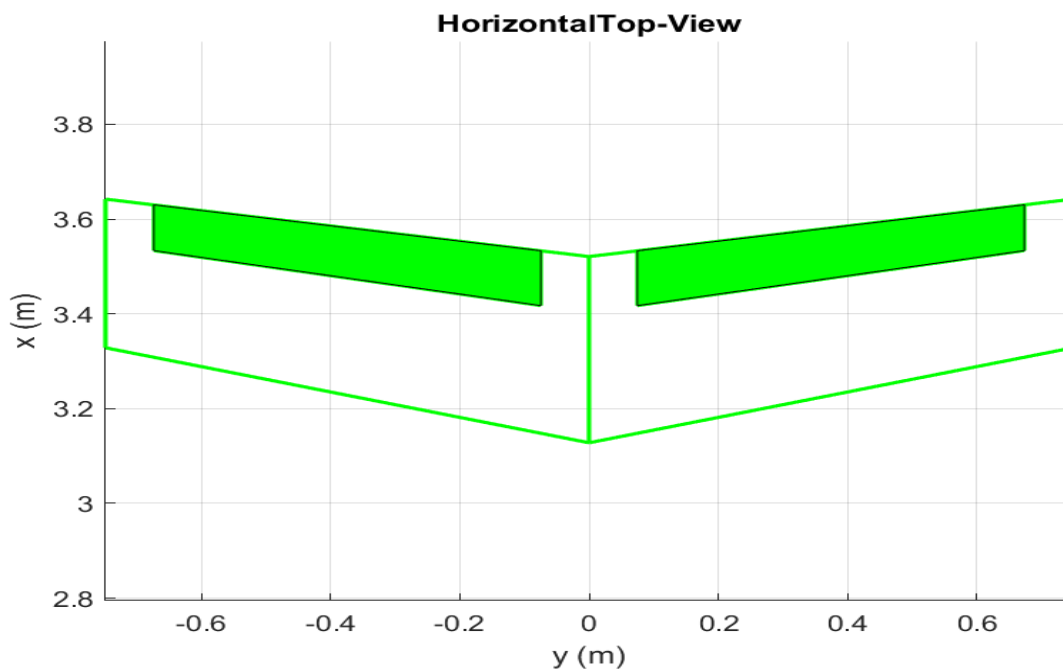


Figure 14.2. Elevator, top view.

Table 14.2. Elevator. Hinge moments coefficients.

Quantity	Value	Units
CH delta	-0.461	1/rad
CH delta	-0.008046	1/deg
CH alfa	-0.269	1/rad
CH alfa	-0.004695	1/deg

Quantity	Value	Units
CH total	-0.003904	1/rad
CH total	-0.2237	1/deg

According to CSVLA 395 , the total elevator load is equal to -506 N. The hinge moment is

$$H_{elevator} = q * S_{elevator} * c_f * C_{h_{total}} = 906.2 * 0.1475 * 0.1085 * -0.2237 = -3.243 \text{ N} * m$$

The total hinge moment that must be considered in structural calculations is the following:

$$H_{elevator_{total}} = 2 * 1.25 * H_{elevator} = 2 * 1.25 * (-3.243) = -8.106 \text{ N} * m$$

TABLE TO BE CHECKED!!!

14.3. Rudder

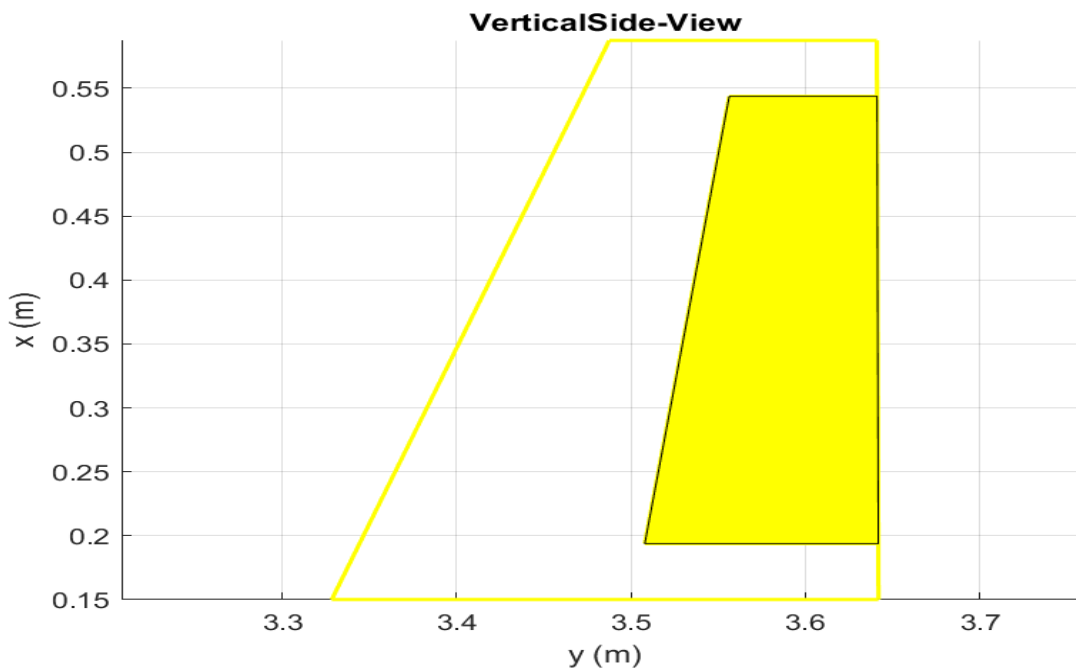


Figure 14.3. Vertical fin, side view.

Table 14.3. Rudder. Hinge moments coefficients.

Quantity	Value	Units
CH delta	-0.4538	1/rad
CH delta	-0.00792	1/deg
CH alfa	-0.0024	1/rad
CH alfa	-4.189e-05	1/deg
CH total	-0.003456	1/rad
CH total	-0.198	1/deg

According to CSVLA 395 , the total rudder load is equal to -65.78 N. The hinge moment is

$$H_{rudder} = q * (2 * S_{rudder}) * c_f * C_{h_{total}} = 906.2 * (2 * 0.01906) * 0.1085 * -0.00792 = -0.7452 \text{ N} * \text{m}$$

where the surface is related to the double fin geometrical arrangement. The total hinge moment that must be considered in structural calculations is the following:

$$H_{rudder_{total}} = 1.25 * H_{rudder} = 1.25 * (-0.7452) = -0.9315 \text{ N} * \text{m}$$

Chapter 15. Power plant

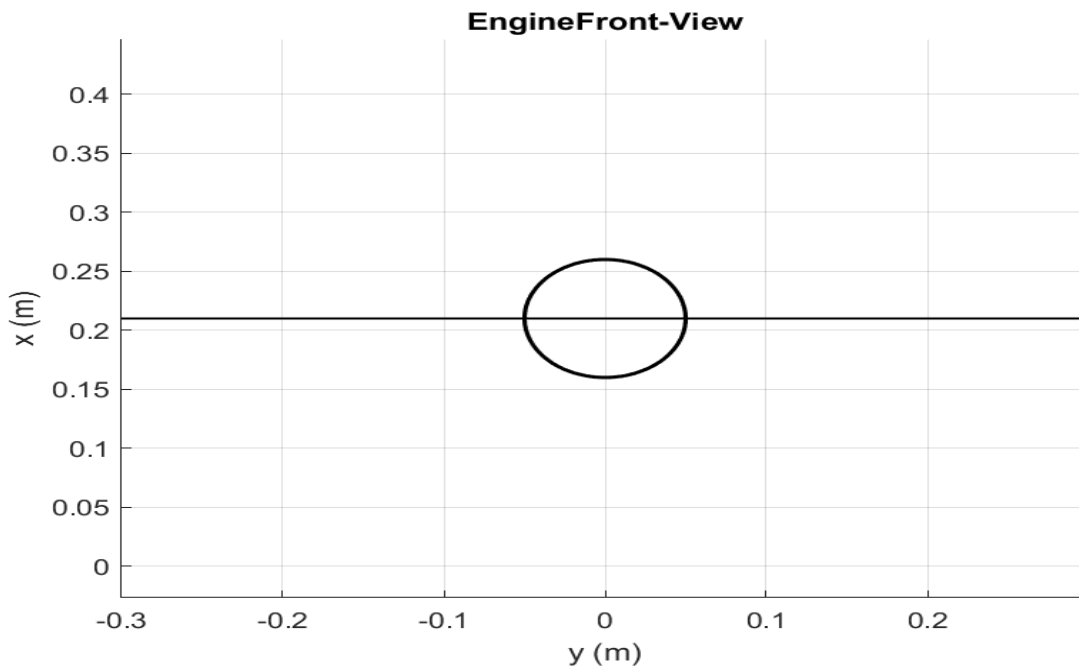


Figure 15.1. Engine, front view.

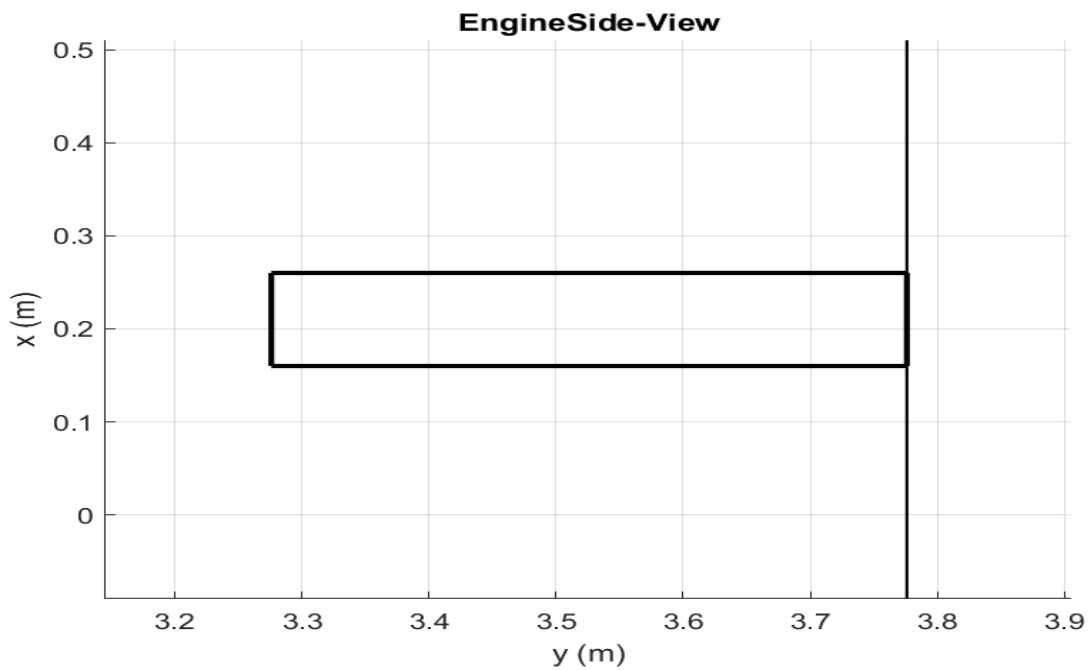


Figure 15.2. Engine, side view.

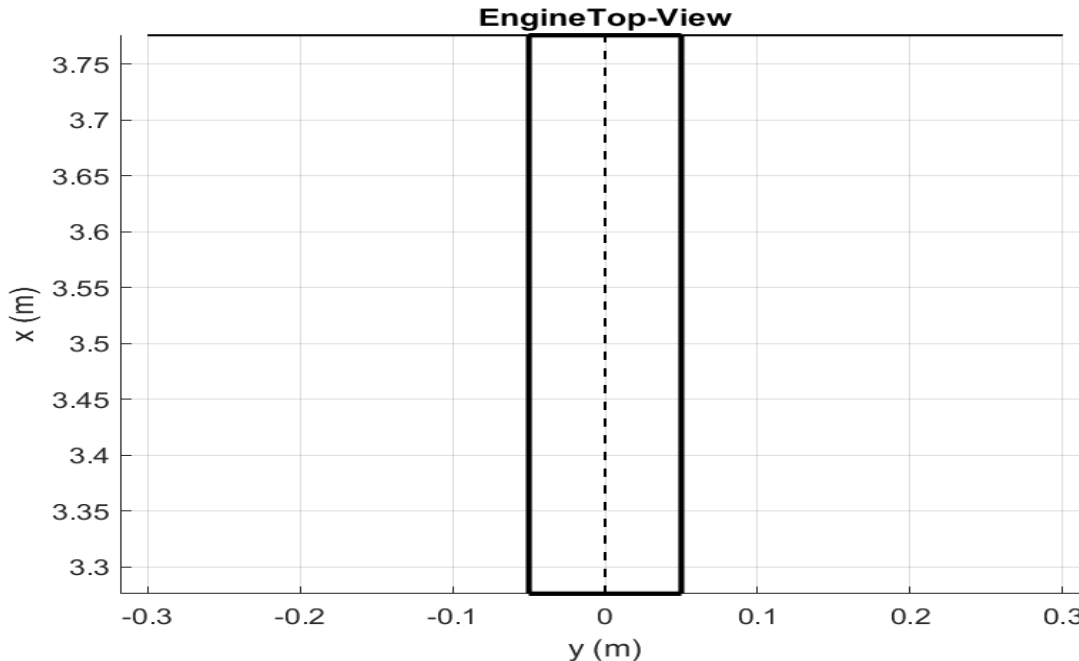


Figure 15.3. Engine, top view.

The engine mount and its supporting structure must be designed for the effects of:

1. a limit engine torque corresponding to takeoff power and propeller speed acting simultaneously with 75% of the limit loads from flight condition A of CSVLA 333(d) , according to CSVLA 361(a)(1) ;
2. the limit engine torque as specified in CSVLA 361(b) acting simultaneously with the limit loads from flight condition A of CSVLA 333(d) , according to CSVLA 361(a)(2) .

The limit engine torque to be considered under CSVLA 361(a)(2) must be obtained by multiplying the mean torque for maximum continuous power by a factor determined as follows:

1. for a four-stroke engines, (i) 1.33 for engines with five or more cylinders, (ii) 2, 3, 4 or 8 for engines with four, three, two or one cylinders, respectively;
2. for a two-stroke engines, (i) 2 for engines with three or more cylinders, (ii) 3 or 6 for engines with two or one cylinders, respectively.

The engine mount and its supporting structure must be designed for a limit load factor in a lateral direction, for the side load on the engine mount not less than 1.33 and this side load may be assumed to be independent of other flight conditions, according to CSVLA 363 .

15.1. Engine torque

The engine takeoff power is 11.19 kW at 5800 RPM. The rotational speed of the propeller is $5800/2.429 = 2388$ RPM. The maximum continuous power is 9.321 kW. The mean engine torque is $44.73 \text{ N} \cdot \text{m}$. Using a factor of 2 for a four cylinder engine, the limit torque will be $89.45 \text{ N} \cdot \text{m}$. This limit torque acts simultaneously with the 75 % of the inertia limit load. The mean engine torque at max continuous power is $39.3 \text{ N} \cdot \text{m}$. Using a factor of 2 for a four cylinder engine, the limit torque will be $78.61 \text{ N} \cdot \text{m}$ which acts simultaneously with the 100 % of the inertia limit load.

$$MT_{continuous} = P_{continuous} * \frac{1000}{\frac{2\pi * RPM_{prop}}{60}} = 9.321 * \frac{1000}{\frac{2 * 3.14 * 2388}{60}} = 39.3 \text{ N} \cdot \text{m}$$

$$LT_{continuous} = RR_{prop} * MT_{continuous} = 2.429 * 39.3 = 78.61 \text{ N} \cdot \text{m}$$

$$MT_{takeoff} = P_{takeoff} * \frac{1000}{\frac{2\pi * RPM_{prop}}{60}} = 11.19 * \frac{1000}{\frac{2 * 3.14 * 2388}{60}} = 44.73 \text{ N} \cdot \text{m}$$

$$LT_{takeoff} = RR_{prop} * MT_{takeoff} = 2.429 * 44.73 = 89.45 \text{ N} \cdot \text{m}$$

- $MT_{takeoff}$ = mean torque at takeoff power ($\text{N} \cdot \text{m}$); and
- $LT_{takeoff}$ = limit torque at takeoff power ($\text{N} \cdot \text{m}$); and
- $MT_{continuous}$ = mean torque at max continuous power ($\text{N} \cdot \text{m}$); and
- $LT_{continuous}$ = limit torque at max continuous power ($\text{N} \cdot \text{m}$).

15.2. Side load on engine mount

The limit load factor in a lateral direction is 1.33. The mass of the engine group is 24.4 kg. The side load results is $1.33 * 24.4 * 9.807 * (1/10) = 31.82 \text{ daN}$

15.3. Inertia load on engine mount

The inertia load is equal to the maximum limit load factor times the engine group weight: $5.337 * 24.4 * 9.807 * (1/10) = 169.9 \text{ daN}$

15.4. Gyroscopic loads

According to AMC 23.371(a) , for a two blade propeller, the maximum gyroscopic couple is given by:

$$2 * I_p * \omega_1 * \omega_2$$

Where:

- I_p = polar moment of inertia of the propeller ($\text{kg} \cdot \text{m}^2$); and
- ω_1 = propeller rotation speed (rad / sec); and

- ω_2 = rate of pitch or yaw (rad / sec).

The asymmetric flow through the propeller disc is discounted because the propeller diameter is less than 2.74 m as established by AMC 23.371(a). The polar moment of inertia of the propeller is 0.37 kg*m². The rate of pitch or yaw is established as 1.0 rad/sec and 2.5 rad/sec respectively, the load factor is 2.5 and the power condition is max continuous power as prescribed in AMC 23.371(a). Therefore, the inertial load is equal to 2.5*24.4 = 61 daN. The rotation of the propeller at maximum continuous power is 5500/2.429 = 2265. The gyroscopic couple is:

1. Yaw case: $2*0.37*2.5*(2*3.14/60)*2265 = 69.83 \text{ daN} * \text{m}$
2. Pitch case: $2*0.37*1.0*(2*3.14/60)*2265 = 27.93 \text{ daN} * \text{m}$