-11

Seat Height Switch

SCHEMATIC

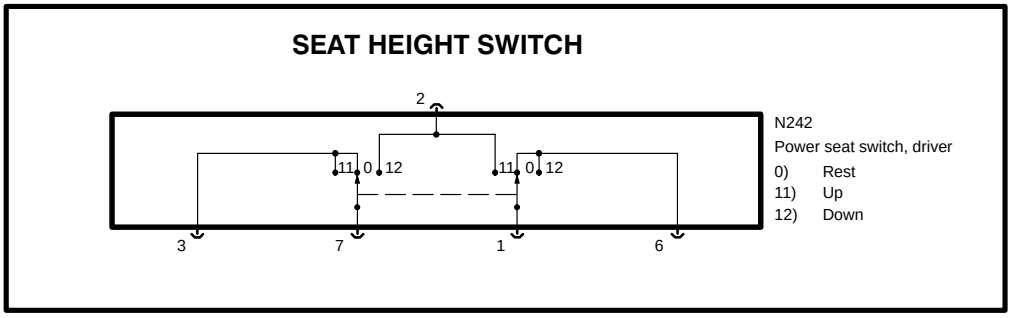

TERMINAL LOCATIONS

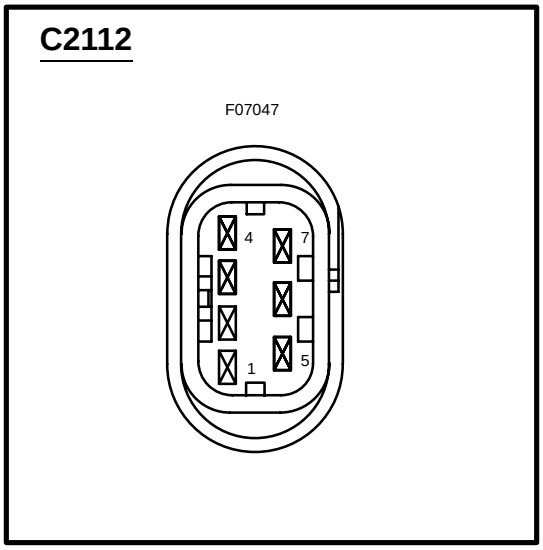

COMPONENT TESTING PROCEDURE

TO TEST	Connect Self-Powered Test Light or Ohmmeter to Terminals	Move Switch to These Positions	A Good Switch Will Indicate
Height Circuit	7 and 2	Rest	Open Circuit
		Up	Open Circuit
		Down	Closed Circuit
	1 and 2	Rest	Open Circuit
		Up	Closed Circuit
		Down	Open Circuit
	7 and 3	Rest	Closed Circuit
		Up	Closed Circuit
		Down	Open Circuit
	1 and 6	Rest	Closed Circuit
		Up	Open Circuit
		Down	Closed Circuit