




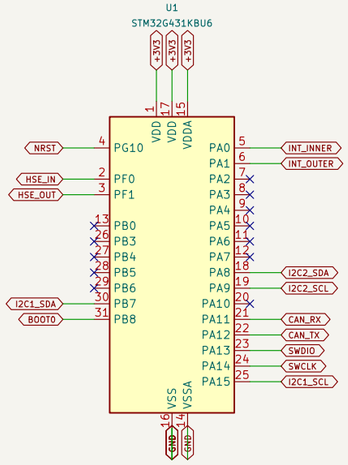















R9 DNP: fit 120 ohm only at physical CAN bus ends.
J2 VTREF is 3.3 V sense; power the board through J1.
Y1 ESR80/CL12, C13/C14 must be qualified on prototype.
Absolute angle requires two-track calibration and firmware.





















J1
5V GND CANH CANL solder pads



J2
SWD pogo



TP1
BOOT0

5 V input; 3.3 V logic; 2 x TMAG5273A2; 4 layers / 0.8 mm

vptc-calc

Sheet: /
File: encoder_can.kicad_sch

Title: Dual-track absolute encoder / CAN

Size: A3	Date: 2026-10-11	**Rev: A prototype**
KiCad E.D.A. 10.0.6		Id: 1/1