

Diode test report

Date	12/10/2026
Tested by	MBO
Approved by	QC
Client	AeroDIODE Corporation / RLS - California Institute of Technology_1
Order Code	F003635

Diode details	
Model	1270LD-1-0-0-1
Serial number	8880AFR

Summary of characteristics		
Parameters	**Sym.**	**Values**
Operating power (mW)	P_{op}	10
Case temperature (°C)	T_c	25
Peak wavelength (nm) @ 25°C	λ_p	1270,85
Operating current (mA)	I_{op}	52
Threshold current (mA)	I_{th}	13
Absolute maximum rating (mA)	I_m	65
Slope efficiency (W/A)	η	0,26
Photo current monitor (µA)	I_{pd}	60
Maximum screwing torque	cNm	5
Screws details	-	4 x M2,5

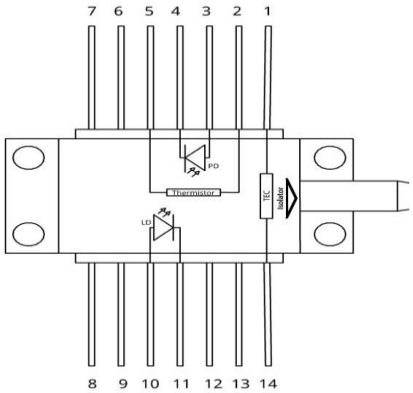

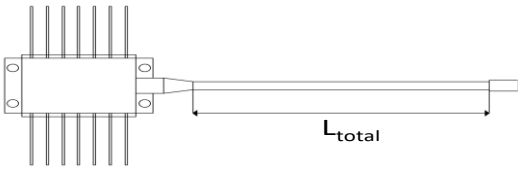

1	TEC (+)	**8**	NC
2	Thermistor	**9**	NC
3	BFM Anode (+)	**10**	LD Anode (+)
4	BFM Cathode (-)	**11**	LD Cathode (-)
5	Thermistor	**12**	NC
6	NC	**13**	NC
7	NC	**14**	TEC (-)

Fiber Characteristics			
Fiber type	**SMF28**	Total length (Ltotal)	1 m
Cut-Off Wavelength (typical)	1260 nm	Distance to DFB (DFBG)	NA
Core Diameter (MFD)	10,4 µm	Connector	FC/APC

Operation Instruction

1. The laser light emitted from this device is invisible and may be harmful to the human eye and skin. Avoid looking directly into the fiber when the device is in operation. Use of protective gear is recommended when the device is in the operation.

2. The operating current should be applied within the range of specified operating current. Do not supply current over the specified Maximum Operating Current. An excessive driving current may result fatal damage to the laser diode.

3. Electro-statistic discharge is the primary cause of unexpected laser diode failure. Take extreme precaution to prevent ESD. Use wrist straps, grounded work surfaces, and rigorous anti-static techniques when handling this device.

4. In order to minimize light reflection, the ferrule flange end of the connector is 8 degrees angle polished. Keep ferrule flange end surface clean to prevent contaminated dirt or scratch.

5. Extremely careful attention is required when this pump laser module is in operation. This device should be operated and handled by experienced personnel. Any doubted matters during or before operation should be asked to AeroDIODE .

6. OEM Laser Product This laser module is designed for use as a component (or replacement) part and is thereby exempt from 21 CFR1040.10 and 1040.11 provisions (USA) ; NF EN 60825-1 (Europe)








SQ116.28

AERODIODE - Institut d'optique d'Aquitaine - Rue François Mitterrand
33400 Talence - France - Tél.: +33 (0)6 27 69 41 62
www.aerodiode.com


Diode test report

Operating Temperature : 25°C			
Pop(mW)	10	@ Iop(mA)	52,00

Power vs Current & Voltage vs Current @ 25 °C

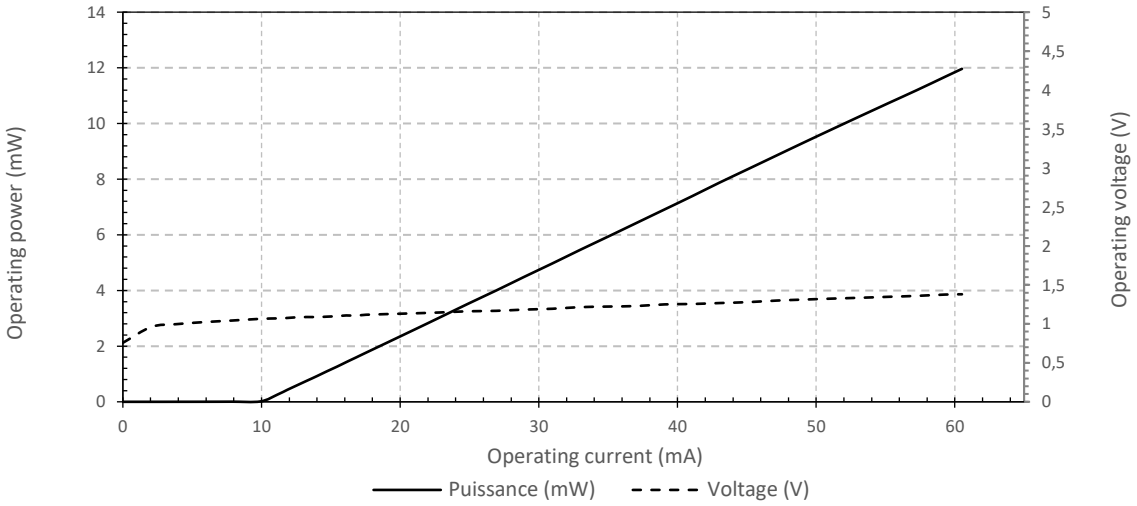

Optical Spectrum
Operating Temperature : 25°C
Spectrometer Resolution : 0,05 nm

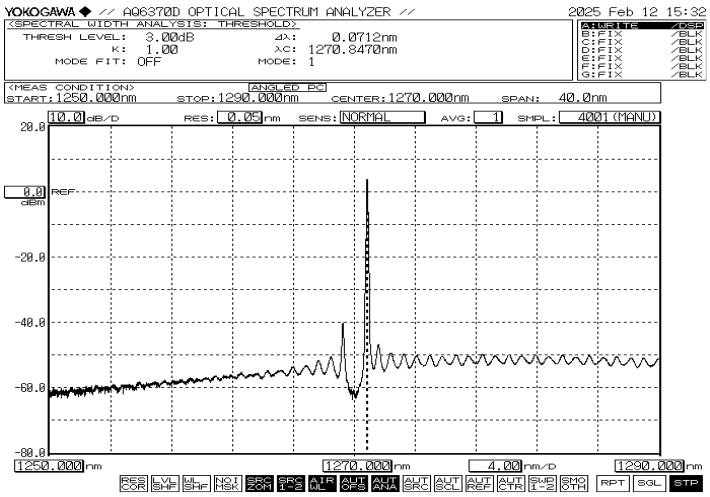

Instrument	Serial Number
Spectrometer	90X801183
Powermeter	Device : JUNO s/n:3080773 Head : PD300IR s/n:3066856

SQ116.28

AERODIODE - Institut d'optique d'Aquitaine - Rue François Mitterrand
33400 Talence - France - Tél.: +33 (0)6 27 69 41 62
www.aerodiode.com