1028nm DFB Laser Test Report

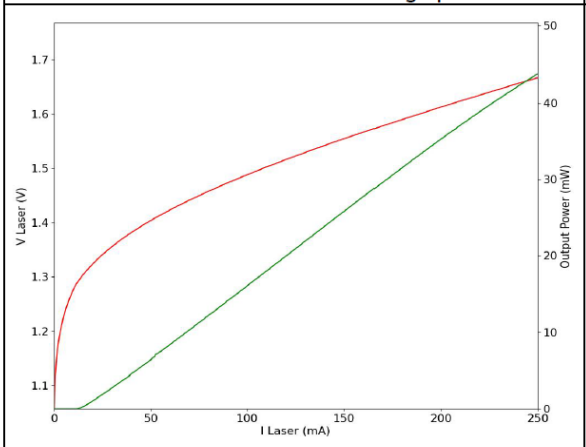
Product	**FLPD-1028-50-DFB-BTF**
Description	**1028nm DFB laser diode with PM fiber pigtail,43.8mW,FC/APC connector**
Serial Number	**BF69016**

Optical and Electrical Data


No.	Parameter	Symbol	Unit	Testing result	Requirement	Condition
1	Threshold current	I_{th}	mA	14.5	≤30	at 25.0°C
2	Monitor PD current	I_{mpd}	uA	23.3	1-100	at 43.8mW power
3	Bias at operation	I_o	mA	250	≤250	at 43.8mW power
4	Slope efficiency	DE	mW/mA	0.185	0.05-0.30	at 43.8mW power
5	Bias voltage	V_f	V	1.667	≤3	at 43.8mW power
6	Operating temperature	T	°C	25	10-40	at 43.8mW power
7	Thermistor resist	R	Ohm	10000	9500~10500	at 25.0°C
8	Wavelength	λ_c	nm	1028.01	1028±1	at 20°C,125mA
9	Polarization Extinction Ratio	PER	dB	27.1	≥18	

NOTE: Imax=250mA


Laser Diode characteristic graph



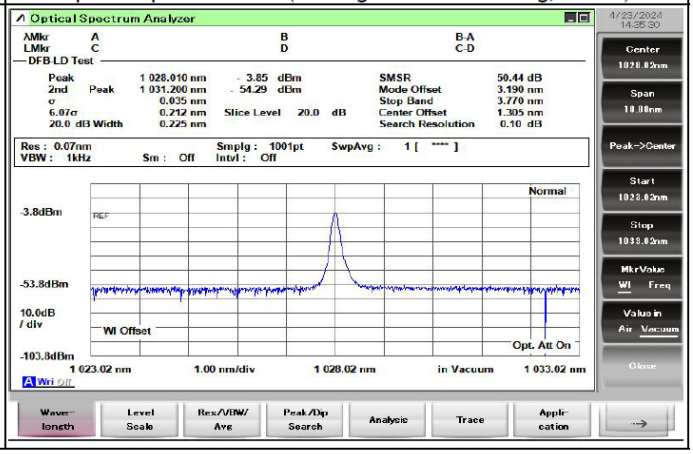Optical Spectrum data(Testing Condition@20deg,125mA)




Diode Dimension

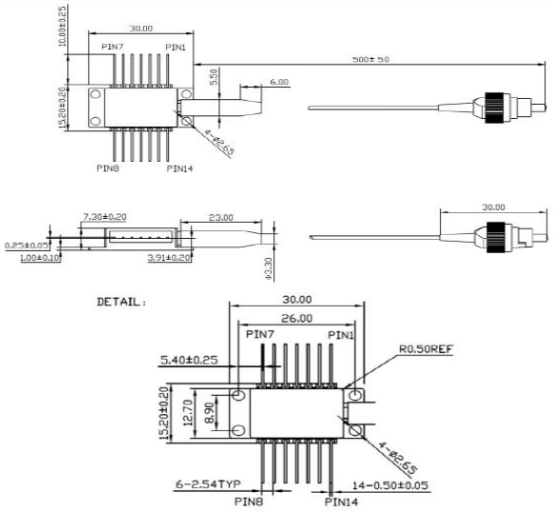






Dimension in mm

Pin Information



1	TEC+
2	Thermistor
3	Detector+
4	Detector-
5	Thermistor
6	NC
7	NC
8	NC
9	NC
10	LD+
11	LD-
12	NC
13	Case Ground
14	TEC-

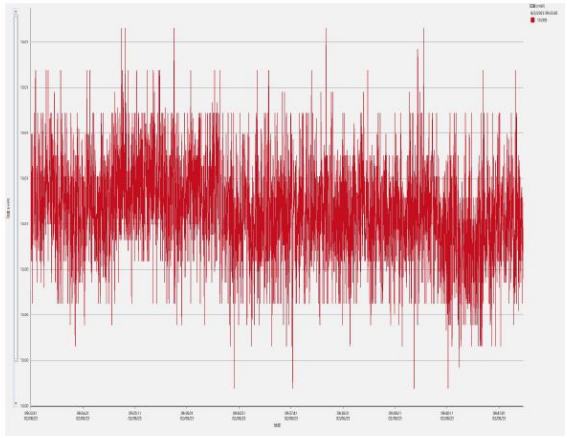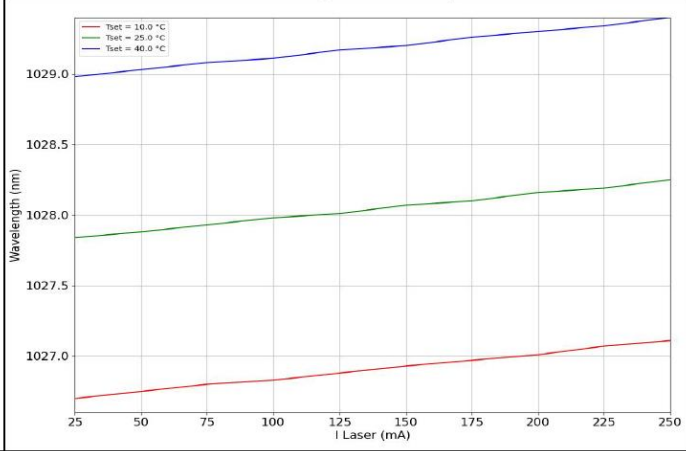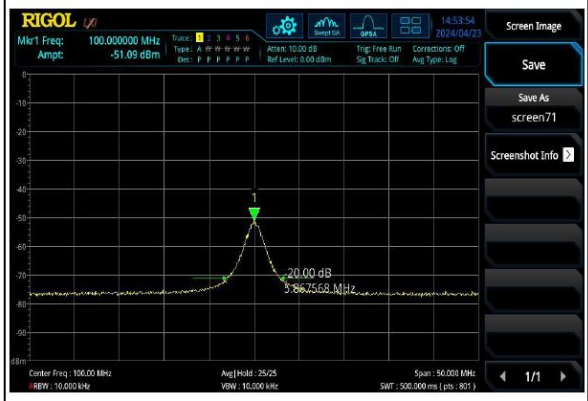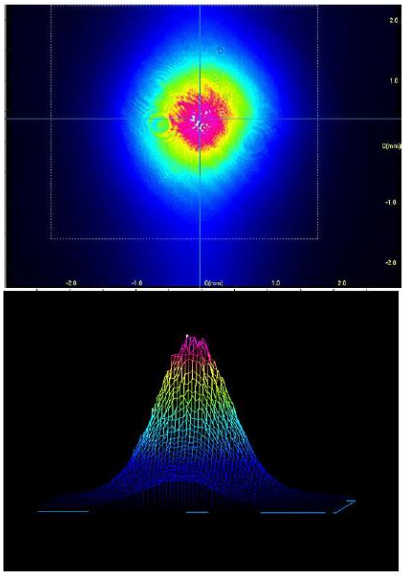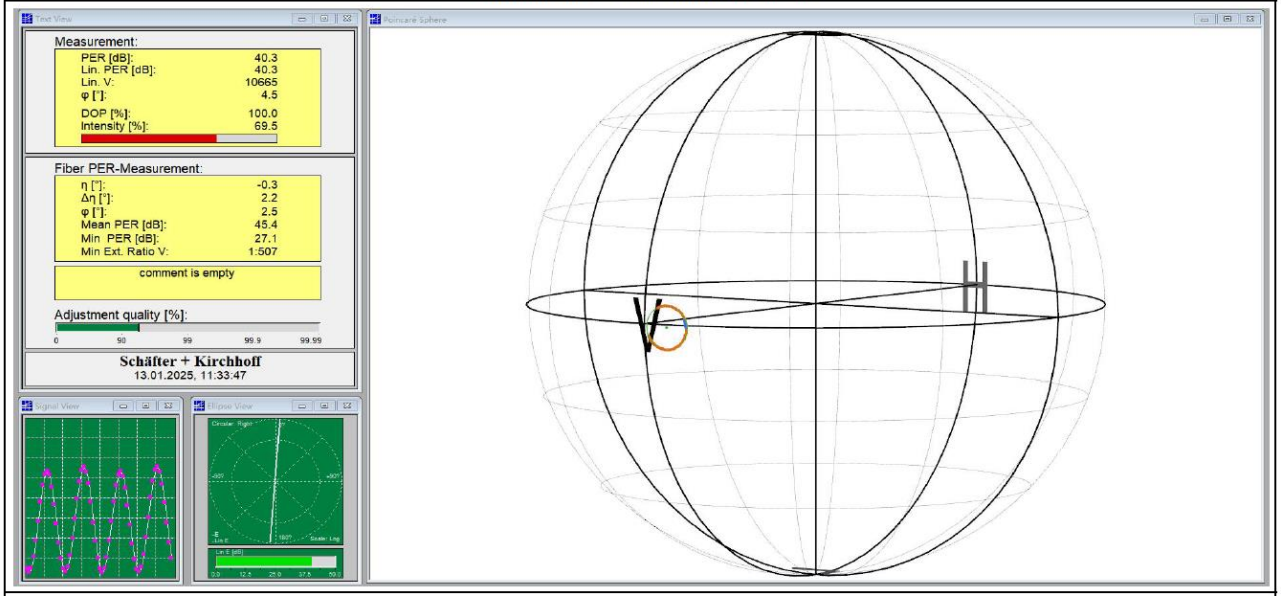FRANKFURT LASER COMPANY
An den 30 Morgen 13, 61381 Friedrichsdorf, Germany
Tel.: +49(0)6172.27978-0 Fax: +49(0)6172.27978-10
E-mail: sales@frlaserco.com; Internet: **WWW.FRLASERCO.COM**

Power Stability	Wavelength Tunability
	
Linewidth Measurement（CW,293.378 kHZ@25deg,200mA)	Beam Quality 2D/3D
	
Polarization Extinction Ratio Test	
	

FRANKFURT LASER COMPANY
An den 30 Morgen 13, 61381 Friedrichsdorf, Germany
Tel.: +49(0)6172.27978-0 Fax: +49(0)6172.27978-10
E-mail: sales@frlaserco.com; Internet: **WWW.FRLASERCO.COM**