2330nm DFB Laser Test Report


Product	**FLPD-2330-03-DFB-BTF**
Description	**2330nm DFB laser diode with PM fiber pigtail,3.18mW,FC/APC connector**
Serial Number	**D4520009**

Optical and Electrical Data


No.	Parameter	Symbol	Unit	Testing result	Requirement	Condition
1	Threshold current	I_{th}	mA	24.9	≤50	at 25.0°C
2	Bias at operation	I_o	mA	120	≤120	at 3.18mW power
3	Slope efficiency	DE	mW/mA	0.031	0.01-0.05	at 3.18mW power
4	Bias voltage	V_f	V	3.105	≤3.5	at 3.18mW power
5	Operating temperature	T	°C	25	10-40	at 3.18mW power
6	Thermistor resist	R	Ohm	10000	9500~10500	at 25.0°C
7	Wavelength	λ_c	nm	2329.81	2330±1	at 40°C,100mA

NOTE: Imax=120mA


Laser Diode characteristic graph

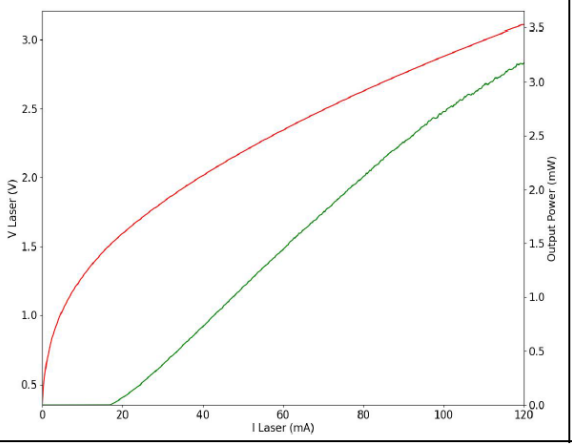

Optical Spectrum data(Testing Condition@40deg,100mA)

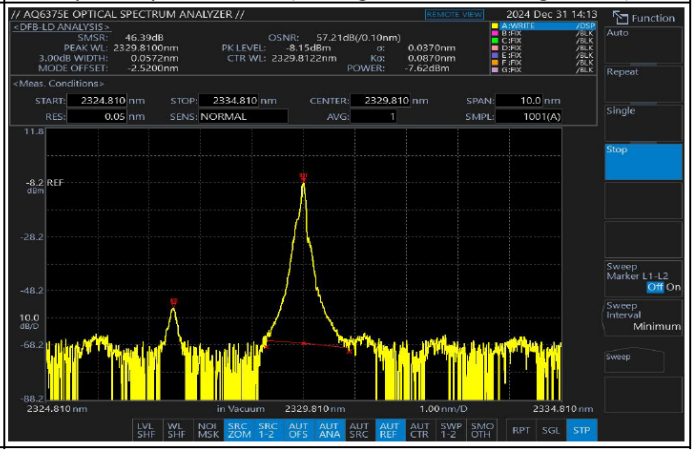


Diode Dimension

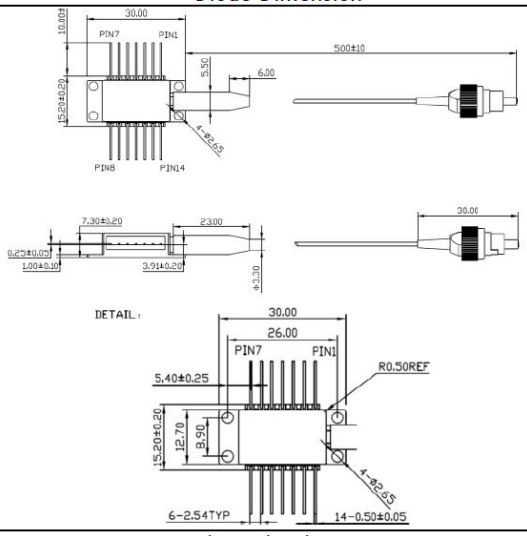





Dimension in mm

Pin Information



1	TEC+
2	Thermistor
3	NC
4	NC
5	Thermistor
6	NC
7	NC
8	NC
9	NC
10	LD+
11	LD-
12	NC
13	Case Ground
14	TEC-

FRANKFURT LASER COMPANY
An den 30 Morgen 13, 61381 Friedrichsdorf, Germany
Tel.: +49(0)6172.27978-0 Fax: +49(0)6172.27978-10
E-mail: sales@frlaserco.com; Internet: **WWW.FRLASERCO.COM**

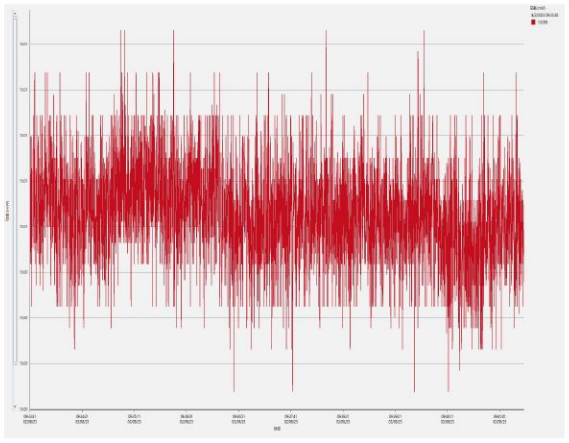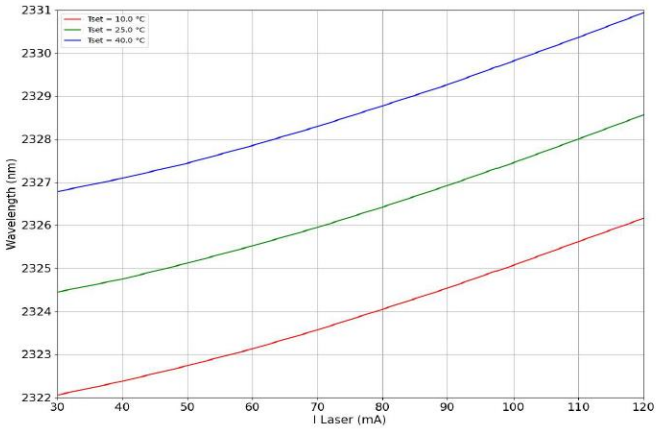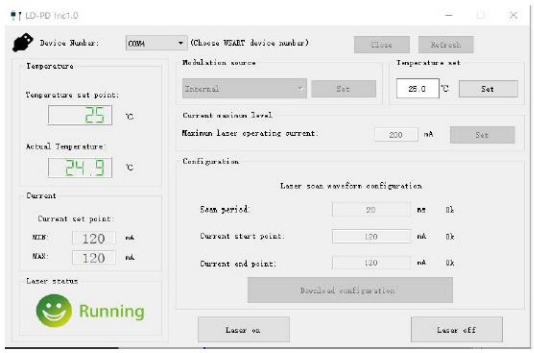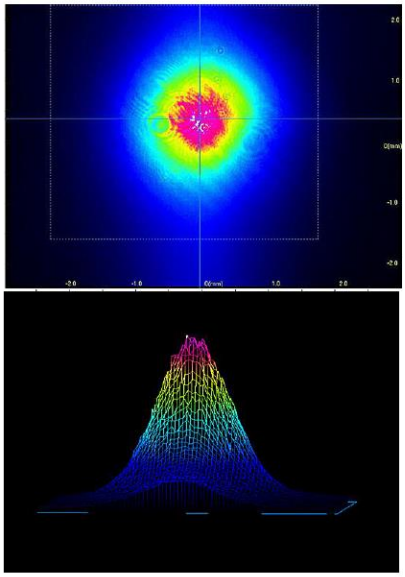Power Stability	Wavelength Tunability
	
2f Signal Quick Finding parameters Point	**Beam Quality 2D/3D**
	

FRANKFURT LASER COMPANY
An den 30 Morgen 13, 61381 Friedrichsdorf, Germany
Tel.: +49(0)6172.27978-0 Fax: +49(0)6172.27978-10
E-mail: sales@frlaserco.com; Internet: **WWW.FRLASERCO.COM**