
# Diode test report




| | |
|---|---|
| Date | 12/10/2026 |
| Tested by | MBO |
| Approved by | QC |
| Client | AeroDIODE Corporation / RLS - California Institute of Technology_1 |
| Order Code | F003635 |

| Diode details | |
|---|---|
| Model | 1270LD-1-0-0-1 |
| Serial number | 8881AFR |

| Summary of characteristics | | |
|---|---|---|
| **Parameters** | **Sym.** | **Values** |
| Operating power (mW) | $P_{op}$ | 10 |
| Case temperature (°C) | $T_c$ | 25 |
| Peak wavelength (nm) @ 25°C | $\lambda_p$ | 1270,52 |
| Operating current (mA) | $I_{op}$ | 52 |
| Threshold current (mA) | $I_{th}$ | 13 |
| Absolute maximum rating (mA) | $I_m$ | 65 |
| Slope efficiency (W/A) | η | 0,26 |
| Photo current monitor (µA) | $I_{pd}$ | 90 |
| Maximum screwing torque | cNm | 5 |
| Screws details | - | 4 x M2,5 |

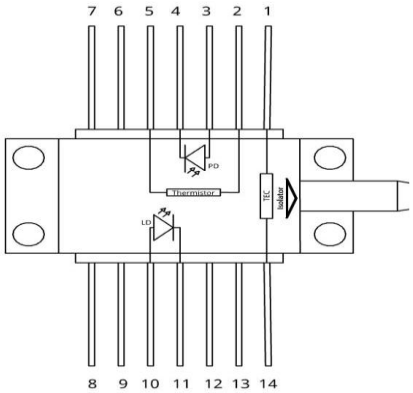

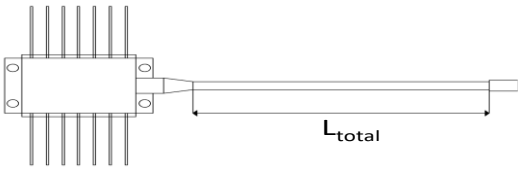
| | | | |
|---|---|---|---|
| 1 | TEC (+) | 8 | NC |
| 2 | Thermistor | 9 | NC |
| 3 | BFM Anode (+) | 10 | LD Anode (+) |
| 4 | BFM Cathode (-) | 11 | LD Cathode (-) |
| 5 | Thermistor | 12 | NC |
| 6 | NC | 13 | NC |
| 7 | NC | 14 | TEC (-) |

| Fiber Characteristics | | | |
|---|---|---|---|
| Fiber type | **SMF28** | Total length (Ltotal) | 1 m |
| Cut-Off Wavelength (typical) | 1260 nm | Distance to DFB (DFBG) | NA |
| Core Diameter (MFD) | 10,4 µm | Connector | FC/APC |

## Operation Instruction

1. The laser light emitted from this device is invisible and may be harmful to the human eye and skin. Avoid looking directly into the fiber when the device is in operation. Use of protective gear is recommended when the device is in the operation.

2. The operating current should be applied within the range of specified operating current. Do not supply current over the specified Maximum Operating Current. An excessive driving current may result fatal damage to the laser diode.

3. Electro-statistic discharge is the primary cause of unexpected laser diode failure. Take extreme precaution to prevent ESD. Use wrist straps, grounded work surfaces, and rigorous anti-static techniques when handling this device.

4. In order to minimize light reflection, the ferrule flange end of the connector is 8 degrees angle polished. Keep ferrule flange end surface clean to prevent contaminated dirt or scratch.

5. Extremely careful attention is required when this pump laser module is in operation. This device should be operated and handled by experienced personnel. Any doubted matters during or before operation should be asked to AeroDIODE .

6. OEM Laser Product This laser module is designed for use as a component (or replacement) part and is thereby exempt from 21 CFR1040.10 and 1040.11 provisions (USA) ; NF EN 60825-1 (Europe)





SQ116.28

# Diode test report


Désignation document
8881AFR

| Operating Temperature : 25°C | | | |
|---|---|---|---|
| Pop(mW) | 10 | @ Iop(mA) | 52,00 |

## Power vs Current & Voltage vs Current @ 25 °C

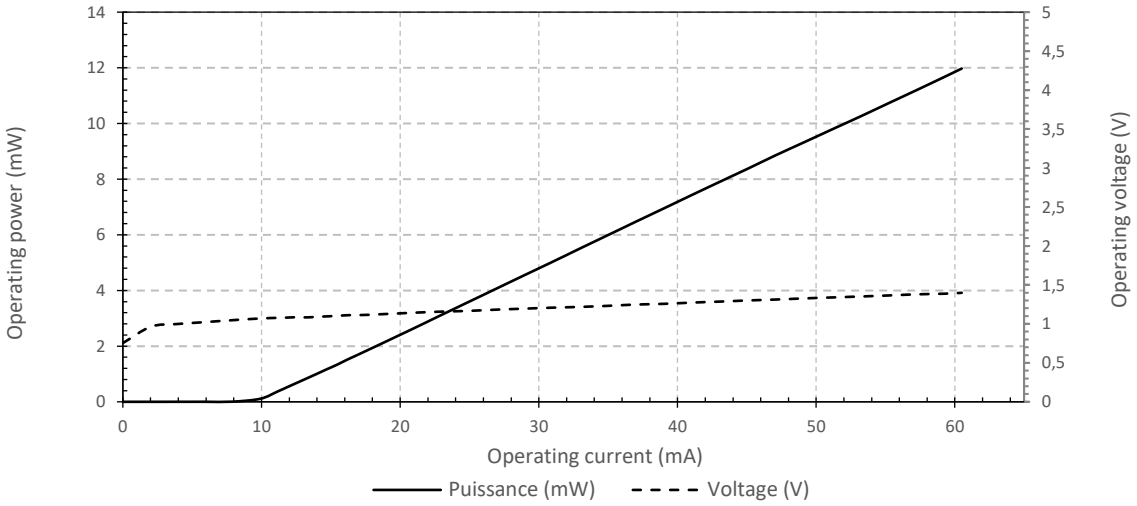


## Optical Spectrum
**Operating Temperature : 25°C**
**Spectrometer Resolution : 0,05 nm**

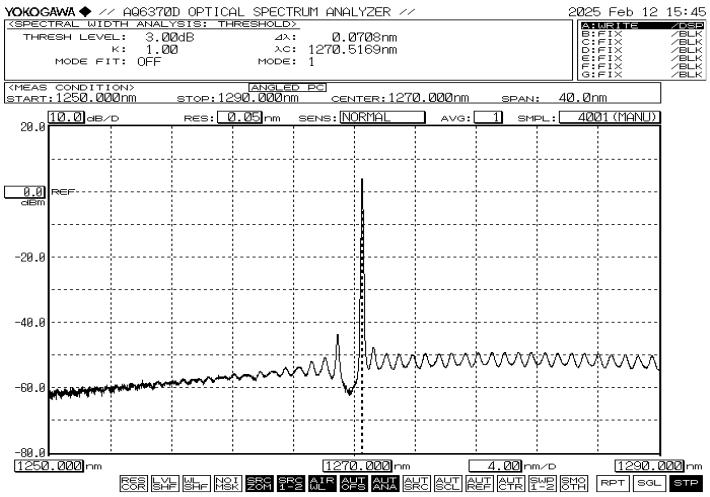


| Instrument | Serial Number |
|---|---|
| Spectrometer | 90X801183 |
| Powermeter | Device : JUNO s/n:3080773 Head : PD300IR s/n:3066856 |

SQ116.28


**AERODIODE** - Institut d'optique d'Aquitaine - Rue François Mitterrand
33400 Talence - France - Tél.: +33 (0)6 27 69 41 62
www.aerodiode.com