





REV.	DATE	DESCRIPTION
C	04/08/01	ADD NOTES AND MOUNTING HOLE
D	04/31/03	UPDATE DRAWING FORMAT

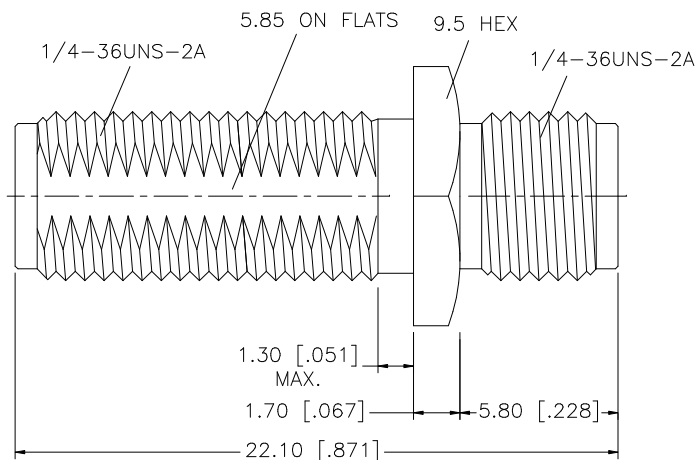

RECOMMENDED
MOUNTING HOLE

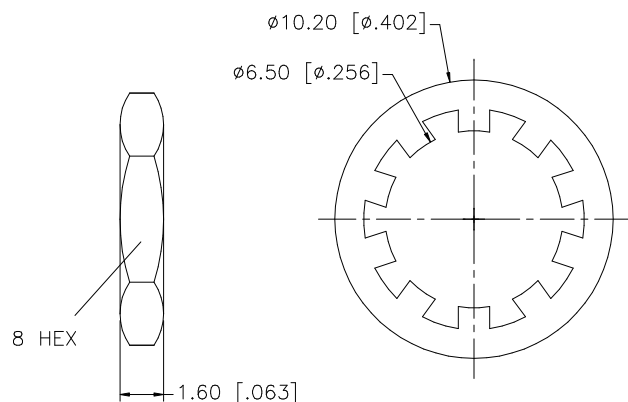

RECOMMENDED
MOUNTING HOLE

NOTES:

- MAX. PANEL THICKNESS = 6.5mm
MIN. PANEL THICKNESS = 2mm

					<div>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</div> <div>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm</div> <div>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”</div> <div>DO NOT SCALE DRAWING</div>	APPROVALS		DATE		<h1>Amphenol Connex</h1>				
8						DRAWN	G.R.S.	04/31/03						
7						CHECKED								
6						ISSUED				PART DESCRIPTION				
5	HEX NUT	BRASS	GOLD	1						SMA BULKHEAD FEMALE TO FEMALE ADAPTOR				
4	LOCK WASHER	BRASS	GOLD	1						PART NO.				
3	CONTACT PIN	BER. COPPER	GOLD	1				1 OF 1		132170				
2	INSULATOR	TEFLON	NATURAL	1										
1	BODY	BRASS	GOLD	1										
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE		DWG. NO.		REV.	SIZE	SCALE	
							C:/132/132170.DWG		132170.DWG		D	A	NA	